Supplement A: Technical Details for The Link Function Problem in Psychological Interaction Testing

Margherita Calderan[1], Filippo Gambarota[2], Laura Sità[1], Tommaso Feraco[1], and Enrico Toffalini[1]

[1]Department of General Psychology, University of Padova

[2]Department of Developmental Psychology and Socialization, University of Padova

Author Note

Margherita Calderan https://orcid.org/0009-0005-5668-5162

Filippo Gambarota https://orcid.org/0000-0002-6666-1747

Laura Sità https://orcid.org/0009-0000-6017-9979

Tommaso Feraco https://orcid.org/0000-0002-8920-5330

Enrico Toffalini https://orcid.org/0000-0002-1404-5133

Correspondence concerning this article should be addressed to Enrico Toffalini, Department of General Psychology, University of Padova, Via Venezia 8, Padova 35131, Italy, Email: enrico.toffalini@unipd.it

Supplement A: Technical Details for The Link Function Problem in Psychological Interaction Testing

Table of contents

Introduction **4**

S1. Scope of this supplement **4**

S2. Preregistered review: extended methods and reliability **4**

Protocol and sampling frame 4

Eligibility and coding workflow 5

Interrater agreement 11

By-journal descriptives 12

S3. The chance-corrected binomial link **13**

S4. Data-generating processes and estimation details **14**

Generative parameters of the illustrative figures 14

Simulation 1: forced-choice accuracy with a chance floor 16

Simulation 2: within-family link choice 19

Simulation 3: sum scores 20

Diagnostic simulation: data-generating processes 21

Diagnostic simulation: estimation and checks 24

S5. Supplementary tables and figures **26**

Implied values, Simulation 1 26

Deterministic link-scale decomposition, Simulation 2 29

Implied values, Simulation 3 30

Logit and probit fitted curves 33

Diagnostic detection rates and AIC strength 33

Distribution of the AIC difference 36

Calibration under correctly specified links 36

Deterministic pseudo-interaction under the wrong link 38

S6. Data, code, and computational environment **40**

References **40**

Supplement A: Technical Details for The Link Function Problem in Psychological Interaction Testing

S1. Scope of this supplement

This supplement reports extended review methods and reliability, followed by the chance-corrected-link algebra and the generative parameters behind the illustrative figures. It then gives full specifications and estimation details for the three worked simulations and the diagnostic simulation, together with supplementary results.

S2. Preregistered review: extended methods and reliability

Protocol and sampling frame

The review protocol was preregistered before any record was screened and is available at https://osf.io/bdu73/, together with the coding data dictionary. The protocol specified a descriptive review of recent psychological research articles from five pre-specified journals, one per major area: *Psychological Science* (general), *Journal of Experimental Psychology: General* (experimental), *Journal of Personality and Social Psychology* (social), *Developmental Science* (developmental), and *Psychological Medicine* (clinical). Journals were selected on a discretionary combination of criteria stated in the protocol: first-quartile Impact Factor in the 2023 Journal Citation Reports, not primarily publishing reviews, not narrowly specialized, and strong general reputation in the respective field, as jointly evaluated by the coauthors.

Article records were retrieved from Elsevier's Scopus database for all articles published in these journals in 2024. For each journal, the full record list was randomly ordered and then screened in that order until 40 eligible articles testing at least one interaction on an observed outcome were included, yielding 200 coded articles across the five journals. The preregistered stopping rule referred to interaction-testing articles in general; the restriction to observed outcomes was introduced during implementation and is a protocol deviation described below. Screening a larger set also allowed estimating the proportion of eligible empirical articles that test

interactions. The design is targeted and descriptive: it characterizes reporting practice in influential outlets during the sampled year. It is not a random or stratified sample of all psychology journals, and the estimates are not prevalence estimates for the discipline.

Eligibility and coding workflow

Eligible articles were empirical articles presenting original psychological research. The following were excluded, per protocol: reviews and meta-analyses; editorials, commentaries, opinion papers, and theoretical articles without empirical data; qualitative-only articles; replication-only studies; and psychometric validation studies. Articles were coded in detail only if they tested at least one interaction, through statistical modeling or ANOVA. Analyzing latent variables or fitting structural equation models was not in itself a reason for exclusion. Because our family and link coding was defined for observed outcomes, articles whose interaction tests all concerned latent outcomes (for example, latent moderation in a structural equation model, or moderation of latent variance components in a twin model) were recorded as eligible and interaction-testing, but were not coded in detail and did not count toward the 40 articles per journal. The preregistration did not specify this restriction, so we treat it as a protocol deviation. It was applied during screening, and we retained the resulting sample rather than reconstructing the point at which screening would otherwise have stopped. Articles combining latent-variable analyses with at least one observed-outcome interaction were coded, with the coding restricted to their observed-outcome interactions.

The resulting screening flow is reported in Table 1.

Table 1
Screening flow for the preregistered review.

Step	N
Records retrieved across journal sheets	2175
Articles screened for eligibility	367
Eligible empirical articles	345
Eligible articles testing at least one interaction	208
Eligible articles not testing interactions	137
Interaction-testing articles with at least one observed-outcome interaction (coded)	200
Interaction-testing articles with interactions on latent outcomes only	8

Each of the 200 coded articles was independently coded by two researchers. Discrepancies were resolved through discussion or, if needed, by consulting the other coauthors. Generative AI tools were used only as an optional aid to locate relevant passages within an article; all coding used in the review is human.

Table 2
Coded variables and their preregistered definitions.

Variable	Definition (preregistered)	Type
Tests interactions	Whether the article tests at least one interaction term in a statistical model or using an ANOVA.	Boolean
Uses non identity link function	Whether at least one tested interaction is presumably analyzed with a non-identity link function (for example, because a generalized linear model was used).	Boolean
Explicit link function	Whether the link function is explicitly declared for at least one statistical model in the article. Indicating only which generalized linear model or family was used is not enough.	Boolean
Incorrect identity link function	Whether at least one tested interaction is analyzed using an identity link function when another, non-identity link function would be more appropriate.	Boolean
Finds significant interactions	Whether at least one interaction, among those where the link was coded as incorrectly identity, yields a statistically significant result, or is considered and discussed analogously in non-frequentist analyses.	Boolean
Response variable types	Non-exclusive list of response-variable types on which interactions are tested (for example, sum score, accuracy, error count, response times, ordinal/Likert).	Category

Beyond these definitions, the coders applied a small set of operational rules for the recurring borderline decisions. Table 3 records the ones that most affect the reported counts.

Table 3
Operational rules the coders applied for the decisions that most affect the reported counts, condensed from the coding sheet. The preregistered variable definitions are in Table 2.

Variable	Coded "Yes" when	Decisions that most affect the count
Non-identity link used	at least one tested interaction is fitted with a model implying a non-identity link, that is, any GLM or GLMM beyond the Gaussian-identity default (ANOVA, ordinary regression, linear mixed model).	A model named "logistic", "probit", "Poisson", "negative binomial", "ordinal"/"cumulative", or "Gamma" regression implies a non-identity link.
Explicit link function	the link is stated in the report, either in words or by naming a link-specific model.	"Logistic regression" (logit), "probit regression" (probit), and "Poisson" or "log-linear" (log) count as explicit. Naming only a family, a "generalized linear model", or a "GLMM" does not.
Gaussian-identity analysis on a constrained outcome	an interaction is tested with an identity-link model (ANOVA, ordinary regression, linear mixed model, or a test on cell means) applied to an outcome with formal constraints: bounded, discrete, positive-only, or with a known chance level.	Flagged only when the constraint is clear from the report. Not flagged when the analysis is explicitly justified as an observed-score estimand, or when the outcome is plausibly continuous and far from any bound.
Significant interaction	at least one interaction already flagged as a Gaussian-identity analysis on a constrained outcome is reported as statistically significant, or is interpreted analogously (for example, a credible interval excluding zero) in a Bayesian analysis.	Restricted to interactions already flagged in the row above.
Response-variable types	—	Non-exclusive: one article can contribute several types (sum score, accuracy or proportion, error count, response time, ordinal/Likert, neural or physiological, difference score, correlation).

One additional decision beyond those summarized in Table 3 concerned transformed outcomes. Coding referred to the response on the scale on which it entered the model. When authors transformed the outcome before applying a linear model or ANOVA, the

analysis was evaluated on the transformed scale and was not flagged. For example, a linear model or ANOVA applied directly to raw response times was flagged because response times are constrained to positive values, whereas the same analysis applied to log transformed response times was not. Logarithmic transformations were the most common, but the same rule was applied to the other transformations encountered in the reviewed articles.

Two notes clarify the interpretation of the coding variables. First, *Incorrect identity link function* is a conservative screening flag for a formal mismatch between the observed-outcome constraints and the identity-link generative model. Cases were flagged only when the constraint was identifiable from the published report; when the report did not allow this judgment, the case was not counted. The flag is not an error rate, not a severity grade, and does not imply that the substantive conclusion is false, since an observed-score estimand can be a deliberate and defensible target. Second, *Response variable types* is non-exclusive: one article can contribute to several categories, so the category counts do not sum to the number of articles.

The last coding variable is described in greater detail in Table 4, which summarizes the response variable labels used during coding and their relation to the broader categories reported in the main paper. Classification was based primarily on the process that generated the response rather than on the terminology used by the article authors. When this process could not be determined reliably from the report, the authors' terminology was retained.

Table 4
Operational definitions of the broad response variable categories reported in the main paper and their principal detailed coding labels. An article could contribute to more than one row.

Broad category in the main paper	Principal detailed labels	Operational definition and coding decisions
Binary / accuracy / proportions	Binary; proportion	*Binary* indicated a finite number of discrete binary events, such as correct and incorrect responses over a predetermined number of trials. This label was retained when binary responses were summed or averaged. *Proportion* was reserved for responses treated as varying continuously between 0 and 1 and not determined by a fixed number of discrete binary events. Accuracy calculated over a predetermined number of trials was therefore coded as binary rather than as a continuous proportion.
Sum scores / composites	Sum score; log transformed sum score; normalized sum score	A *sum score* was a sum or average of multiple ordinal or slider responses. Aggregates of dichotomous responses were instead coded as binary. Log transformed and normalized totals were identified separately during detailed coding but were included in the same broad category for reporting.
Ordinal / Likert / ratings	Ordinal; slider	*Ordinal* indicated a single ordered response with no more than 10 response levels. A single ordered response with more than 10 available levels was coded as a *slider*. When multiple ordinal or slider responses were summed or averaged, the resulting outcome was coded as a sum score.
Response times / durations	Response time; log transformed response time; inverse response time	Positive response or reaction times were included in this category whether they were analyzed on their original scale, after a logarithmic transformation, or after a reciprocal transformation. The specific transformation was retained in the detailed coding.
Neural / physiological measures	Amplitude; log transformed amplitude; heart rate; heart rate variability; skin conductance response	Continuous neural and physiological measurements were included in this category. When a physiological response represented a count rather than an amplitude or continuous measurement, it was classified according to the process that generated the count.

Broad category in the main paper	Principal detailed labels	Operational definition and coding decisions
Difference / distance scores	Difference score; distance	A *difference score* was the arithmetic difference between two individual responses. *Distance* referred to continuous distance measures, including angular deviation, positional error, and geodesic distance.
Counts / error counts	Count; log transformed count; frequency	*Count* was reserved for counts without a predetermined upper bound. Counts of correct responses or errors over a fixed number of trials were coded as binary because the number of possible events was predetermined. Generic descriptions such as "errors" were therefore classified according to the underlying process whenever it could be established from the report.
Correlations / associations	Correlation; Fisher z transformed correlation	Correlations used as outcomes and their Fisher z transformations were distinguished during detailed coding and combined in this broad category for reporting.

Coding relied only on what a reader can observe in a published report: the analysis described, the outcome described, and any explicit statement of family or link. The review therefore documents reporting practice, not the correctness of substantive conclusions. For the same reason, the review did not classify interactions as removable or nonremovable at the article level, because published reports rarely provide the target contrast, the complete coefficients, and the assumed measurement scale that such a classification requires.

Interrater agreement

Double-coded records with complete coder pairs are summarized in Table 5, with raw percentage agreement and Cohen's kappa reported together. Several coded variables had imbalanced marginal distributions, a setting in which kappa can be conservative, so the coder-specific yes rates are reported alongside to let readers evaluate the agreement pattern directly.

Table 5
Interrater agreement for double-coded records.

Item	N	Agreement	Kappa	Coder 1 yes	Coder 2 yes
Uses non-identity link	199	92.0%	0.81	28.1%	30.2%
Explicit link reported	199	88.9%	0.66	20.6%	20.6%
Gaussian-identity flagged	197	88.3%	0.71	71.6%	72.1%
Significant flagged interaction	141	91.5%	0.68	86.5%	82.3%

By-journal descriptives

Table 6 reports the review descriptives by journal. Link percentages are computed within the coded articles (eligible articles with at least one observed-outcome interaction, 40 per journal), whereas the interaction-testing percentage counts interactions on observed or latent outcomes and is computed within eligible articles. The main paper reports only the range of these quantities across journals and the position of *Psychological Medicine*, which had the lowest screening proportion and the highest non-identity-link proportion in this sample.

Table 6
By-journal review descriptives.

Journal	Eligible (n)	Interaction-testing (n)	Interaction / eligible	Coded (n)	Non-identity link	Explicit link	Gaussian-identity flagged
Developmental Science	64	41	64.1%	40	25.0%	17.5%	57.5%
JEP: General	47	40	85.1%	40	27.5%	27.5%	75.0%
JPSP	62	42	67.7%	40	25.0%	15.0%	92.5%
Psychological Medicine	109	43	39.4%	40	40.0%	35.0%	40.0%
Psychological Science	63	42	66.7%	40	27.5%	20.0%	95.0%

S3. The chance-corrected binomial link

For binomial accuracy with a known chance level c, the chance-corrected link maps the linear predictor onto the interval from c to 1,

$$p_i = c + (1 - c)\, F(\eta_i),$$

where F is a cumulative distribution function, taken to be logistic in the analyses reported here. The corresponding link applies F^{-1} to the above-chance quantity,

$$g(p_i) = F^{-1}\left(\frac{p_i - c}{1 - c}\right).$$

For a two-alternative forced-choice or true/false task with $c = .50$ this becomes $p_i = .50 + .50\, F(\eta_i)$. A standard binomial logit

or probit is the special case $c = 0$. Both specifications respect the binomial sampling process, but they define different no-interaction baselines: a product term under the standard link tests additivity over the full 0-to-1 range, whereas under the chance-corrected link it tests additivity on a performance-above-chance scale that already encodes the task-implied lower asymptote.

The fixed-chance form used in the paper is the simplest member of a broader psychometric-function family. A more general version adds a lapse parameter λ that lowers the upper asymptote,

$$p_i = c + (1 - c - \lambda)\, F(\eta_i),$$

so that performance saturates below 1 when occasional lapses are plausible (Knoblauch & Maloney, 2012; Wichmann & Hill, 2001). The analyses in the paper fix $\lambda = 0$ and fix c by task design, for transparency and identifiability; the lapse-rate version is the natural extension when the design and data can support estimation of an upper asymptote.

S4. Data-generating processes and estimation details

This section gives the formal generative models and the estimation internals for the simulations. The main paper describes the purpose and interpretation of each simulation; here we state the equations, the fixed parameter values, and the fitting procedures needed to reproduce the reported behavior. Unless noted otherwise, each scenario used a significance level of $\alpha = .05$, and each simulation set a fixed random seed.

Generative parameters of the illustrative figures

Two figures in the main paper are illustrations rather than simulation results, so their parameters are recorded here.

The introductory count example samples $N = 250$ children with age drawn uniformly between 6 and 10 and group assigned by a fair coin. Error counts are Poisson with a log link,

$$\log \mu_i = 2.60 - 0.55\,(\text{age}_i - 6) + 0.65\,\text{group}_i,$$

with no age-by-group product term on the log scale. The figure plots, for one such sample, a Gaussian identity model with an age-by-group product term on the count scale, and a Poisson-log model without it on the log and count scales. The count scenario of the diagnostic simulation (D1) adapts this coefficient pattern rather than reproducing it exactly: it keeps the same generating structure but uses a smaller sample ($N = 180$), a slightly lower intercept (2.20), and a smaller group effect (0.45); its full specification is given below under *Diagnostic simulation: data-generating processes*.

The motivating 2×2 figure is fully deterministic: it evaluates four cell probabilities, without sampling. They are generated additively on the chance-corrected logit scale with $c = .50$,

$$p = .50 + .50\,\text{logistic}(\eta), \qquad \eta = -1.00 + 2.10\,\text{condition} + 1.70\,\text{group},$$

again with no condition-by-group product term. The resulting cell probabilities are given in Table 7. Because a saturated 2×2 design has exactly one product-term coefficient per scale, those same four probabilities imply the three different interaction coefficients reported in Table 8: exactly zero on the generating scale, positive on the standard logit scale, and negative on the raw probability scale.

Table 7
Cell probabilities of the motivating 2 × 2 figure. These four values are identical in all three panels of that figure.

Group	Condition	Linear predictor	Expected probability
0	0	−1.00	0.634
0	1	1.10	0.875
1	0	0.70	0.834
1	1	2.80	0.971

Table 8
Product-term coefficient implied by the cell probabilities in the previous table, on each of the three scales shown in the motivating figure. Only the scale on which the difference between differences is computed changes.

Scale	Implied product term
Linear (probability)	−0.103
Standard logit	0.513
Chance-corrected logit	0.000

Simulation 1: forced-choice accuracy with a chance floor

For each participant i, age is drawn on the range 6 to 10 and centered at 8, group is a two-level factor, and 20 repeated binary trial responses are generated. Age and group are constant across trials. The data-generating model is

$$u_i \sim N(0, \sigma_u^2), \qquad \eta_{ij} = \beta_0 + 0.60\,\text{age}_{c,i} - 0.90\,\text{group}_i + 0\,(\text{age}_{c,i} \times \text{group}_i) + u_i,$$

$$p_{ij} = .50 + .50\,\text{logistic}(\eta_{ij}), \qquad y_{ij} \sim \text{Bernoulli}(p_{ij}).$$

The subject random-intercept standard deviation is $\sigma_u = \sqrt{.30(\pi^2/3)/(1 - .30)} \approx 1.187$, corresponding to latent-scale ICC .30 under the usual logistic convention. The age-by-group product term is exactly zero on the conditional chance-corrected-logit scale. Three scenarios move the same fixed-effect structure along the accuracy range through the intercept: lower performance ($\beta_0 = -0.80$), middle performance ($\beta_0 = 0.00$), and higher performance ($\beta_0 = 0.80$). Each replication samples $N = 250$ participants. Deterministic scenario curves are evaluated at $u_i = 0$ and are not population-average probabilities.

Four candidate models are fitted to the same trial-level data with the same `age_c * group + (1 | id)` structure: (1) a Gaussian identity LMM applied intentionally to the binary response; (2) a standard binomial-logit GLMM; (3) a standard binomial-probit GLMM; and (4) a chance-corrected binomial-logit GLMM fitted with `lme4::glmer` and `psyphy::mafc.logit(2)`. Each receives one ordinary fit attempt. The chance-corrected GLMM is the only model fitted with a non-default setting, `nAGQ = 10` instead of 1. According to the `glmer` documentation, larger values evaluate the likelihood more accurately at some computational cost. With the default, 42% to 47% of the chance-corrected fits were flagged across scenarios. The other three models are fitted with defaults. The interaction test is the same asymptotic Wald-normal calculation for every model.

A fit is flagged when it errors, has a non-empty `fit@optinfo$conv$lme4$messages`, is singular at tolerance 10^{-4}, emits a targeted convergence, identifiability, Hessian, non-positive-definite, or degeneracy warning while inferential quantities are extracted, or has a non-finite interaction coefficient, standard error, or p-value, or a non-positive standard error. Finite p-values from flagged fits are retained. The primary rate is computed among fits passing these checks. The matched model's primary rate is a nominal rejection rate; the alternative models' primary rates are pseudo-interaction detection rates. The separately reported rate among flagged fits is an apparent rejection rate and not a valid inferential error rate.

Table 9

Product-term rejection rates by forced-choice performance scenario and fitted mixed model. Each model was fitted to 3,000 datasets per scenario. Primary rates use fits passing the minimal fit-quality checks; for the matched chance-corrected model this is a nominal rejection rate, for the other models a pseudo-interaction detection rate. Apparent rates among flagged fits are shown separately and are not valid inferential error rates. Rejections are given as rejections/finite p-values. CI = Wilson 95%.

Scenario	Model	Passing fits	Primary rejections	Primary rate [95% CI]	Flagged fits	Apparent rejections	Apparent rate [95% CI]
Lower	Gaussian identity	3000	372/3000	12.4% [11.3, 13.6]	0	–	–
Lower	Standard binomial logit	3000	605/3000	20.2% [18.8, 21.6]	0	–	–
Lower	Standard binomial probit	3000	570/3000	19.0% [17.6, 20.4]	0	–	–
Lower	Chance-corrected binomial logit	2652	152/2652	5.7% [4.9, 6.7]	348	261/347	75.2% [70.4, 79.5]
Middle	Gaussian identity	3000	163/3000	5.4% [4.7, 6.3]	0	–	–
Middle	Standard binomial logit	3000	466/3000	15.5% [14.3, 16.9]	0	–	–
Middle	Standard binomial probit	2902	383/2902	13.2% [12.0, 14.5]	98	91/98	92.9% [86.0, 96.5]
Middle	Chance-corrected binomial logit	2703	127/2703	4.7% [4.0, 5.6]	297	223/296	75.3% [70.1, 79.9]
Higher	Gaussian identity	3000	156/3000	5.2% [4.5, 6.1]	0	–	–
Higher	Standard binomial logit	2999	320/2999	10.7% [9.6, 11.8]	1	0/1	0.0% [0.0, 79.3]
Higher	Standard binomial probit	2892	245/2892	8.5% [7.5, 9.5]	108	88/108	81.5% [73.1, 87.7]
Higher	Chance-corrected binomial logit	2783	145/2783	5.2% [4.4, 6.1]	217	170/217	78.3% [72.4, 83.3]

The chance-corrected GLMM was flagged in 7% to 12% of replications across scenarios, against at most 4% for the other models. Its flagged fits rejected the product term in 75% to 78% of cases, so they must not be pooled with the acceptable fits.

Simulation 2: within-family link choice

Repeated binary trials are generated in a two-group, two-condition design with $N = 700$ participants, $k = 15$ trials per participant-condition cell, and a subject random intercept. The reference fixed effects on the probit scale are intercept 1.50, group −1.00, condition −1.00, and product term 0. When the generating link is logit, all fixed effects are multiplied by 1.65, so that the logit and probit data-generating processes imply similar cell probabilities while preserving a zero product term on the generating link scale. The random-intercept standard deviation is set from a latent-scale ICC of .30, using the latent residual variance of the generating link ($\pi^2/3$ for logit, 1 for probit).

Generating and fitted links are fully crossed (logit and probit in both roles), giving two matched-link and two wrong-link cells. All models are random-intercept GLMMs fitted with `glmmTMB`, using the same `group * condition` fixed-effect formula. The separate fitted-curve illustration uses a grouped-binomial dataset with 1,000 observational units and 60 trials per unit, with one `cbind(correct, incorrect)` response per unit; it is shown in Section S5, Figure 1.

Table 10

Product-term rejection rates for the within-family link simulation. Matched links show nominal rejection; wrong links show pseudo-interaction detection. The median coefficient and SE are on the fitted link scale. CI = Wilson 95%. All scenarios used 3,000 replications.

Generating link	Fitted link	Status	Rejections (n)	Rejection rate [95% CI]	Median β	Median SE
Logit	Logit	Matched link	148	4.9% [4.2, 5.8]	0.000	0.075
Logit	Probit	Wrong link	491	16.4% [15.1, 17.7]	−0.041	0.043
Probit	Logit	Wrong link	523	17.4% [16.1, 18.8]	0.078	0.076
Probit	Probit	Matched link	140	4.7% [4.0, 5.5]	0.000	0.043

Simulation 3: sum scores

Each replication samples $N = 600$ participants. A latent trait is generated as

$$\theta_i = 0.85\, x_i - 0.90\, \text{group}_i + 0\, (x_i \times \text{group}_i) + \varepsilon_i, \qquad \varepsilon_i \sim N(0, 1),$$

so the x-by-group product term is exactly zero on the latent generating scale. The latent trait is mapped to $J = 9$ ordinal items, each scored 0 to 3, through a graded logistic threshold model: item j has three ordered thresholds, and the probability of reaching category k or higher is logistic$(\theta_i - \tau_{jk})$. Thresholds are deterministic, with base values $(-1, 0, 1)$, evenly spaced item offsets from −0.45 to 0.45 across the nine items, and a scenario-level shift: lower range (shift +1.60, harder items compress scores toward the lower bound), middle range (shift 0.00), and upper range (shift −1.60). The observed outcome is the item total, bounded between 0 and 27, discrete, and differentially compressed across the score range.

Three analyses are fitted with the same `x * group` formula, to separate the relevant scales: (1) an observed sum-score identity model, `lm()` on the manifest total; (2) a Gaussian-probit bounded-score model, a Gaussian GLM with a probit link fitted to the

continuity-corrected score proportion $(\text{sum} + 0.5)/(\max + 1)$, included as a sensitivity model on the manifest total rather than a measurement model; and (3) a latent-scale benchmark, `lm()` on the true θ, available only because θ is known in the simulation.

Table 11

Product-term rejection rates by sum-score scenario and analysis scale. The latent generating-scale benchmark shows nominal rejection; observed-score models show pseudo-interaction detection. The latent benchmark is available only because θ is known. CI = Wilson 95%. All scenarios used 3,000 replications.

Scenario	Model	Rejections (n)	Rejection rate [95% CI]
Lower range	Latent generating scale	145	4.8% [4.1, 5.7]
Lower range	Observed sum-score identity	2147	71.6% [69.9, 73.2]
Lower range	Gaussian-probit bounded score	242	8.1% [7.1, 9.1]
Middle range	Latent generating scale	156	5.2% [4.5, 6.1]
Middle range	Observed sum-score identity	241	8.0% [7.1, 9.1]
Middle range	Gaussian-probit bounded score	102	3.4% [2.8, 4.1]
Upper range	Latent generating scale	125	4.2% [3.5, 4.9]
Upper range	Observed sum-score identity	1076	35.9% [34.2, 37.6]
Upper range	Gaussian-probit bounded score	130	4.3% [3.7, 5.1]

Diagnostic simulation: data-generating processes

The main paper introduces the five diagnostic scenarios in prose. Their formal generating models are given here. In every scenario the product term is exactly zero on the generating link scale, and the fitted model keeps the outcome family and the interaction formula while changing only the link.

D1, count errors (Poisson log, fitted with identity). For $N = 180$ children with age uniform on $[6, 10]$ and a balanced group factor, errors are Poisson with

$$\log \mu_i = 2.20 - 0.55\,(\text{age}_i - 6) + 0.45\,\text{group}_i.$$

D2, chance-floor accuracy (chance-corrected logit, fitted with standard logit). The lower-performance scenario of Simulation 1: $N = 250$ participants, $k = 20$ trial-level Bernoulli responses per participant, and

$$p_{ij} = .50 + .50\,\text{logistic}(\eta_{ij}), \qquad \eta_{ij} = -0.80 + 0.60\,\text{age}_{c,i} - 0.90\,\text{group}_i + u_i.$$

Here u_i is a subject random intercept with standard deviation $\sqrt{.30(\pi^2/3)/(1 - .30)}$, corresponding to latent-scale ICC .30 under the usual logistic convention. Both the standard-logit and chance-corrected-logit diagnostic models retain the same `(1 | id)` structure.

D3, binary repeated trials (probit, fitted with logit). A two-group, two-condition design with $N = 300$ participants, 15 trials per participant-condition cell, a subject random intercept, and a latent ICC of .30:

$$\Pr(y_{ij} = 1) = \Phi\left(1.50 - 1.00\,\text{group}_i - 1.00\,\text{condition}_j + u_i\right).$$

D4, binary with a continuous predictor (probit, fitted with logit). The same structure as D3 — $N = 300$ participants, 30 trials each — with the two-level condition replaced by a continuous predictor $x \sim \text{Uniform}(0, 1)$, so that the contrast from $x = 0$ to $x = 1$ has the same probit-scale size as the condition contrast in D3. This scenario exists because residual checks over a focal predictor are better identified when the predictor has many unique values.

D5, Gamma mean response time (log, fitted with inverse). For $N = 220$ participants, response times are Gamma with shape 8 and

$$\log \mu_i = \log(400) + 0.25\,x_i + 0.25\,\text{group}_i,$$

so the baseline mean is 400 ms at $x = 0$ in the reference group.

Table 12 reports the expected values these parameters imply, which is what the misspecified link has to reproduce with a product term.

Table 12

Expected values implied by the five diagnostic data-generating processes, at low, middle, and high values of the focal predictor. Values for the two binary scenarios are conditional on a subject random intercept of zero. Units differ by scenario and are given in the outcome column.

Scenario	Predictor	Predictor value	Group	Linear predictor	Outcome	Expected outcome
Count errors	age	6.0	0	2.20	expected count	9.025
Count errors	age	8.0	0	1.10	expected count	3.004
Count errors	age	10.0	0	0.00	expected count	1.000
Count errors	age	6.0	1	2.65	expected count	14.154
Count errors	age	8.0	1	1.55	expected count	4.711
Count errors	age	10.0	1	0.45	expected count	1.568
Chance-floor accuracy	age	6.0	0	−2.00	expected accuracy (u = 0)	0.560
Chance-floor accuracy	age	8.0	0	−0.80	expected accuracy (u = 0)	0.655
Chance-floor accuracy	age	10.0	0	0.40	expected accuracy (u = 0)	0.799
Chance-floor accuracy	age	6.0	1	−2.90	expected accuracy (u = 0)	0.526
Chance-floor accuracy	age	8.0	1	−1.70	expected accuracy (u = 0)	0.577
Chance-floor accuracy	age	10.0	1	−0.50	expected accuracy (u = 0)	0.689
Binary repeated trials	condition	0.0	0	1.50	expected probability (u = 0)	0.933
Binary repeated trials	condition	1.0	0	0.50	expected probability (u = 0)	0.691
Binary repeated trials	condition	0.0	1	0.50	expected probability (u = 0)	0.691
Binary repeated trials	condition	1.0	1	−0.50	expected probability (u = 0)	0.309
Binary continuous predictor	x	0.0	0	1.50	expected probability (u = 0)	0.933

Scenario	Predictor	Predictor value	Group	Linear predictor	Outcome	Expected outcome
Binary continuous predictor	x	0.5	0	1.00	expected probability (u = 0)	0.841
Binary continuous predictor	x	1.0	0	0.50	expected probability (u = 0)	0.691
Binary continuous predictor	x	0.0	1	0.50	expected probability (u = 0)	0.691
Binary continuous predictor	x	0.5	1	0.00	expected probability (u = 0)	0.500
Binary continuous predictor	x	1.0	1	−0.50	expected probability (u = 0)	0.309
Gamma mean response time	x	−2.0	0	5.49	expected mean (ms)	242.612
Gamma mean response time	x	0.0	0	5.99	expected mean (ms)	400.000
Gamma mean response time	x	2.0	0	6.49	expected mean (ms)	659.489
Gamma mean response time	x	−2.0	1	5.74	expected mean (ms)	311.520
Gamma mean response time	x	0.0	1	6.24	expected mean (ms)	513.610
Gamma mean response time	x	2.0	1	6.74	expected mean (ms)	846.800

Diagnostic simulation: estimation and checks

The diagnostic simulation ties each of the five link-misspecification scenarios defined above to a misspecified fitted link, holding the outcome family and the interaction formula fixed. In every replication the interaction model is fitted under the wrong link, and the

primary diagnostics are applied to that same fitted model, because that is the model an analyst would inspect after finding the interaction. The same diagnostics are also applied to the corresponding correct-link interaction model as a calibration check. The technical specification of the checks is as follows.

Simulation-based residuals (Dunn & Smyth, 1996; Hartig, 2024) were computed with DHARMa, simulating 250 responses from the fitted model per replication. Four prespecified checks were applied: residual uniformity (`testUniformity`), dispersion (`testDispersion`), residual quantile patterns over fitted values (`testQuantiles`), and residual structure over the focal predictor. The last check is scenario-aware: `testQuantiles` over the predictor is used when the predictor has at least eight unique values; for the 2×2 repeated-trials scenario, residuals are instead compared across the group-by-condition design cells with `testCategorical`, flagged when any of its within-cell uniformity tests (adjusted by DHARMa) or its Levene test is significant. All checks use the defaults of DHARMa 0.5.0; in this version, `simulateResiduals` simulates new responses conditionally on the fitted random effects. Table 19 reports this design-cell check for D3. Cells are marked "–" only when a check is not applicable or returns no usable replications in the saved diagnostic summary.

The Pregibon-style added-term link check (Pregibon, 1980) extracts the fitted linear predictor, adds its square to the model formula, and tests the significance of the added term while retaining the family, link, base formula, and random-effects structure of the model being diagnosed. For GLMMs, the constructed term uses the population-level linear predictor, with the estimated random effects set to zero; this avoids feeding outcome-derived empirical Bayes estimates back into the model as an ordinary covariate. The check is reported as not applicable when the squared predictor does not increase the rank of the fixed-effects design matrix. In particular, the 2×2 interaction model is saturated over its four design cells, so its squared fitted linear predictor is exactly collinear with the existing fixed effects.

The chance-corrected fits in D2 use `lme4::glmer` with `psyphy::mafc.logit(2)`, `nAGQ = 10` as in Simulation 1, and the

same subject random intercept as the standard-logit GLMM. DHARMa operates directly on the fitted `merMod` object. The Pregibon-style extension, when estimable, refits the same GLMM after adding the squared fixed-effects linear predictor.

The same-formula AIC comparison contrasts the target-link and the misspecified-link interaction models, holding the response data, the likelihood family, and the structural formula fixed, so only the mean-link mapping varies. No inconclusive ΔAIC category is used, so the two AIC rows in Table 19 are complementary whenever both AIC values are available.

S5. Supplementary tables and figures

The tables in this section report quantities at a finer grain than the main paper, or quantities the main paper states only in prose or in a figure. The headline rejection-rate summaries are reported in Section S4, next to each data-generating process.

Implied values, Simulation 1

The main paper describes the three forced-choice scenarios by the accuracy range they occupy. Table 13 gives the exact expected values behind those descriptions, and Table 14 gives the contrasts derived from them. The last row of the contrast table is the quantity the simulation is about: the age-by-group product term is exactly zero on the generating chance-corrected logit scale, while the group difference in expected accuracy still changes with age, by an amount that grows as the scenario moves toward the chance floor.

Table 13

Expected accuracy implied by the three forced-choice scenarios, at the youngest, middle, and oldest age. Correct responses are out of k = 20 trials.

Scenario	Age	Group	Linear predictor	Expected accuracy	Correct out of 20
Lower performance	6	0	−2.00	0.560	11.19
Lower performance	8	0	−0.80	0.655	13.10
Lower performance	10	0	0.40	0.799	15.99
Lower performance	6	1	−2.90	0.526	10.52
Lower performance	8	1	−1.70	0.577	11.54
Lower performance	10	1	−0.50	0.689	13.78
Middle performance	6	0	−1.20	0.616	12.31
Middle performance	8	0	0.00	0.750	15.00
Middle performance	10	0	1.20	0.884	17.69
Middle performance	6	1	−2.10	0.555	11.09
Middle performance	8	1	−0.90	0.645	12.89
Middle performance	10	1	0.30	0.787	15.74
Higher performance	6	0	−0.40	0.701	14.01
Higher performance	8	0	0.80	0.845	16.90
Higher performance	10	0	2.00	0.940	18.81
Higher performance	6	1	−1.30	0.607	12.14
Higher performance	8	1	−0.10	0.738	14.75
Higher performance	10	1	1.10	0.875	17.50

Table 14

Contrasts derived from the forced-choice scenarios. Probability points and correct-response units are on the observed accuracy scale; the link-scale column is on the generating chance-corrected logit scale.

Scenario	Contrast	Probability points	Correct responses (out of 20)	Link scale
Lower performance	Group difference at youngest age: Group 1 minus Group 0	−0.034	−0.67	–
Lower performance	Group difference at oldest age: Group 1 minus Group 0	−0.111	−2.21	–
Lower performance	Age-related change in Group 0: oldest minus youngest	0.240	4.79	–
Lower performance	Age-related change in Group 1: oldest minus youngest	0.163	3.25	–
Lower performance	Change in group difference from youngest to oldest age	−0.077	−1.54	–
Lower performance	Generating link-scale age-by-group product term	–	–	0.000
Middle performance	Group difference at youngest age: Group 1 minus Group 0	−0.061	−1.22	–
Middle performance	Group difference at oldest age: Group 1 minus Group 0	−0.097	−1.94	–
Middle performance	Age-related change in Group 0: oldest minus youngest	0.269	5.37	–
Middle performance	Age-related change in Group 1: oldest minus youngest	0.233	4.65	–
Middle performance	Change in group difference from youngest to oldest age	−0.036	−0.72	–
Middle performance	Generating link-scale age-by-group product term	–	–	0.000

Table 14
Contrasts derived from the forced-choice scenarios. Probability points and correct-response units are on the observed accuracy scale; the link-scale column is on the generating chance-corrected logit scale.

Scenario	Contrast	Probability points	Correct responses (out of 20)	Link scale
Higher performance	Group difference at youngest age: Group 1 minus Group 0	−0.094	−1.87	–
Higher performance	Group difference at oldest age: Group 1 minus Group 0	−0.065	−1.31	–
Higher performance	Age-related change in Group 0: oldest minus youngest	0.240	4.79	–
Higher performance	Age-related change in Group 1: oldest minus youngest	0.268	5.36	–
Higher performance	Change in group difference from youngest to oldest age	0.028	0.57	–
Higher performance	Generating link-scale age-by-group product term	–	–	0.000

Deterministic link-scale decomposition, Simulation 2

The nominal rejection and pseudo-interaction detection rates for Simulation 2 are reported in Section S4. Table 15 instead reports the deterministic quantities behind them: for each generating-by-fitted link combination, the product-term contrast induced by evaluating the generating cell probabilities on the fitted link scale, and the corresponding response-scale difference-in-differences. Under a matched link the induced product term is zero by construction; under a wrong link it is a fixed nonzero value. These values hold at random intercept 0; the median GLMM estimates in Table 10 are smaller, because changing the link also changes how the random intercept enters the model, but they have the same sign.

Table 15
Deterministic link-scale decomposition for Simulation 2. The induced product term is evaluated on the fitted link scale; the response-scale difference-in-differences is on the probability scale.

Generating link	Fitted link	Link status	Induced product term (fitted-link scale)	Response-scale diff-in-diff
Logit	Logit	Matched link	0.000	−0.164
Logit	Probit	Wrong link	−0.112	−0.164
Probit	Logit	Wrong link	0.216	−0.141
Probit	Probit	Matched link	0.000	−0.141

Implied values, Simulation 3

Table 16 gives the expected sum scores implied by the three sum-score scenarios, and Table 17 the contrasts derived from them. The generating latent-scale product term is zero in all three, yet the change in the group difference from low to high x, expressed in raw score points, is close to zero only in the middle of the scale and grows as the expected totals approach a bound. This is the compression the main paper describes, stated as a number rather than as a curve.

Table 16
Expected sum scores implied by the three sum-score scenarios, at low, middle, and high values of the predictor. Totals run from 0 to 27.

Scenario	x	Group	Latent mean	Expected sum score	Percent of max
Lower range	−1	0	−0.85	3.52	13.1%
Lower range	0	0	0.00	6.20	23.0%
Lower range	1	0	0.85	9.82	36.4%
Lower range	−1	1	−1.75	1.75	6.5%
Lower range	0	1	−0.90	3.40	12.6%
Lower range	1	1	−0.05	6.01	22.3%
Middle range	−1	0	−0.85	9.35	34.6%
Middle range	0	0	0.00	13.50	50.0%
Middle range	1	0	0.85	17.65	65.4%
Middle range	−1	1	−1.75	5.65	20.9%
Middle range	0	1	−0.90	9.12	33.8%
Middle range	1	1	−0.05	13.25	49.1%
Upper range	−1	0	−0.85	17.18	63.6%
Upper range	0	0	0.00	20.80	77.0%
Upper range	1	0	0.85	23.48	86.9%
Upper range	−1	1	−1.75	12.75	47.2%
Upper range	0	1	−0.90	16.94	62.8%
Upper range	1	1	−0.05	20.61	76.3%

Table 17

Contrasts derived from the sum-score scenarios. Sum-score units and percent of maximum are on the observed total; the latent-scale column is on the generating scale.

Scenario	Contrast	Contrast (score points)	Contrast (% of maximum)	Latent scale
Lower range	Group difference at low x: Group 1 minus Group 0	−1.774	−6.6%	–
Lower range	Group difference at high x: Group 1 minus Group 0	−3.807	−14.1%	–
Lower range	x-related change in Group 0: high x minus low x	6.295	23.3%	–
Lower range	x-related change in Group 1: high x minus low x	4.262	15.8%	–
Lower range	Change in group difference from low x to high x	−2.034	−7.5%	–
Lower range	Generating latent-scale x-by-group product term	–	–	0.000
Middle range	Group difference at low x: Group 1 minus Group 0	−3.702	−13.7%	–
Middle range	Group difference at high x: Group 1 minus Group 0	−4.398	−16.3%	–
Middle range	x-related change in Group 0: high x minus low x	8.294	30.7%	–
Middle range	x-related change in Group 1: high x minus low x	7.598	28.1%	–
Middle range	Change in group difference from low x to high x	−0.696	−2.6%	–
Middle range	Generating latent-scale x-by-group product term	–	–	0.000
Upper range	Group difference at low x: Group 1 minus Group 0	−4.432	−16.4%	–
Upper range	Group difference at high x: Group 1 minus Group 0	−2.863	−10.6%	–
Upper range	x-related change in Group 0: high x minus low x	6.295	23.3%	–
Upper range	x-related change in Group 1: high x minus low x	7.865	29.1%	–
Upper range	Change in group difference from low x to high x	1.570	5.8%	–
Upper range	Generating latent-scale x-by-group product term	–	–	0.000

Logit and probit fitted curves

Section S4 notes that the within-family comparison is also illustrated with a separate grouped-binomial dataset of 1,000 observational units and 60 trials per unit. Figure 1 shows the two fitted curves, and Table 18 the corresponding coefficients and AIC values.

The illustration makes concrete why the two links are usually treated as interchangeable and why that is not sufficient for an interaction claim. Panel A shows fitted probabilities that are hard to tell apart by eye. Panel B plots their difference, which never exceeds about two probability points but is systematic rather than noisy: it changes sign across the predictor range, so the logit fit sits above the probit fit in some regions and below it in others. A difference between differences computed on one scale therefore cannot equal the same contrast computed on the other, which is the deterministic quantity tabulated in Table 15. The coefficients in Table 18 are on each model's own link scale and are not comparable across rows; the AIC values are comparable, and they differ by far more than the fitted probabilities do.

Table 18
Coefficients and AIC for the logit and probit models fitted to the grouped-binomial illustration dataset. Intercept and slope are on each model's own link scale, so they are not directly comparable across rows.


Model	Intercept	Slope	AIC
Logit	0.045	1.753	4315.6
Probit	0.024	0.990	4380.4

Diagnostic detection rates and AIC strength

The main paper reports the DHARMa detection rate as a min-to-max range across checks. Table 19 gives the individual checks, the within-replication alignment between pseudo-interactions and applicable DHARMa checks, and the strength of the same-formula

Figure 1

Logit and probit models fitted to the same grouped-binomial dataset.

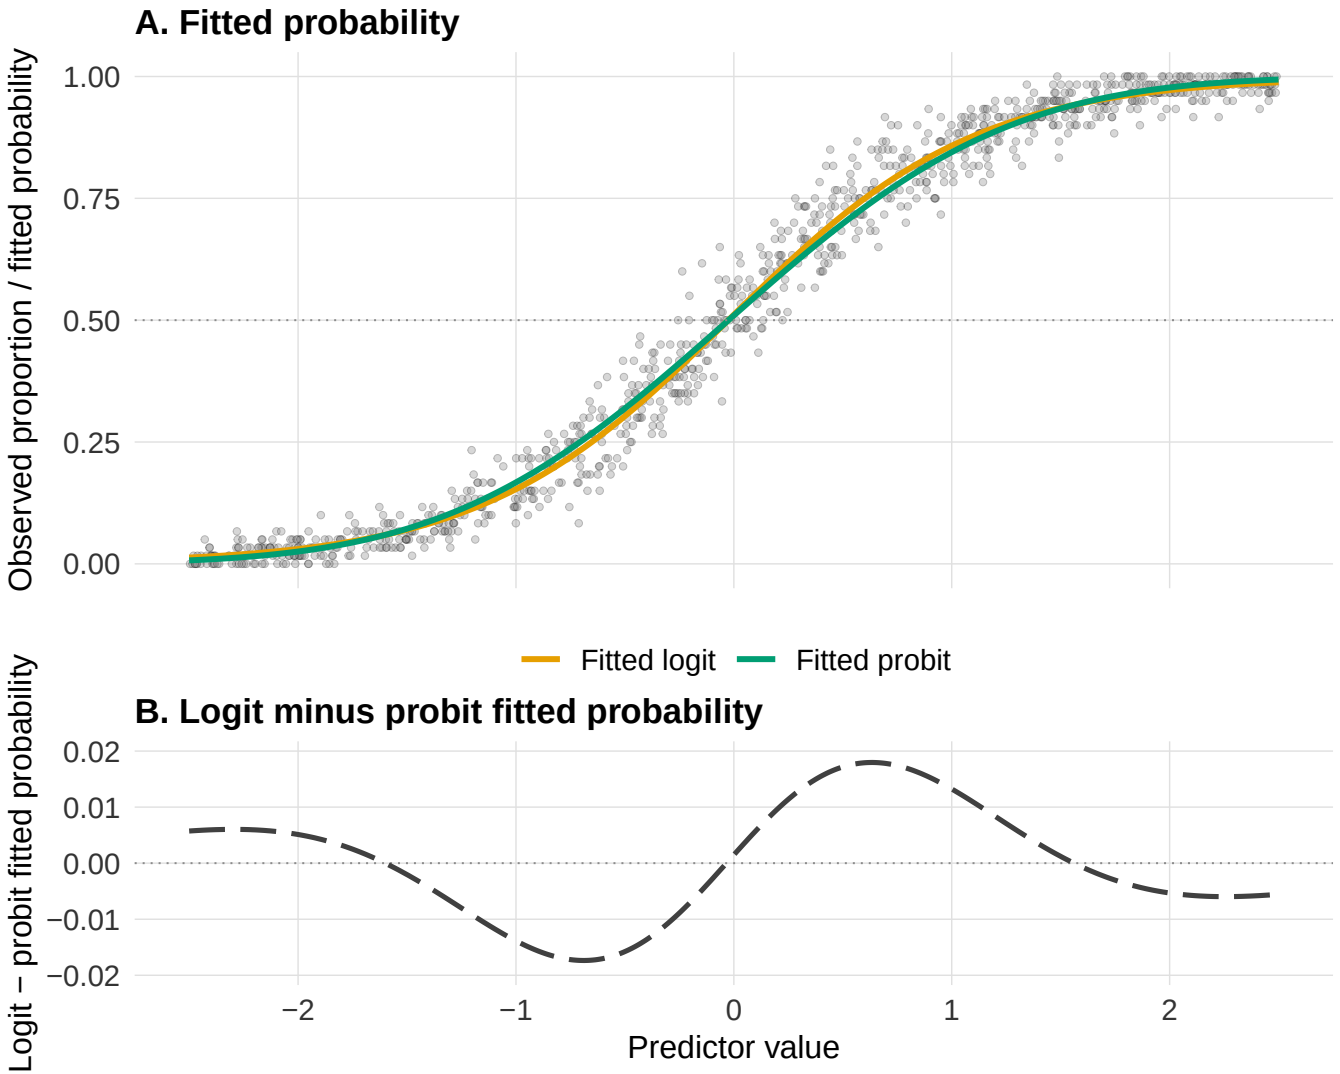

AIC comparison.

Table 19

Diagnostic detection rates and AIC strength across five scenarios. D1 count errors (Poisson log to identity); D2 chance-floor accuracy (chance-corrected to standard logit); D3 binary 2 × 2 GLMM (probit to logit); D4 binary continuous-predictor GLMM (probit to logit); D5 Gamma mean response time (log to inverse).

Check	D1	D2	D3	D4	D5
Pseudo-interaction (wrong link)	2693/2790 (96.5%)	588 (19.6%)	302 (10.1%)	201 (6.7%)	918 (30.6%)
DHARMa: uniformity	0.9%	3.6%	3.1%	3.4%	0.0%
DHARMa: dispersion	21.7%	0.0%	0.0%	0.0%	0.1%
DHARMa: quantiles vs fitted	63.7%	1.6%	3.2%	2.0%	2.7%
DHARMa: quantiles vs predictor	90.9%	1.5%	–	2.3%	6.4%
DHARMa: across design cells	–	–	7.4%	–	–
Pseudo-interactions missed by all applicable DHARMa checks	200/2693 (7.4%)	570/588 (96.9%)	267/302 (88.4%)	191/201 (95.0%)	853/918 (92.9%)
Pregibon link check	99.3%	11.9%	N.A.	5.4%	32.2%
AIC favors target link	99.3%	98.5%	95.5%	95.5%	79.7%
AIC favors misspecified link	0.7%	1.5%	4.5%	4.5%	20.3%
Median ΔAIC	22.8 (n = 2790)	16.7	6.0	4.8	2.4
|ΔAIC| < 2	23/2790 (0.8%)	62 (2.1%)	332 (11.1%)	431 (14.4%)	1142 (38.1%)

Each scenario used 3,000 replications, and each table reports its usable denominator. "Missed" means that none of the applicable prespecified DHARMa checks had $p < .05$; pseudo-interactions for which all five DHARMa p-values were missing are excluded from this conditional denominator. $\Delta\text{AIC} = \text{AIC}(\text{wrong link}) - \text{AIC}(\text{target link})$, so positive values favor the target link and negative values favor the wrong link. The sample size shown with the median and the denominator for $|\Delta\text{AIC}| < 2$ are the finite AIC

comparisons. N.A. indicates that the Pregibon-style added term is not identifiable in the saturated 2×2 interaction model.

Distribution of the AIC difference

The proportion of replications in which AIC favors the target link is not informative on its own, because winning by less than one AIC unit and winning by fifty describe different situations. Table 20 therefore gives the distribution of ΔAIC rather than only its median.

Table 20
Distribution of the AIC difference across replications, by diagnostic scenario. ΔAIC = AIC(wrong link) − AIC(target link), so positive values favor the target link. n = replications with both AIC values available.

Scenario	n	10th	25th	Median	75th	90th	Within 2 units	Favors target
Count errors	2790	10.7	16.6	22.8	30.3	36.4	0.8%	99.3%
Chance-floor accuracy	3000	7.1	11.4	16.7	22.5	28.0	2.1%	98.5%
Binary repeated trials	3000	1.5	3.8	6.0	8.4	10.5	11.1%	95.5%
Binary continuous predictor	3000	1.2	3.0	4.8	6.8	8.5	14.4%	95.5%
Gamma mean response time	3000	−1.3	0.4	2.4	4.5	6.3	38.1%	79.7%

Calibration under correctly specified links

The same DHARMa and Pregibon-style checks were applied to the corresponding correct-link interaction model in each replication. These baseline flagging rates provide a reference for interpreting detection under the wrong link. They reuse the same simulated datasets and scenarios rather than defining a new simulation.

The correct-link column provides the baseline needed to interpret detection under the wrong link. The four DHARMa checks flag the correct model in at most 8% of replications in every scenario. The highest rates are the uniformity check for the chance-corrected GLMM in D2 (8%) and the comparison across design cells in D3 (8%), which flags the misspecified model at a

similar rate (7%). The Pregibon-style check flags the correct chance-corrected GLMM in 14% of replications, still above the nominal level. As noted in the DHARMa documentation, the simulated residuals do not account for parameter estimation, so the DHARMa tests can be conservative; detection rates under the wrong link should therefore be read against the correct-link rates reported here rather than against the nominal α. For the Pregibon-style check, the random-intercept GLMMs use the population-level rather than subject-specific fitted linear predictor. The 2×2 version is not applicable because its saturated fixed-effects design already spans the proposed squared term; the continuous-predictor version is estimable, and its wrong-link flagging rate should be read against its correct-link calibration rate.

Table 21

Diagnostic calibration under correctly specified and misspecified links. Each cell gives the flagging rate with its Wilson 95% confidence interval and the number of successful diagnostic fits. Each cell had 3,000 attempted replications.

Scenario	Diagnostic	Correct-link flagging	Wrong-link flagging
Count errors	DHARMa uniformity	0.1% [0.0, 0.2]	0.9% [0.6, 1.3] (n = 2790)
Count errors	DHARMa dispersion	5.3% [4.5, 6.1]	21.7% [20.2, 23.3] (n = 2790)
Count errors	DHARMa residual quantiles over fitted values	3.4% [2.8, 4.1]	63.7% [61.9, 65.5] (n = 2790)
Count errors	DHARMa residual quantiles over focal predictor	3.9% [3.3, 4.7]	90.9% [89.8, 91.9] (n = 2790)
Count errors	Pregibon-style added-term link check	4.7% [4.0, 5.5]	99.3% [98.9, 99.5] (n = 2790)
Chance-floor accuracy	DHARMa uniformity	7.5% [6.6, 8.5]	3.6% [3.0, 4.4]
Chance-floor accuracy	DHARMa dispersion	0.1% [0.0, 0.3]	0.0% [0.0, 0.1]
Chance-floor accuracy	DHARMa residual quantiles over fitted values	2.8% [2.2, 3.4]	1.6% [1.2, 2.2]
Chance-floor accuracy	DHARMa residual quantiles over focal predictor	2.5% [2.0, 3.1]	1.5% [1.1, 2.0]
Chance-floor accuracy	Pregibon-style added-term link check	14.3% [13.1, 15.6]	11.9% [10.8, 13.1]
Binary repeated trials	DHARMa uniformity	3.8% [3.2, 4.5]	3.1% [2.5, 3.8]
Binary repeated trials	DHARMa dispersion	0.0% [0.0, 0.1]	0.0% [0.0, 0.1]
Binary repeated trials	DHARMa residual quantiles over fitted values	3.1% [2.5, 3.8]	3.2% [2.6, 3.9]


Scenario	Diagnostic	Correct-link flagging	Wrong-link flagging
Binary repeated trials	DHARMa residual distribution across design cells	8.4% [7.5, 9.5]	7.4% [6.5, 8.4]
Binary repeated trials	Pregibon-style added-term link check	N.A.	N.A.
Binary continuous predictor	DHARMa uniformity	3.9% [3.3, 4.7]	3.4% [2.8, 4.1]
Binary continuous predictor	DHARMa dispersion	0.0% [0.0, 0.1]	0.0% [0.0, 0.1]
Binary continuous predictor	DHARMa residual quantiles over fitted values	3.0% [2.5, 3.7]	2.0% [1.6, 2.6]
Binary continuous predictor	DHARMa residual quantiles over focal predictor	2.5% [2.0, 3.2]	2.3% [1.8, 2.9]
Binary continuous predictor	Pregibon-style added-term link check	5.3% [4.5, 6.1]	5.4% [4.7, 6.3]
Gamma mean response time	DHARMa uniformity	0.0% [0.0, 0.1]	0.0% [0.0, 0.2]
Gamma mean response time	DHARMa dispersion	0.4% [0.2, 0.7]	0.1% [0.1, 0.3]
Gamma mean response time	DHARMa residual quantiles over fitted values	1.5% [1.1, 2.0]	2.7% [2.2, 3.4]
Gamma mean response time	DHARMa residual quantiles over focal predictor	2.3% [1.8, 2.9]	6.4% [5.6, 7.4]
Gamma mean response time	Pregibon-style added-term link check	4.0% [3.4, 4.8]	32.2% [30.6, 33.9]

Deterministic pseudo-interaction under the wrong link

Figure 2 shows the deterministic pseudo-interaction induced on the wrong link scale in Simulation 2, before any sampling noise. It makes explicit why matched-link cells imply an exactly additive structure while wrong-link cells do not.

Figure 2

Deterministic pseudo-interaction induced on the wrong link scale in Simulation 2.

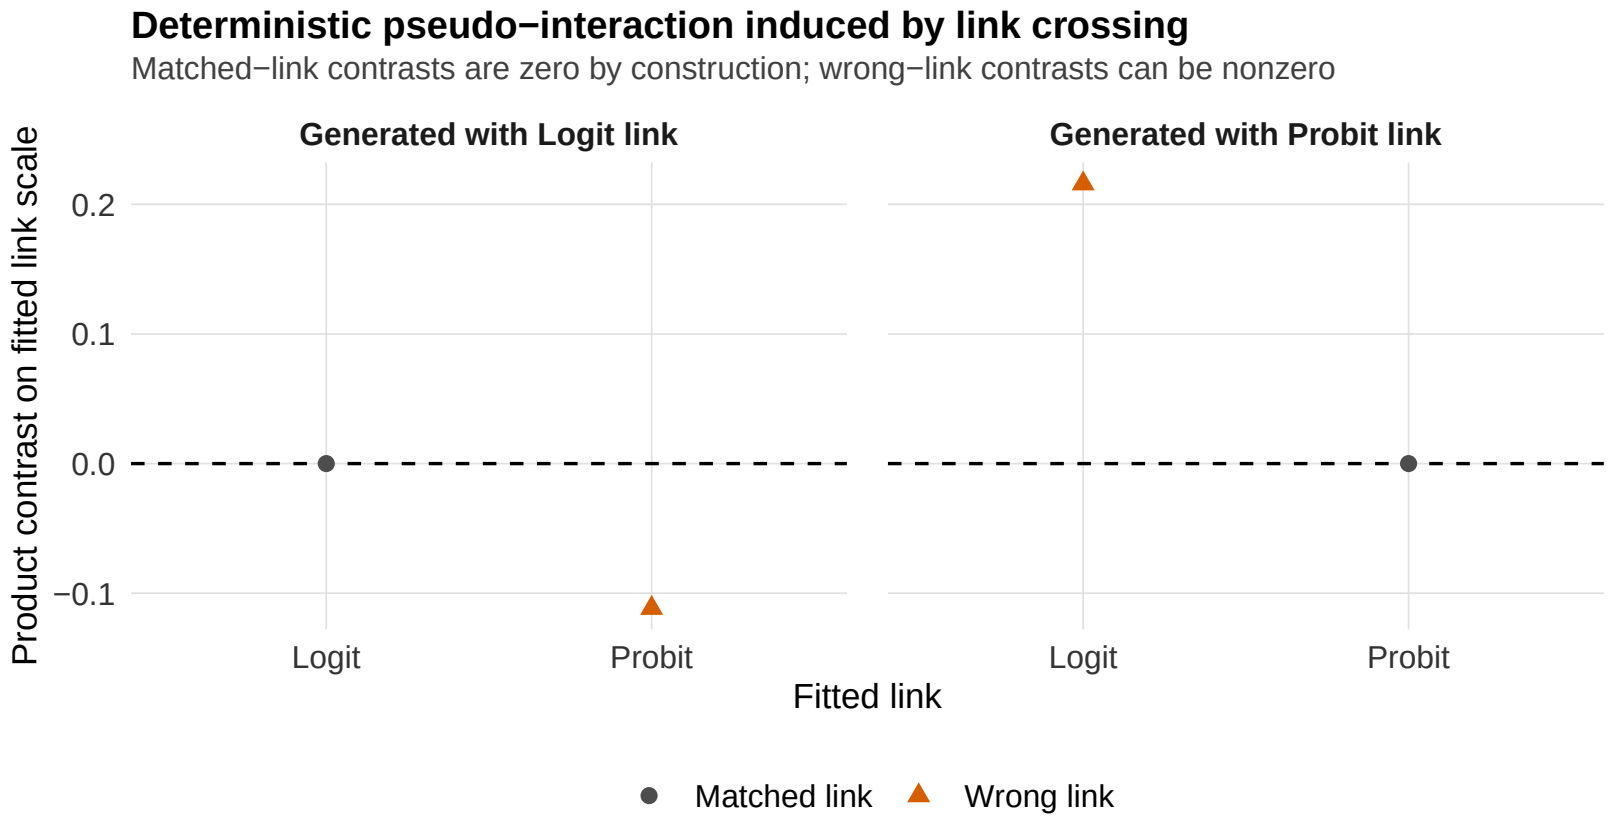

S6. Data, code, and computational environment

All analyses were conducted in R, and the manuscript and this supplement were written in Quarto. Each simulation sets a fixed random seed, and the number of Monte Carlo replications and the significance level are recorded together with the saved results. Exact package versions are pinned with `renv`, which is the source of truth for the computational environment; the key modeling dependencies are `glmmTMB` and `lme4` for the mixed-model simulations and `DHARMa` for the diagnostic checks. The complete data, analysis code, preregistration materials, and generated outputs are archived in the public repository associated with the article, so that every table and figure can be regenerated from the raw inputs.

The manuscript simulations use a small number of transparent scenarios. A broader precomputed sensitivity atlas (Supplement B) varies key parameters around those anchors, and the Shiny app explores its compact summaries without running simulations interactively. Replication-level atlas results are intended for the public repository or OSF archive and are not required to render this supplement.

References

Dunn, P. K., & Smyth, G. K. (1996). Randomized quantile residuals. *Journal of Computational and Graphical Statistics*, *5*(3), 236–244. https://doi.org/10.1080/10618600.1996.10474708

Hartig, F. (2024). *DHARMa: Residual diagnostics for hierarchical (multi-level / mixed) regression models*. https://doi.org/10.32614/CRAN.package.DHARMa

Knoblauch, K., & Maloney, L. T. (2012). *Modeling Psychophysical Data in R*. Springer. https://doi.org/10.1007/978-1-4614-4475-6

Pregibon, D. (1980). Goodness of link tests for generalized linear models. *Journal of the Royal Statistical Society Series C: Applied Statistics*, *29*(1), 15–24. https://doi.org/10.2307/2346405

Wichmann, F. A., & Hill, N. J. (2001). The psychometric function: I. Fitting, sampling, and goodness of fit. *Perception & Psychophysics*, *63*(8), 1293–1313. https://doi.org/10.3758/BF03194544