

tiaoma

A barcode generator for typst that provides type safe API bindings for [Zint](#) (GitHub) library through a WASM [plugin](#).

See [official Zint manual](#) for a more in-depth description of supported functionality.

API

barcode function

`#barcode`(data, symbology, options: (:), foreground: (fill: black), background: (:), ..args)

Encodes data into a barcode of the given symbology and renders it using native typst drawing primitives.

Parameter	Type	Description	Default
data	<code>str</code> or array	Data to encode.	–
symbology	<code>str</code>	Symbology name. See Zint manual for supported types.	–
options	dictionary	Zint encoding options. See configuration .	(:)
foreground	dictionary	Foreground and HRT text styling. <code>fill</code> sets bar color; all keys are spread into typst's <code>text()</code> for HRT rendering.	(fill: black)
background	dictionary	Background styling for the container box. Accepts <code>fill</code> , <code>stroke</code> , <code>radius</code> , <code>outset</code> , <code>inset</code> .	(:)
..args	any	Forwarded to the outer <code>box()</code> .	–

foreground dictionary

The foreground dictionary controls both the color of barcode elements (bars, dots, hexagons) and the styling of Human Readable Text (HRT). Its contents are spread into typst's `text()` function, so any valid `text()` parameter can be used.

The `fill` key is special: it is used as the foreground color for *all* barcode elements, not just text.

Key	Type	Description	Default
fill	<code>color</code> or <code>gradient</code>	Foreground color for bars and text.	<code>black</code>
font	<code>str</code> or array	Font family for HRT.	inherited
size	<code>length</code>	Overrides HRT font size.	from zint
weight	<code>str</code> or <code>int</code>	Font weight for HRT.	inherited
...	any	Any other <code>text()</code> parameter.	–

background dictionary

The background dictionary is spread into the outer `box()` that contains the barcode.

Key	Type	Description	Default
fill	<code>color</code> or <code>gradient</code> or <code>none</code>	Background fill.	<code>none</code>
stroke	<code>stroke</code> or <code>none</code>	Border stroke.	<code>none</code>
radius	<code>length</code> or dictionary	Corner radius.	<code>0pt</code>
outset	<code>length</code> or dictionary	Outset around box.	<code>0pt</code>
inset	<code>length</code> or dictionary	Inset padding.	<code>0pt</code>

Shortcut functions

Shortcut functions accept the same arguments as `barcode` but don't require symbology to be specified. See `lib.typ` for the full list.

Zint configuration

All exported functions support optionally providing the options dictionary which is passed to Zint. This provides means to fully configure generated symbols.

The following values are valid for the options dictionary:

Field	Type	Description	Default
-------	------	-------------	---------

height	float	Barcode height in X-dimensions (ignored for fixed-width barcodes).	none
whitespace-width	int	Width in X-dimensions of whitespace to left & right of barcode.	0
whitespace-height	int	Height in X-dimensions of whitespace above & below the barcode.	0
border-width	int	Size of border in X-dimensions.	0
show-hrt	bool	Whether to generate Human Readable Text.	true
output-options	int or array or dictionary	Various output parameters (bind, box, etc; see below).	0
primary	str	Primary message data (MaxiCode, Composite).	""
option-1	int	Symbol-specific option (see manual).	-1
option-2	int	Symbol-specific option (see manual).	0
option-3	int or str	Symbol-specific option (see manual).	0
input-mode	int or str or array or dictionary	Encoding of input data.	0
dot-size	float	Size of dots used in BARCODE_DOTTY_MODE.	4.0 / 5.0
text-gap	float	Gap between barcode and text (HRT) in X-dimensions.	1.0
guard-descent	float	Height in X-dimensions that EAN/UPC guard bars descend.	5.0
ultracode-colors	dictionary	Custom Ultracode color palette. Maps string codes "1"–"8" to colors.	CMYK defaults

Input Mode

Input mode options specify how Zint handles input data. Zint uses `int` bitflags, but tiaoma accepts several formats.

Input format (mutually exclusive)

Constant	int	str	Description
DATA_MODE	0	"data"	Use full 8-bit range interpreted as binary data.
UNICODE_MODE	1	"unicode"	Use UTF-8 input.
GS1_MODE	2	"gs1"	Encode GS1 data using FNC1 characters.

Behavior customization

Constant	int	str	Description
ESCAPE_MODE	8	"escape"	Process input data for escape sequences.
GS1PARENS_MODE	16	"gs1-parentheses"	Parentheses used in GS1 data instead of square brackets.
GS1NOCHECK_MODE	32	"gs1-no-check"	Do not check GS1 data for validity.
HEIGHTPERROW_MODE	64	"height-per-row"	Interpret height as per-row rather than overall height.
FAST_MODE	128	"fast"	Use faster if less optimal encodation (currently Data Matrix only).
EXTRA_ESCAPE_MODE	256	"extra-escape"	Process special symbology-specific escape sequences.

String Value

input-mode of `str` type is assumed to be an *input format* value from the first table.

Array Value

input-mode of `array` type is assumed to be a list of `str` values; individual constants will be OR'd together.

Dictionary Value

input-mode of `dictionary` type is assumed to be `str-bool` pairs where keys are constants from the above tables.

Output Options

Output options specify how Zint generates the barcode.

Constant	int	str	Description
BARCODE_BIND_TOP	1	"barcode-bind-top"	Boundary bar <i>above</i> the symbol.
BARCODE_BIND	2	"barcode-bind"	Boundary bars <i>above</i> and <i>below</i> the symbol.
BARCODE_BOX	4	"barcode-box"	Box surrounding the symbol and whitespace.
SMALL_TEXT	32	"small-text"	Use a smaller font for HRT.
BOLD_TEXT	64	"bold-text"	Embolden the HRT.
BARCODE_DOTTY_MODE	256	"barcode-dotty-mode"	Plot matrix symbol using dots rather than squares.
GS1_GS_SEPARATOR	512	"gs1-gs-separator"	Use GS instead of FNC1 as GS1 separator (Data Matrix).
BARCODE_QUIET_ZONES	2048	"barcode-quiet-zones"	Add compliant quiet zones.
BARCODE_NO_QUIET_ZONES	4096	"barcode-no-quiet-zones"	Disable quiet zones.
COMPLIANT_HEIGHT	8192	"compliant-height"	Use standard height as default.
EANUPC_GUARD_WHITESPACE	16384	"ean-upc-guard-whitespace"	Add quiet zone indicators to HRT whitespace (EAN/UPC).

Array Value

output-options of `array` type: list of `str` constant names.

Dictionary Value



output-options of `dictionary` type: `str-bool` pairs where keys are constant names.

Option 3

Constants associated with option-3 values. Can be specified as `int` or `str`.

Constant	int	str	Description
DM_SQUARE	100	"square"	Only consider square versions on automatic symbol size selection.
DM_DMRE	101	"rect"	Consider DMRE versions on automatic symbol size selection.
DM_ISO_144	128	"iso-144"	Use ISO instead of “de facto” format for 144×144.
ZINT_FULL_MULTIBYTE	200	"full-multibyte"	Enable Kanji/Hanzi compression for Latin-1 & binary data.
ULTRA_COMPRESSION	128	"compression"	Enable Ultracode compression (<i>experimental</i>).

Examples

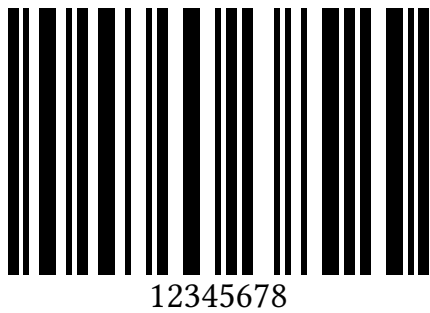

Supported Symbolologies

General

Code11

Code 11

Shortcut: #code11(data)

Symbology value: "Code11"

Options:

Option	Type	Description	Default
check_digits	int	Number of modulo-11 check digits to add to the symbol.	2

C25Standard

2 of 5 Standard (Matrix)

Shortcut: #c25-standard(data)

Symbology value: "C25Standard"

Options:

Option	Type	Description	Default
check_digit	bool	Whether to add a check digit to 2 of 5 code.	–
hide_check_digit	bool	Whether to hide the check digit from Human Readable Text (HRT).	–

C25Inter

2 of 5 Interleaved

Shortcut: `#c25-inter(data)`

Symbology value: "C25Inter"

Uses shared options from C25options.

C25IATA

2 of 5 IATA

Shortcut: `#c25-iata(data)`

Symbology value: "C25IATA"

Uses shared options from C25options.

C25Logic

2 of 5 Data Logic

Shortcut: `#c25-logic(data)`

Symbology value: "C25Logic"

Uses shared options from C25options.

C25Ind

2 of 5 Industrial

Shortcut: `#c25-ind(data)`

Symbology value: "C25Ind"

Uses shared options from C25options.

Code39

Code 39

Shortcut: `#code39(data)`

Symbology value: "Code39"

ExCode39

Extended Code 39

Shortcut: `#ex-code39(data)`

Symbology value: "ExCode39"

Codabar

Codabar

Shortcut: `#codabar(data)`

Symbology value: "Codabar"

Code128

Code 128

Shortcut: `#code128(data)`

Symbology value: "Code128"

Code16k

Code 16k

Shortcut: `#code16k(data)`

Symbology value: "Code16k"

Code49

Code 49

Shortcut: `#code49(data)`

Symbology value: "Code49"

Code93

Code 93

Shortcut: #code93(data)

Symbology value: "Code93"

Flat

Flattermarken

Shortcut: #flat(data)

Symbology value: "Flat"

Telepen

Telepen Alpha

Shortcut: #telepen(data)

Symbology value: "Telepen"

MSIPlessey

MSI Plessey is based on Plessey and developed by MSE Data Corporation.

MSI Plessey has a range of check digit options that are selectable by setting `check_digits`.

Numeric (digits 0-9) input can be encoded, up to a maximum of 65 digits.

Shortcut: #msi-plessey(data)

Symbology value: "MSIPlessey"

Options:

Option	Type	Description	Default
check_digits	MSIPlesseyCheckDigits	Specifies mode for generated check digits.	–
hide_check_digit	bool	Whether to hide the check digit from Human Readable Text (HRT).	–

FIM

Facing Identification Mark

Shortcut: #fim(data)

Symbology value: "FIM"

LOGMARS

Also accepted as: "Logmars"

LOGMARS

Shortcut: #logmars(data)

Symbology value: "LOGMARS"

Code128AB

Also accepted as: "CODE128B"

Code 128 (Suppress Code Set C)

Shortcut: #code128ab(data)

Symbology value: "Code128AB"

VIN

Vehicle Identification Number

Shortcut: #vin(data)

Symbology value: "VIN"

Plessey

Plessey (Code) symbology was developed by the Plessey Company Ltd. in the UK.

The symbol can encode data consisting of digits (0-9) or letters A-F up to a maximum of 65 characters and includes a CRC check digit.

Shortcut: #plessey(data)
Symbology value: "Plessey"

TelepenNum

Telepen Numeric

Shortcut: #telepen-num(data)
Symbology value: "TelepenNum"

Code32

Code 32

Shortcut: #code32(data)
Symbology value: "Code32"

Channel

Channel Code

Shortcut: #channel(data)
Symbology value: "Channel"

BC412

IBM BC412 (SEMI T1-95)

Shortcut: #bc412(data)
Symbology value: "BC412"

DXFilmEdge

DX Film Edge Barcode on 35mm and APS films

Shortcut: #dx-film-edge(data)
Symbology value: "DXFilmEdge"

Retail & Product Identification

EANX

Variable length EAN variant

Shortcut: #eanx(data)
Symbology value: "EANX"

Uses shared options from UPCEOptions.

EANXChk

Variable length EAN variant with digit check

Shortcut: #eanx-chk(data)
Symbology value: "EANXChk"

Uses shared options from UPCEOptions.

EANXCC

Variable length composite EAN variant

Shortcut: #eanx-cc(data)
Symbology value: "EANXCC"

Uses shared options from UPCEOptions.

EAN2

Also accepted as: "EAN2Addon"

EAN/UPC 2-digit

This symbology is almost never used as standalone and is generally appended to other one-dimensional barcodes.

Shortcut: #ean-2(data)

Symbology value: "EAN2"

Uses shared options from UPCEOptions.

EAN5

Also accepted as: "EAN5Addon"

EAN/UPC 5-digit

This symbology is almost never used as standalone and is generally appended to other one-dimensional barcodes.

Shortcut: #ean-5(data)

Symbology value: "EAN5"

Uses shared options from UPCEOptions.

EAN8

Also accepted as: "GTIN8"

EAN-8 (European Article Number) GTIN-8

In addition EAN-2 and EAN-5 add-on symbols can be added by using the '+' character as a separator after EAN-8 data.

Shortcut: #ean-8(data)

Symbology value: "EAN8"

Uses shared options from UPCEOptions.

EAN13

Also accepted as: "GTIN13"

EAN-13 (European Article Number) is a standard 13-digit barcode used in retail across Europe.

EAN-13 requires 12-digit numerical input. The check digit is calculated by Zint.

In addition EAN-2 and EAN-5 add-on symbols can be added by using the '+' character as a separator after EAN-13 data.

Shortcut: #ean-13(data)

Symbology value: "EAN13"

Uses shared options from UPCEOptions.

EAN14

Also accepted as: "GTIN14"

EAN-14

EAN-14 requires 13-digit numerical input. The check digit is calculated by Zint.

In addition EAN-2 and EAN-5 add-on symbols can be added by using the '+' character as a separator after EAN-14 data.

Shortcut: #ean-14(data)

Symbology value: "EAN14"

Uses shared options from UPCEOptions.

EAN8CC

EAN-8 Composite

Shortcut: #ean-8-cc(data)

Symbology value: "EAN8CC"

Uses shared options from UPCEOptions.

EAN13CC

EAN-13 Composite

Shortcut: #ean-13-cc(data)

Symbology value: "EAN13CC"

Uses shared options from UPCEOptions.

UPCA

UPC-A is used in the United States for retail applications. The symbol requires an 11-digit article number. The check digit is calculated by Zint.

In addition EAN-2 and EAN-5 add-on symbols can be added by using the ‘+’ character as a separator before EAN-2/EAN-5 data.

If input data already includes the check digit, UPCAChk can be used.

Shortcut: #upca(data)
Symbology value: "UPCA"

Options:

Option	Type	Description	Default
addon_gap	int	Gap between the main symbol and an add-on in multiples of the X-dimension.	9
guard_descent	float	Height in X-dimensions that the guard bars descend below the main bars.	5.0

UPCAChk

UPC-A variant that expects check digit to be included in input data.

See UPCA for details.

Shortcut: #upca-chk(data)
Symbology value: "UPCAChk"

Uses shared options from UPCAOptions.

UPCE

UPC-E

Shortcut: #upce(data)
Symbology value: "UPCE"

Options:

Option	Type	Description	Default
addon_gap	int	Gap between the main symbol and an add-on in multiples of the X-dimension.	7
guard_descent	float	Height in X-dimensions that the guard bars descend below the main bars.	5.0

UPCEChk

UPC-E including check digit

Shortcut: #upce-chk(data)
Symbology value: "UPCEChk"

Uses shared options from UPCEOptions.

ISBNX

ISBN

Relevant check digit needs to be present in the input data and will be verified before the symbol is generated.

In addition EAN-2 and EAN-5 add-on symbols can be added using the + character as with UPC symbols.

Shortcut: #isbnx(data)
Symbology value: "ISBNX"

Uses shared options from UPCEOptions.

NVE18

NVE-18 (SSCC-18)

Shortcut: #nve18(data)
Symbology value: "NVE18"

ITF14

ITF-14, also known as UPC Shipping Container Symbol or Case Code, is based on Interleaved Code 2 of 5 and requires a 13-digit numeric input (digits 0-9).

Shortcut: `#itf14(data)`

Symbology value: "ITF14"

UPCACC

UPC-A Composite

Shortcut: `#upca-cc(data)`

Symbology value: "UPCACC"

UPCECC

UPC-E Composite

Shortcut: `#upce-cc(data)`

Symbology value: "UPCECC"

GS1 DataBar

GS1128

Also accepted as: "EAN128"

GS1-128

Shortcut: `#gs1-128(data)`

Symbology value: "GS1128"

DBarOmn

Also accepted as: "RSS14"

GS1 DataBar Omnidirectional

Shortcut: `#dbar-omn(data)`

Symbology value: "DBarOmn"

DBarLtd

GS1 DataBar Limited

Shortcut: `#dbar-ltd(data)`

Symbology value: "DBarLtd"

DBarExp

GS1 DataBar Expanded

Shortcut: `#dbar-exp(data)`

Symbology value: "DBarExp"

DBarStk

Also accepted as: "RSS14Stk"

GS1 DataBar Stacked

Shortcut: `#dbar-stk(data)`

Symbology value: "DBarStk"

DBarOmnStk

Also accepted as: "RSS14Stack0mni"

GS1 DataBar Stacked Omnidirectional

Shortcut: `#dbar-omn-stk(data)`

Symbology value: "DBarOmnStk"

DBarExpStk

GS1 DataBar Expanded Stacked

Shortcut: #dbar-exp-stk(data)
Symbology value: "DBarExpStk"

GS1128CC

Also accepted as: "EAN128CC"

GS1-128 Composite

Shortcut: #gs1-128-cc(data)
Symbology value: "GS1128CC"

DBarOmnCC

Also accepted as: "RSS14CC"

GS1 DataBar Omnidirectional Composite

Shortcut: #dbar-omn-cc(data)
Symbology value: "DBarOmnCC"

DBarLtdCC

Also accepted as: "RSSLtdCC"

GS1 DataBar Limited Composite

Shortcut: #dbar-ltd-cc(data)
Symbology value: "DBarLtdCC"

DBarExpCC

Also accepted as: "RSSExpCC"

GS1 DataBar Expanded Composite

Shortcut: #dbar-exp-cc(data)
Symbology value: "DBarExpCC"

DBarStkCC

Also accepted as: "RSS14StackCC"

GS1 DataBar Stacked Composite

Shortcut: #dbar-stk-cc(data)
Symbology value: "DBarStkCC"

DBarOmnStkCC

Also accepted as: "RSS140mniCC"

GS1 DataBar Stacked Omnidirectional Composite

Shortcut: #dbar-omn-stk-cc(data)
Symbology value: "DBarOmnStkCC"

DBarExpStkCC

Also accepted as: "RSSExpStackCC"

GS1 DataBar Expanded Stacked Composite

Shortcut: #dbar-exp-stk-cc(data)
Symbology value: "DBarExpStkCC"

2D Matrix Codes

PDF417

PDF417

Shortcut: #pdf417(data)
Symbology value: "PDF417"

PDF417Comp

Also accepted as: "PDF417Trunc"

Compact PDF417 (Truncated PDF417)

Shortcut: #pdf417-comp(data)
Symbology value: "PDF417Comp"

MaxiCode

MaxiCode symbology is designed for the identification of parcels.

MaxiCode symbols can be encoded in one of five modes which are specified using the mode option.

This symbology uses Latin-1 character encoding by default but also supports the ECI encoding mechanism. The maximum length of text which can be placed in a MaxiCode symbol depends on the type of characters used in the text and mode, see MaxiCodeMode variants for details.

Shortcut: #maxicode(data)
Symbology value: "MaxiCode"

Options:

Option	Type	Description	Default
mode	MaxiCodeMode < 'o >	MaxiCode mode and corresponding options to use for encoding. See MaxiCodeMode for details.	–
scm_prefix	int	2-digit version used in ISO/IEC 15434 Format 01 (transportation) prefix []>\R01\Gvv which will be prepended to ASCII-compatible secondary message data. This prefix will only be used with StructuredCarrierMessage and will be ignored otherwise. Only values in range [0, 99] are valid, and zint will return an error if provided data ECI isn't ASCII-compatible. This is only a utility option and prefix can be included in secondary message data manually.	–

QRCode

QR Code

Shortcut: #qrcode(data)
Symbology value: "QRCode"

Options:

Option	Type	Description	Default
error_correction	QRErrorCorrection	–	–
size	QRSize	–	–
full_multibyte	bool	–	–
mask	QRMask	–	–

DataMatrix

Data Matrix (ECC200)

Shortcut: #data-matrix(data)
Symbology value: "DataMatrix"

CodablockF

Codablock-F

Shortcut: #codablock-f(data)
Symbology value: "CodablockF"

MicroPDF417

MicroPDF417

Shortcut: #micro-pdf417(data)
Symbology value: "MicroPDF417"

Aztec
Aztec Code

Shortcut: #aztec(data)
Symbology value: "Aztec"

MicroQR
Micro QR Code

Shortcut: #micro-qr(data)
Symbology value: "MicroQR"

DotCode
DotCode

Shortcut: #dotcode(data)
Symbology value: "DotCode"

HanXin
Han Xin (Chinese Sensible) Code

Shortcut: #hanxin(data)
Symbology value: "HanXin"

AzRune
Aztec Runes

Shortcut: #azrune(data)
Symbology value: "AzRune"

CodeOne
Code One

Shortcut: #code-one(data)
Symbology value: "CodeOne"

GridMatrix
Grid Matrix

Shortcut: #grid-matrix(data)
Symbology value: "GridMatrix"

Ultra
Ultracode symbology uses a grid of coloured elements to encode data.
ECI and GS1 modes are supported.

Shortcut: #ultra(data)
Symbology value: "Ultra"

Options:

Option	Type	Description	Default
error_correction	UltracodeErrorCorrection	Specifies amount of symbol holding error correction data.	–
compression	bool	Enables support for data compression. Experimental Ultracode data compression is experimental and should not be used in a production environment.	–
revision	UltracodeRevision	Specifies which Ultracode revision to use for symbol encoding.	–

RMQR

Rectangular Micro QR Code (rMQR)

Shortcut: `#rmqr(data)`

Symbology value: "RMQR"

Postal Services

DPLEIT

Deutsche Post Leitcode is based on Interleaved Code 2 of 5 and is used by Deutsche Post for mailing purposes. Leitcode requires a 13-digit numerical input and includes a check digit.

Shortcut: `#dpleit(data)`

Symbology value: "DPLEIT"

DPIDENT

Deutsche Post Identcode is based on Interleaved Code 2 of 5 and is used by Deutsche Post for mailing purposes. Identcode requires 11-digit numerical input and includes a check digit.

Shortcut: `#dpident(data)`

Symbology value: "DPIDENT"

Postnet

USPS (U.S. Postal Service) POSTNET

Shortcut: `#postnet(data)`

Symbology value: "Postnet"

CEPNet

Brazilian CEPNet Postal Code

Shortcut: `#cepnet(data)`

Symbology value: "CEPNet"

AusPost

Australia Post Standard Customer

Shortcut: `#aus-post(data)`

Symbology value: "AusPost"

AusReply

Australia Post Reply Paid

Shortcut: `#aus-reply(data)`

Symbology value: "AusReply"

AusRoute

Australia Post Routing

Shortcut: `#aus-route(data)`

Symbology value: "AusRoute"

AusRedirect

Australia Post Redirection

Shortcut: `#aus-redirect(data)`

Symbology value: "AusRedirect"

RM4SCC

Royal Mail 4-State Customer Code

Shortcut: `#rm4scc(data)`

Symbology value: "RM4SCC"

JapanPost

Japanese Postal Code

Shortcut: #japan-post(data)
Symbology value: "JapanPost"

KoreaPost

Korea Post

Shortcut: #korea-post(data)
Symbology value: "KoreaPost"

Planet

USPS PLANET

Shortcut: #planet(data)
Symbology value: "Planet"

USPSIMail

Also accepted as: "OneCode"

USPS Intelligent Mail (OneCode)

Shortcut: #usps-icemail(data)
Symbology value: "USPSIMail"

KIX

Dutch Post KIX Code

Shortcut: #kix(data)
Symbology value: "KIX"

DAFT

DAFT Code

Shortcut: #daft(data)
Symbology value: "DAFT"

DPD

DPD Code

Shortcut: #dpd(data)
Symbology value: "DPD"

Mailmark2D

Royal Mail 2D Mailmark (CMDM) (Data Matrix)

Shortcut: #mailmark-2d(data)
Symbology value: "Mailmark2D"

UPUS10

Universal Postal Union S10

Shortcut: #upus10(data)
Symbology value: "UPUS10"

Mailmark4S

Also accepted as: "Mailmark"

Royal Mail 4-State Mailmark

Shortcut: #mailmark-4s(data)
Symbology value: "Mailmark4S"

UPNQR

UPNQR (Univerzalnega Plačilnega Naloga QR)

Shortcut: #upnqr(data)
Symbology value: "UPNQR"

Healthcare & Pharmaceutical

Pharma

Pharmacode One-Track

Shortcut: `#pharma(data)`

Symbology value: "Pharma"

PZN

Pharmazentralnummer

Shortcut: `#pzn(data)`

Symbology value: "PZN"

PharmaTwo

Pharmacode Two-Track

Shortcut: `#pharma-two(data)`

Symbology value: "PharmaTwo"

HIBC128

HIBC (Health Industry Barcode) Code 128

Shortcut: `#hibc-128(data)`

Symbology value: "HIBC128"

HIBC39

HIBC Code 39

Shortcut: `#hibc-39(data)`

Symbology value: "HIBC39"

HIBCDM

HIBC Data Matrix

Shortcut: `#hibc-dm(data)`

Symbology value: "HIBCDM"

HIBCQR

HIBC QR Code

Shortcut: `#hibc-qr(data)`

Symbology value: "HIBCQR"

HIBCPDF

HIBC PDF417

Shortcut: `#hibc-pdf(data)`

Symbology value: "HIBCPDF"

HIBCMicroPDF

Also accepted as: "HIBCMicPDF"

HIBC MicroPDF417

Shortcut: `#hibc-micro-pdf(data)`

Symbology value: "HIBCMicroPDF"

HIBCCodablockF

Also accepted as: "HIBCBlockF"

HIBC Codablock-F

Shortcut: `#hibc-codablock-f(data)`

Symbology value: "HIBCCodablockF"

HIBCAztec

HIBC Aztec Code

Shortcut: #hibc-aztec(data)

Symbology value: "HIBCAztec"