


BAO recon param scan (catalog-based ξ ℓ): sample=cmasslowztot, dist=lcdm, out_tag_prefix=recon_grid_iso

Ross post-recon vs catalog-based (上位 configs)



rank_by=chi2 (lower is better)

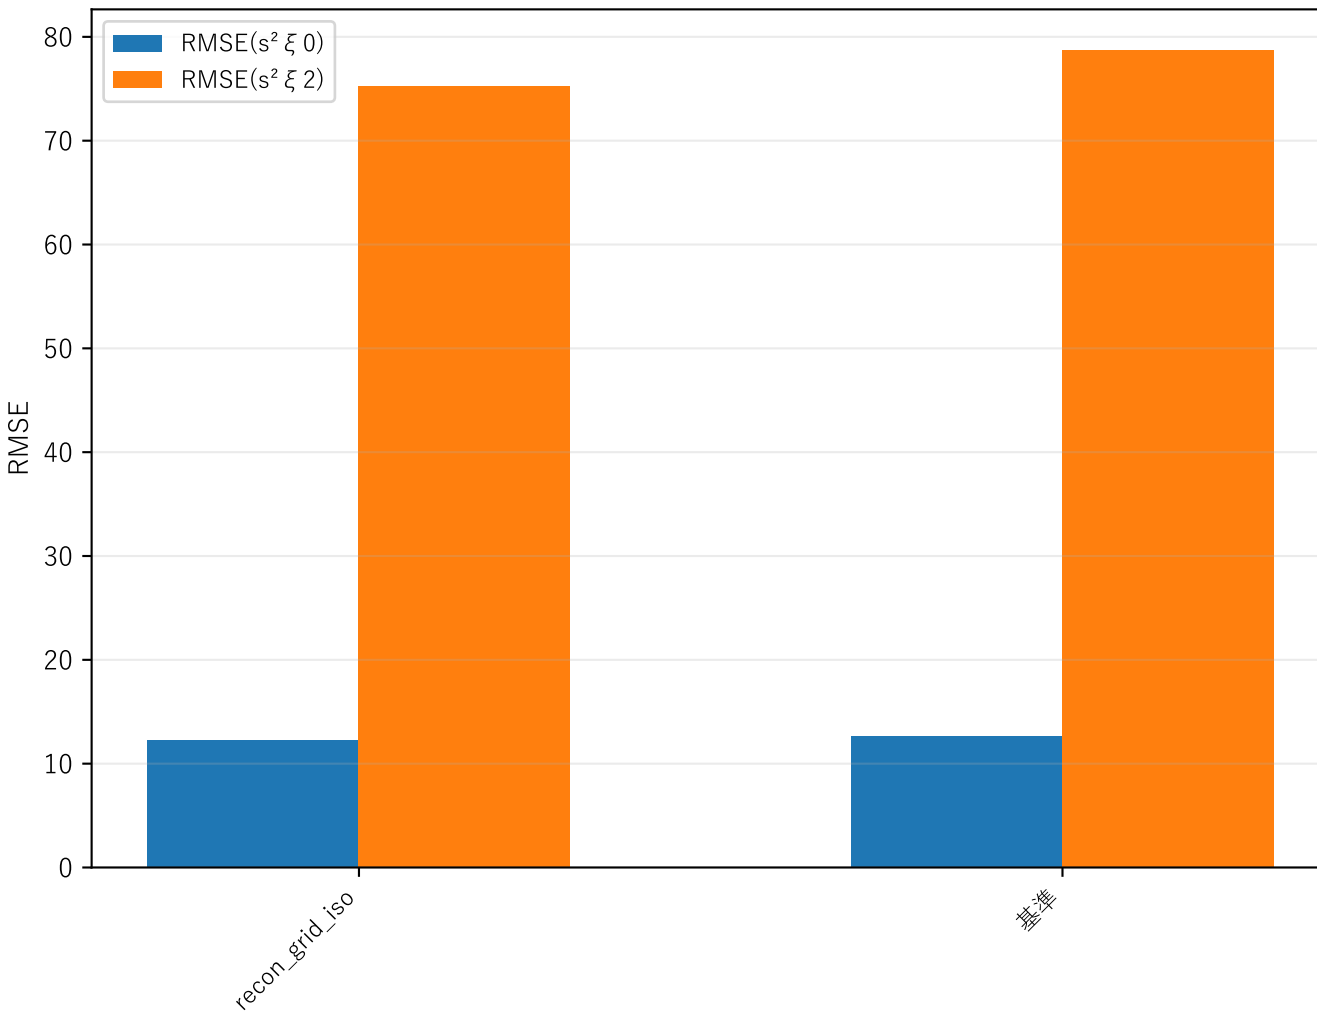