

MÓDULO DE API

Se intentaron llevar a cabo las pruebas de API siguiendo las pautas y los resultados son los siguientes:

1- Al hacer POST nos encontramos con un 401.



The screenshot shows a REST client interface with the following details:

- Method:** POST
- URL:** <https://reqres.in/api/users>
- Body:**



```
{
  "name": "Test User",
  "job": "Automation Engineer"
}
```
- Status:** 401 Unauthorized
- Response Body (JSON):**

```
{
  "error": "missing_api_key",
  "message": "The x-api-key header is required for this endpoint.",
  "hint": "Create a free key at app.reqres.in and send it as x-api-key.",
  "next_steps": [
    "Go to app.reqres.in/api-keys to get your key",
    "Add header: x-api-key: <your_key>",
    "For app user endpoints, use Authorization: Bearer <session_token> instead"
  ],
  "docs_url": "https://app.reqres.in/docs#authentication",
  "example_curl": "curl -H \"x-api-key: YOUR_API_KEY\" https://api.reqres.in/api/collections",
  "_meta": {
    "powered_by": "ReqRes",
    "docs_url": "https://app.reqres.in/documentation",
    "upgrade_url": "https://app.reqres.in/upgrade",
    "example_url": "https://app.reqres.in/examples/notes-app",
    "variant": "v1_a",
    "message": "API key invalid or revoked. Create a new key in API Keys.",
    "cta": {
      "label": "Get a key",
      "url": "https://app.reqres.in/api-keys"
    },
    "context": "invalid_key"
  }
}
```


2- Se decidió crear una X-api-key de la pagina oficial para avanzar con las pruebas que fue agregado al header junto con el content type.

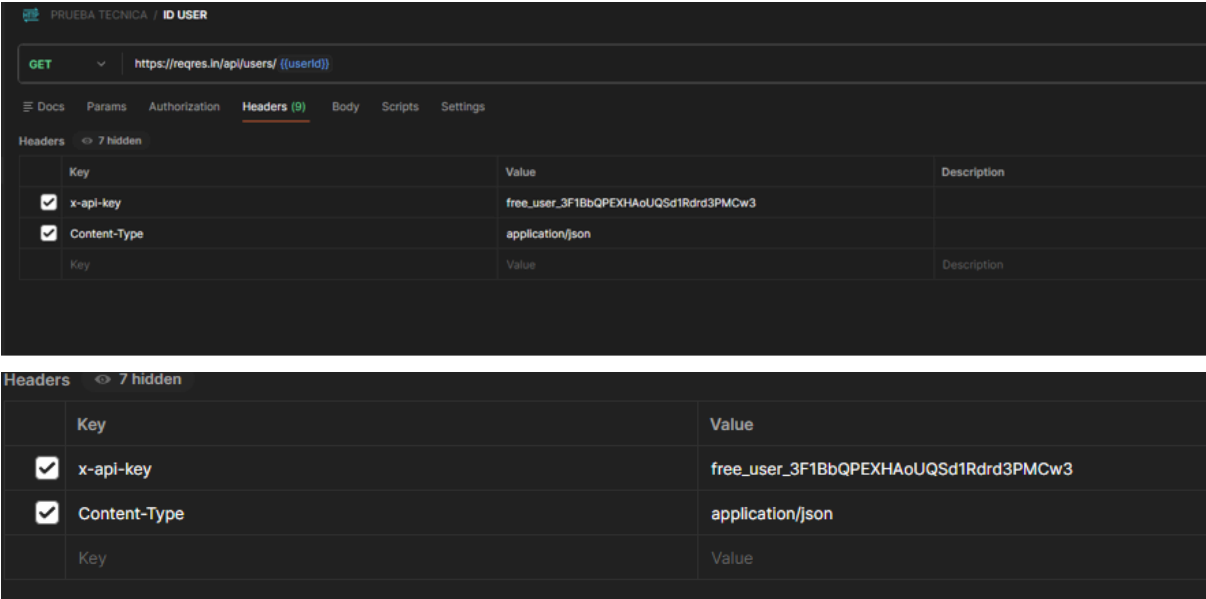
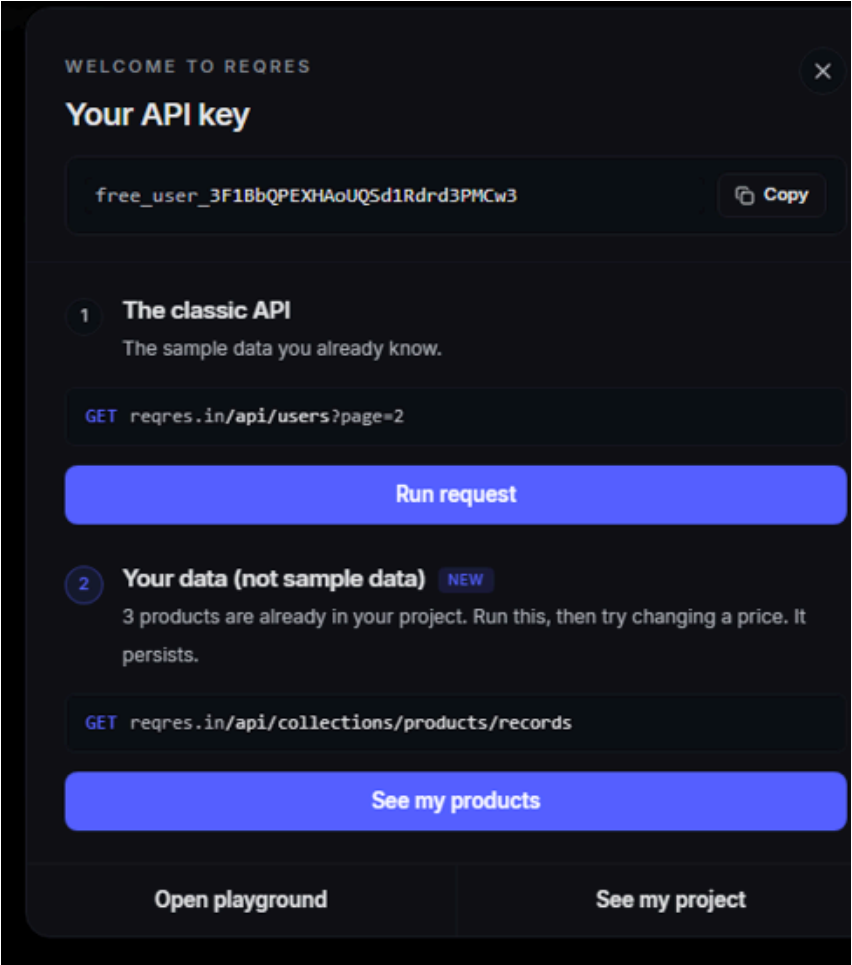


3- Para Extraer el ID del usuario recién creado de la respuesta y realizar una solicitud GET al endpoint `/users/{id}`” Se implementó el siguiente Script dentro del Post

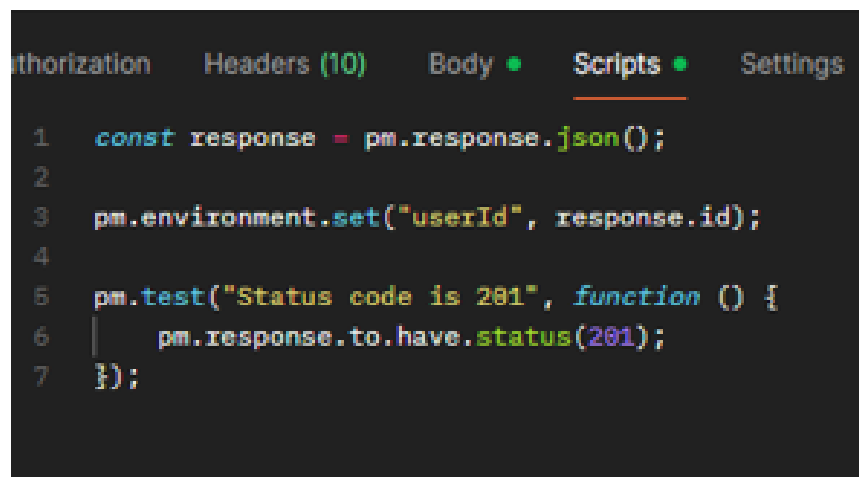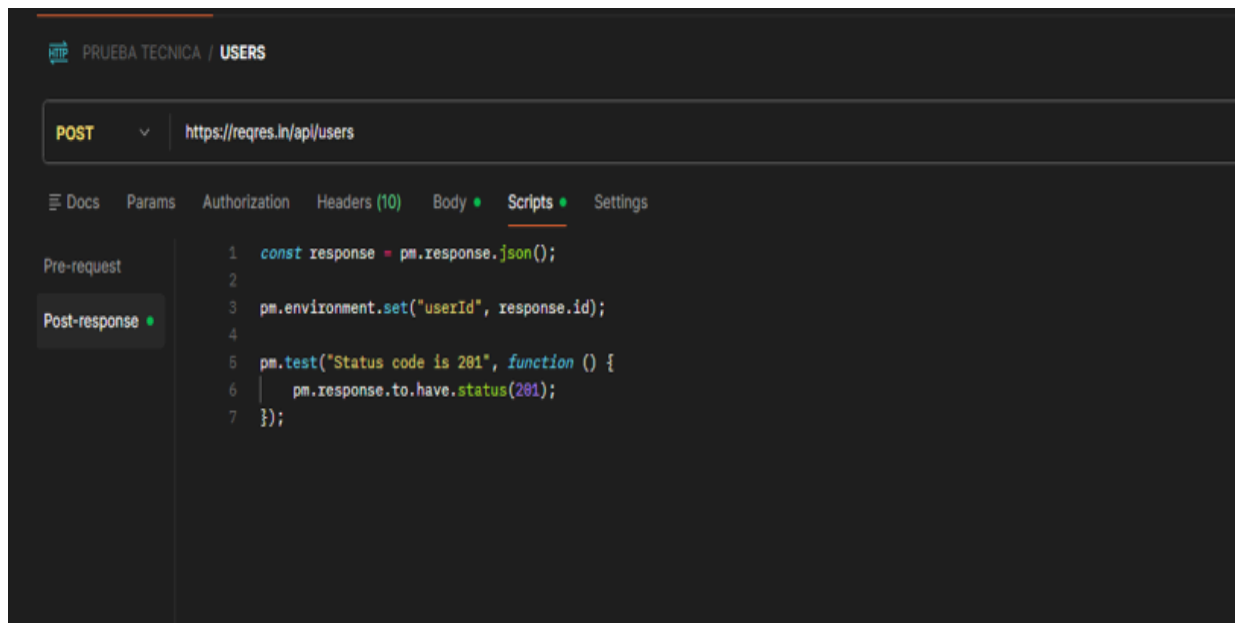

4- Del POST Se obtuvo la siguiente RESPONSE:

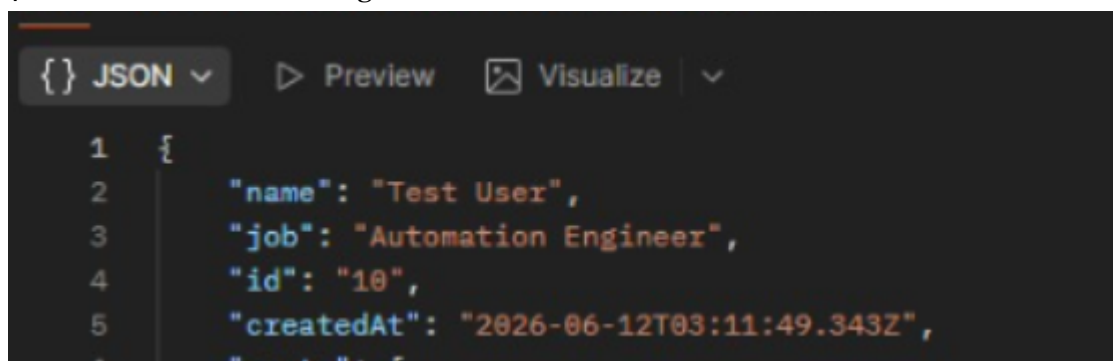


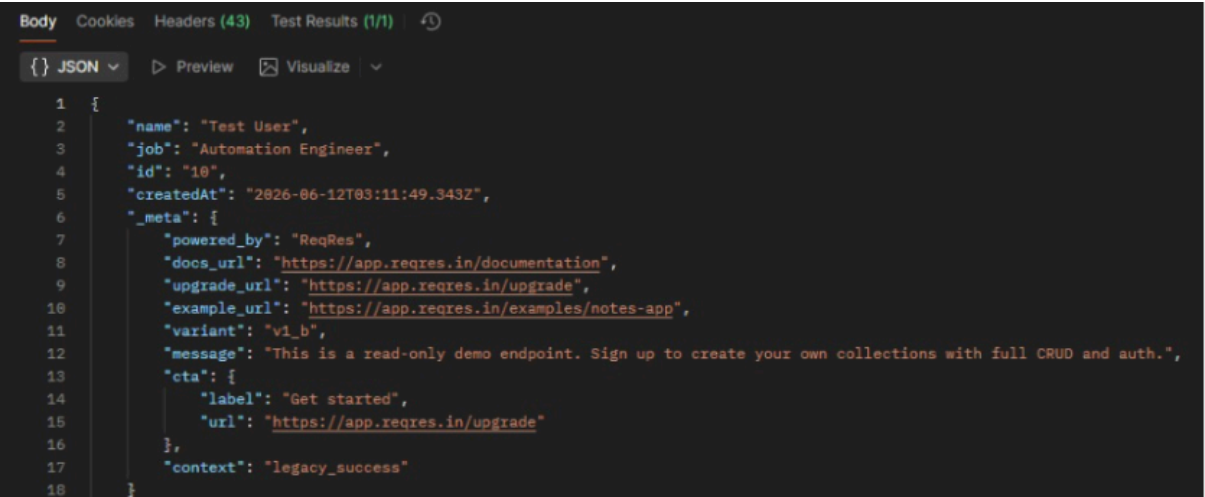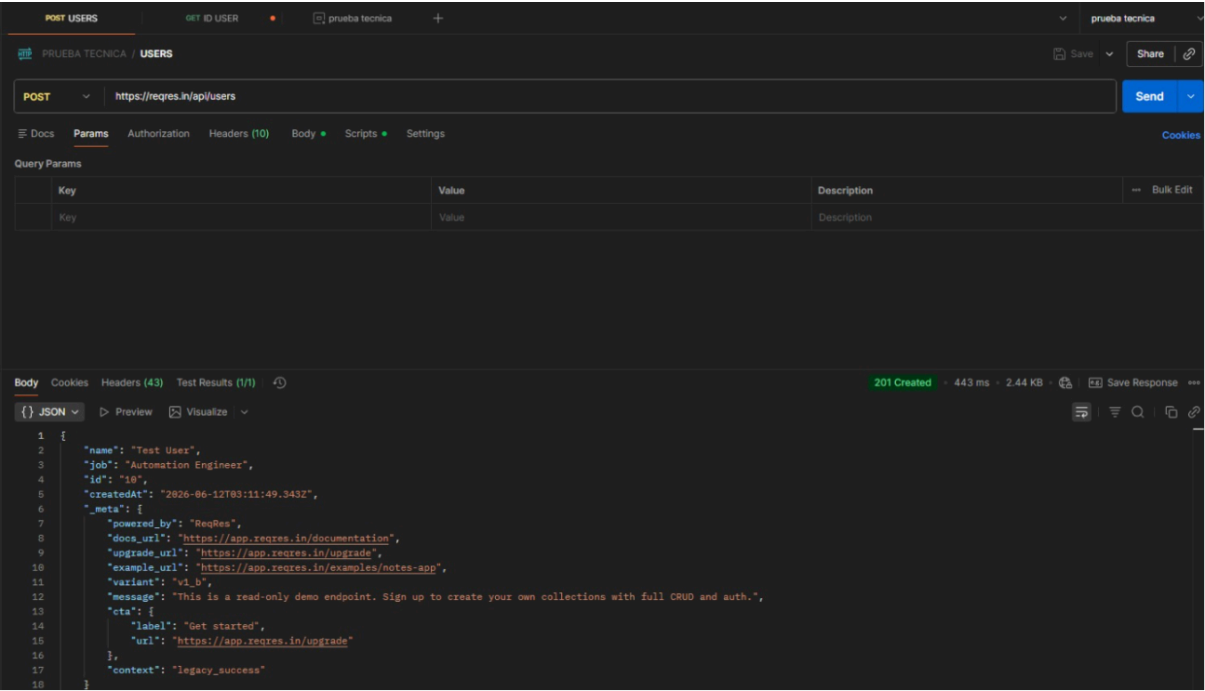

5- Creamos el ENVIROMENT con el userId necesario para que el get no nos de errores.

prueba tecnica	
Variable	Value
userId	

6- Luego pasamos al GET para obtener el user creado ID:10

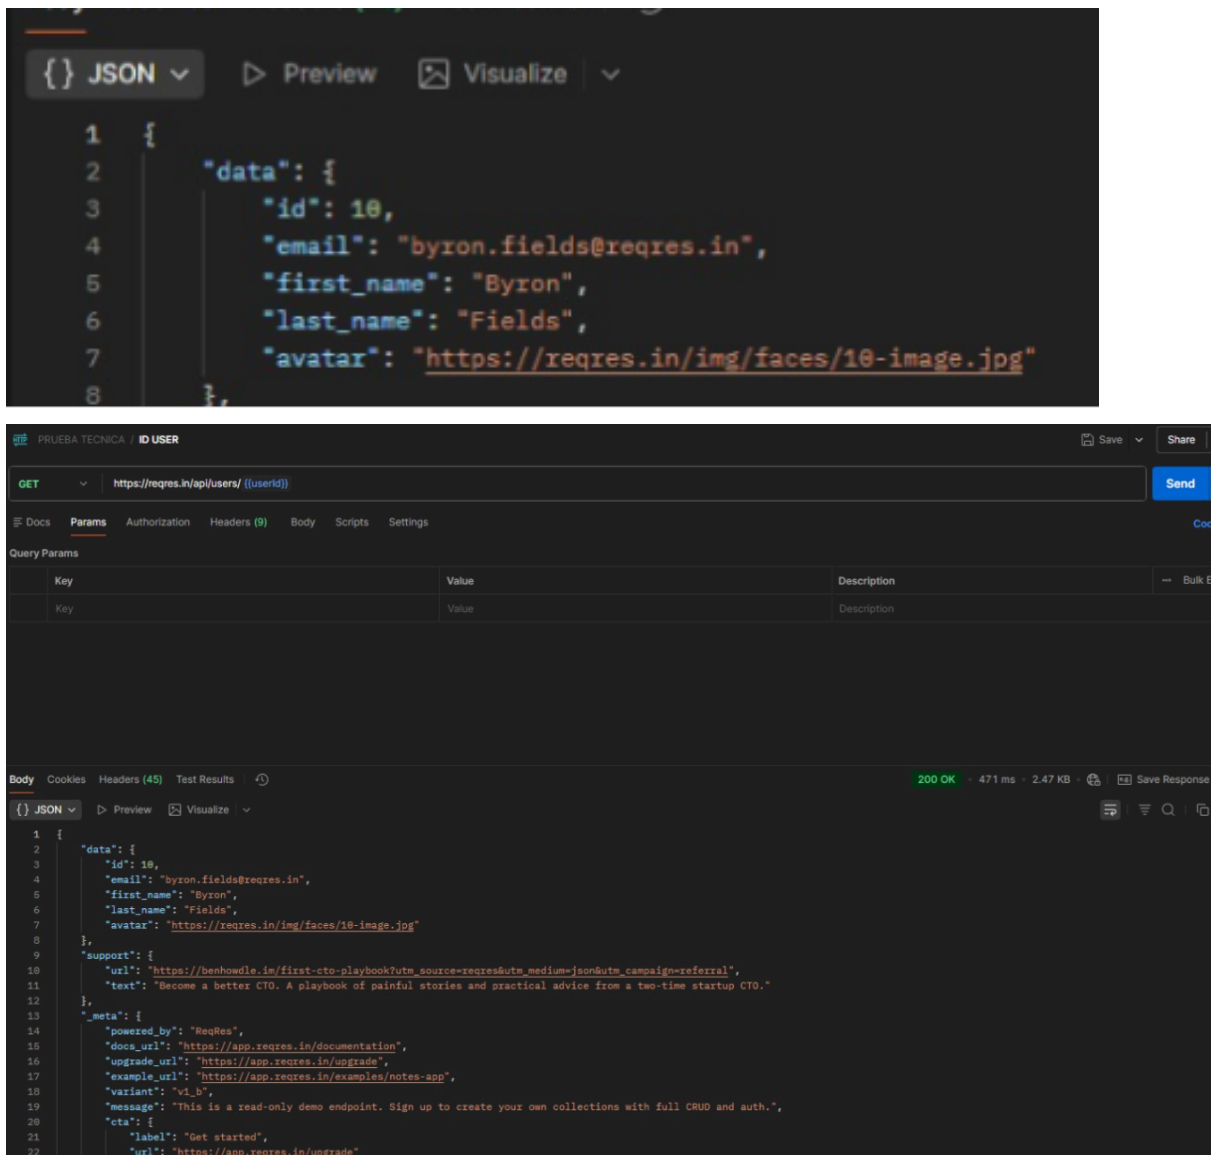

Aquí nos damos cuenta que la API de ReqRes es un servicio mock y no persiste los datos creados en POST, por lo que el GET por ID puede no retornar el recurso creado. Será muy difícil que ese valor se retorne así que decidí crear una API y utilizarla para terminar las pruebas. La nueva API esta hecha con MockAPI y es la siguiente:

<https://6a2b7f6fb687a7d5cbc555e0.mockapi.io/api/v1/:endpoint>




Para seguir con las pruebas del post creamos:

<https://6a2b7f6fb687a7d5cbc555e0.mockapi.io/api/v1/users>

y para el Get:

<https://6a2b7f6fb687a7d5cbc555e0.mockapi.io/api/v1/users/{{userId}}>

7- Creamos el user con el primer endpoint y el script POST:

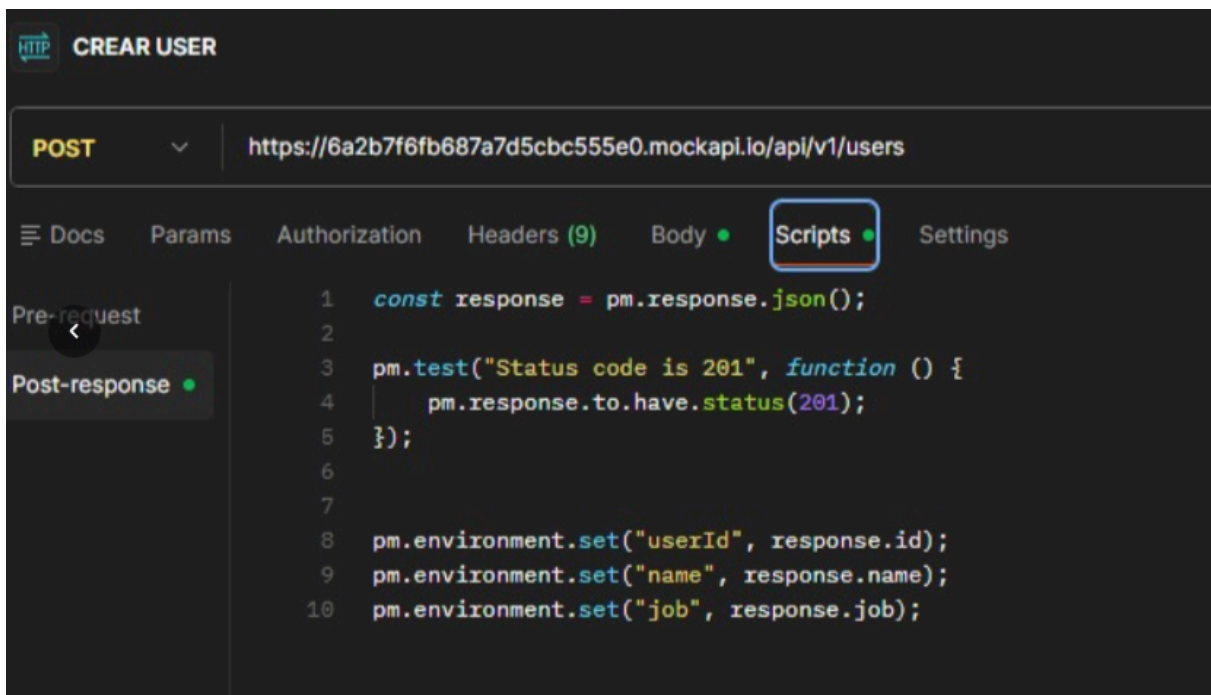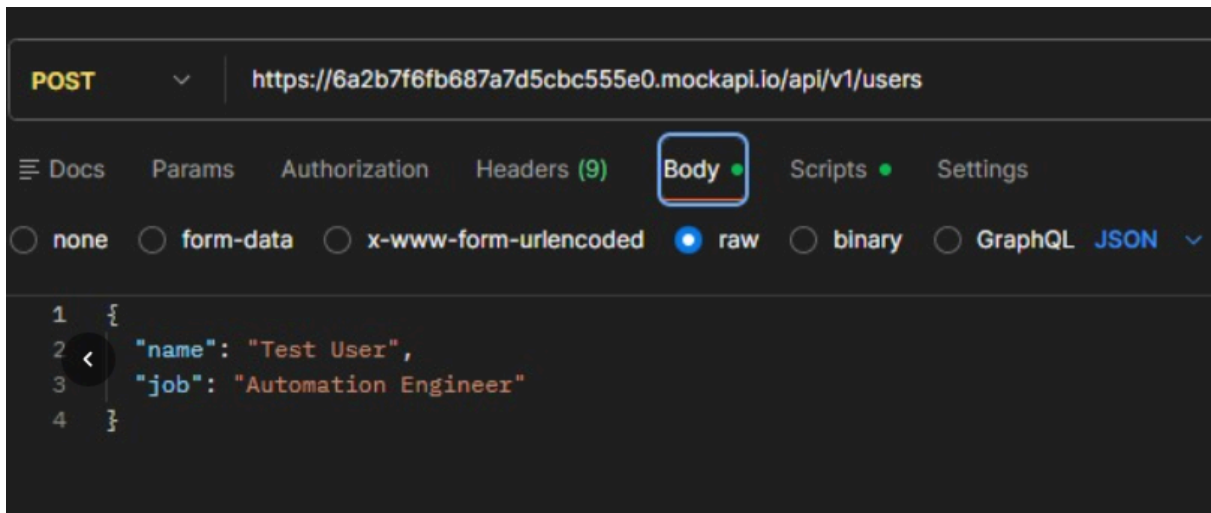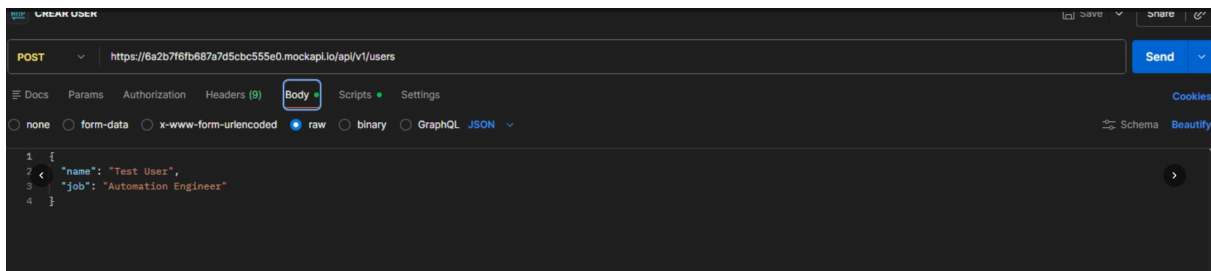

RESPONSE:

POST

https://6a2b7f6fb687a7d5cbc555e0.mockapi.io/api/v1/users

Docs

Params

Authorization

Headers (9)

Body

Scripts

Settings

Query Params

	Key	Value
	Key	Value

Body

Cookies

Headers (12)

Test Results (1/1)

{ } JSON

Preview

Visualize

1 {

2 "createdAt": "2026-06-11T22:03:00.505Z",

3 "name": "Test User",


4 "job": "Automation Engineer",

5 "id": "7"

6 }

8- Verificamos con el GET ese usuario creado:

GET:

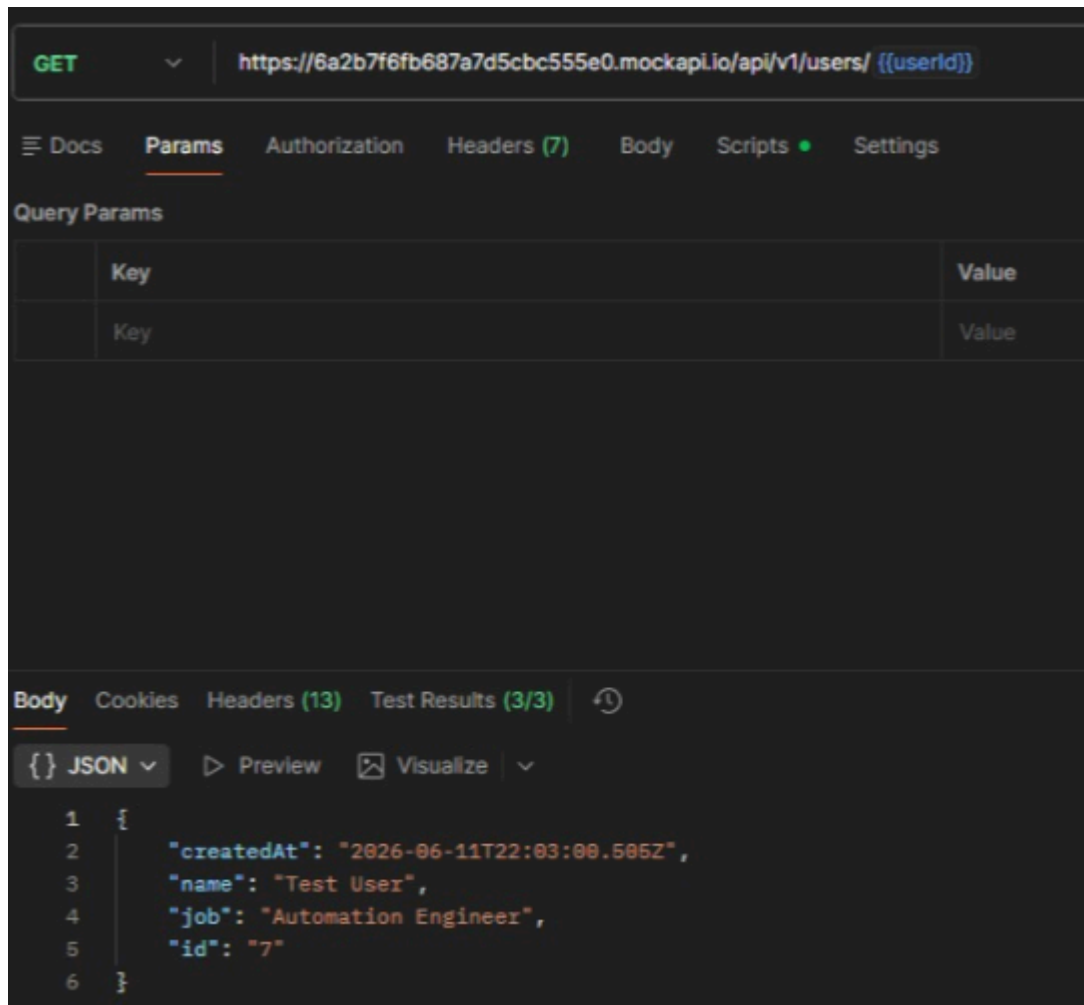

Se verifica el usuario creado con mismo nombre y job como pide la consigna.

Ahora como paso extra agregamos otros Casos Negativos que son necesarios para el alcance de pruebas. Algunos daran 201 cuando deberian dar 400 pero por el simple hecho de ser una API MOCKEADA y No una Productiva.

Aquí solo estarán las imagenes o capturas de Postman para los casos. Todo lo demas en el apartado del EXCEL.

CASOS EXTRA:

POST: <https://6a2b7f6fb687a7d5cbc555e0.mockapi.io/api/v1/users>

CASO 1 – Body vacío

CASO 2 – Tipo de dato incorrecto

CASO 3 – Campos extra

CASO 4 – JSON mal formado


GET <https://6a2b7f6fb687a7d5cbc555e0.mockapi.io/api/v1/users/{{userId}}>

CASO 5 – ID inexistente

CASO 6 – ID inválido

CASO 7 – Sin API Key (simulado)

CASO 1 – Body vacío

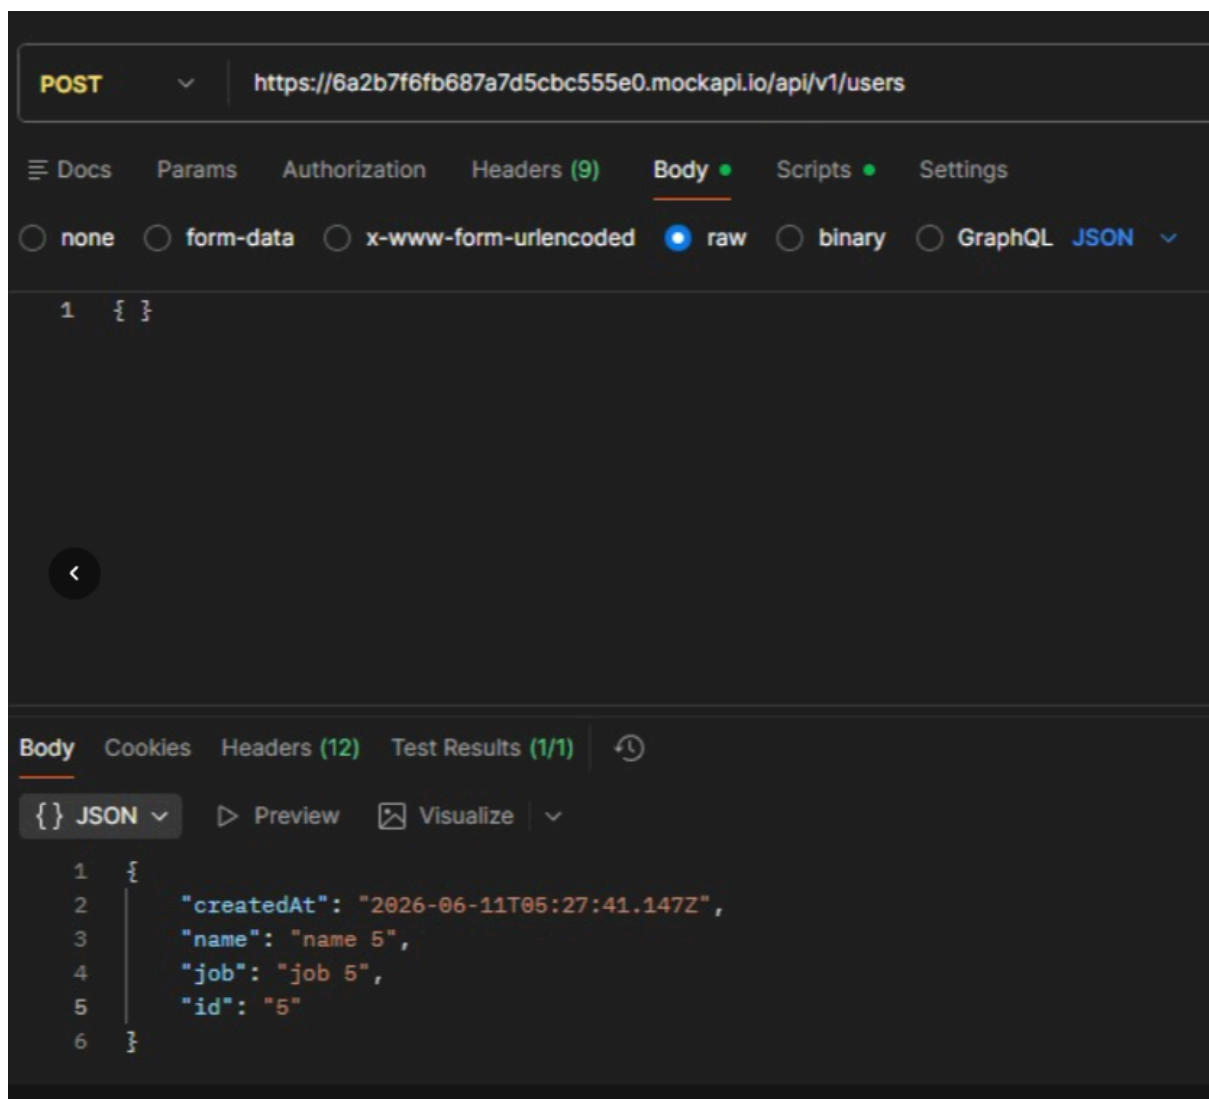

POST

https://6a2b7f6fb687a7d5cbc555e0.mockapliq/api/v1/users

Docs

Params

Authorization

Headers (9)

Body

Scripts

Settings

none

form-data

x-www-form-urlencoded

raw

binary

GraphQL

JSON

1

{ }

Body

Cookies

Headers (12)

Test Results (1/1)

201 Created

{ } JSON

Preview

Visualize

1

{

2

"createdAt": "2026-06-11T05:27:41.147Z",

3

"name": "name 5",

4

"job": "job 5",

5

"id": "5"

6

}

CASO 2 – Tipo de dato incorrecto


The screenshot shows a REST client interface with a POST request to `https://6a2b7f6fb687a7d5cbc555e0.mockapi.io/api/v1/users`. The request body is set to 'raw' and contains the following JSON:

```
1 {  
2   "name": 123,  
3   "job": true  
4 }
```


A yellow circle highlights the value `123` for the `"name"` property, indicating it is an incorrect data type (number instead of string).

The response section shows the 'Body' tab with the following JSON:

```
1 {  
2   "createdAt": "2026-06-11T08:55:44.709Z",  
3   "name": 123,  
4   "job": true,  
5   "id": "7"  
6 }
```

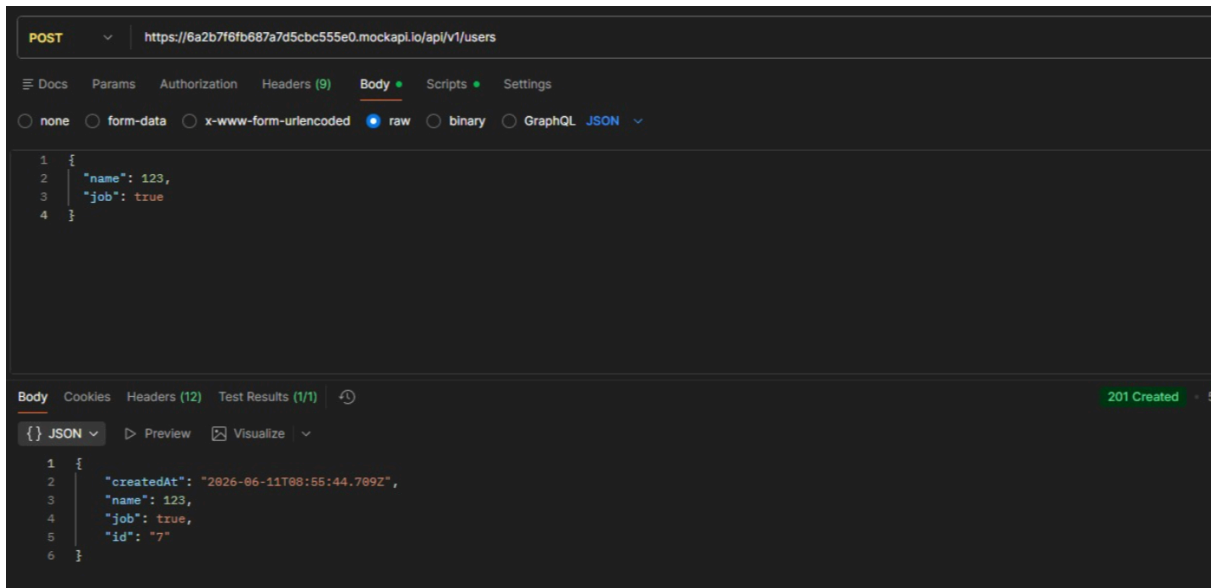

CASO 3 – Campos extra

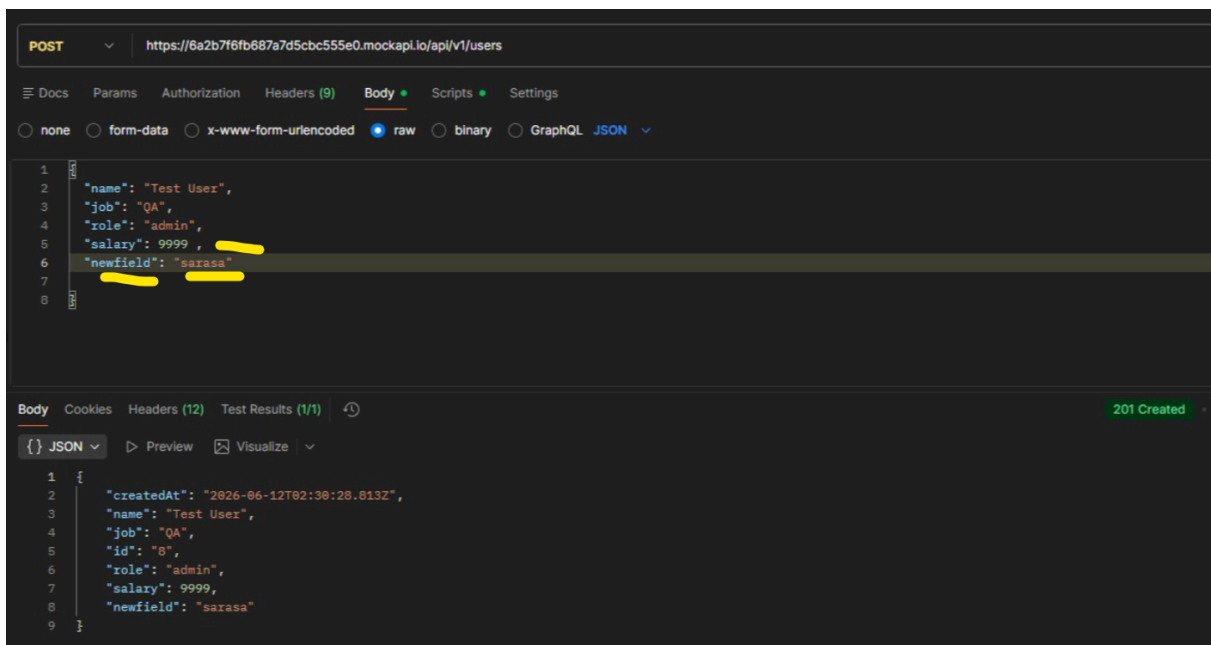

POST ▼ <https://6a2b7f6fb687a7d5cbc555e0.mockapi.io/api/v1/users>

Docs Params Authorization Headers (9) **Body** ● Scripts ● Settings

☐ none ☐ form-data ☐ x-www-form-urlencoded ☒ raw ☐ binary ☐ GraphQL **JSON** ▼

```
1 {
2   "name": "Test User",
3   "job": "QA",
4   "role": "admin",
5   "salary": 9999,
6   "newfield": "sarasa"
7 }
8
```

Body Cookies Headers (12) Test Results (1/1) ↻

{ } JSON ▼ ▶ Preview 🖼 Visualize ▼

```
1 {
2   "createdAt": "2026-06-12T02:30:28.813Z",
3   "name": "Test User",
4   "job": "QA",
5   "id": "8",
6   "role": "admin",
7   "salary": 9999,
8   "newfield": "sarasa"
9 }
```

CASO 4 – JSON mal formado

The screenshot shows a REST client interface with a POST request to `https://6a2b7f6fb687a7d5cbc555e0.mockapi.io/api/v1/users`. The request body is set to 'raw' and contains the following JSON:

```
1 {  
2   "name": "Test",  
3   "job": "QA"  
}
```

The closing brace on line 3 is highlighted in yellow. The response section shows a '400 Bad Request' error, also highlighted in yellow.

CASO 6 – ID inexistente

The screenshot shows a REST client interface with a GET request to `https://6a2b7f6fb687a7d5cbc555e0.mockapi.io/api/v1/users/09210930`. The request is set to 'JSON' format. The response section shows a '404 Not Found' error.

Key	Value	Description
Key	Value	Description

HTTP

PRUEBA TECNICA / GET USERS

GET

https://6a2b7f6fb687a7d5cbc555e0.mockapi.io/api/v1/users/09210930

Docs

Params

Authorization

Headers (7)

Body

Scripts

Settings

Query Params

	Key	Value
	Key	Value

Body

Cookies

Headers (13)

Test Results (0/3)

{ } JSON

Preview

Debug with AI

1 "Not found"

CASO 7 – ID inválido

GET

https://6a2b7f6fb687a7d5cbc555e0.mockapi.io/api/v1/users/asxsadw

Docs

Params

Authorization

Headers (7)

Body

Scripts

Settings

Query Params

	Key	Value	Description
	Key	Value	Description

Body

Cookies

Headers (13)

Test Results (0/3)

{ } JSON

Preview

Debug with AI

1 "Not found"

404 Not Found



GET



https://6a2b7f6fb687a7d5cbc555e0.mockapi.io/api/v1/users/asxqsadw

Docs Params Authorization Headers (7) Body Scripts Settings

Query Params

	Key	Value
	Key	Value



Body Cookies Headers (13) Test Results (0/3) ↺

{ } JSON



▶ Preview




Debug with AI



1 "Not found"

CASO 8 – Sin API Key (simulado)

Caso de autenticación simulada para evaluar comportamiento de APIs en entornos donde se requiere autorización.

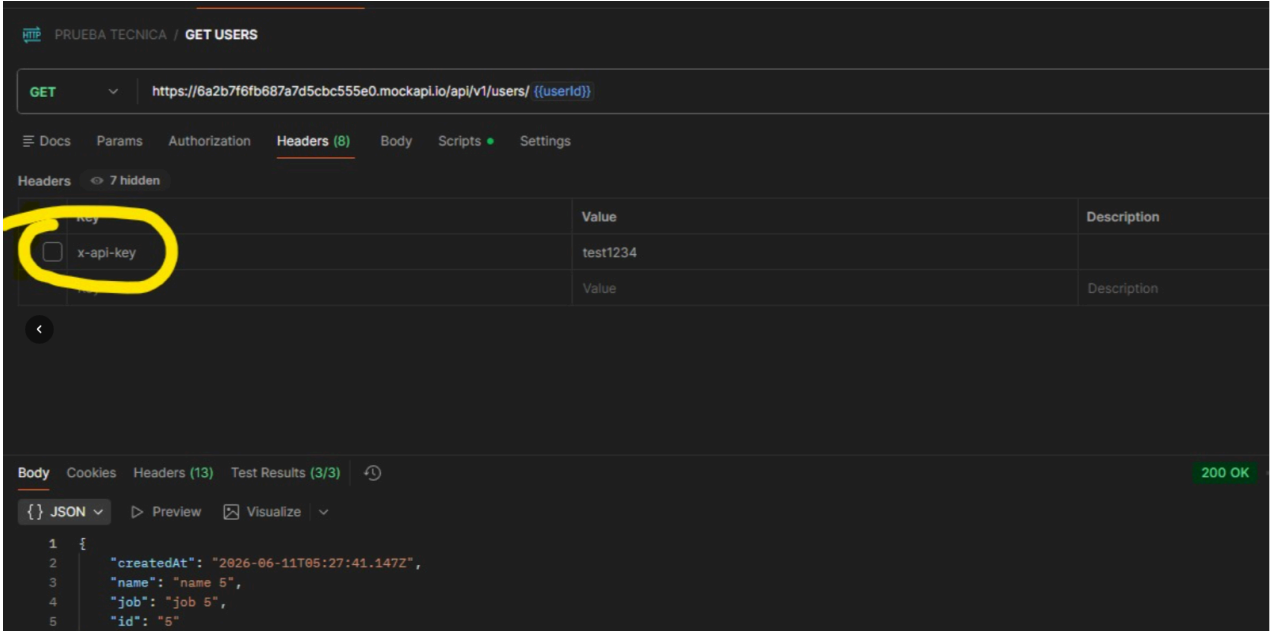

The screenshot displays a REST client interface for a GET request to the endpoint `https://6a2b7f6b687a7d5cbc555e0.mockapi.io/api/v1/users/{{userId}}`. The 'Headers' tab is selected, showing a table with headers. The header `x-api-key` is highlighted with a yellow circle, with a value of `test1234`. The 'Body' tab shows a JSON response with a status of `200 OK`.

Key	Value	Description
☐ x-api-key	test1234	
	Value	Description

Body	Cookies	Headers (13)	Test Results (3/3)
<pre>1 { 2 "createdAt": "2026-06-11T05:27:41.147Z", 3 "name": "name 5", 4 "job": "job 5", 5 "id": "5"</pre>			200 OK