



SECURETRACK WEBSERVICES TECHNICAL GUIDE

Visit our website at www.inmediata.com



Copyright © 2010 Inmediata Health Group. All rights reserved.

No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without prior written permission from Inmediata Health Group.

All copyright, confidential information, patents, design rights and all other intellectual property rights of whatsoever nature contained herein are and shall remain the sole and exclusive property of Inmediata Health Group. The information furnished herein is believed to be accurate and reliable.

However, no responsibility is assumed by Inmediata Health Group for its use, or for any infringements of patents or other rights of third parties resulting from its use.

All other trademarks are the property of their respective owners.

Table of Contents

Introduction.....	4
Service Reference	5
Authentication	6
Client.....	6
Client Methods.....	6
SendRealTime	6
SendX12File.....	7
SendCustomFile.....	8
GetRoutedFiles	8
MarkFilesAsDownloaded.....	9
ListRoutedFiles.....	10
GetRoutedFilesById.....	11
Glossary	12
Appendixes	13

Introduction

The purpose of this INMEDIATA technical supplement is to provide a communication platform for our trading partners, allowing integration of their HIPAA Billing Process with INMEDIATA Clearinghouse Services.

This technical supplement is designed to assist those who send files to INMEDIATA Health Group Clearinghouse in the HIPAA X12 standard formats for all transactions regulated by HIPAA (270\271, 837P, 837I, 837D, TA1, 997, 277U, 835) and custom files. It is not modifying the definition, condition, or use of a data element or segment in the Standard HIPAA Implementation Guides nor does it change the meaning or intent. This supplement is solely for the purpose of clarification.


Service Reference

Below you will find the Service Reference for File Transmission and Eligibility Request/Response:

QA: <https://securetrack-uat.inmediata.com/webservices/EdiTransfer/EdiFileTransfer.asmx>

PROD: <https://www.inmediata.com/webservices/EdiTransfer/EdiFileTransfer.asmx?wsdl>

Remove from your config file any reference to port number in the URL once you have added the service reference.

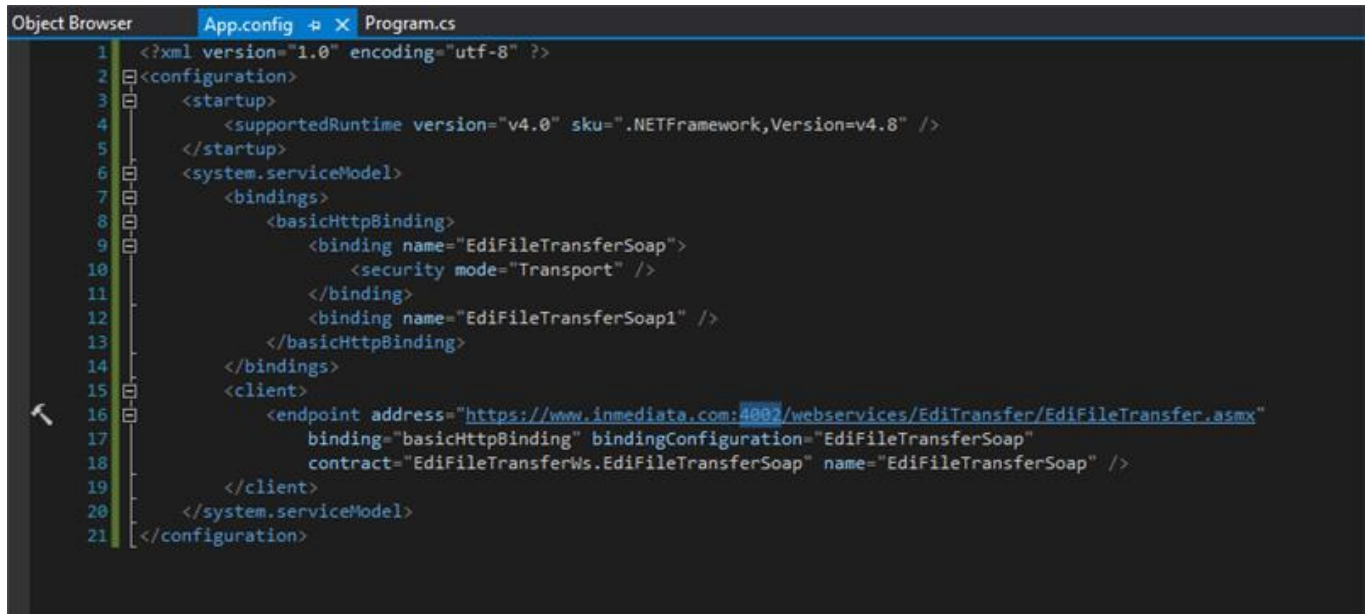A screenshot of a code editor showing an XML configuration file named 'App.config'. The file contains a service reference for 'EdiFileTransferSoap'. The XML is as follows:

```
<?xml version="1.0" encoding="utf-8" ?>
<configuration>
  <startup>
    <supportedRuntime version="v4.0" sku=".NETFramework,Version=v4.8" />
  </startup>
  <system.serviceModel>
    <bindings>
      <basicHttpBinding>
        <binding name="EdiFileTransferSoap">
          <security mode="Transport" />
        </binding>
        <binding name="EdiFileTransferSoap1" />
      </basicHttpBinding>
    </bindings>
    <client>
      <endpoint address="https://www.inmediata.com:8082/webservices/EdiTransfer/EdiFileTransfer.asmx"
        binding="basicHttpBinding" bindingConfiguration="EdiFileTransferSoap"
        contract="EdiFileTransferWs.EdiFileTransferSoap" name="EdiFileTransferSoap" />
    </client>
  </system.serviceModel>
</configuration>
```

If you are using Microsoft .Net framework version 4.6 or older, include the following snippet before initializing the SOAP client for the web service:

```
ServicePointManager.SecurityProtocol = SecurityProtocolType.Ssl3 |
SecurityProtocolType.Tls | SecurityProtocolType.Tls11 |
SecurityProtocolType.Tls12;
```

Authentication

```
authenticationHeader = new AuthenticationHeader()
{
    Username = ConfigurationManager.AppSettings.Get(name: "UserName"),
    Password = ConfigurationManager.AppSettings.Get(name: "Password")
};
```

This is the first step prior calling any method of Inmediata's webservice. It must be filled out with the credentials you were provided upon contract signing and is expected as first parameter of each method call.

Class *AuthenticationHeader*

Properties

1. Username: string
2. Password: string

Client

```
client = new EdiFileTransferSoapClient();
```

This corresponds to the SOAP client that is used to call all web service's methods.

Class *EdiFileTransferSoapClient*

Client Methods

SendRealTime

```
/// <summary>
/// Eligibility Request/Response Testing.
/// </summary>
1reference
private static void TestEligibility()
{
    var result = client.SendRealTime(authenticationHeader, X12Data: SampleEligibilityRequest);

    Console.WriteLine(result.ErrorCount > 0
        ? $"Error Requesting Eligibility: {result.Message}"
        : $"Eligibility Response: {result.RealTimeResponse}");
}
```

Sends and receive real-time transactions, such as eligibility, claim status, etc.

Parameters

- AuthenticationHeader, for authentication.
- X12Data: The string corresponding to the HIPAA-X12 request.

Returns: RealTimeResult

- ErrorCount: Indicates if one or more errors occurred processing the request.
- Message: This will report the result description and/or the error message if error count is greater than zero.
- RealTimeResponse: String corresponding to the HIPAA-X12 response returned by Inmediata.

SendX12File

```
/// <summary>
/// X12 File Sending Testing
/// </summary>
1reference
private static void TestSendX12File()
{
    var response :FileTransferResult = client.SendX12File(authenticationHeader,
        FileName: $"My-Claims-File-{DateTime.Now:yyyy\\MddHHmmss}.x12",
        Body: SampleClaimFile,
        DateTime.Now.ToString( format: "MM/dd/yyyy HH:mm:ss"),
        FixX12Envelope: false);

    Console.WriteLine((response.ErrorCount > 0) ? $"Error Sending Claim File: {response.Message}" : "Claim File Sent!");
}
```

Used to send HIPAA-X12 batch transactions, such as claims.

Parameters

- AuthenticationHeader: for authentication.
- FileName: The name of the file as it appears in your system, for your reference. If you do not have one, it can be left empty.
- Body: File contents, which is a standard HIPAA-X12 string.
- FileDate: Your file's date time stamp.
- FixX12Envelope: A Boolean parameter indicating whether you need Inmediata to set for you the sender/recipient information. It is advised to set this value to false, so that you have control over this. If set to true, Inmediata will set it to what you have on registration and this may differ to the settings of your system.

Ex. If set to true:

Your file	Inmediata replaces settings from registration
ISA*01*AUTH *00* *ZZ*YOURID*...	ISA*00* *00* *30*123456789*...

Returns: FileTransferResult

- ErrorCount: Indicates if one or more errors occurred processing the request.
- Message: This will report the result description and/or the error message if error count is greater than zero.
- RoutedFiles (future use): An array of routed files received in response to the transmission, in case Inmediata was able to process the request in a timely fashion.

- MoreToDownload (future use): A Boolean file indicating whether there are more files to be downloaded pertaining the transmission or not.

SendCustomFile

Used to send non-HIPAA-X12 batch transactions.

Parameters

- AuthenticationHeader: for authentication.
- EdiFile: File contents and descriptive properties.

Returns: FileTransferResult

- ErrorCount: Indicates if one or more errors occurred processing the request.
- Message: This will report the result description and/or the error message if error count is greater than zero.
- RoutedFiles: An array of routed files received in response to the transmission, in case Inmediata was able to process the request in a timely fashion.
- MoreToDownload: A Boolean file indicating whether there are more files to be downloaded pertaining the transmission or not.

GetRoutedFiles 1

```

/// <summary>
/// Files receiving testing
/// </summary>
1 reference
private static void TestReceiveFilesAllAtOnce()
{
    var response :FileTransferResult = client.GetRoutedFiles(authenticationHeader, MarkAsDownloaded:false);

    while ((response.ErrorCount == 0) && response.MoreToDownload )
    {
        foreach (var routedFile in response.RoutedFiles)
        {
            // set separator based on FileType
            var separator :string = IsX12Response(routedFile.FileType) ? "~" : "\r\n";

            // as integrating operation, save file on disk
            // here is where your application logic for the file takes place
            File.WriteAllText(
                path:ReceivedFilesFolder +
                $"{routedFile.FileType}-{routedFile.MsgID}-{Guid.NewGuid().ToString().Replace( oldValue: "-", newValue: "")}.x12",
                contents:string.Join(separator, routedFile.FileBody) + separator);

            // since the integration succeeded, mark it as downloaded
            client.MarkFilesAsDownloaded(authenticationHeader, MsgIDs:new[] { routedFile.MsgID });
        }

        // retrieve more files from the server
        response = client.GetRoutedFiles(authenticationHeader, MarkAsDownloaded:false);
    }

    // report errors
    if (response.ErrorCount > 0)
    {
        Console.WriteLine($"Error Receiving Files: {response.Message}");
    }
}

```

Looks for files pending to be downloaded in the Inmediata servers.

Parameters

- AuthenticationHeader: for authentication.
- MarkAsDownloaded: A Boolean value indicating that you would like to mark files immediately as downloaded. It is **not** advised to set this to true unless you have 100% certainty that your integration process will not fail, and if it does, you will not lose the data that was just downloaded.

Returns: FileTransferResult

- ErrorCount: Indicates if one or more errors occurred processing the request.
- Message: This will report the result description and/or the error message if error count is greater than zero.
- RoutedFiles: An array of routed files received in response to the transmission, in case Inmediata was able to process the request in a timely fashion.
- MoreToDownload: A Boolean file indicating whether there are more files to be downloaded pertaining the transmission or not.

RoutedFile

Represents a file as downloaded from the Inmediata servers.

- FileType: String indicating the type of the received file:
 - HIPAASTDDOC for HIPAA-X12
 - INMNOTIFMSG for Inmediata's notification message
- FileBody: Array of strings representing the contents of the file.
 - A HIPAASTDDOC file type will have array with one element containing the entire file in it.
 - For other types, an element per line will be present.
- FileSize: File size.
- MsgID: Long value with the identification of the downloaded file.
- RoutedDate: Date-time when the file was made available for you to download it.
- RowDelimiter: Character(s) used to separate the lines that compose the file. See glossary to learn about possible values.
- AttachmentBody (future use): Contents of attachment companion of the file.
- AttachmentName (future use): Attachment name.
- AttachmentFileType (future use): Attachment type.
- ExtendedProperties (future use): A collection of name-value pairs with extended information about the file received.

MarkFilesAsDownloaded 2

Marks one or more files as downloaded on the server.

Parameters

- AuthenticationHeader: for authentication.
- MsgIDs: Array of strings containing each MsgID to be marked as downloaded.

ListRoutedFiles

```
/// <summary>
/// Lists Files Pending to be downloaded
/// </summary>
/// </summary>
private static void ListRoutedMessages()
{
    var routedDetails = client.ListRoutedFiles(
        authenticationHeader,
        startDate: DateTime.Now.AddYears(-1),
        endDate: DateTime.Now,
        documentType: string.Empty);

    if (routedDetails.ErrorCount == 0)
    {
        Console.WriteLine($"{routedDetails.ListRoutedFiles.Length} Messages pending for download\n");

        foreach (var routedFile:RoutedFilesDetails in routedDetails.ListRoutedFiles)
        {
            Console.WriteLine(
                "MsgID: {0}, Type: {1}, Date: {2}, From: {3}",
                routedFile.MsgID,
                routedFile.DocumentType,
                routedFile.CreationDate,
                routedFile.EntityFrom);
        }

        Console.WriteLine();
    }
    else
    {
        Console.WriteLine($"Error getting Routed Messages List: {routedDetails.Message}");
    }
}
```

Gets the list of files pending to be downloaded but does not bring back their contents.

Parameters

- AuthenticationHeader: for authentication.
- StartDate: Date-time indicating the start date for querying pending files.
- EndDate: Date-time indicating the end date for querying pending files.
- DocumentType (optional): Empty for all files; CSV with specific types for narrowing the query. See glossary for other types.

Returns: *RoutedFilesDetailsResult*

- ErrorCount: Indicates if one or more errors occurred processing the request.
- Message: This will report the result description and/or the error message if error count is greater than zero.
- ListRoutedFiles: A collection of MsgIDs with a representation of routed files as instances of RoutedFileDetails.

RoutedFilesDetails

- EntityFrom: Sending Entity of the file. For example, in the case of the remittance it will be the payer's name.
- CreationDate: Date-time when the file was made available for download.
- DocumentType: Document specific type. (ex. 835)
- FileSize: File size.
- IsResponse: Indicates if the routed file was generated by Inmediata as direct response to a previously submitted file.
- MsgID: Identification of the routed file.

- SenderETIN: Electronic Transmitter Identification Number (ETIN) corresponding to the submitter of the file that you will receive.
- SubmittedFileID (optional): If the routed file is in response to a file you submitted, this will be the unique identification that Inmediata assigned to it.
- SubmittedFileName (optional): If the routed file is in response to a file you submitted, this will be the name you used when it was submitted.
- SubmittedICN (optional): If the routed file is in response to a file you submitted, this will be the interchange control number that you used, if the submitted file was a HIPAA-X12.

GetRoutedFilesById

```

/// <summary>
/// Download Specific Routed Messages based on their MsgID
/// </summary>
/// <param name="msgIds">CSV containing MsgIDs to be downloaded.</param>
1reference
private static void DownloadSpecificRoutedMessages(string msgIds)
{
    var result = client.GetRoutedFilesById(authenticationHeader, MarkAsDownloaded: false, msgIds);

    if (result.ErrorCount == 0)
    {
        foreach (var routedFile in result.RoutedFiles)
        {
            // set separator based on FileType
            var separator: string = IsX12Response(routedFile.FileType) ? "~" : "\r\n";

            // as integrating operation, save file on disk
            // here is where your application logic for the file takes place
            File.WriteAllText(
                path: ReceivedFilesFolder +
                $"{routedFile.FileType}-{routedFile.MsgID}-{Guid.NewGuid().ToString().Replace(oldValue: "-", newValue: "")}.x12",
                contents: string.Join(separator, routedFile.FileBody) + separator);

            // since the integration succeeded, mark it as downloaded
            client.MarkFilesAsDownloaded(authenticationHeader, msgIds: new[] { routedFile.MsgID });
        }
    }
}

```

Use this method to download specific routed messages. Normally combined with method ListRoutedMessages, this method will allow you to download files based on their MsgID.

Parameters

- AuthenticationHeader: for authentication.
- MarkAsDownloaded: A Boolean value indicating that you would like to mark files immediately as downloaded. It is **not** advised to set this to true unless you have 100% certainty that your integration process will not fail, and if it does, you will not lose the data that was just downloaded.
- MsgIDs: A CSV string containing the MsgIDs you would like to download.

Returns: FileTransferResult


- ErrorCount: Indicates if one or more errors occurred processing the request.
- Message: A Boolean value indicating that you would like to mark files immediately as downloaded. It is **not** advised to set this to true unless you have 100% certainty that your integration process will not fail, and if it does, you will not lose the data that was just downloaded.
- RoutedFiles: An array of routed files received in response to the transmission, in case Inmediata was able to process the request in a timely fashion.
- MoreToDownload: A Boolean file indicating whether there are more files to be downloaded pertaining the transmission or not.

Glossary



- RowDelimiter values:
 - "2": Carriage return, line feed (CRLF).
 - "4": Carriage return (CR).
 - "5": Line feed (LF).
- DocumentType: for list routed files it is a CSV which contain the code(s) for files to be considered. For example, "835,277A" will bring back only remittances and claim status acknowledgements. Other document types are:
 - 999
 - TA1
 - 277U

Appendixes

Real-Time Method Calls Flow

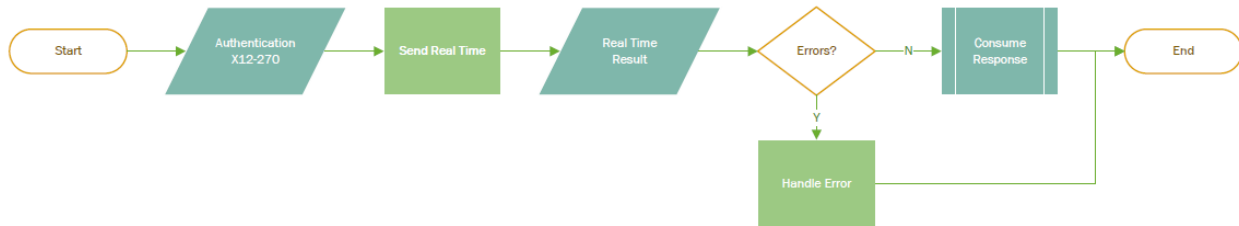

Batch Transactions Transmission Method Calls Flow – All Files

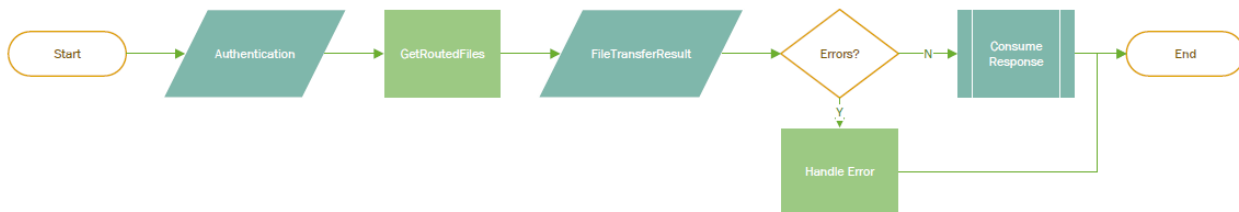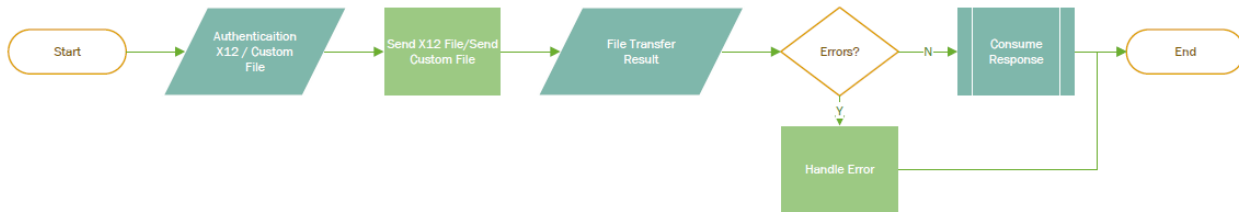

Batch Transactions Transmission Method Calls Flow – Selective Download

