

Project 2

Ahmed Tlili, Leon Petrinos, Mathilde Peruzzo

March 6, 2025

1 ER Diagram

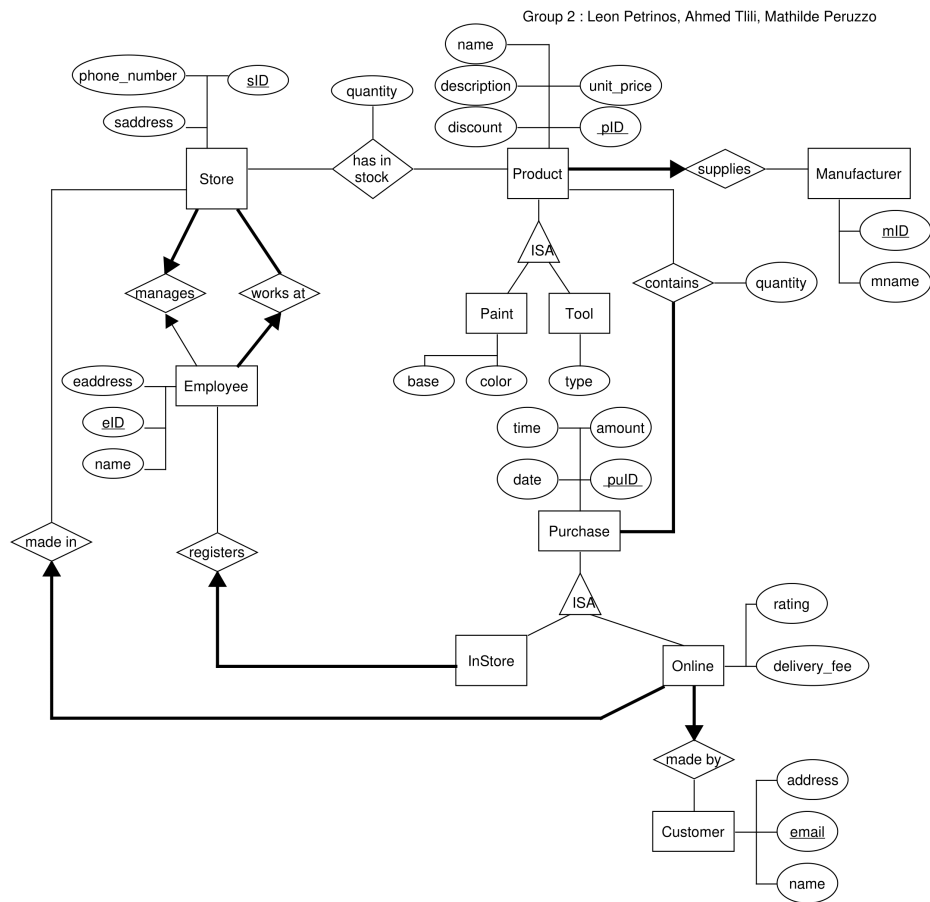


Figure 1: ER Diagram

2 Relational Schema

- **Store**(s_id, s_address, phone_number, manager_id UNIQUE NOT NULL)
FOREIGN KEY(manager_id) REFERENCES Employee(employee_id)
- **Employee**(e_id, e_name, s_id)
FOREIGN KEY(s_id) REFERENCES Store(s_id)
- **Manufacturer**(m_id, m_name)

- **Product**(p_id, p_name NOT NULL, unit_price NOT NULL, description, discount_percentage, m_id NOT NULL)
FOREIGN KEY(m_id) REFERENCES Manufacturer(m_id)
- **Paint**(p_id, base, color)
FOREIGN KEY(p_id) REFERENCES Product(p_id)
- **Tool**(p_id, type)
- **Has_in_stock**(p_id, s_id, quantity NOT NULL CHECK(quantity ≥ 0))
FOREIGN KEY(p_id) REFERENCES Product(p_id)
FOREIGN KEY(s_id) REFERENCES Store(s_id)
- **Customer**(email, c_name, c_address NOT NULL)
PRIMARY KEY(email)
- **Purchase**(p_id, amount NOT NULL, p_date NOT NULL, p_time NOT NULL)
- **Contains_purchase**(p_id, product_id, quantity NOT NULL CHECK(quantity ≥ 0))
FOREIGN KEY(p_id) REFERENCES Purchase(p_id)
FOREIGN KEY(product_id) REFERENCES Product(p_id)
- **Instore**(p_id, e_id)
FOREIGN KEY(p_id) REFERENCES Purchase(p_id)
FOREIGN KEY(e_id) REFERENCES Employee(e_id)
- **Online**(p_id, rating CHECK(rating ≥ 0 AND rating ≤ 5 OR rating IS NULL), delivery_fee NOT NULL, email NOT NULL)
FOREIGN KEY(p_id) REFERENCES Purchase(p_id)
FOREIGN KEY(email) REFERENCES Customer(email)

3 Pending Constraints

- A store should have at least one employee. (TODO: might not be correct as a every store should have a manage which will work there as well)
- A purchase should have at least one product.
- Cannot have store manager_id referencing a row in the Employee table.
As here we have two tables referencing each other (STORE, EMPLOYEE).
One of them has to drop the foreign key constraint.

4 SQL Queries

Query 1

- (a) List the id and address of every store with the respective quantities of the products (with p_id = 3) they have in stock.
- (b)

```
SELECT STORE.s_id , s_address , COALESCE(quantity , 0) AS
      quantity
FROM STORE
LEFT JOIN HAS_IN_STOCK
ON STORE.s_id = HAS_IN_STOCK.s_id AND HAS_IN_STOCK.p_id = 3
ORDER BY STORE.s_id ASC;
```

(c)

```
db2 =>          SELECT STORE.s_id, s_address, COALESCE(quantity, 0) AS quantity
          FROM STORE
          LEFT JOIN HAS_IN_STOCK
            ON STORE.s_id = HAS_IN_STOCK.s_id AND HAS_IN_STOCK.p_id = 3
          ORDER BY STORE.s_id ASC;
db2 (cont.) => db2 (cont.) => db2 (cont.) => db2 (cont.) =>
S_ID      S_ADDRESS      QUANTITY
-----
1 9301 Leopard St      0
2 456 Oakwood Dr      180
3 789 Maple Ave      0
4 321 Pine St      195
5 654 Cedar Ln      0
6 987 Birch Rd      180
7 159 Elm St      205
8 753 Walnut Blvd      0

8 record(s) selected.
```

Figure 2: Query 1 result

Query 2

- (a) List the total amount of money spent by each customer in the store with id = 1.
Output should include the customer's email and the total amount of money spent.

(b)

```
SELECT CUSTOMER.email, COALESCE(SUM(amount), 0) AS
      total_amount
FROM CUSTOMER
LEFT JOIN ONLINE ON CUSTOMER.email = ONLINE.email
LEFT JOIN PURCHASE ON ONLINE.p_id = PURCHASE.p_id
LEFT JOIN STORE ON ONLINE.s_id = STORE.s_id
GROUP BY CUSTOMER.email
ORDER BY email ASC;
```

(c)

```
db2 =>          SELECT CUSTOMER.email, COALESCE(SUM(amount), 0) AS total_amount
          FROM CUSTOMER
          LEFT JOIN ONLINE ON CUSTOMER.email = ONLINE.email
          LEFT JOIN PURCHASE ON ONLINE.p_id = PURCHASE.p_id
          LEFT JOIN STORE ON ONLINE.s_id = STORE.s_id
          GROUP BY CUSTOMER.email
          ORDER BY email ASC;
db2 (cont.) => db2 (cont.) => db2 (cont.) => db2 (cont.) => db2 (cont.) =>
EMAIL      TOTAL_AMOUNT
-----
david.miller@example.com      238.87
emily.jones@example.com      66.46
james.white@example.com      0.00
jane.smith@example.com      0.00
john.doe@example.com      0.00
karen.martin@example.com      0.00
lisa.brown@example.com      66.45
mark.johnson@example.com      0.00
michael.wilson@example.com      88.45
susan.davis@example.com      0.00

10 record(s) selected.
```

Figure 3: Query 2 result

Query 3

- (a) List the id of the biggest in-store purchase made by each store.
Output should include the store id, address and the purchase amount.

(b)

```

SELECT STORE.s_id , s_address , COALESCE(MAX(amount), 0) AS
    max_purchase_amount
FROM STORE
LEFT JOIN EMPLOYEE ON STORE.s_id = EMPLOYEE.s_id
LEFT JOIN INSTORE ON EMPLOYEE.e_id = INSTORE.e_id
LEFT JOIN PURCHASE ON INSTORE.p_id = PURCHASE.p_id
GROUP BY STORE.s_id , s_address
ORDER BY STORE.s_id ASC;

```

- (c)

```

db2 =>      SELECT STORE.s_id, s_address, COALESCE(MAX(amount), 0) AS max_purchase_amount
FROM STORE
LEFT JOIN EMPLOYEE ON STORE.s_id = EMPLOYEE.s_id
LEFT JOIN INSTORE ON EMPLOYEE.e_id = INSTORE.e_id
LEFT JOIN PURCHASE ON INSTORE.p_id = PURCHASE.p_id
GROUP BY STORE.s_id, s_address
ORDER BY STORE.s_id ASC;
db2 (cont.) => db2 (cont.) => db2 (cont.) => db2 (cont.) =>
S_ID          S_ADDRESS                                     MAX_PURCHASE_AMOUNT
-----
1 9301 Leopard St                                     44.47
2 456 Oakwood Dr                                     107.45
3 789 Maple Ave                                       90.95
4 321 Pine St                                         97.45
5 654 Cedar Ln                                       105.93
6 987 Birch Rd                                        0.00
7 159 Elm St                                         0.00
8 753 Walnut Blvd                                    0.00

8 record(s) selected.

```

Figure 4: Query 3 result

Query 4

- (a) List the id and address of every store and the corresponding money ever spent at that store.

(b)

```

WITH TEMP_INSTORE AS (
SELECT STORE.s_id , s_address , COALESCE(SUM(amount), 0) AS
    total_amount
FROM STORE
LEFT JOIN EMPLOYEE ON STORE.s_id = EMPLOYEE.s_id
LEFT JOIN INSTORE ON EMPLOYEE.e_id = INSTORE.e_id
LEFT JOIN PURCHASE ON INSTORE.p_id = PURCHASE.p_id
GROUP BY STORE.s_id , s_address
),
TEMP_ONLINE AS (
SELECT STORE.s_id , s_address , COALESCE(SUM(amount), 0) AS
    total_amount
FROM STORE
LEFT JOIN ONLINE ON STORE.s_id = ONLINE.s_id
LEFT JOIN PURCHASE ON ONLINE.p_id = PURCHASE.p_id
GROUP BY STORE.s_id , s_address
)
SELECT TEMP_INSTORE.s_id , TEMP_INSTORE.s_address ,

```

```

TEMP_INSTORE.total_amount + TEMP_ONLINE.total_amount AS
    total_amount
FROM TEMP_INSTORE
LEFT JOIN TEMP_ONLINE ON TEMP_INSTORE.s_id = TEMP_ONLINE.s_id
ORDER BY TEMP_INSTORE.s_id ASC;

```

(c)

```

db2 => WITH TEMP_INSTORE AS (
SELECT STORE.s_id, s_address, COALESCE(SUM(amount), 0) AS total_amount
FROM STORE
LEFT JOIN EMPLOYEE ON STORE.s_id = EMPLOYEE.s_id
LEFT JOIN INSTORE ON EMPLOYEE.e_id = INSTORE.e_id
LEFT JOIN PURCHASE ON INSTORE.p_id = PURCHASE.p_id
GROUP BY STORE.s_id, s_address
),
TEMP_ONLINE AS (
SELECT STORE.s_id, s_address, COALESCE(SUM(amount), 0) AS total_amount
FROM STORE
LEFT JOIN ONLINE ON db2 (cont.) => STORE.s_id = ONLINE.s_id
LEFT JOIN PURCHASE ON ONLINE.p_id = PURCHASE.p_id
GROUP BY STORE.s_id, s_address
)
SELECT TEMP_INSTORE.s_id, TEMP_INSTORE.s_address, TEMP_INSTORE.total_amount + TEMP_ONLINE.total_amount AS total_amount
db2 (cont.) => FROM TEMP_INSTORE
db2 (cont.) => db2 (cont.) => db2 (cont.) => db2 (cont.) => db2 (cont.) => db2 (cont.) => db2 (cont.) => db2 (cont.) => db2 (cont.) =
> db2 (cont.) => db2 (cont.) => db2 (cont.) => db2 (cont.) => db2 (cont.) => db2 (cont.) => LEFT JOIN TEMP_ONLINE ON TEMP_INSTORE.s_id
= TEMP_ONLINE.s_id
ORDER BY TEMP_INSTORE.s_id ASC;
db2 (cont.) =>
S_ID S_ADDRESS TOTAL_AMOUNT
-----
1 9301 Leopard St 110.92
2 456 Oakwood Dr 195.90
3 789 Maple Ave 157.41
4 321 Pine St 279.86
5 654 Cedar Ln 162.39
6 987 Birch Rd 0.00
7 159 Elm St 0.00
8 753 Walnut Blvd 0.00

8 record(s) selected.

```

Figure 5: Query 4 result

Query 5

(a) List the Paint products that are in that are in maximum quantity in the store with id = 1. List the product id, name and quantity.

(b)

```

WITH TEMP AS (
    SELECT PRODUCT.p_id, p_name, COALESCE(quantity, 0) AS
        quantity
    FROM PAINT
    LEFT JOIN PRODUCT ON PRODUCT.p_id = PAINT.p_id
    LEFT JOIN HAS_IN_STOCK ON PRODUCT.p_id = HAS_IN_STOCK.p_id
    WHERE HAS_IN_STOCK.s_id = 1
    ORDER BY quantity DESC
)
SELECT p_id, p_name, quantity
FROM TEMP
WHERE quantity = (SELECT MAX(quantity) FROM TEMP);

```

(c)

```

db2 =>      WITH TEMP AS (
            SELECT PRODUCT.p_id, p_name, COALESCE(quantity, 0) AS quantity
            FROM PAINT
            LEFT JOIN PRODUCT ON PRODUCT.p_id = PAINT.p_id
            LEFT JOIN HAS_IN_STOCK ON PRODUCT.p_id = HAS_IN_STOCK.p_id
            WHERE HAS_IN_STOCK.s_id = 1
            ORDER BY quantity DESC
        )
        SELECT p_id, p_name, quantity
        FROM TEMP
        WHERE quantity = (SELECT MAX(quantity) FROM TEMP);
db2 (cont.) => db2 (cont.) => db2 (cont.) => db2 (cont.) => db2 (cont.) => db2 (cont.) => db2 (
cont.) => db2 (cont.) =>
P_ID      P_NAME      QUANTITY
-----
      4 Sunset Orange      300

1 record(s) selected.

```

Figure 6: Query 5 result