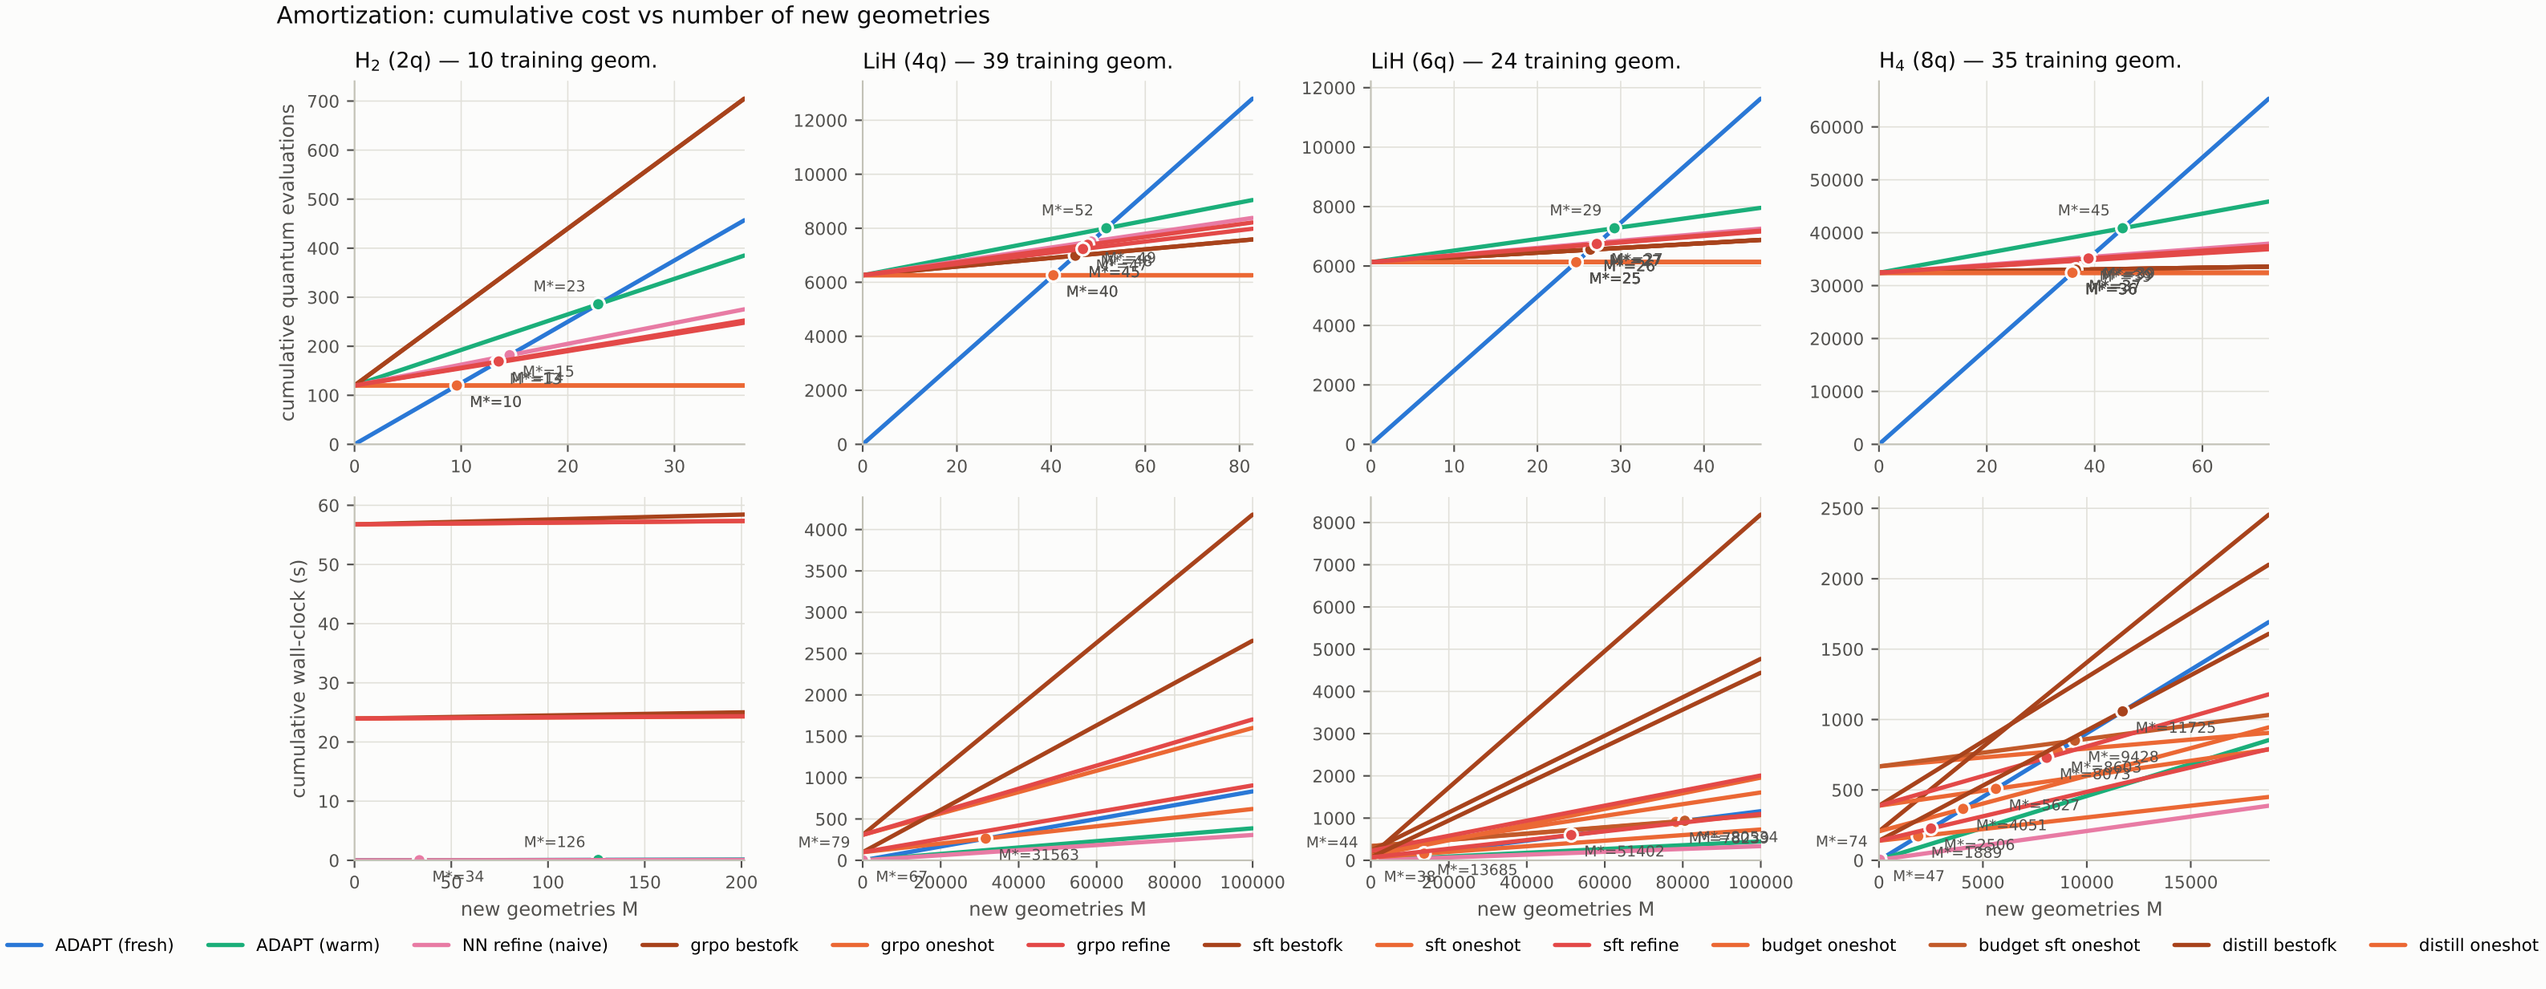
Amortization: cumulative cost vs number of new geometries
H2 (2q) — 10 training geom.
LiH (4q) — 39 training geom.
LiH (6q) — 24 training geom.
H4 (8q) — 35 training geom.
cumulative quantum evaluations
cumulative wall-clock (s)
new geometries M
M*=23
M*=10
M*=52
M*=40
M*=29
M*=25
M*=45
M*=126
M*=34
M*=79
M*=67
M*=31563
M*=44
M*=38
M*=13685
M*=51402
M*=74
M*=47
M*=1889
M*=2506
M*=4051
M*=5627
M*=8073
M*=9428
M*=11725
ADAPT (fresh)
ADAPT (warm)
NN refine (naive)
grpo bestofk
grpo oneshot
grpo refine
sft bestofk
sft oneshot
sft refine
budget oneshot
budget sft oneshot
distill bestofk
distill oneshot
Fixed cost = teacher ADAPT on all training geometries (+ logged model training time for generators). Dots: break-even M* vs fresh ADAPT.