


SPSS Report

Safalya Pal

A90555919003

[27/8/2021]


Variable View



	Name	Type	Width	Decimals	Label	Values	Missing	Columns	Align	Measure	Role
1	Var1	Numeric	8	2		None	None	8	Right	Scale	Input
2											
3											

Name - Name of the variable.

Type - The types of values the variable can take.

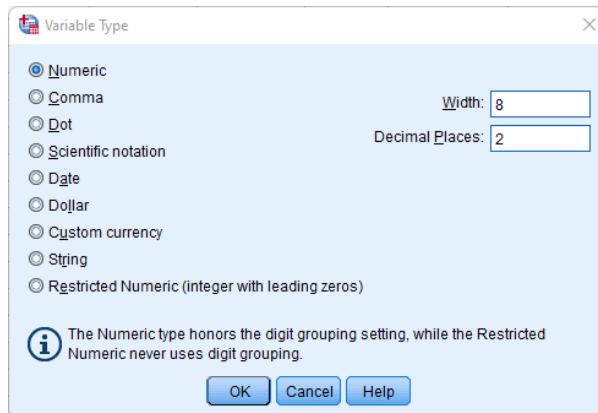

Variable Type

☒ Numeric

☐ Comma

☐ Dot

☐ Scientific notation

☐ Date

☐ Dollar


☐ Custom currency

☐ String

☐ Restricted Numeric (integer with leading zeros)

Width: 8

Decimal Places: 2

 The Numeric type honors the digit grouping setting, while the Restricted Numeric never uses digit grouping.

OK Cancel Help


Variable type selector popup window

Width - Specifies the column width for the display of variables in the Data Editor.

Decimals - No. of decimal places permitted by the variable.


Label - Description for the variable.

Values - Values which can be taken by the variable.

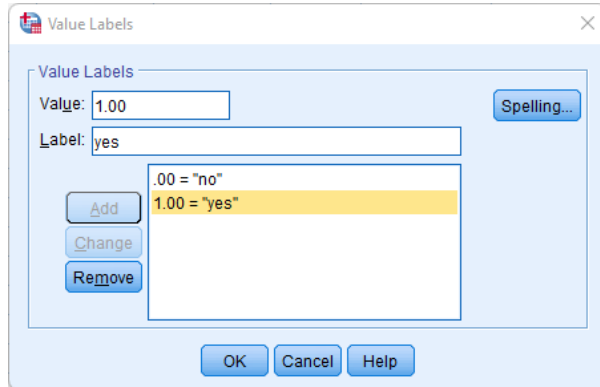

Value editor window


Missing - Specify what is to be entered for a value that is missing for a variable in a case.

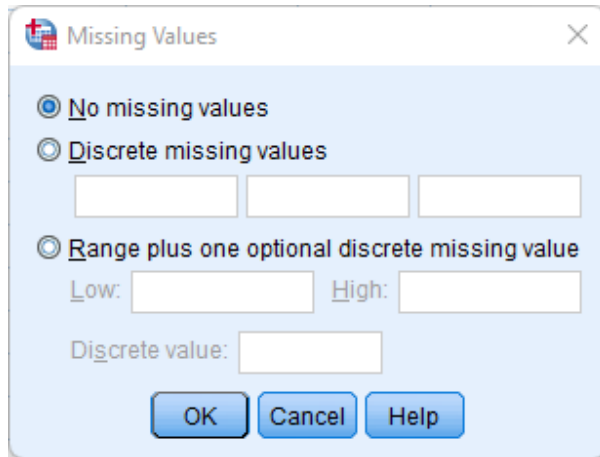


Missing values editor

Align - Alignment of the values in the cell of the Data Editor view.

Measure - SPSS measurement levels are limited to nominal(i.e. categorical), ordinal(i.e. ordered like 1st, 2nd, 3rd...), or scale. Essentially, a scale variable is a measurement variable.

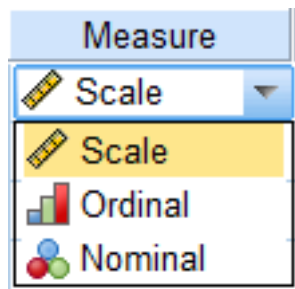

Role - Specifies the variable's role in analysis.

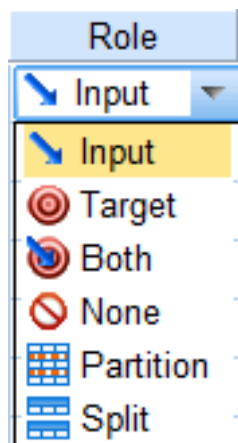


Classwork

Variable View

	Name	Type	Width	Decimals	Label	Values	Missing	Columns	Align	Measure	Role
1	President	String	25	0		None	None	8	Left	Nominal	Input
2	MB_Rating	Numeric	25	2	MB Rating of p...	None	None	8	Right	Scale	Input
3	ID	Numeric	25	1		None	None	8	Right	Scale	Input

Data View

	V1	president	mbrating	IQ	Openness
1	1	Washington	1.87	130.0	14.0
2	2	J. Adams	.59	150.0	61.0
3	3	Jefferson	1.52	160.0	99.1
4	4	Madison	.23	150.0	62.0
5	5	Monroe	.19	120.7	3.7

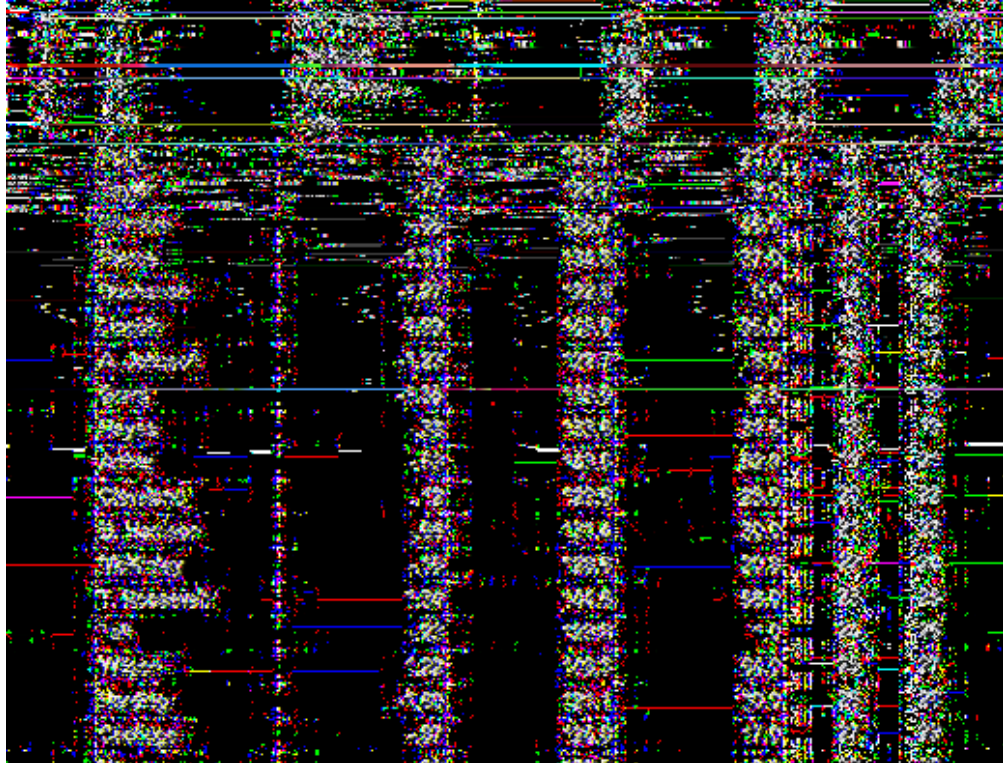

[1/9/2021]


Descriptive Analysis

The Descriptives menu lies under **Analyze** → **Descriptive Statistics** → **Descriptives...**




The descriptives popup window

Once the window is open, select the variables you want to perform the analysis on and click the arrow in the middle to move them to the variables side.

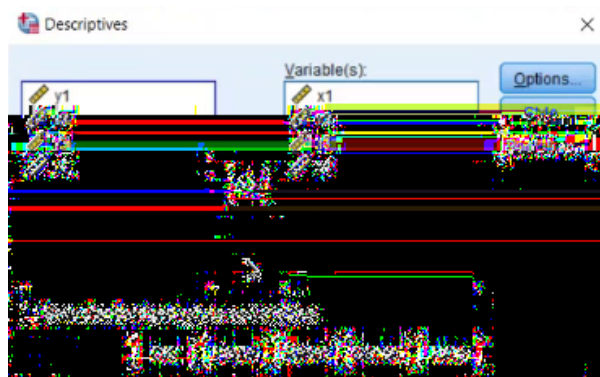

The descriptives window after moving the variables

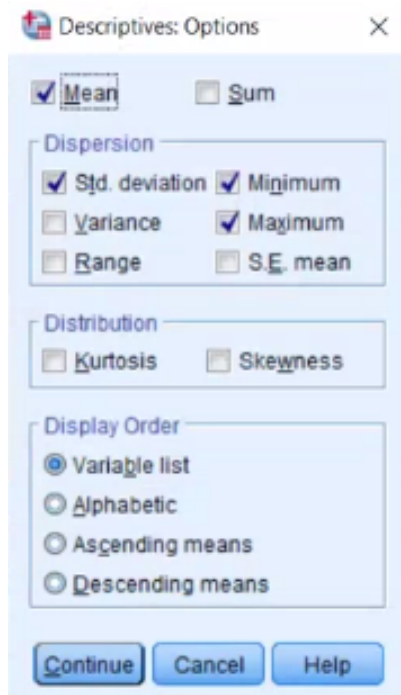

Options available for descriptive analysis

Chart Builder

To build a graph, Chart Builder is used which is available under **Graphs** → **Chart Builder**

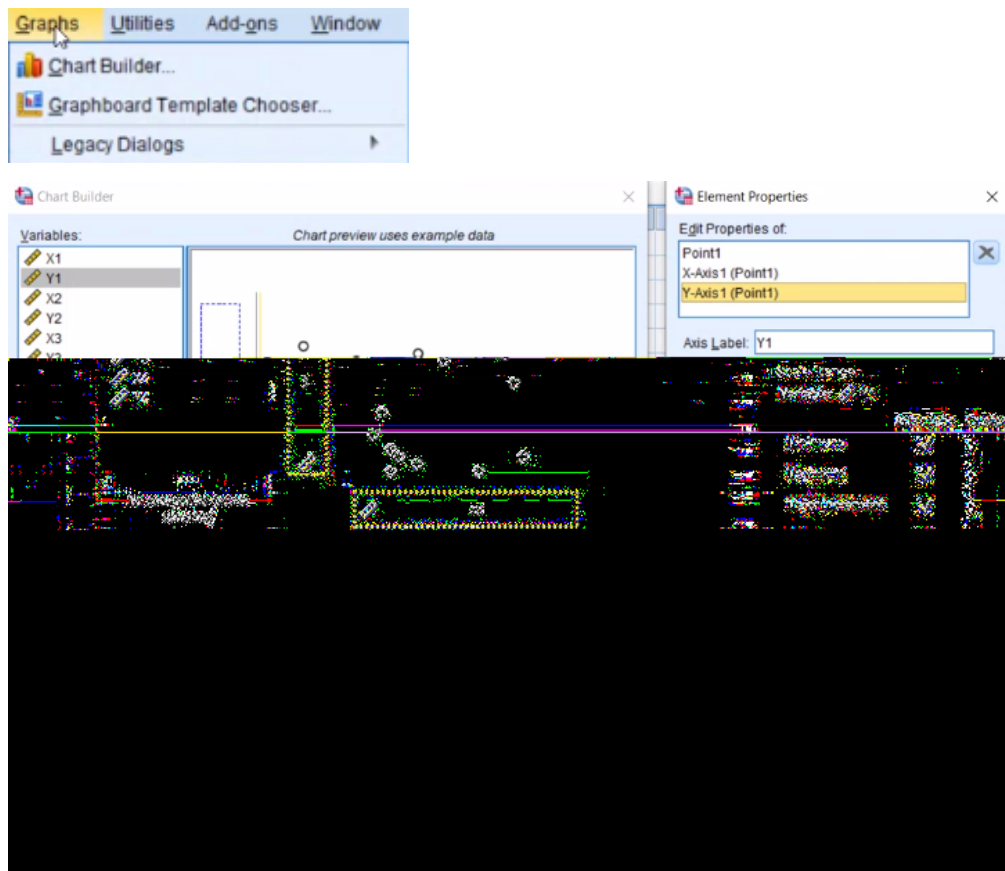


Chart Builder Window

Variables - A list of variables which can be used to build the graph.

Gallery - Types of plots for the user to choose from.


Element Properties - This window allows the variables to be modified in the graph.

Scatterplot **Alternate Method** **Graphs** → **Legacy Dialogs** → **Scatter/Dot...**

Classwork

Data View

	x1	y1	x2	y2	x3	y3	x4	y4
1	10	8.04	10	9.14	10	7.46	8	6.58
2	8	6.95	8	8.14	8	6.77	8	5.76

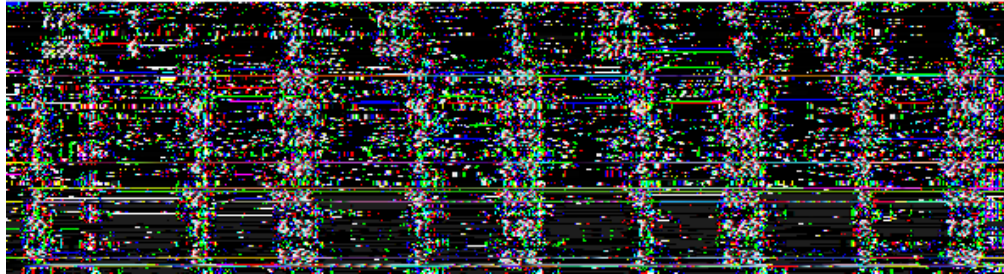

Output View

Descriptives

[DataSet1] C:\Users\Abhirup Moitra\Pictures\anscombe.sav


Descriptive Statistics										
	N	Minimum	Maximum	Mean	Std. Deviation	Variance	Skewness		Kurtosis	
	Statistic	Statistic	Statistic	Statistic	Statistic	Statistic	Statistic	Std. Error	Statistic	Std. Error
X1	11	4.00	14.00	9.0000	3.31662	11.000	.000	.661	-1.200	1.279
X2	11	4.00	14.00	9.0000	3.31662	11.000	.000	.661	-1.200	1.279
X3	11	4.00	14.00	9.0000	3.31662	11.000	.000	.661	-1.200	1.279
X4	11	8.00	19.00	9.0000	3.31662	11.000	3.317	.661	11.000	1.279
Valid N (listwise)	11									

```
DESCRIPTIVES VARIABLES=Y1 Y2 Y3 Y4
  /STATISTICS=MEAN STDDEV VARIANCE MIN MAX KURTOSIS SKEWNESS.
```


Descriptives

Descriptive Statistics										
	N	Minimum	Maximum	Mean	Std. Deviation	Variance	Skewness		Kurtosis	
	Statistic	Statistic	Statistic	Statistic	Statistic	Statistic	Statistic	Std. Error	Statistic	Std. Error
X1	11	4.00	14.00	9.0000	3.31662	11.000	.000	.661	-1.200	1.279
X2	11	4.00	14.00	9.0000	3.31662	11.000	.000	.661	-1.200	1.279
X3	11	4.00	14.00	9.0000	3.31662	11.000	.000	.661	-1.200	1.279
X4	11	8.00	19.00	9.0000	3.31662	11.000	3.317	.661	11.000	1.279
Valid N (listwise)	11									


GGraph

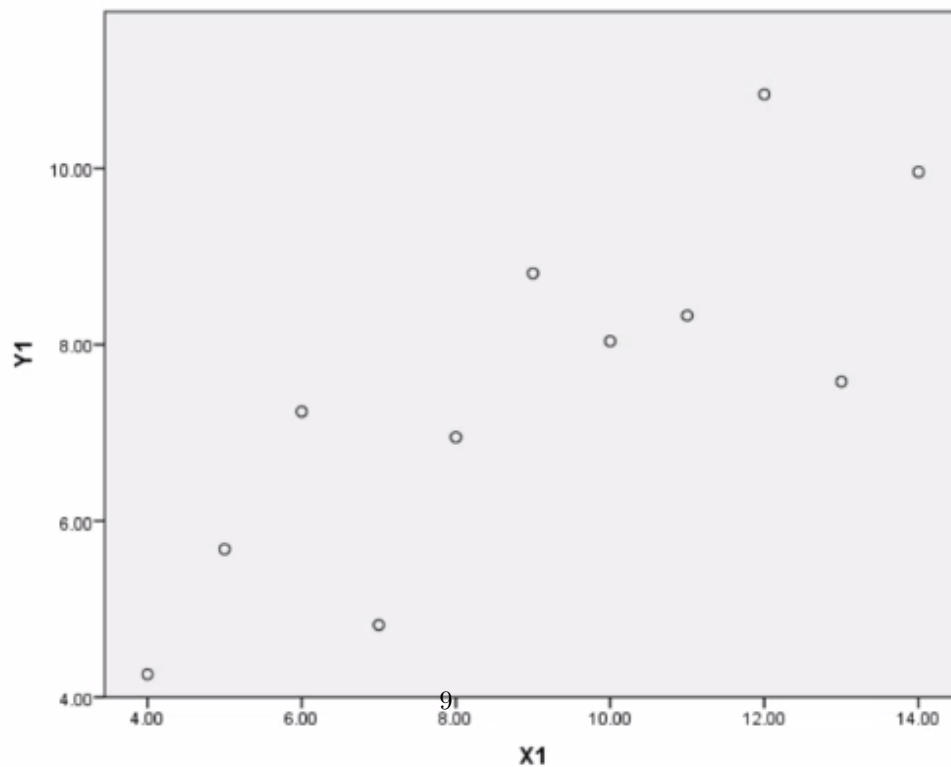

GGraph

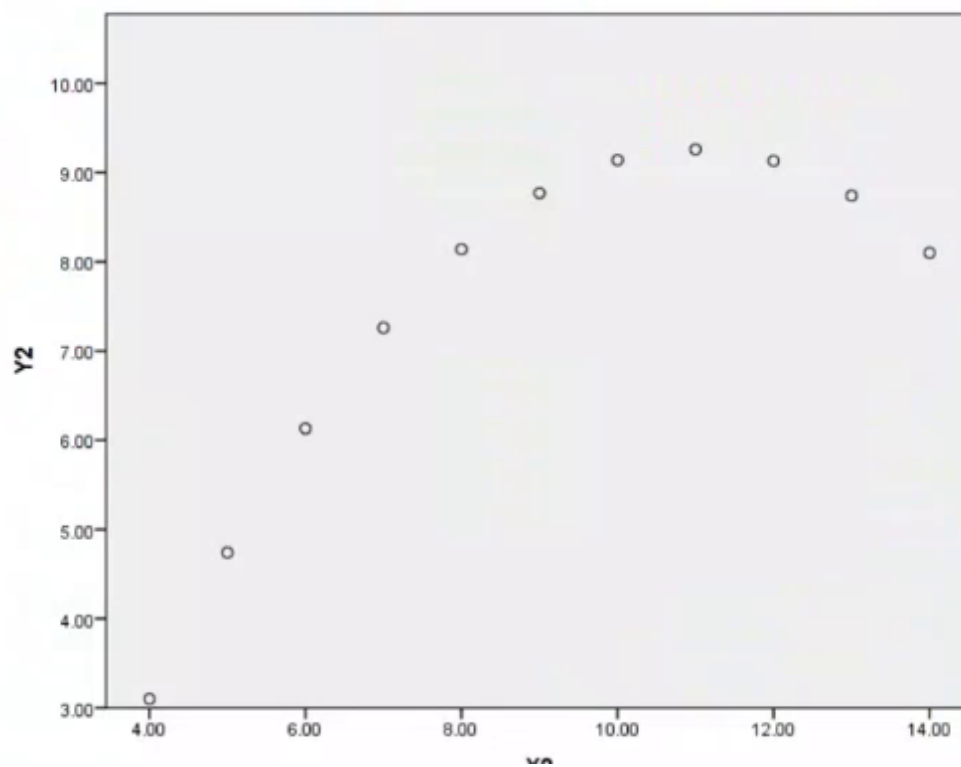


GGraph

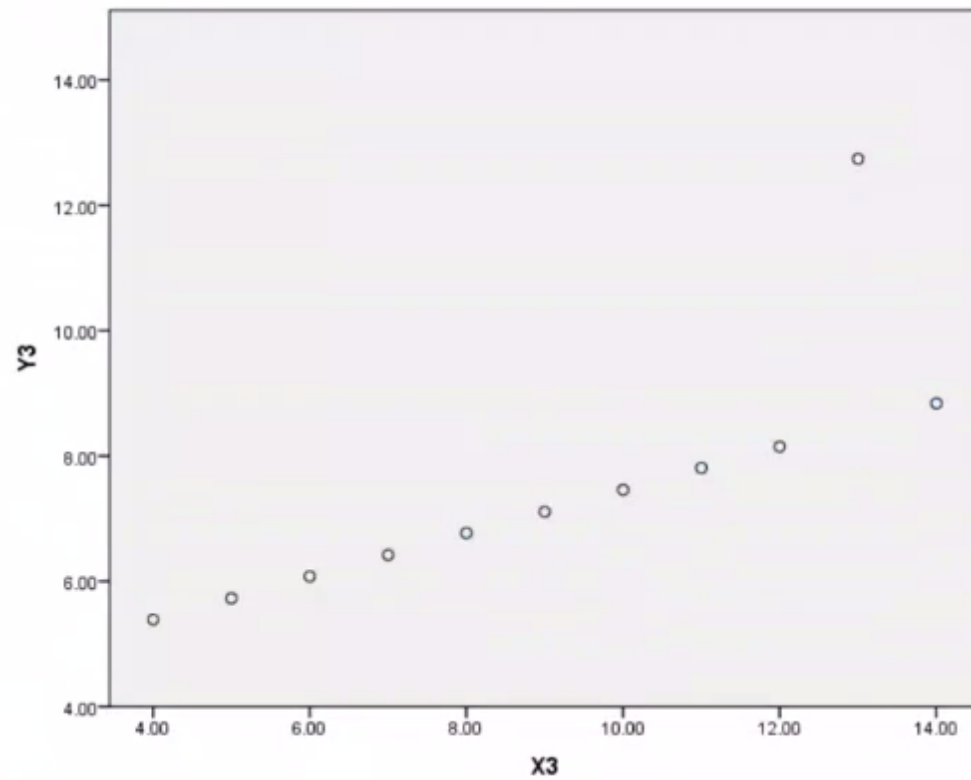


[3/9/2021]

Outlier Detection with Boxplots

The Boxplot option is available in Chart Builder under Gallery

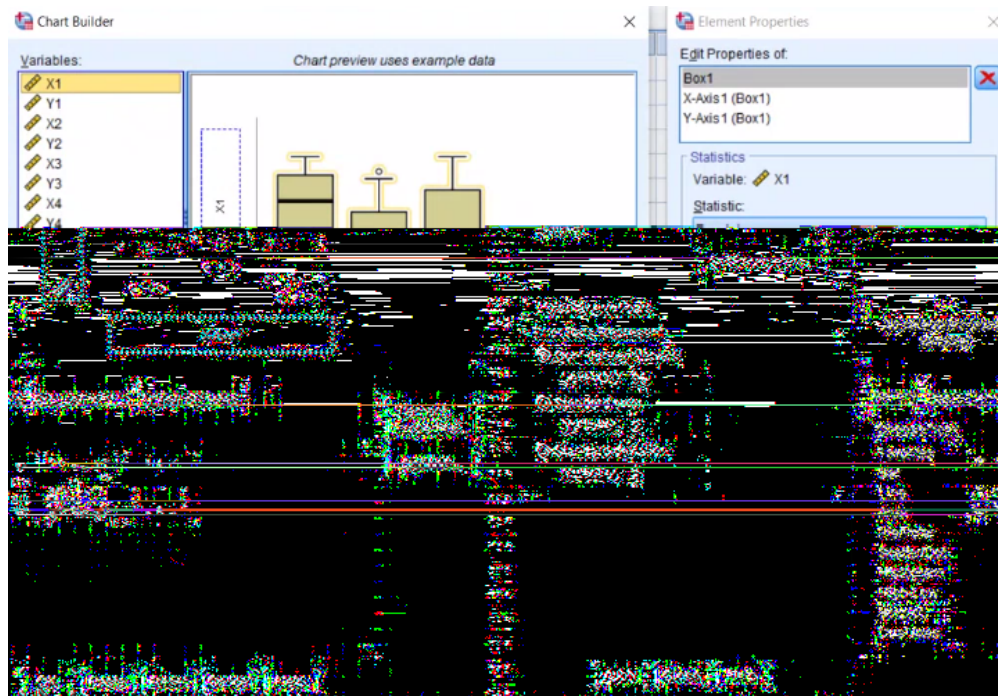

Alternate Method Graphs → Legacy Dialogs → Boxplot

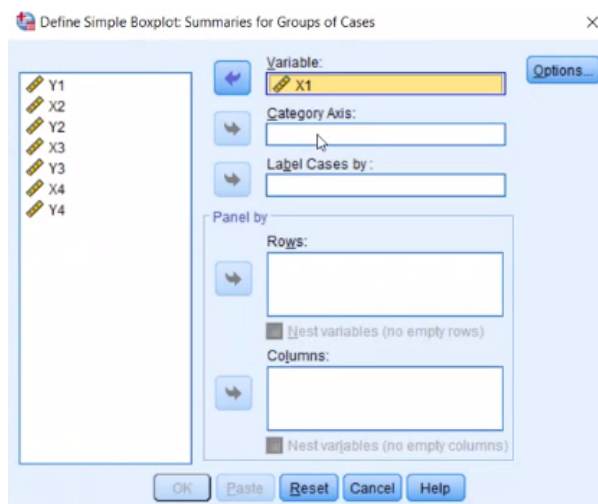


Legacy Boxplot window

Panel by - Separates into different boxes based on variables in this option



Classwork 1

Data View

	x1	y1	x2	y2	x3	y3	x4	y4
1	10	8.04	10	9.14	10	7.46	8	6.58
2	8	6.95	8	8.14	8	6.77	8	5.76

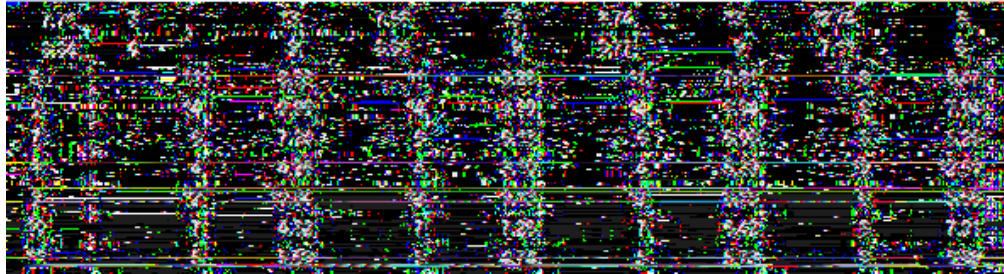

Output View

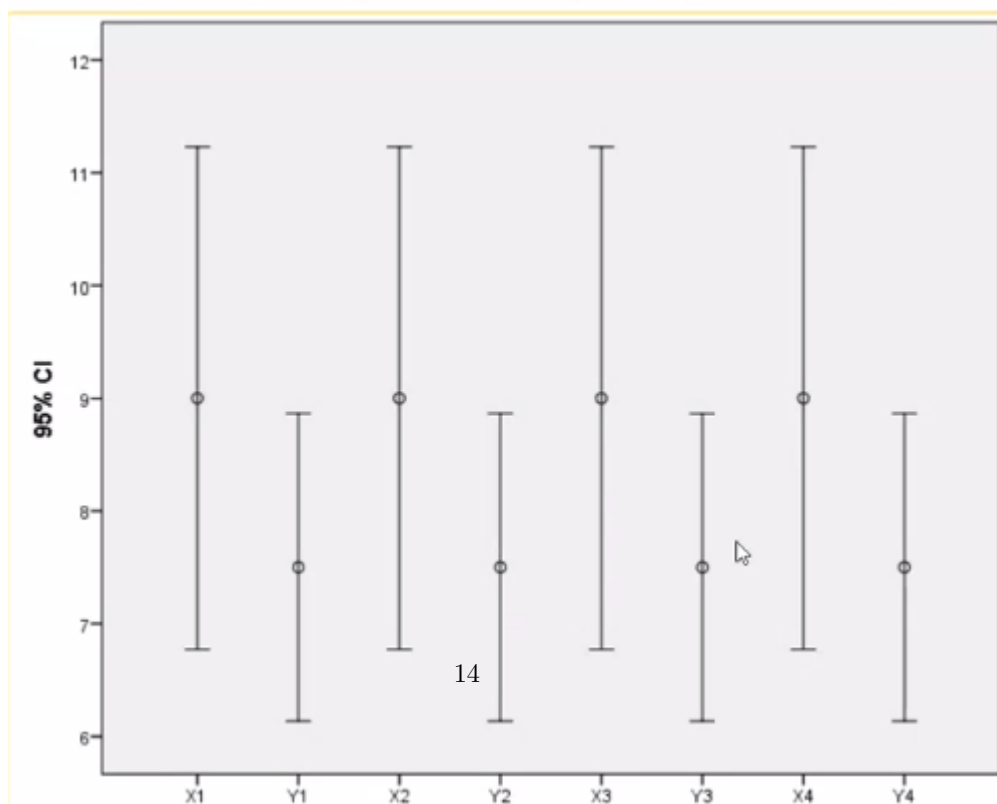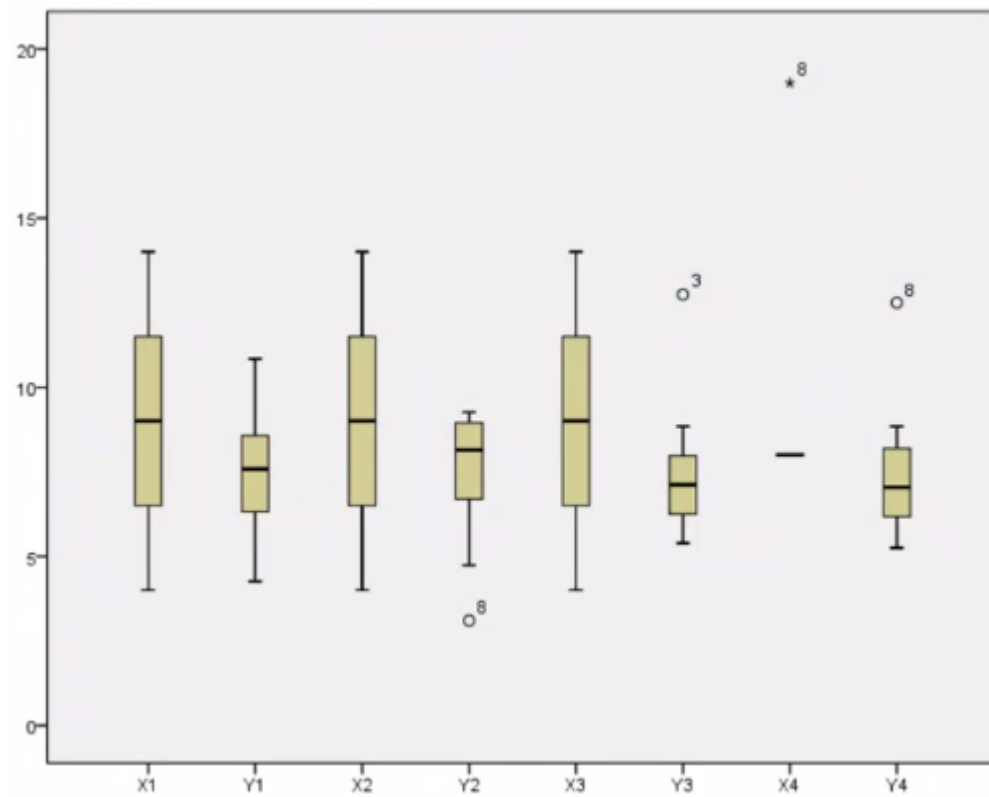


95% Confidence interval plot


Classwork 2

Data View


	SP	SIZE	AGE	LOCATION	LOCATION_NAME
1	109360	1404	20	1	A
2	137980	1477	2	1	A
3	131230	1503	5	1	A
4	130230	1552	4	1	A
5	125410	1608	23	1	A
6	124370	1633	34	1	A
7	139030	1717	25	1	A

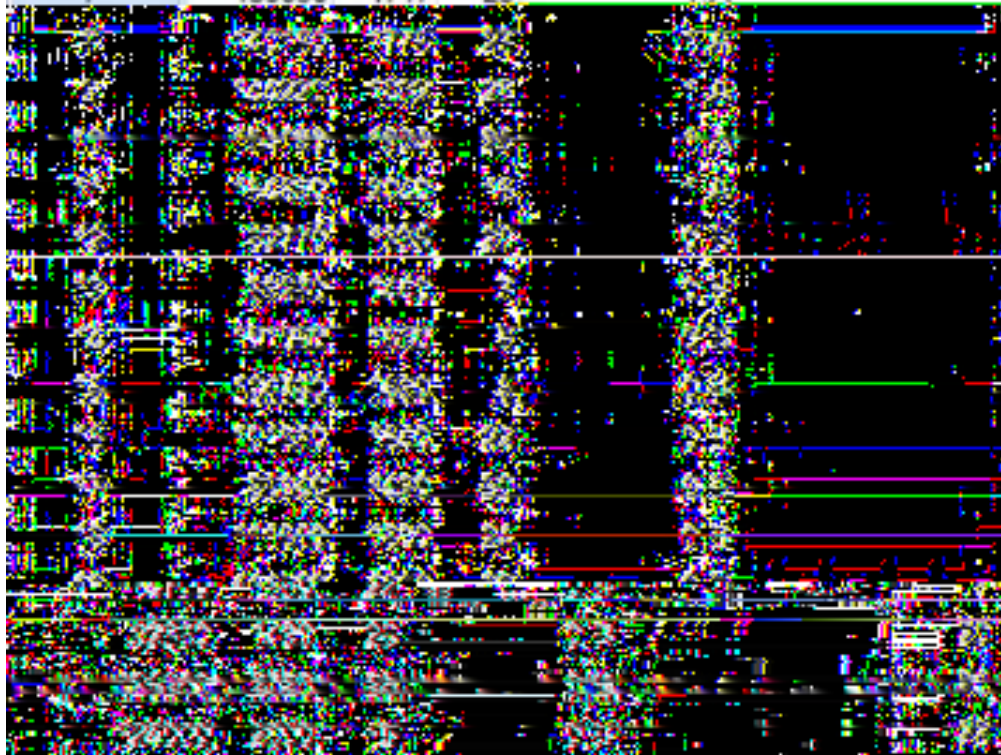

Boxplot Window

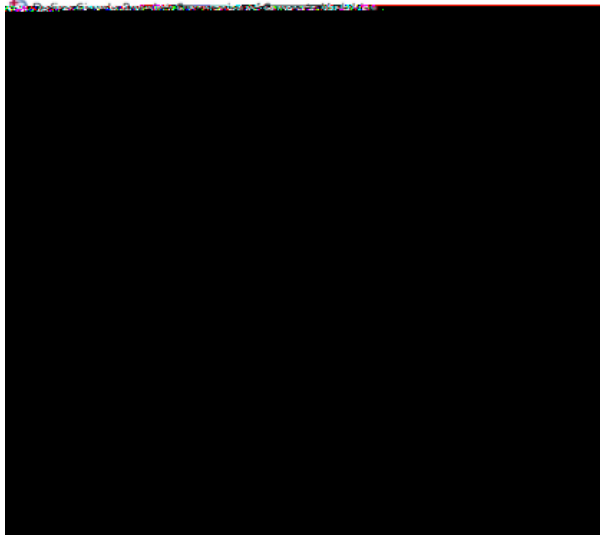


Output View

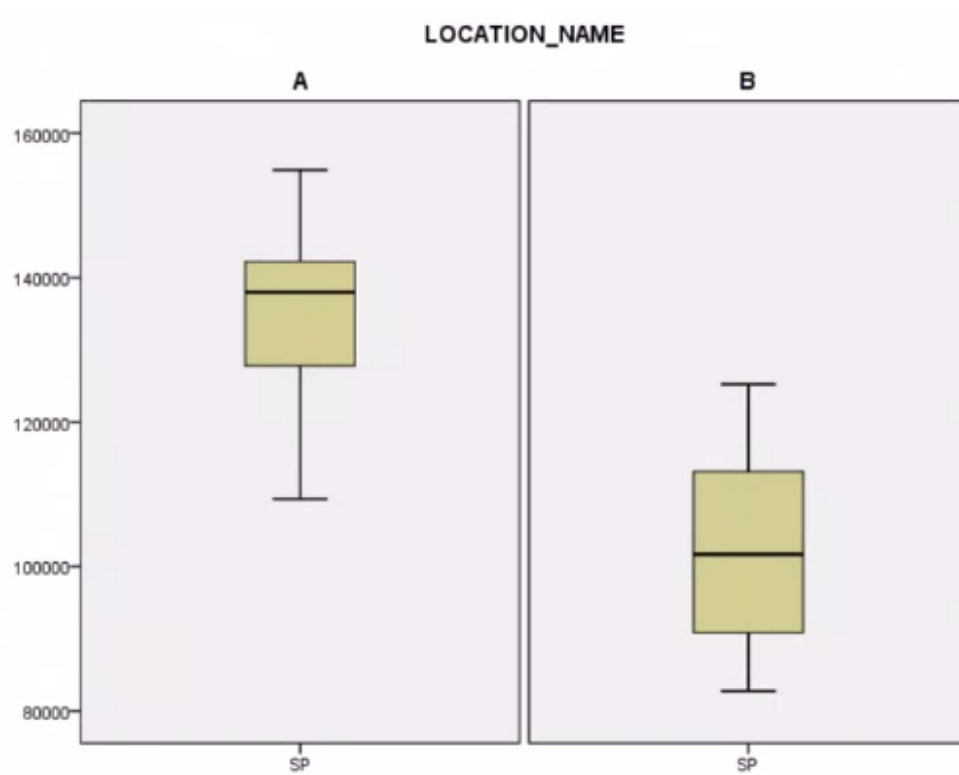


[8/9/2021]

Splitting Files into Groups

To split the data w.r.t some variable, we use **Split File** under **Data**→**Split File...**

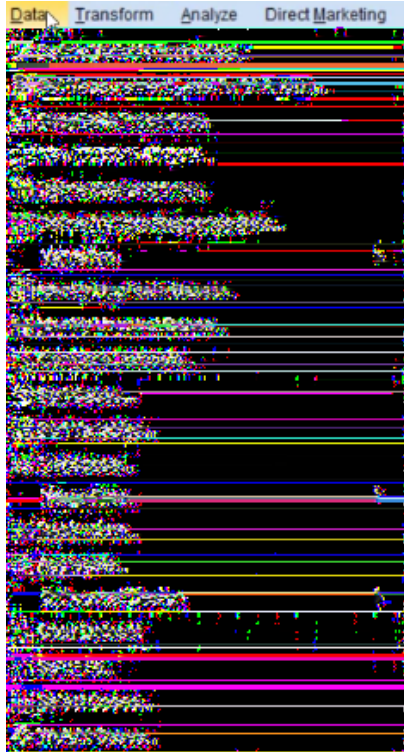


To split the file based on a variable, the variables must be in the **Group Based on:** dialogue.

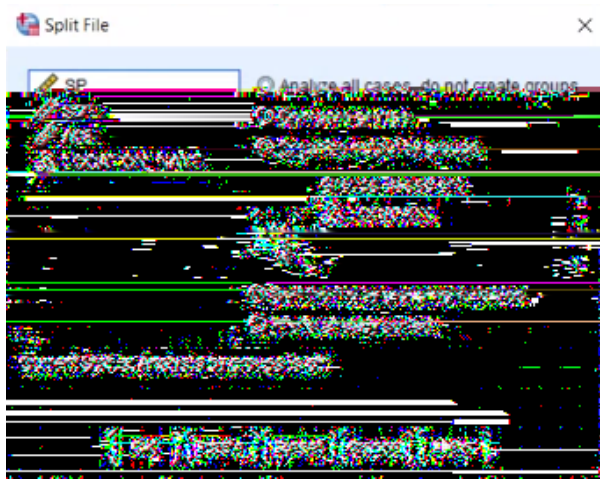

Frequencies for Descriptive Statistics

To display the descriptive statistics of a dataset in a vertical tabular form, an alternative method exists i.e. by using the **Frequencies...** dialogue.

The **Frequencies** window is under **Analyze**→**Descriptive Statistics**→**Frequencies...**

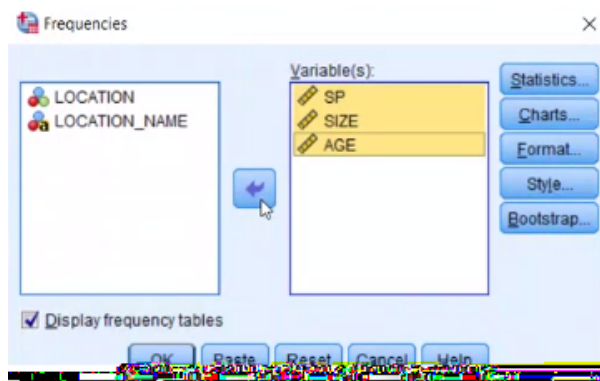


Variable selector window




Stats selector window


Visual Binning

To create class intervals for continuous data, we use the **Visual Binning** dialogue under **Transform**→**Visual Binning**

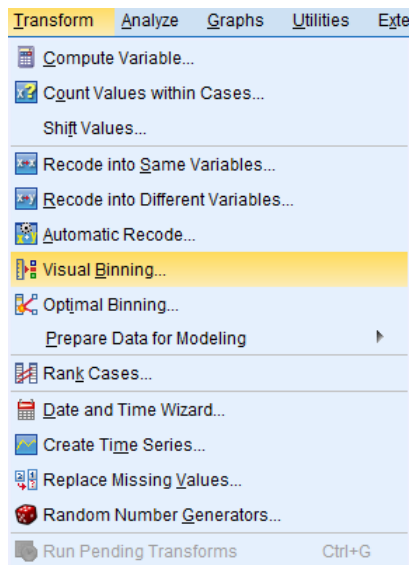

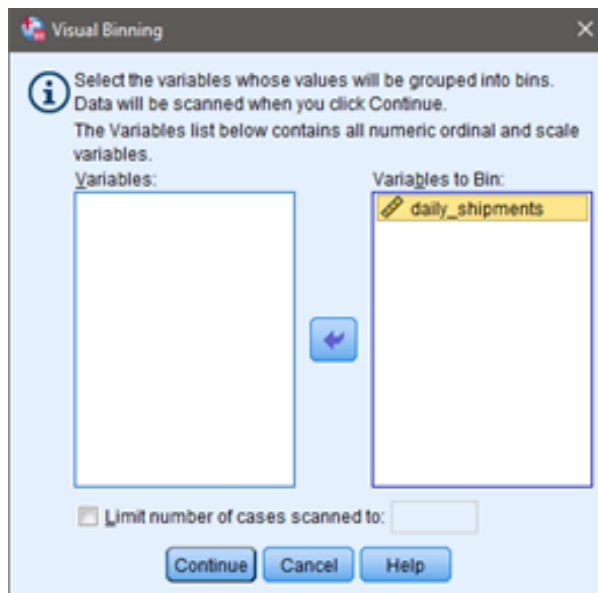


Variable Selector Window

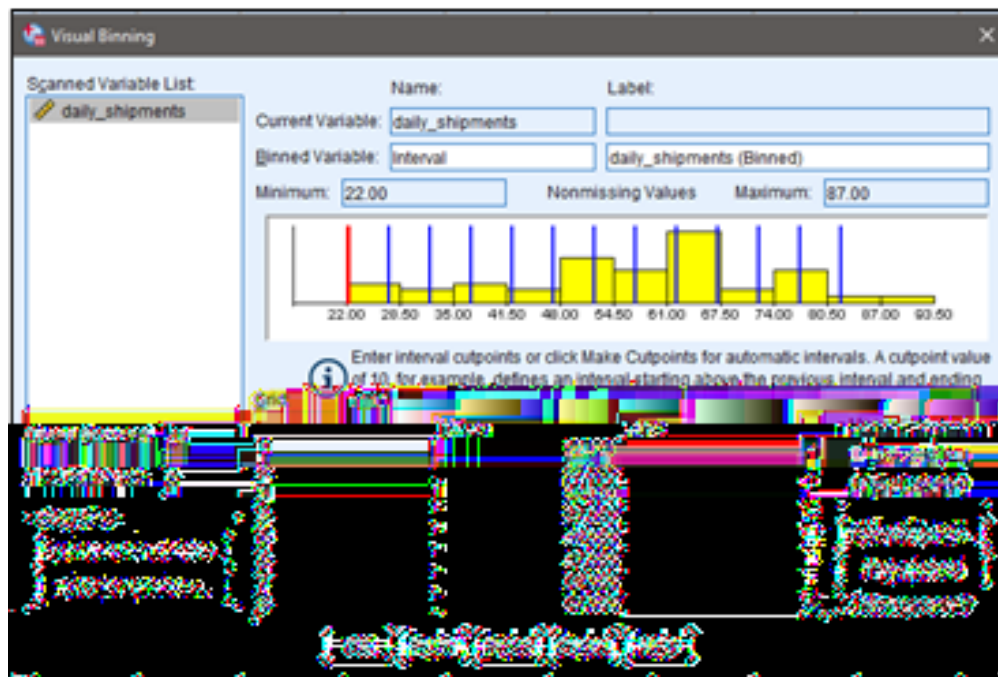

Visual Binning Window

To specify the cutpoint properties, use the Make Cutpoint options

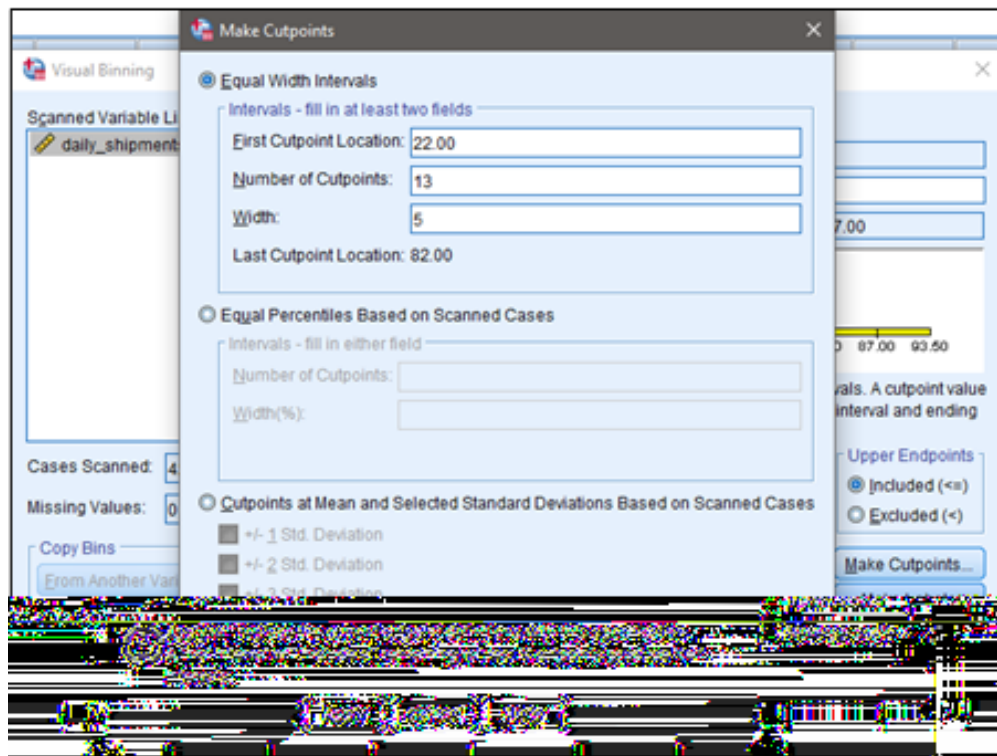


Classwork 1



Variable View

	Name	Type	Width	Decimals	Label	Values	Missing	Columns	Align	Measure	Role
1	daily_shipm...	Numeric	8	2		None	None	18	Right	Scale	Input
2											

Data View




	 daily_shipments	var
1	22.00	
2	65.00	
3	65.00	
4	67.00	
5	55.00	
6	50.00	
7	65.00	
8	77.00	
9	73.00	
10	30.00	
11	62.00	
12	54.00	
13	48.00	
14	65.00	
15	79.00	
16	60.00	
17	63.00	
18	45.00	
19	51.00	
20	68.00	
21	79.00	
22	83.00	
23	33.00	
24	41.00	
1		
Data View Variable View		

Post Binning Data View


	 daily_shipments	 Interval	var
1	22.00	1	
2	65.00	10	
3	65.00	10	
4	67.00	10	
5	55.00	8	
6	50.00	7	
7	65.00	10	
8	77.00	12	
9	73.00	12	
10	30.00	3	
11	62.00	9	
12	54.00	8	
13	48.00	7	
14	65.00	10	
15	79.00	13	
16	60.00	9	
17	63.00	10	
18	45.00	6	
19	51.00	7	
20	68.00	11	
21	79.00	13	
22	83.00	14	
23	33.00	4	
24	61.00	6	
1			
<div> <div>Data View</div> <div>Variable View</div> </div>			

Classwork 2



Variable View

	Name	Type	Width	Decimals	Label	Values	Missing	Columns	Align	Measure	Role
1	Sales	Numeric	8	2		None	None	18	 Right	 Scale	 Input
2											

Data View

	 Sales	var
1	13.00	
2	19.00	
3	22.00	
4	14.00	
5	13.00	
6	16.00	
7	19.00	
8	21.00	
9	23.00	
10	11.00	
11	27.00	
12	25.00	
13	17.00	
14	17.00	
15	13.00	
16	21.00	
17	23.00	
18	11.00	
19	26.00	
20	28.00	
21	20.00	
22	26.00	
23	16.00	
24	28.00	
25	22.00	
26	22.00	
27	22.00	
28	22.00	
29	22.00	
30	22.00	
31	22.00	
32	22.00	
33	22.00	
34	22.00	
35	22.00	
36	22.00	
37	22.00	
38	22.00	
39	22.00	
40	22.00	
41	22.00	
42	22.00	
43	22.00	
44	22.00	
45	22.00	
46	22.00	
47	22.00	
48	22.00	
49	22.00	
50	22.00	
51	22.00	
52	22.00	
53	22.00	
54	22.00	
55	22.00	
56	22.00	
57	22.00	
58	22.00	
59	22.00	
60	22.00	
61	22.00	
62	22.00	
63	22.00	
64	22.00	
65	22.00	
66	22.00	
67	22.00	
68	22.00	
69	22.00	
70	22.00	
71	22.00	
72	22.00	
73	22.00	
74	22.00	
75	22.00	
76	22.00	
77	22.00	
78	22.00	
79	22.00	
80	22.00	
81	22.00	
82	22.00	
83	22.00	
84	22.00	
85	22.00	
86	22.00	
87	22.00	
88	22.00	
89	22.00	
90	22.00	
91	22.00	
92	22.00	
93	22.00	
94	22.00	
95	22.00	
96	22.00	
97	22.00	
98	22.00	
99	22.00	
100	22.00	

Post Binning Data View

	 Sales	 interval	var
1	13.00	2	
2	19.00	2	
3	22.00	3	
4	14.00	2	
5	13.00	2	
6	16.00	2	
7	19.00	2	
8	21.00	3	
9	23.00	3	
10	11.00	2	
11	27.00	3	
12	25.00	3	
13	17.00	2	
14	17.00	2	
15	13.00	2	
16	20.00	2	
17	22.00	2	
18	22.00	2	
19	22.00	2	
20	22.00	2	
21	22.00	2	
22	22.00	2	
23	22.00	2	
24	22.00	2	
25	22.00	2	
26	22.00	2	
27	22.00	2	
28	22.00	2	
29	22.00	2	
30	22.00	2	
31	22.00	2	
32	22.00	2	
33	22.00	2	
34	22.00	2	
35	22.00	2	
36	22.00	2	
37	22.00	2	
38	22.00	2	
39	22.00	2	
40	22.00	2	
41	22.00	2	
42	22.00	2	
43	22.00	2	
44	22.00	2	
45	22.00	2	
46	22.00	2	
47	22.00	2	
48	22.00	2	
49	22.00	2	
50	22.00	2	
51	22.00	2	
52	22.00	2	
53	22.00	2	
54	22.00	2	
55	22.00	2	
56	22.00	2	
57	22.00	2	
58	22.00	2	
59	22.00	2	
60	22.00	2	
61	22.00	2	
62	22.00	2	
63	22.00	2	
64	22.00	2	
65	22.00	2	
66	22.00	2	
67	22.00	2	
68	22.00	2	
69	22.00	2	
70	22.00	2	
71	22.00	2	
72	22.00	2	
73	22.00	2	
74	22.00	2	
75	22.00	2	
76	22.00	2	
77	22.00	2	
78	22.00	2	
79	22.00	2	
80	22.00	2	
81	22.00	2	
82	22.00	2	
83	22.00	2	
84	22.00	2	
85	22.00	2	
86	22.00	2	
87	22.00	2	
88	22.00	2	
89	22.00	2	
90	22.00	2	
91	22.00	2	
92	22.00	2	
93	22.00	2	
94	22.00	2	
95	22.00	2	
96	22.00	2	
97	22.00	2	
98	22.00	2	
99	22.00	2	
100	22.00	2	

[10/9/2021]

Classwork 1

Variable View

	Name	Type	Width	Decimals	Label	Values	Missing	Columns	Align	Measure	Role
1	id	Numeric	8	0		None	None	1	Left	None	Input
2	sex	Numeric	8	0	male or female	None	None	1	Left	None	Input
3	age	Numeric	8	0		None	None	1	Left	None	Input
4	height	Numeric	8	0		None	None	1	Left	None	Input
5	weight	Numeric	8	0		None	None	1	Left	None	Input

Data View


	rollno	name	subject1	subject2	subject3
1	1	Aditi	89.00	87.00	78.00
2	2	Anushka	56.00	76.00	98.00
3	3	Ritika	78.00	75.00	89.00
4	4	Rishika	67.00	88.00	76.00
5	5	Aish	75.00	99.00	56.00
6	6	Laxmi	67.00	79.00	56.00
7	7	Safalya	89.00	68.00	46.00
8	8	Shoumit	78.00	77.00	76.00
9	9	Abhirup	80.00	66.00	65.00
10	10	Shougata	97.00	96.00	76.00


Output View

Descriptive Statistics					
	N	Minimum	Maximum	Mean	Std. Deviation
subject1	10	56.00	97.00	77.6000	12.20382
subject2	10	66.00	99.00	81.1000	11.10005
subject3	10	46.00	98.00	71.6000	15.93180
Valid N (listwise)	10				


Normality Check

To check if the data is normal or not, the Explore option under Analyze→Descriptive Statistics→Explore

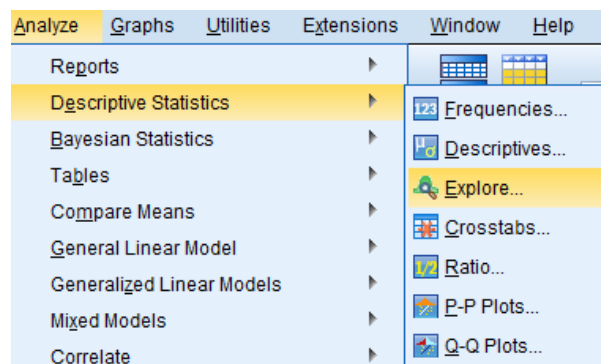

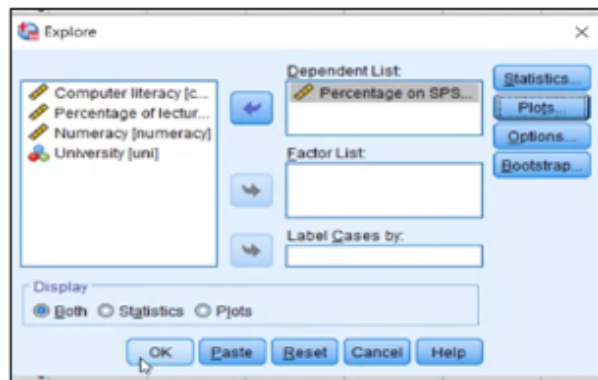

Explore Window

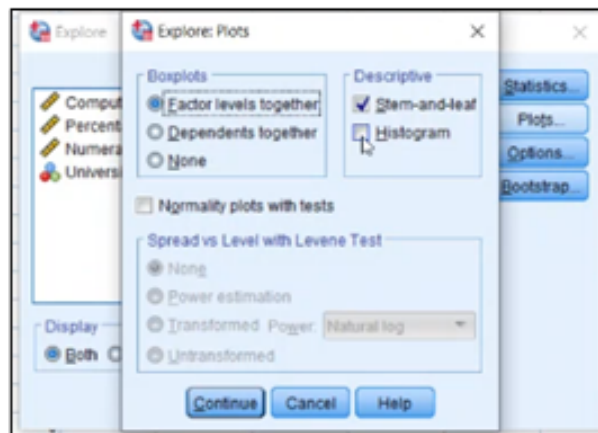

Plot Selector Window


Classwork 2

Variable View



Data View

	exam	computer	lectures	numeracy	uni
1	18	54	75.0	7	0
2	30	47	8.5	1	0
3	40	58	69.5	6	0

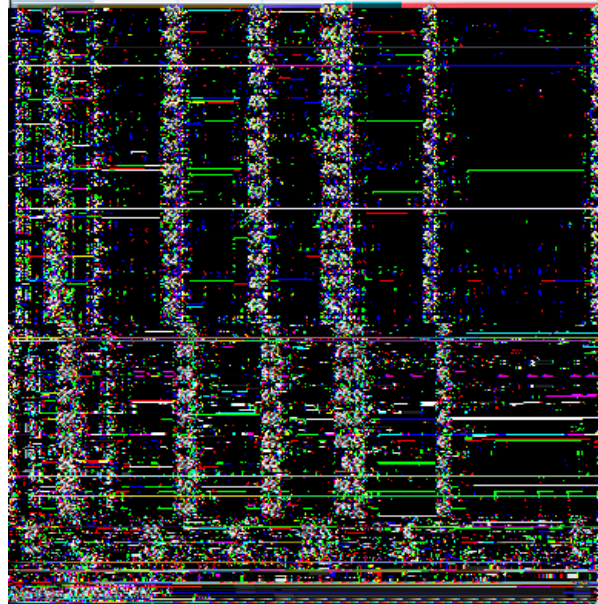

Output View

Explore

[DataSet1] D:\ACE_STAT\SEM 5\spss_dataset\Data File _ SPSSExam.sav

Case Processing Summary


	Cases					
	Valid		Missing		Total	
	N	Percent	N	Percent	N	Percent
Percentage on SPSS exam	100	100.0%	0	0.0%	100	100.0%

Descriptives

		Statistic	Std. Error
Percentage on SPSS exam	Mean	58.10	2.132
	95% Confidence Interval for Mean	Lower Bound	53.87
		Upper Bound	62.33
	5% Trimmed Mean	58.12	
	Median	60.00	
	Variance	454.354	
	Std. Deviation	21.316	
	Minimum	15	
	Maximum	99	
	Range	84	
	Interquartile Range	37	
	Skewness	-1.107	.241
Kurtosis	-1.105	.478	

Tests of Normality

	Kolmogorov-Smirnov ^a			Shapiro-Wilk		
	Statistic	df	Sig.	Statistic	df	Sig.
Percentage on SPSS exam	.102	100	.012	.961	100	.005

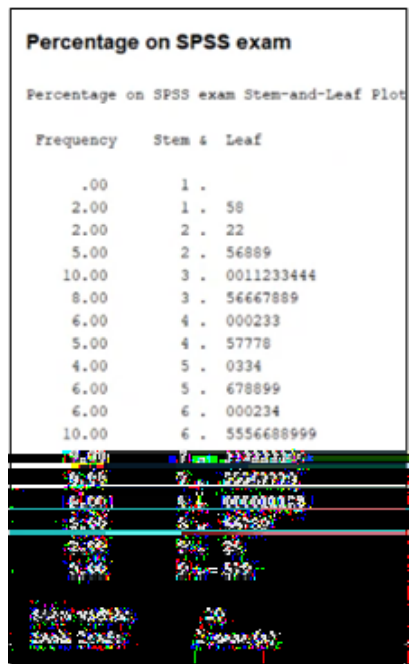

If the significance value is greater than 0.05 then the data is normal.