

Flowmodoro Timer: how it is put together

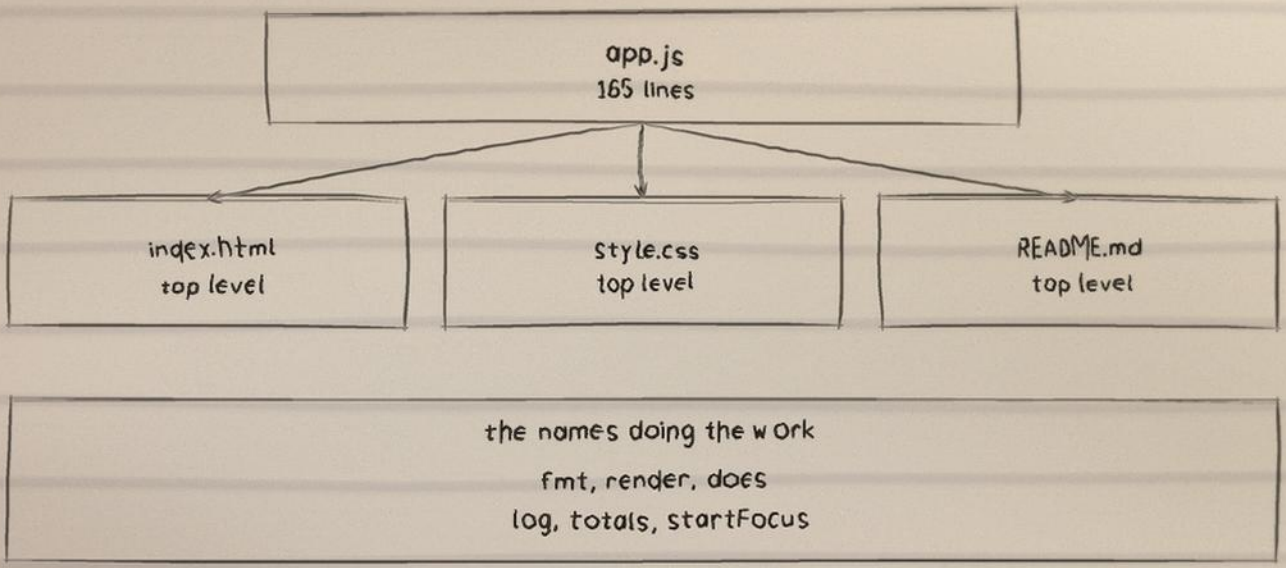

This project is complete and runnable. Run it: open index.html in any browser (or serve the folder with python3 -m http.server). Focus counts up; stopping banks a break worth

sketched from the files

Flowmodoro Timer: the run, step by step

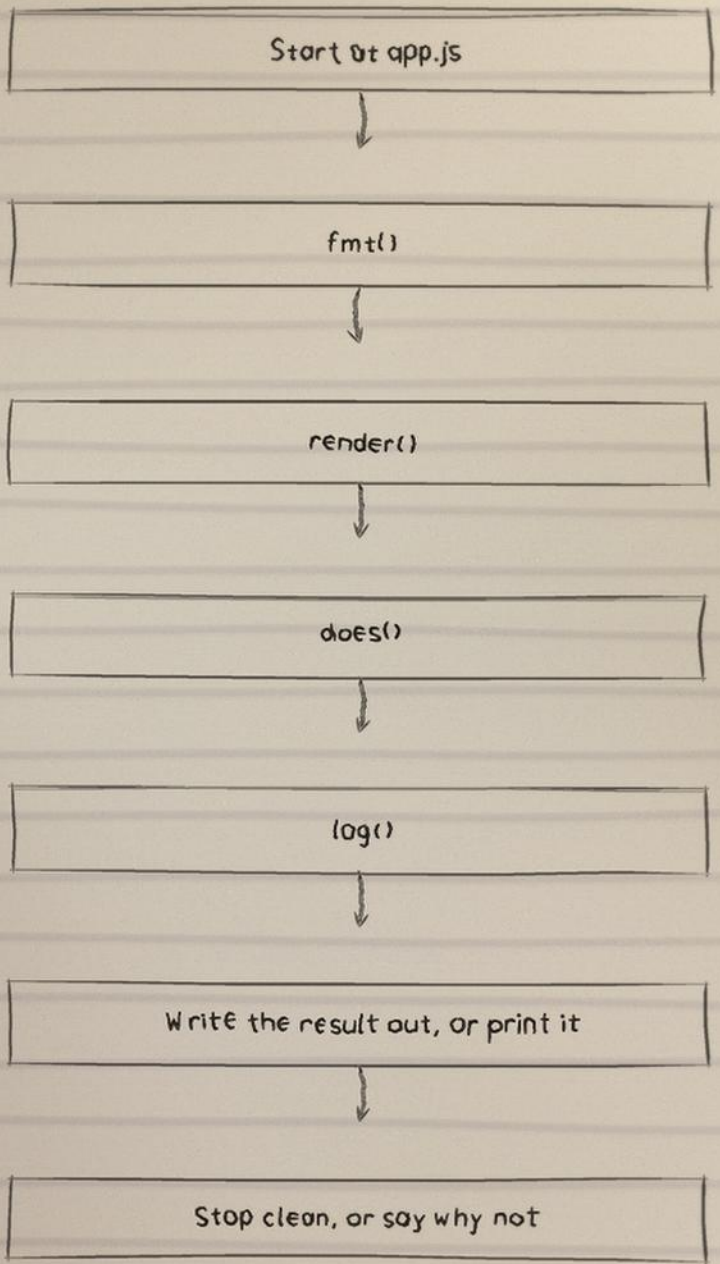

If a step fails, the honest run says so and stops.

traced, not guessed, OK

Product map: what Flowmodoro Timer is for

WHAT IT IS

This project is complete and runnable. Run it: open index.html in any browser (or serve the folder with python3 -m http.server). Focus counts up; stopping banks a break worth 1/5.

WHAT GOES IN

The files at the top of the tree: app.js, index.html, style.css.

WHAT COMES OUT


What the top files produce when they run or get read. Nothing else is promised.

WHERE IT STOPS

No service behind it, no account, no upload. If a path is untested, VISUAL.md says so.

mapped by hand, GK

Flow modoro Timer: data flow, in one direction

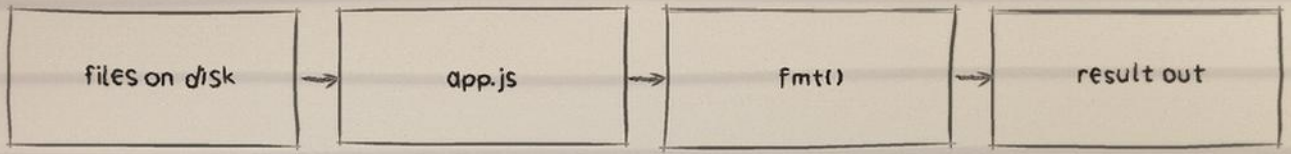


One direction. Anything the code does not do is not drawn.

second sheet, GK

Flowmodoro Timer in numbers, counted 2026-10-30

Counted from the local snapshot of this repo. Method for every number: VISUAL.md.

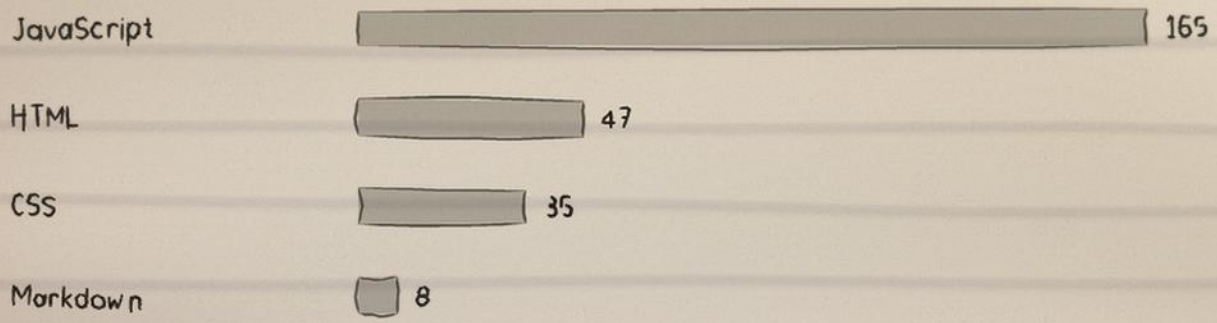

7 files in the tree.

6 commits, first 2023-05-11, last 2026-10-30, from the local git log.

No test files by name in this snapshot.

counted and drawn,

Flowmodoro Timer: schematic of the apparatus


the system as a machine: parts, flow, and measurements

construction lines left in, as drawn

parts list

1. app.js
2. index.html
3. style.css
4. README.md

in flow order, first to last

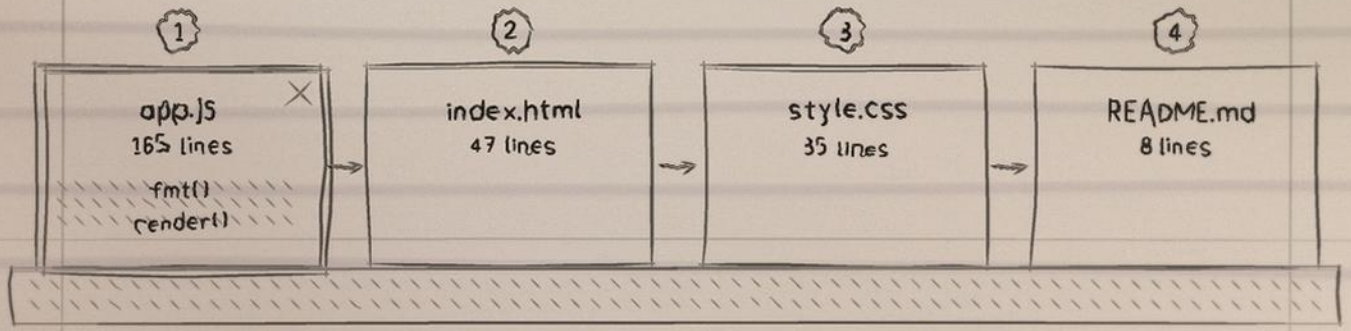

base plate: the repo itself, sectioned

span: 7 files, 255 lines counted

turns of the crank so far: 6 commits, 2023-05-11 to 2026-10-30

measured and sketched, GK