

RunAsDate For MacOS: how it is put together

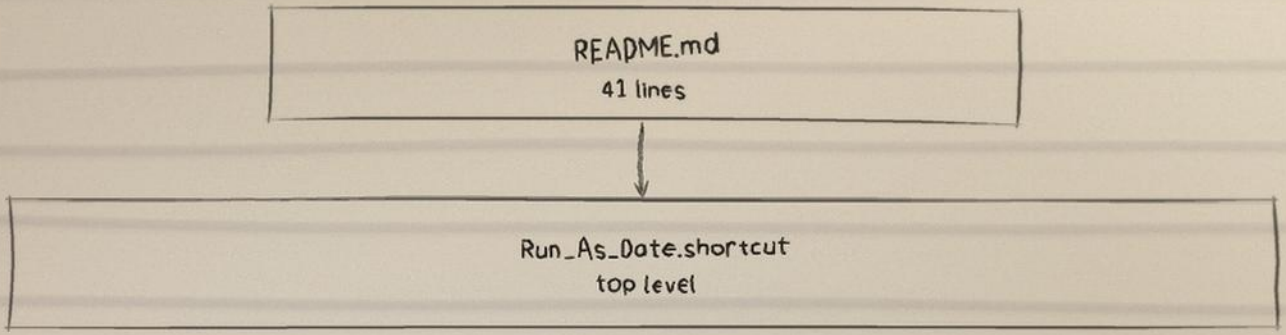

Until recently, this type of tool was not available for macOS.
However, I have found a way to create a "Run as Date" launcher
for macOS.

sketched from the files

RunAsDate For MacOS: the run, step by step

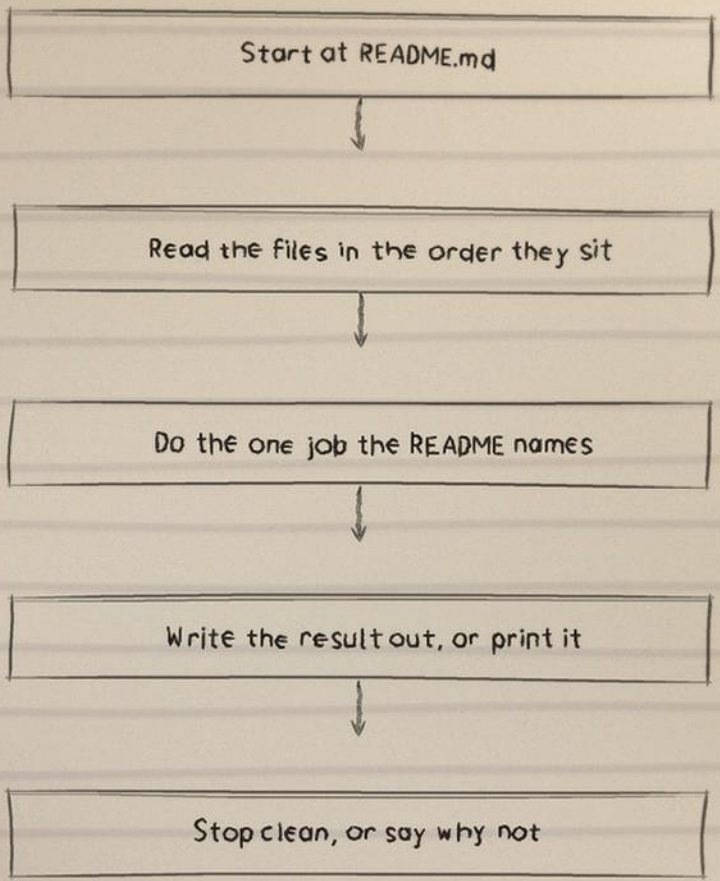

If a step fails, the honest run says so and stops.

traced, not guessed. GK

Product map: what RunAsDate For MacOS is for

WHAT IT IS

Until recently, this type of tool was not available for macOS. However, I have found a way to create a "Run as Date" launcher for macOS.

WHAT GOES IN

The files at the top of the tree: README.md, Run_As_Date.shortCut.

WHAT COMES OUT


What the top files produce when they run or get read. Nothing else is promised.

WHERE IT STOPS

No service behind it, no account, no upload. If a path is untested, VISUAL.md says so.

mapped by hand, 

RunAsDate For MacOS: data flow, in one direction

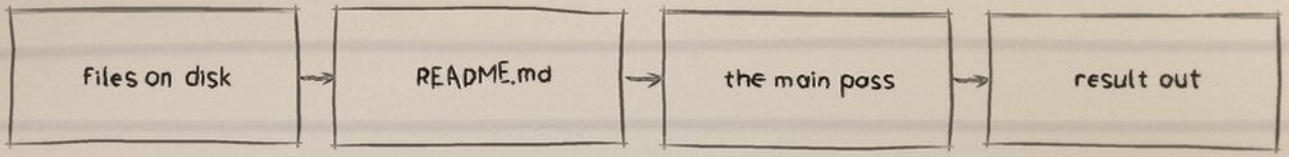

One direction. Anything the code does not do is not drawn.

second sheet, BK

RunAsDate for macOS in numbers, counted 2026-10-30

Counted from the local snapshot of this repo. Method for every number: VISUAL.md.



2 files in the tree.

4 commits, first 2023-01-24, last 2023-01-24, from the local git log.

No test files by name in this snapshot.

counted and drawn, GK

RunAsDate For MacOS: Schematic of the apparatus


the system as a machine: parts, flow, and measurements

construction lines left in, as drawn

parts list

1. README.md
2. Run_As_Date.shortcut

in flow order, first to last

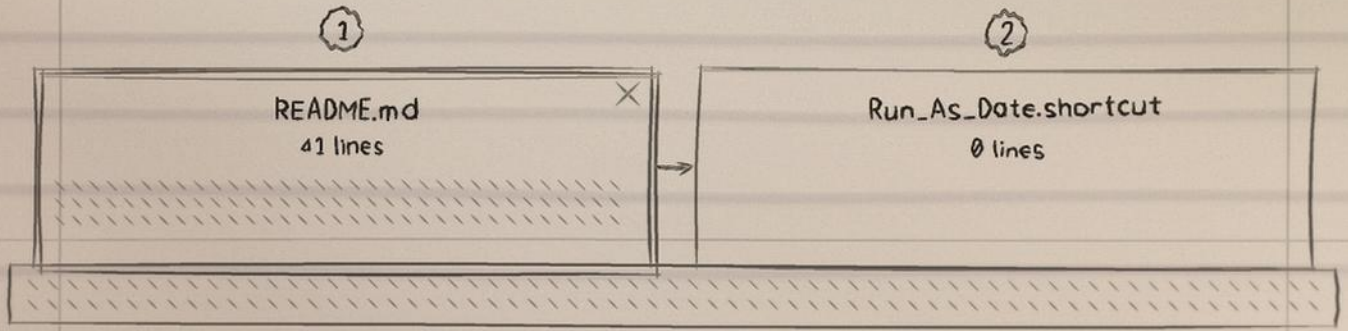

base plate: the repo itself, sectioned

span: 2 files, 41 lines counted

turns of the crank so far: 4 commits, 2023-01-24 to 2023-01-24

measured and sketched, GK