

FleetCart API Integration Guide

Complete step-by-step documentation for integrating airport parking search and live pricing, available space (parking slots) into your website or booking platform.

Base URL: `apis.fleetcart.co.uk/api`

Version 1.0

JSON · HTTPS · POST

CONTENTS

1. Introduction
2. Credentials Setup
3. Integration Overview
4. Quick Start
5. Get Airports API
6. Products API
7. Step-by-Step Implementation
8. Code Examples
9. Error Handling
10. FAQ & Support

1. Introduction

The FleetCart API enables partners to retrieve available airports and parking products with calculated prices in real time.

Endpoint	URL	Purpose
Get Airports	<code>/api/getAirports</code>	List airports for your company
Get Products	<code>/api/products</code>	Fetch products and live pricing

Security note: Always call the FleetCart API from your **server**, never from browser JavaScript. Tokens must remain private.

2. Credentials Setup

Before making any API call, obtain both tokens below.

From FleetCart — Service Provider

`app_token`

Identifies your parking company.
Required for **every** API request.

HOW TO OBTAIN

1. Contact FleetCart support or your account manager
2. Request API access for your company
3. FleetCart activates your account and shares your unique token
4. Store it securely in environment variables — never in frontend code

From Company Admin Panel


`supplier_token`

Identifies the supplier/partner. Required for the **Products** endpoint only.

HOW TO GENERATE

1. Log in to the FleetCart Company Admin Panel
2. Go to **Suppliers** → create or edit a supplier
3. Ensure the supplier is **Active**
4. Copy the generated `supplier_token`
5. Configure commission and allowed products as needed

3. Integration Overview

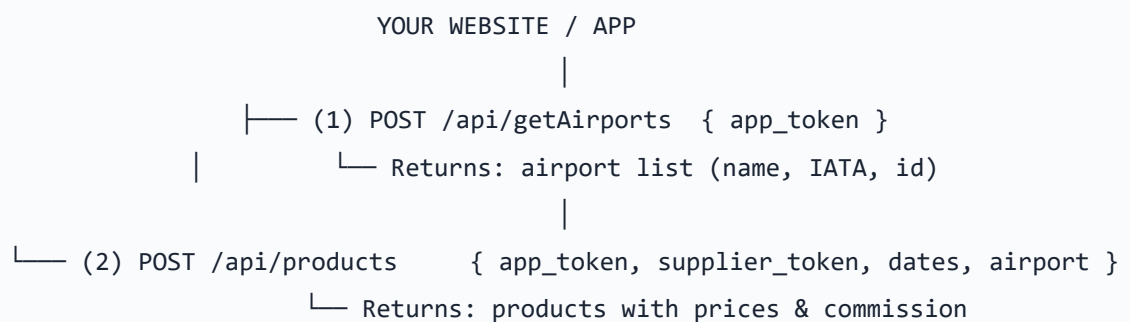

4. Quick Start — 5 Steps

- 1 Obtain your `app_token` from FleetCart

2 Generate a `supplier_token` in the Company Admin Panel

3 Call **Get Airports** to populate your airport dropdown

4 Collect drop-off/return date & time from the user

5 Call **Get Products** and display names and prices

5. Get Airports API

POST <https://apis.fleetcart.co.uk/api/getAirports>

Request Body

Field	Type	Required	Description
<code>app_token</code>	string	Yes	Company token from FleetCart

Example Request

```
{
  "app_token": "your_app_token_here"
}
```

Success Response **200 OK**

```
{
  "success": true,
  "data": [
    {
      "airport_id": 1,
      "airport_name": "London Heathrow",
      "iata_code": "LHR"
    },
    {
```

```
"airport_id": 2,
"airport_name": "London Gatwick",
"iata_code": "LGW"
}
]
```

When calling **/api/products**, use the exact `airport_name` value — not the IATA code alone.

6. Get Products & Pricing API

POST <https://apis.fleetcart.co.uk/api/products>

Request Body

Field	Type	Required	Description
<code>app_token</code>	string	Yes	Company token from FleetCart
<code>supplier_token</code>	string	Yes	Supplier token from Admin Panel
<code>depart_date</code>	string	Yes	Drop-off date — <code>YYYY-MM-DD</code>
<code>depart_time</code>	string	Yes	Drop-off time — <code>HH:mm</code> or <code>HH:mm:ss</code>
<code>return_date</code>	string	Yes	Return date — <code>YYYY-MM-DD</code>
<code>return_time</code>	string	Yes	Return time — <code>HH:mm</code> or <code>HH:mm:ss</code>
<code>airport</code>	string	Yes	Airport name from Get Airports response

Example Request

```
{
  "app_token": "your_app_token_here",
  "supplier_token": "your_supplier_token_here",
  "depart_date": "2026-06-22",
  "depart_time": "10:00",
  "return_date": "2026-06-29",
  "return_time": "18:00",
```

```
"airport": "London Heathrow"
}
```

Success Response 200 OK

```
{
  "success": true,
  "data": [
    {
      "CompanyName": "Example Parking Ltd",
      "ProductName": "Meet & Greet Terminal 5",
      "ProductPrice": "89.50",
      "AvailableSlots": "",
      "SupplierCommission": 12.5
    }
  ]
}
```

Response Fields

Field	Description
CompanyName	Your company name
ProductName	Parking product display name
ProductPrice	Calculated price (2 decimal places, string)
AvailableSlots	Reserved — currently empty
SupplierCommission	Commission % configured for the supplier

7. Step-by-Step Implementation

Step 1 — Store credentials securely

```
# .env (server-side only – never commit to Git)
FLEETCART_APP_TOKEN=your_app_token_here
FLEETCART_SUPPLIER_TOKEN=your_supplier_token_here
FLEETCART_API_BASE=https://apis.fleetcart.co.uk/api
```

Step 2 — Load airports on page init

Call Get Airports from your backend and populate a dropdown using `airport_name` as the value.

Step 3 — Build the search form

UI Field	API Parameter	Example
Drop-off date	<code>depart_date</code>	<code>2026-06-22</code>
Drop-off time	<code>depart_time</code>	<code>10:00</code>
Return date	<code>return_date</code>	<code>2026-06-29</code>
Return time	<code>return_time</code>	<code>18:00</code>
Airport	<code>airport</code>	<code>London Heathrow</code>

Step 4 — Fetch products on search

When the user submits the form, your backend calls `/api/products` and returns results to the frontend.

Step 5 — Display results

Show `ProductName` and `ProductPrice` to users. Use `SupplierCommission` internally for reporting.

An empty `data: []` array is a valid response — show a friendly "no availability" message rather than an error.

8. Code Examples

cURL — Get Airports

```
curl -X POST "https://apis.fleetcart.co.uk/api/getAirports" \  
  -H "Content-Type: application/json" \  
  -d '{"app_token": "YOUR_APP_TOKEN"}'
```

cURL — Get Products

```
curl -X POST "https://apis.fleetcart.co.uk/api/products" \
-H "Content-Type: application/json" \
-d '{
  "app_token": "YOUR_APP_TOKEN",
  "supplier_token": "YOUR_SUPPLIER_TOKEN",
  "depart_date": "2026-06-22",
  "depart_time": "10:00",
  "return_date": "2026-06-29",
  "return_time": "18:00",
  "airport": "London Heathrow"
}'
```

Node.js — Server-side proxy

```
app.post("/api/parking-quotes", async (req, res) => {
  const { depart_date, depart_time, return_date, return_time, airport } = req.body;

  const response = await fetch("https://apis.fleetcart.co.uk/api/products", {
    method: "POST",
    headers: { "Content-Type": "application/json" },
    body: JSON.stringify({
      app_token: process.env.FLEETCART_APP_TOKEN,
      supplier_token: process.env.FLEETCART_SUPPLIER_TOKEN,
      depart_date, depart_time, return_date, return_time, airport,
    }),
  });

  const result = await response.json();
  res.status(response.status).json(result);
});
```

PHP — Get Airports

```
$ch = curl_init('https://apis.fleetcart.co.uk/api/getAirports');
curl_setopt_array($ch, [
  CURLOPT_POST => true,
  CURLOPT_HTTPHEADER => ['Content-Type: application/json'],
  CURLOPT_POSTFIELDS => json_encode(['app_token' => getenv('FLEETCART_APP_TOKEN')]),
  CURLOPT_RETURNTRANSFER => true,
]);
$result = json_decode(curl_exec($ch), true);
curl_close($ch);
```

9. Error Handling

All errors return JSON: `{ "success": false, "message": "..." }`

Status	Meaning	Common Cause
200	Success	Includes empty product lists
400	Bad Request	Missing fields or invalid date/time
401	Unauthorized	Invalid or missing tokens
500	Server Error	Retry or contact FleetCart support

Common Error Messages

Message	Action
<code>app_token is required</code>	Include <code>app_token</code> in request body
<code>Invalid app_token</code>	Verify token with FleetCart; check company is active
<code>supplier_token is required</code>	Include <code>supplier_token</code> for <code>/api/products</code>
<code>Invalid supplier_token</code>	Check Admin Panel — supplier must be active
<code>Invalid depart or return date/time</code>	Use YYYY-MM-DD and HH:mm formats

10. FAQ & Support

Can I use GET instead of POST?

No. Both endpoints require POST with a JSON body.

Should I send IATA code or airport name?

Send the full `airport_name` exactly as returned by Get Airports.

Why are some products missing?

Products are filtered by operational hours, airport, supplier settings, and price band availability.

Health check

GET

<https://apis.fleetcart.co.uk/health>

Contact

For API access, token issues, or integration support, contact your **FleetCart account manager** or support team. When reporting issues, include the endpoint, HTTP status, error message, and timestamp — but never share your tokens.