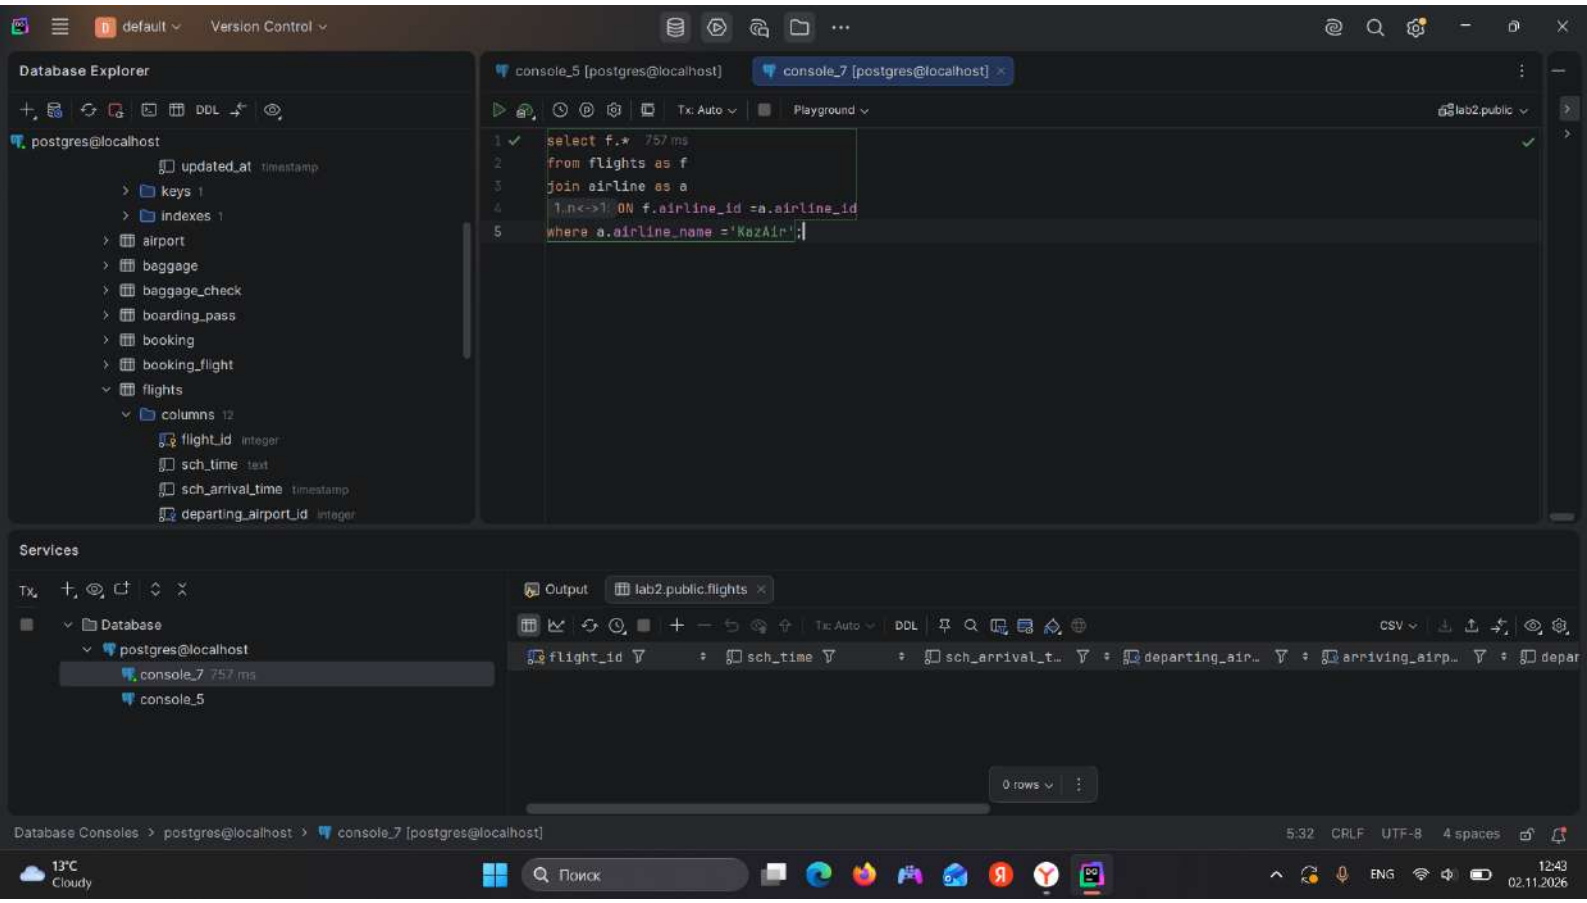
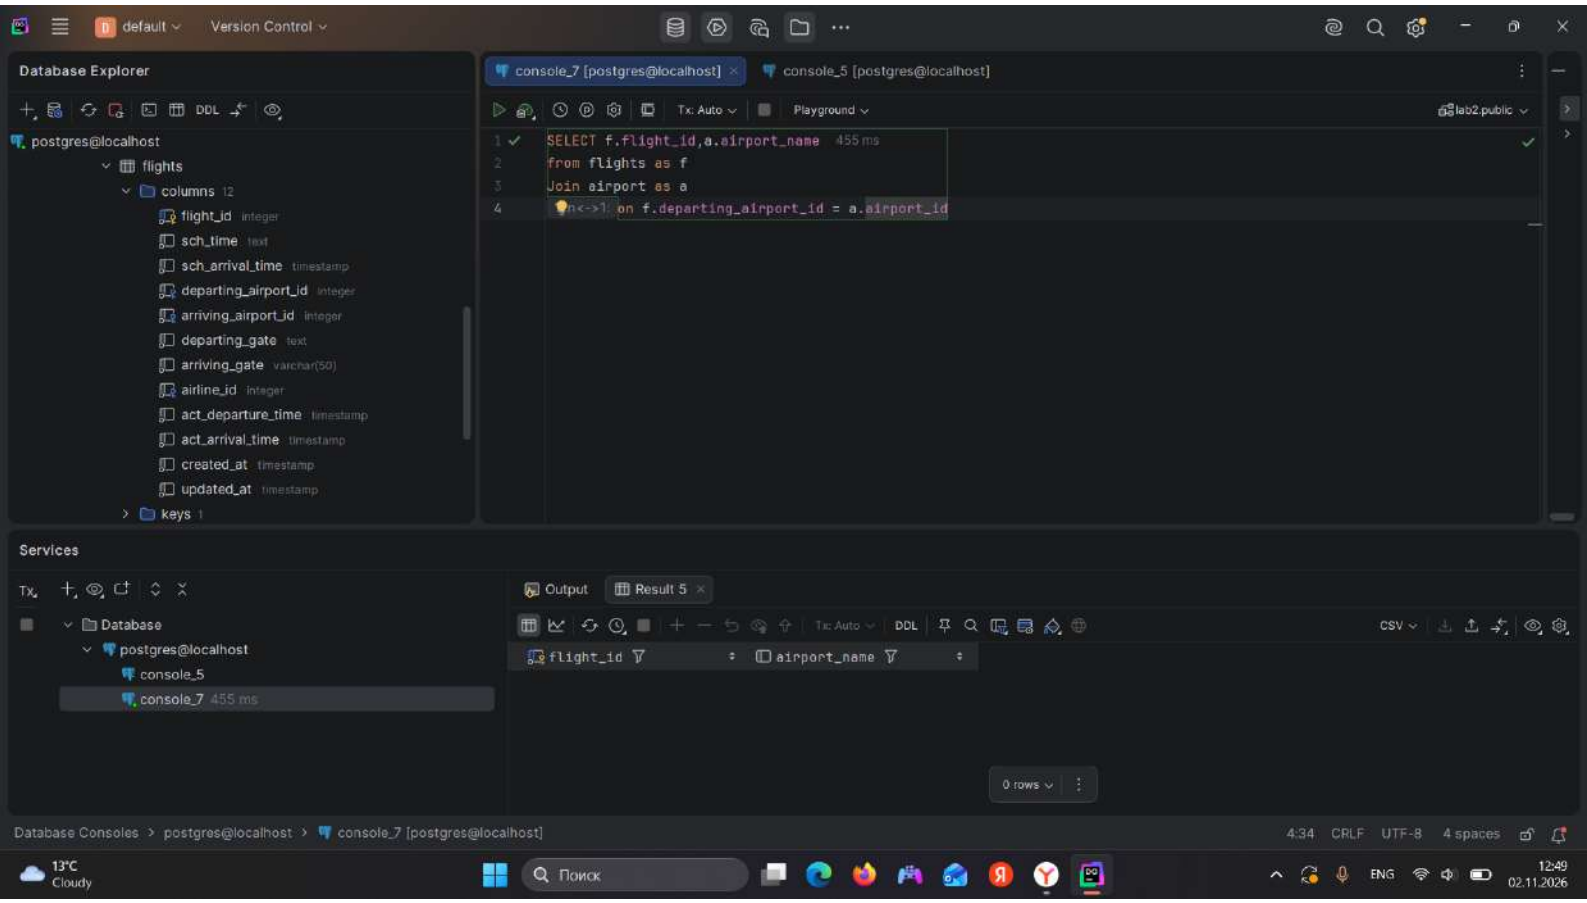
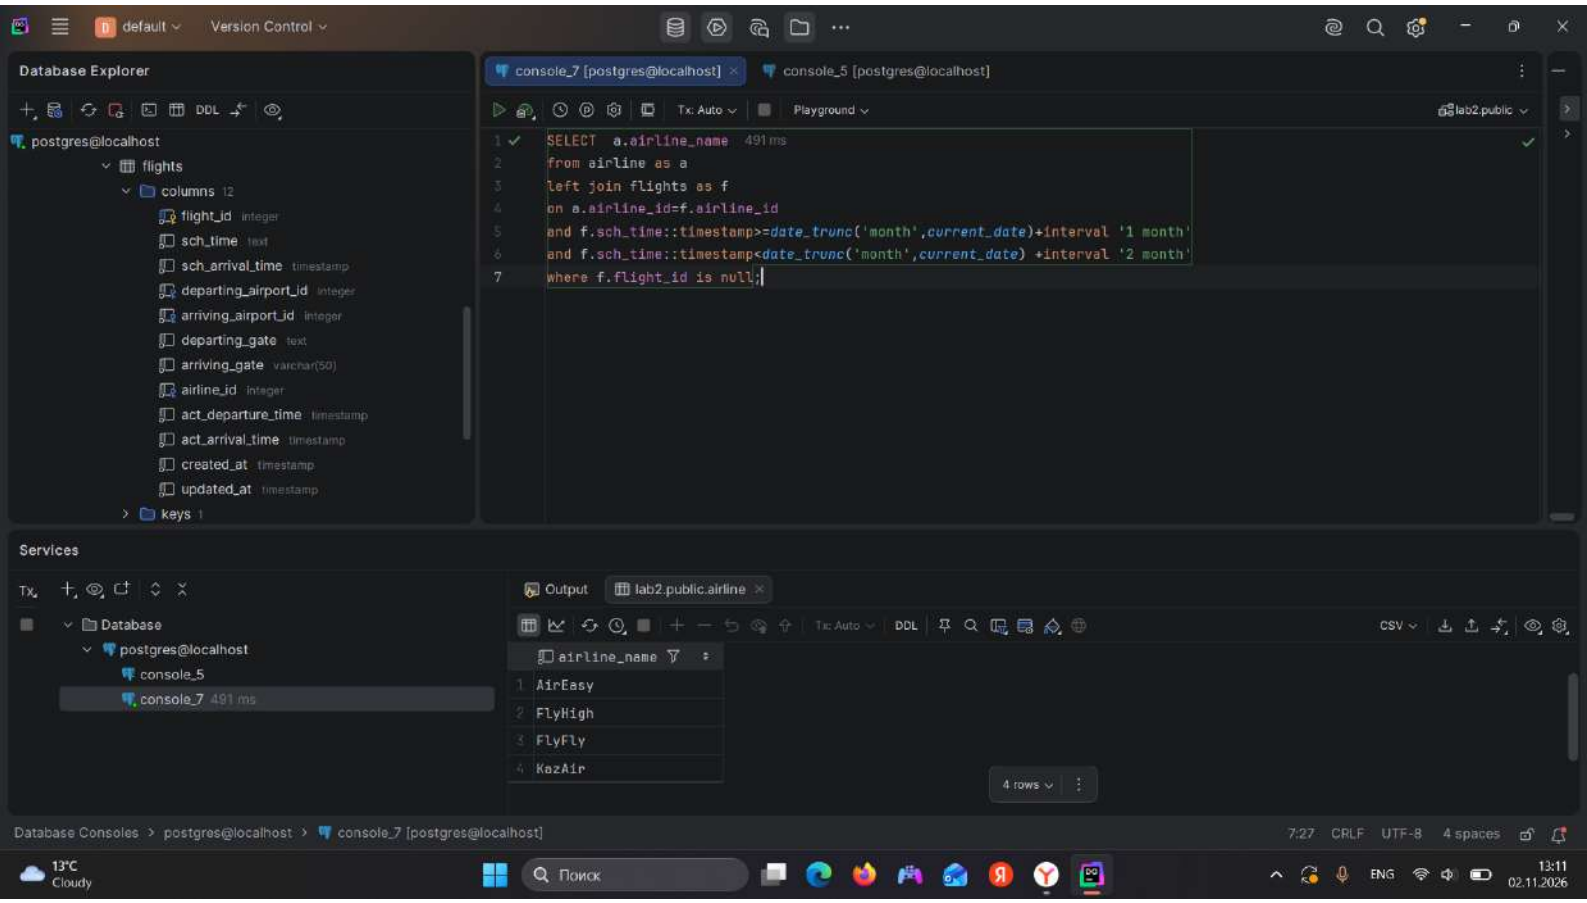
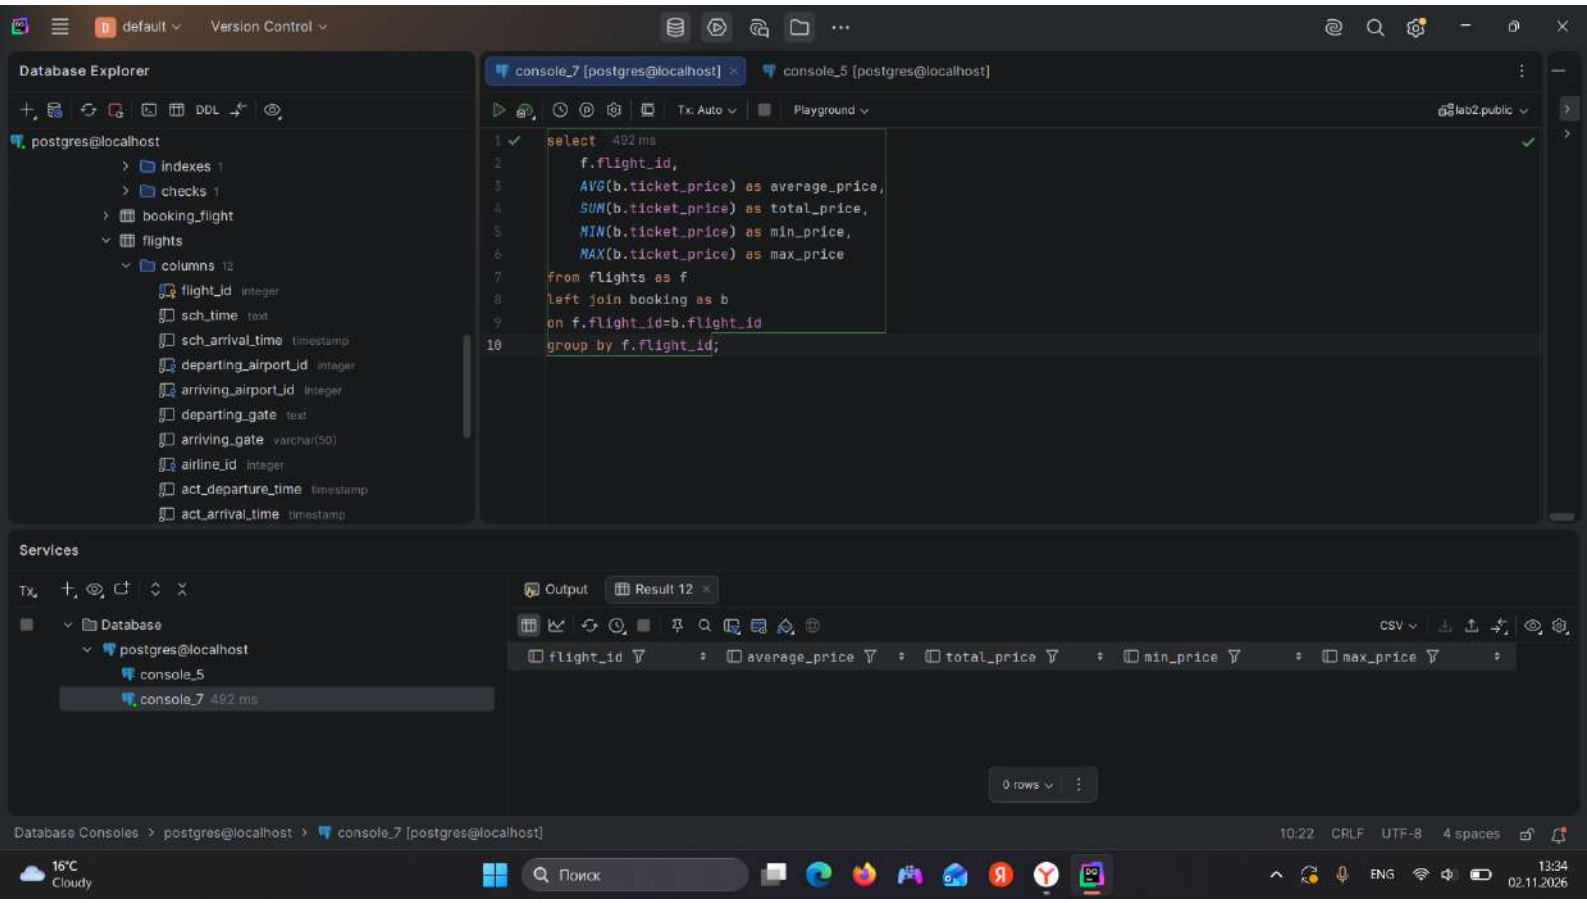
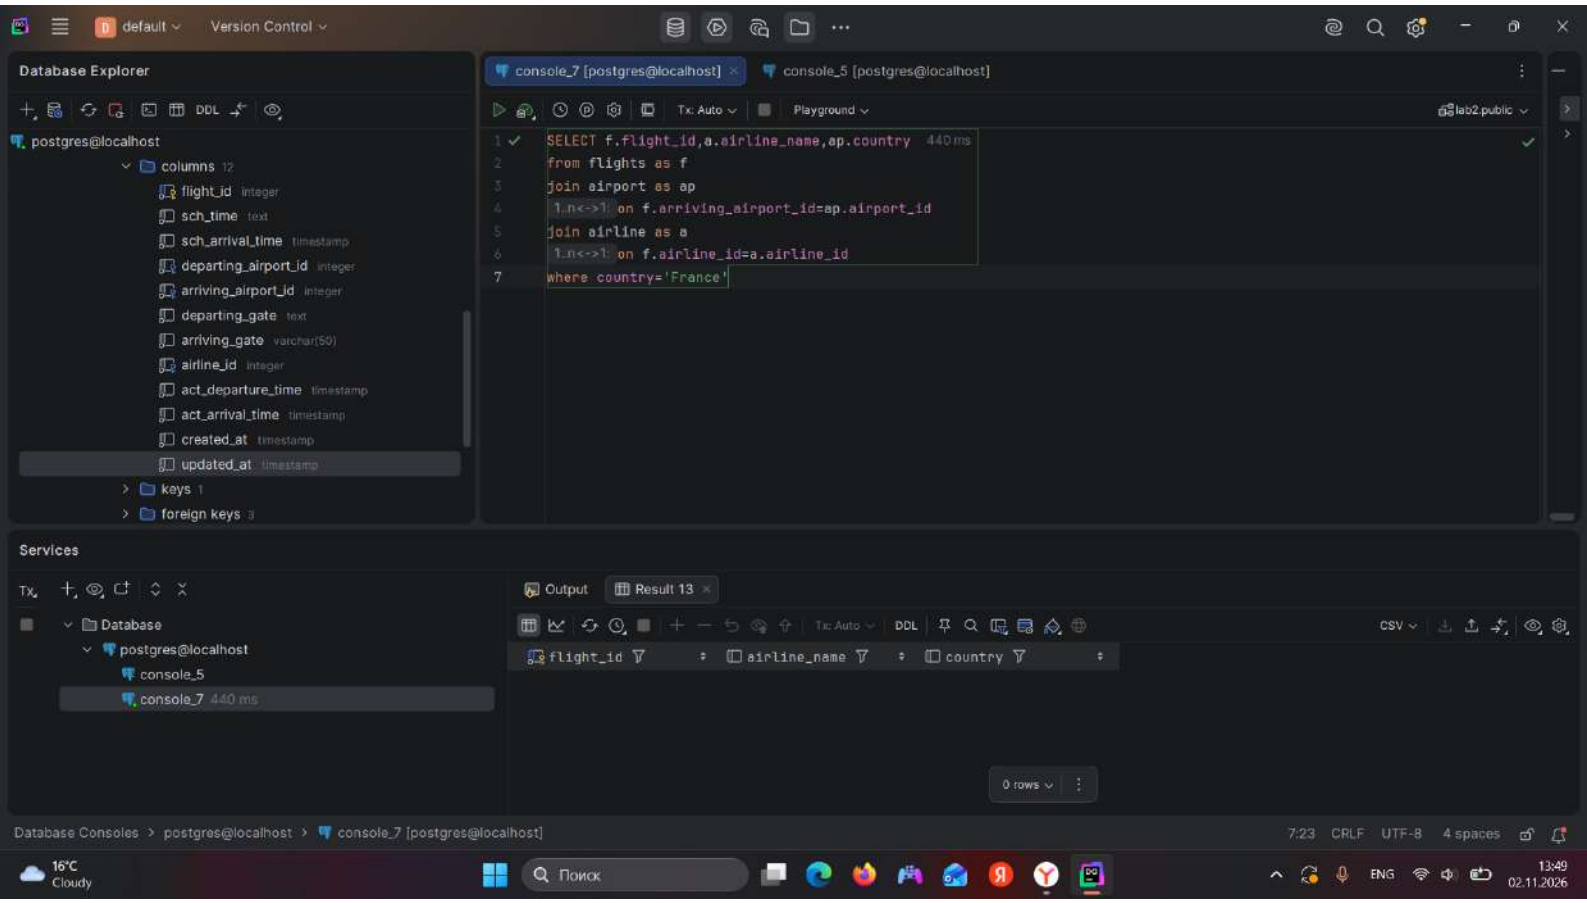
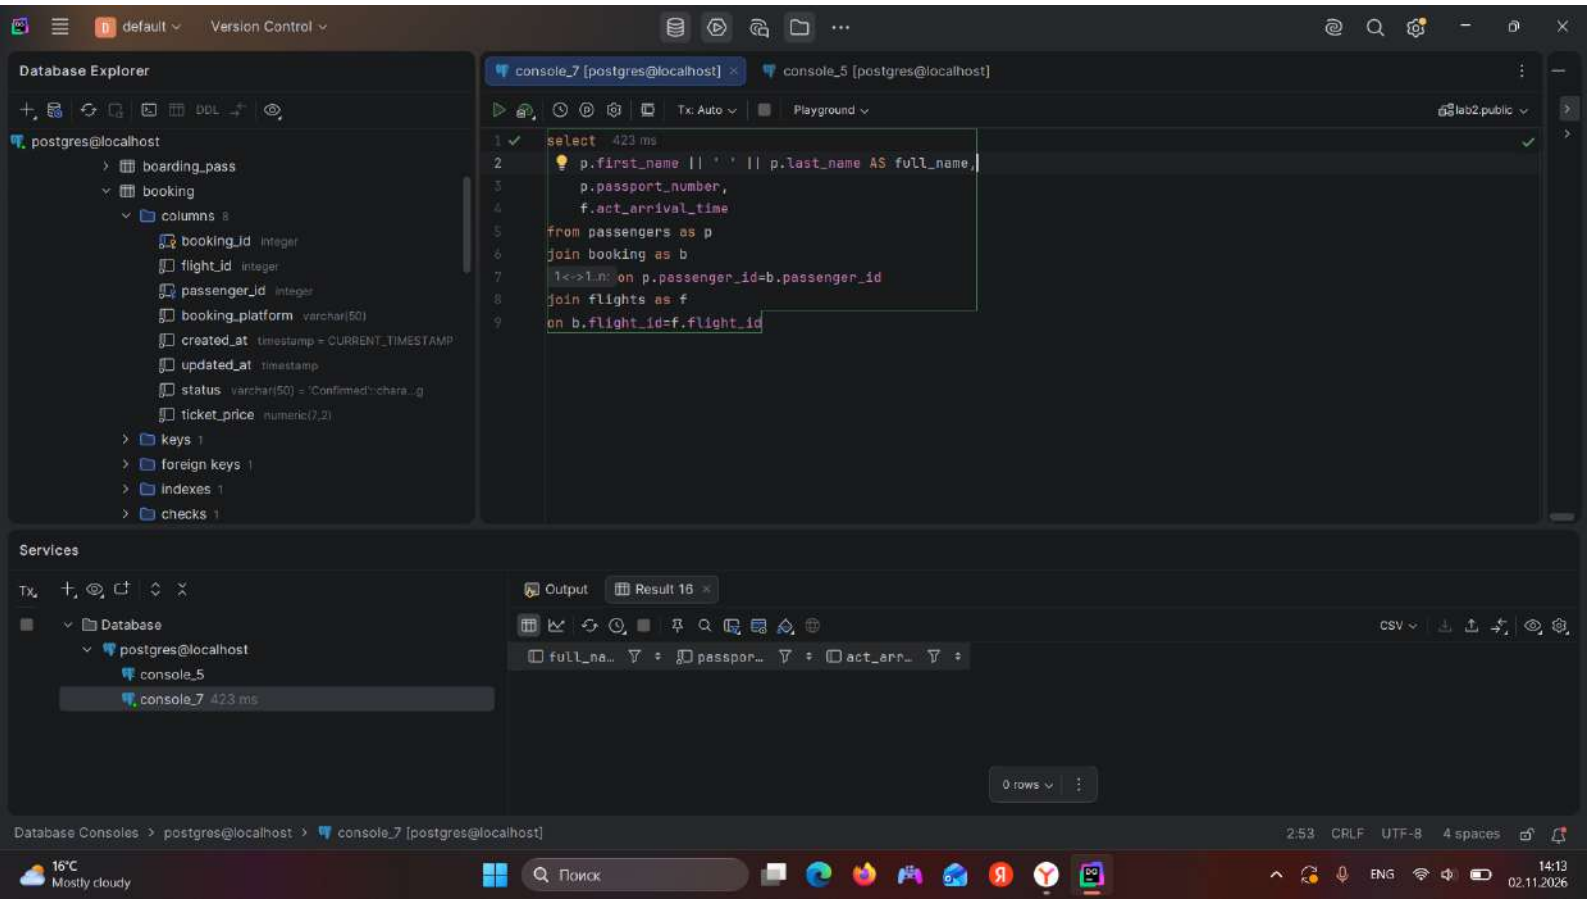

default
Version Control
Database Explorer
DDL
postgres@localhost
updated_at timestamp
keys 1
indexes 1
airport
baggage
baggage_check
boarding_pass
booking
booking_flight
flights
columns 12
flight_id integer
sch_time text
sch_arrival_time timestamp
departing_airport_id integer
console_5 [postgres@localhost]
console_7 [postgres@localhost]
Tx: Auto
Playground
lab2.public
1 select f.* 757 ms
2 from flights as f
3 join airline as a
4 1.n<->1 ON f.airline_id =a.airline_id
5 where a.airline_name ='KazAir';
Services
Database
postgres@localhost
console_7 757 ms
console_5
Output
lab2.public.flights
CSV
flight_id
sch_time
sch_arrival_t…
departing_air…
arriving_airp…
depar
0 rows
Database Consoles > postgres@localhost > console_7 [postgres@localhost]
5:32 CRLF UTF-8 4 spaces
13°C
Cloudy
Поиск
ENG
12:43
02.11.2026

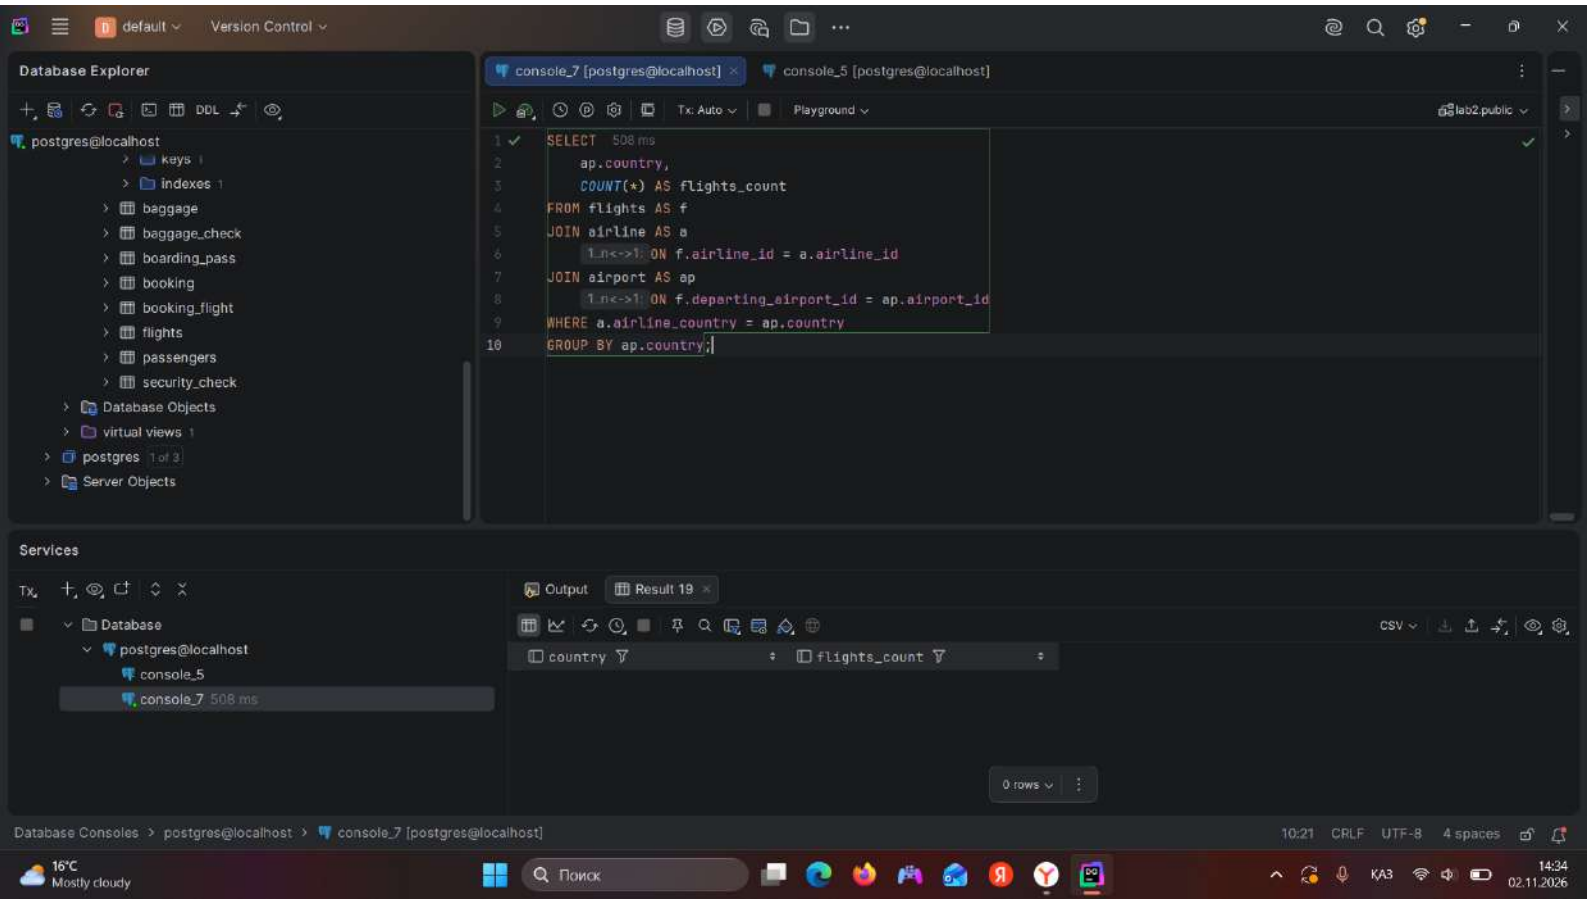

default
Version Control
Database Explorer
DDL
postgres@localhost
flights
columns 12
flight_id integer
sch_time text
sch_arrival_time timestamp
departing_airport_id integer
arriving_airport_id integer
departing_gate text
arriving_gate varchar(50)
airline_id integer
act_departure_time timestamp
act_arrival_time timestamp
created_at timestamp
updated_at timestamp
keys 1
console_7 [postgres@localhost]
console_5 [postgres@localhost]
Tx: Auto
Playground
lab2.public
1 SELECT f.flight_id,a.airport_name 455 ms
2 from flights as f
3 Join airport as a
4 on f.departing_airport_id = a.airport_id
Services
Database
postgres@localhost
console_5
console_7 455 ms
Output
Result 5
CSV
flight_id
airport_name
0 rows
Database Consoles > postgres@localhost > console_7 [postgres@localhost]
4:34 CRLF UTF-8 4 spaces
13°C
Cloudy
Поиск
ENG
12:49
02.11.2026

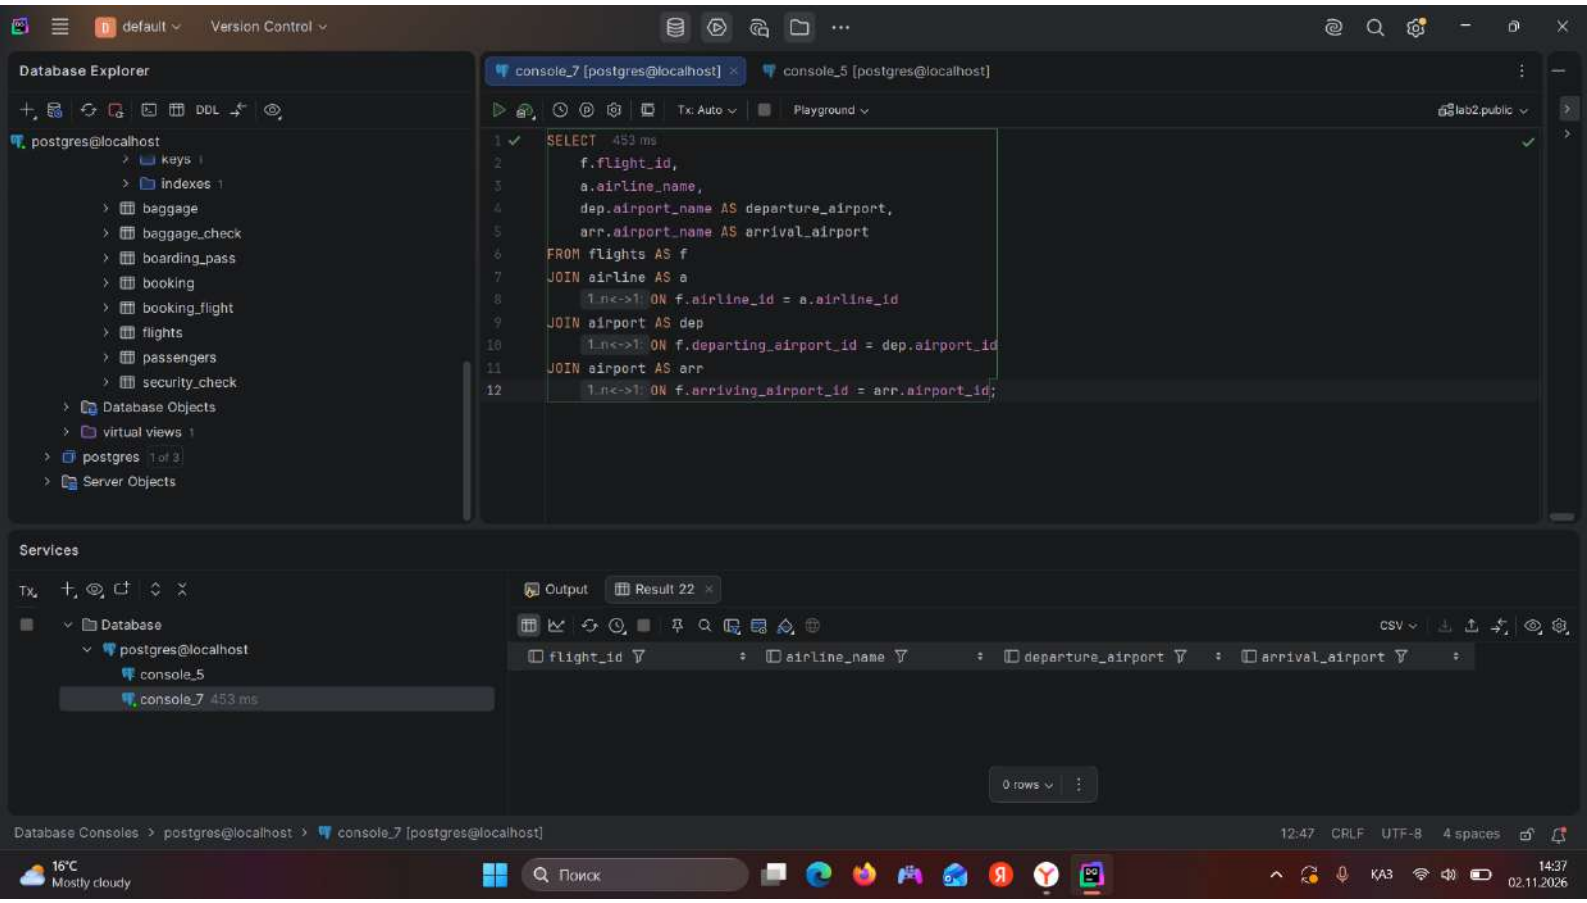

default
Version Control
Database Explorer
DDL
postgres@localhost
flights
columns 12
flight_id integer
sch_time text
sch_arrival_time timestamp
departing_airport_id integer
arriving_airport_id integer
departing_gate text
arriving_gate varchar(50)
airline_id integer
act_departure_time timestamp
act_arrival_time timestamp
created_at timestamp
updated_at timestamp
keys 1
console_7 [postgres@localhost]
console_5 [postgres@localhost]
Tx: Auto
Playground
lab2.public
1 SELECT a.airline_name 491 ms
2 from airline as a
3 left join flights as f
4 on a.airline_id=f.airline_id
5 and f.sch_time::timestamp>=date_trunc('month',current_date)+interval '1 month'
6 and f.sch_time::timestamp<date_trunc('month',current_date) +interval '2 month'
7 where f.flight_id is null;
Services
Database
postgres@localhost
console_5
console_7 491 ms
Output
lab2.public.airline
Tx: Auto
DDL
CSV
airline_name
1 AirEasy
2 FlyHigh
3 FlyFly
4 KazAir
4 rows
Database Consoles > postgres@localhost > console_7 [postgres@localhost]
7:27 CRLF UTF-8 4 spaces
13°C
Cloudy
Поиск
ENG
13:11
02.11.2026

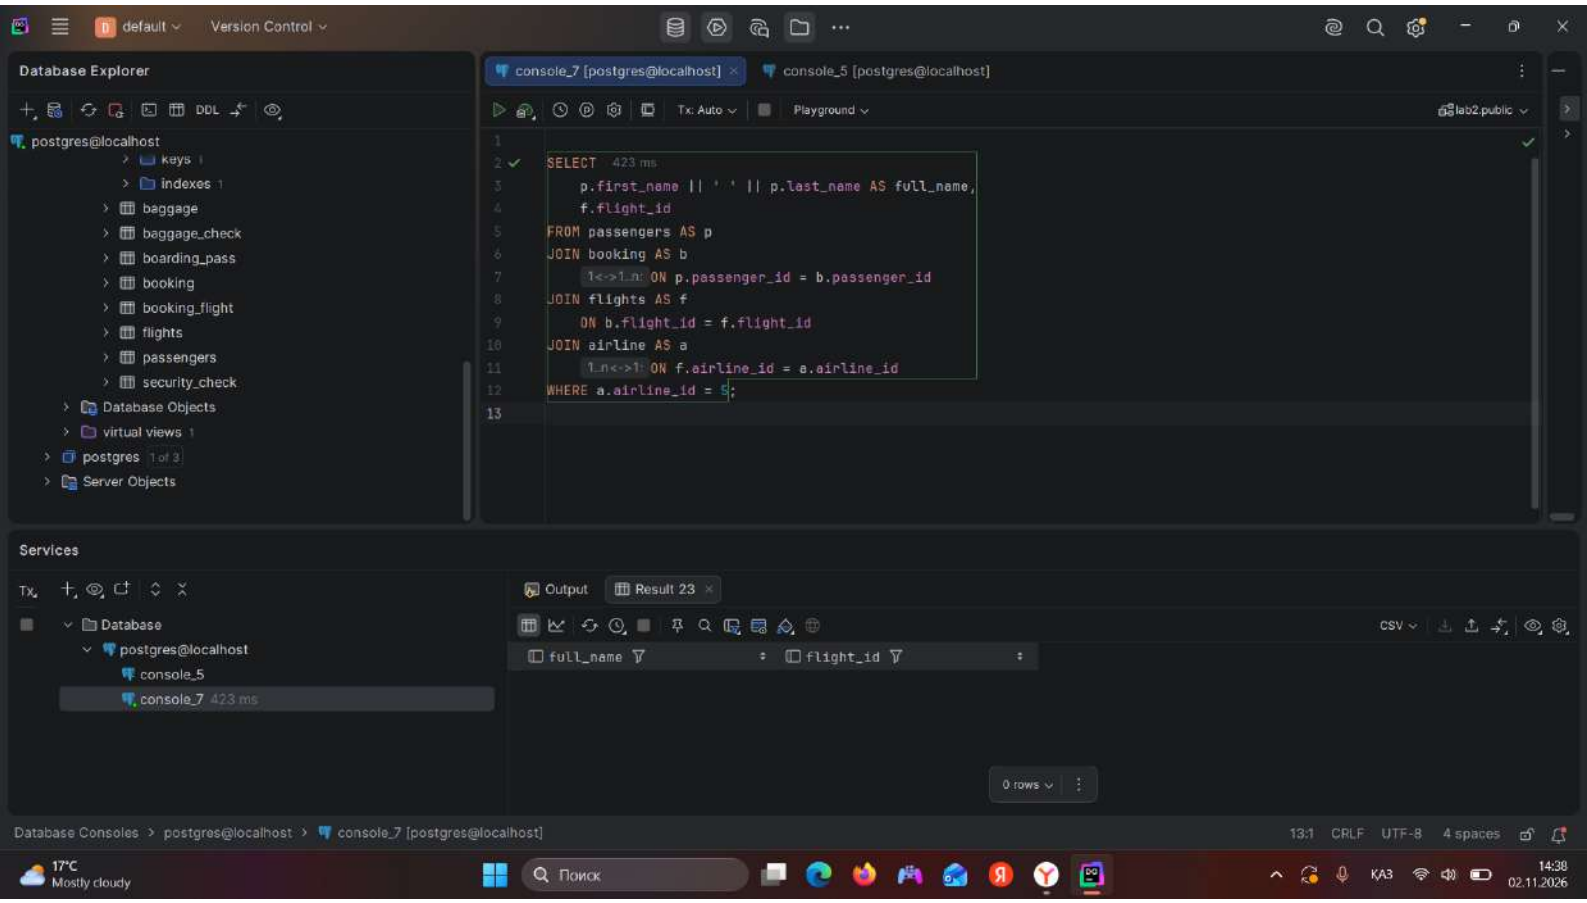

default
Version Control
Database Explorer
DDL
postgres@localhost
indexes 1
checks 1
booking_flight
flights
columns 12
flight_id integer
sch_time text
sch_arrival_time timestamp
departing_airport_id integer
arriving_airport_id integer
departing_gate text
arriving_gate varchar(50)
airline_id integer
act_departure_time timestamp
act_arrival_time timestamp
console_7 [postgres@localhost]
console_5 [postgres@localhost]
Tx: Auto
Playground
lab2.public
select 492 ms
f.flight_id,
AVG(b.ticket_price) as average_price,
SUM(b.ticket_price) as total_price,
MIN(b.ticket_price) as min_price,
MAX(b.ticket_price) as max_price
from flights as f
left join booking as b
on f.flight_id=b.flight_id
group by f.flight_id;
Services
Database
postgres@localhost
console_5
console_7 492 ms
Output
Result 12
CSV
flight_id
average_price
total_price
min_price
max_price
0 rows
Database Consoles > postgres@localhost > console_7 [postgres@localhost]
10:22 CRLF UTF-8 4 spaces
16°C Cloudy
Поиск
ENG
13:34
02.11.2026

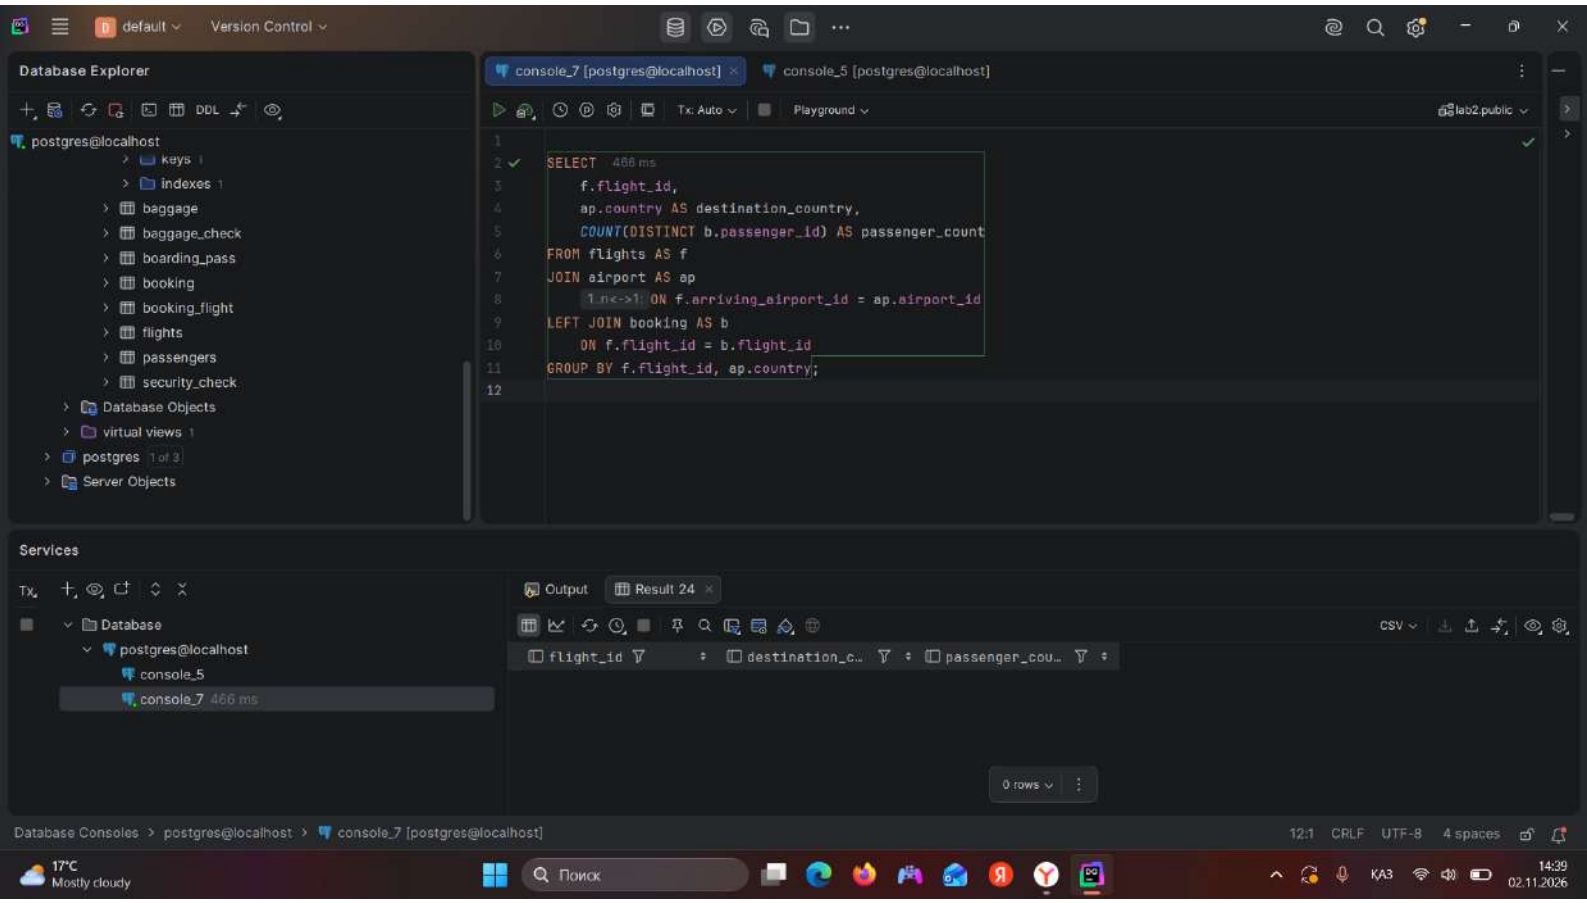

default
Version Control
Database Explorer
DDL
postgres@localhost
columns 12
flight_id integer
sch_time text
sch_arrival_time timestamp
departing_airport_id integer
arriving_airport_id integer
departing_gate text
arriving_gate varchar(50)
airline_id integer
act_departure_time timestamp
act_arrival_time timestamp
created_at timestamp
updated_at timestamp
keys 1
foreign keys 3
console_7 [postgres@localhost]
console_5 [postgres@localhost]
Tx: Auto
Playground
lab2.public
SELECT f.flight_id,a.airline_name,ap.country 440 ms
from flights as f
join airport as ap
1.n<->1 on f.arriving_airport_id=ap.airport_id
join airline as a
1.n<->1 on f.airline_id=a.airline_id
where country='France'
Services
Database
postgres@localhost
console_5
console_7 440 ms
Output
Result 13
Tx: Auto
DDL
CSV
flight_id
airline_name
country
0 rows
Database Consoles > postgres@localhost > console_7 [postgres@localhost]
7:23 CRLF UTF-8 4 spaces
16°C
Cloudy
Поиск
ENG
13:49
02.11.2026

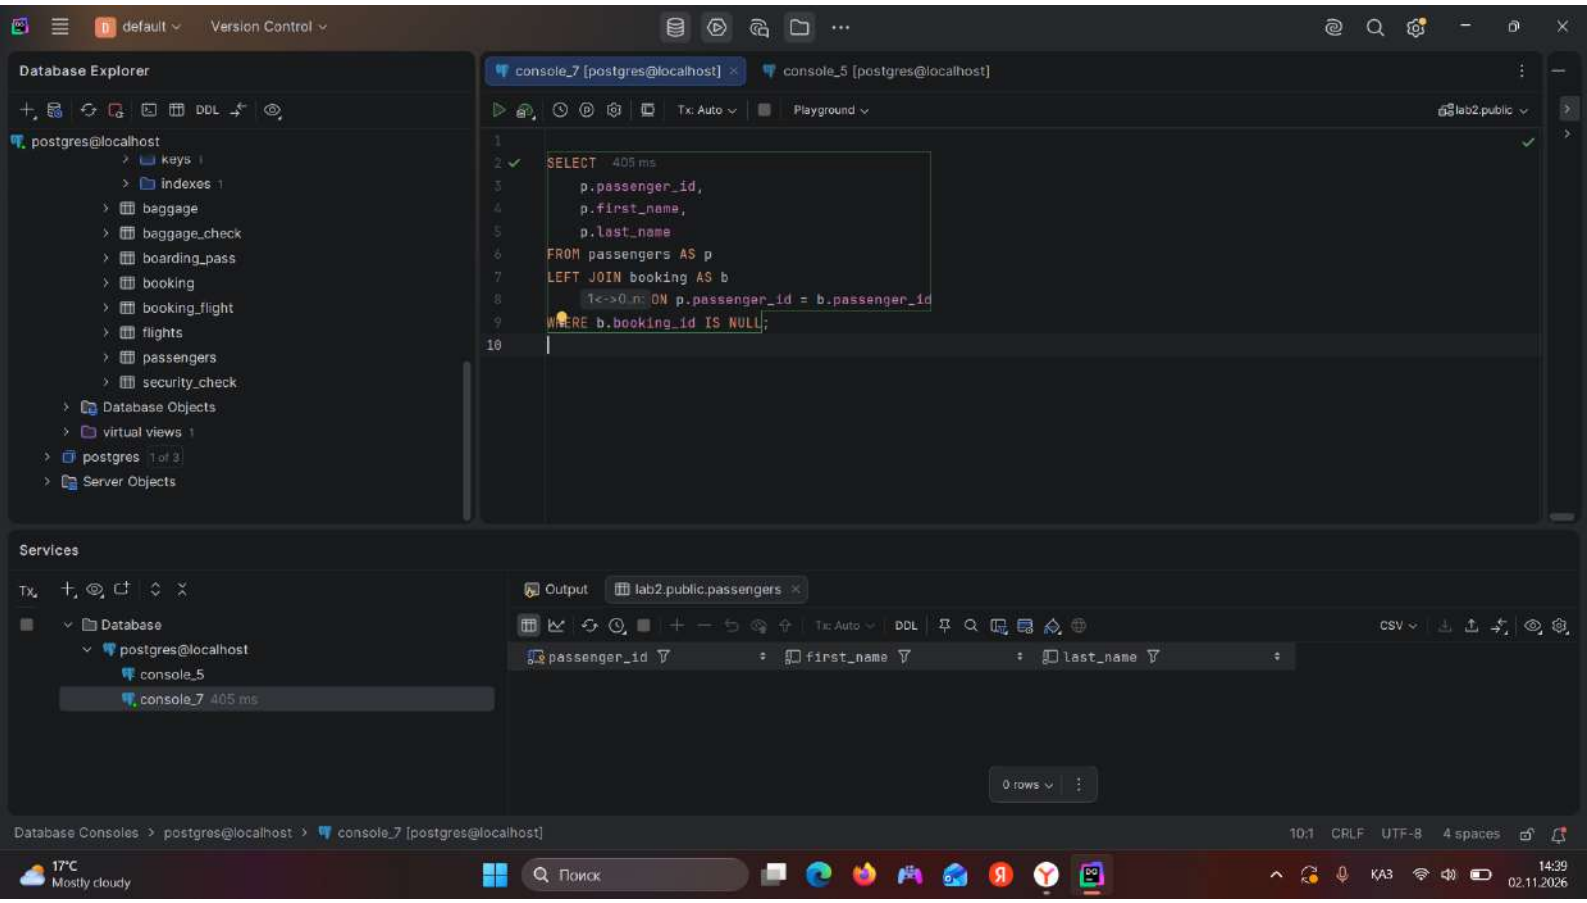

default
Version Control
Database Explorer
postgres@localhost
boarding_pass
booking
columns 8
booking_id integer
flight_id integer
passenger_id integer
booking_platform varchar(50)
created_at timestamp = CURRENT_TIMESTAMP
updated_at timestamp
status varchar(50) = 'Confirmed'::chara...g
ticket_price numeric(7,2)
keys 1
foreign keys 1
indexes 1
checks 1
console_7 [postgres@localhost]
console_5 [postgres@localhost]
Tx: Auto
Playground
lab2.public
select 423 ms
p.first_name || ' ' || p.last_name AS full_name,
p.passport_number,
f.act_arrival_time
from passengers as p
join booking as b
1<->1..n: on p.passenger_id=b.passenger_id
join flights as f
on b.flight_id=f.flight_id
Services
Database
postgres@localhost
console_5
console_7 423 ms
Output
Result 16
CSV
full_na...
passpor...
act_arr...
0 rows
Database Consoles > postgres@localhost > console_7 [postgres@localhost]
2:53 CRLF UTF-8 4 spaces
16°C
Mostly cloudy
Поиск
ENG
14:13
02.11.2026

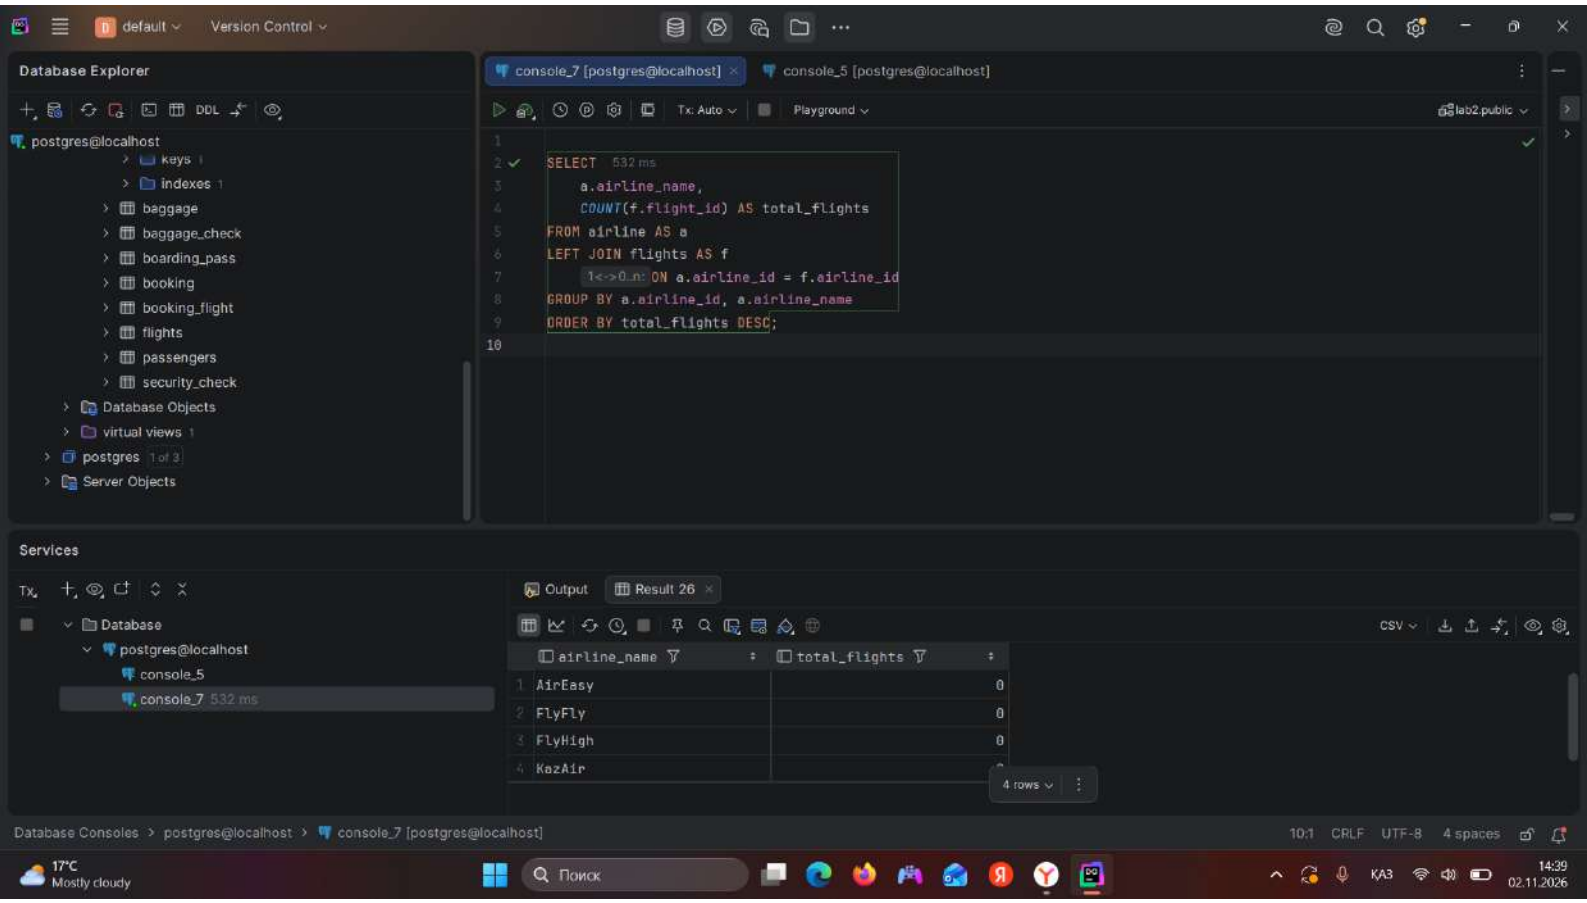

default
Version Control
Database Explorer
DDL
postgres@localhost
keys 1
indexes 1
baggage
baggage_check
boarding_pass
booking
booking_flight
flights
passengers
security_check
Database Objects
virtual views 1
postgres 1 of 3
Server Objects
console_7 [postgres@localhost]
console_5 [postgres@localhost]
Tx: Auto
Playground
lab2.public
1 SELECT 508 ms
2 ap.country,
3 COUNT(*) AS flights_count
4 FROM flights AS f
5 JOIN airline AS a
6 1..n<->1 ON f.airline_id = a.airline_id
7 JOIN airport AS ap
8 1..n<->1 ON f.departing_airport_id = ap.airport_id
9 WHERE a.airline_country = ap.country
10 GROUP BY ap.country;
Services
Database
postgres@localhost
console_5
console_7 508 ms
Output
Result 19
CSV
country
flights_count
0 rows
Database Consoles > postgres@localhost > console_7 [postgres@localhost]
10:21 CRLF UTF-8 4 spaces
16°C
Mostly cloudy
Поиск
ҚАЗ
14:34
02.11.2026

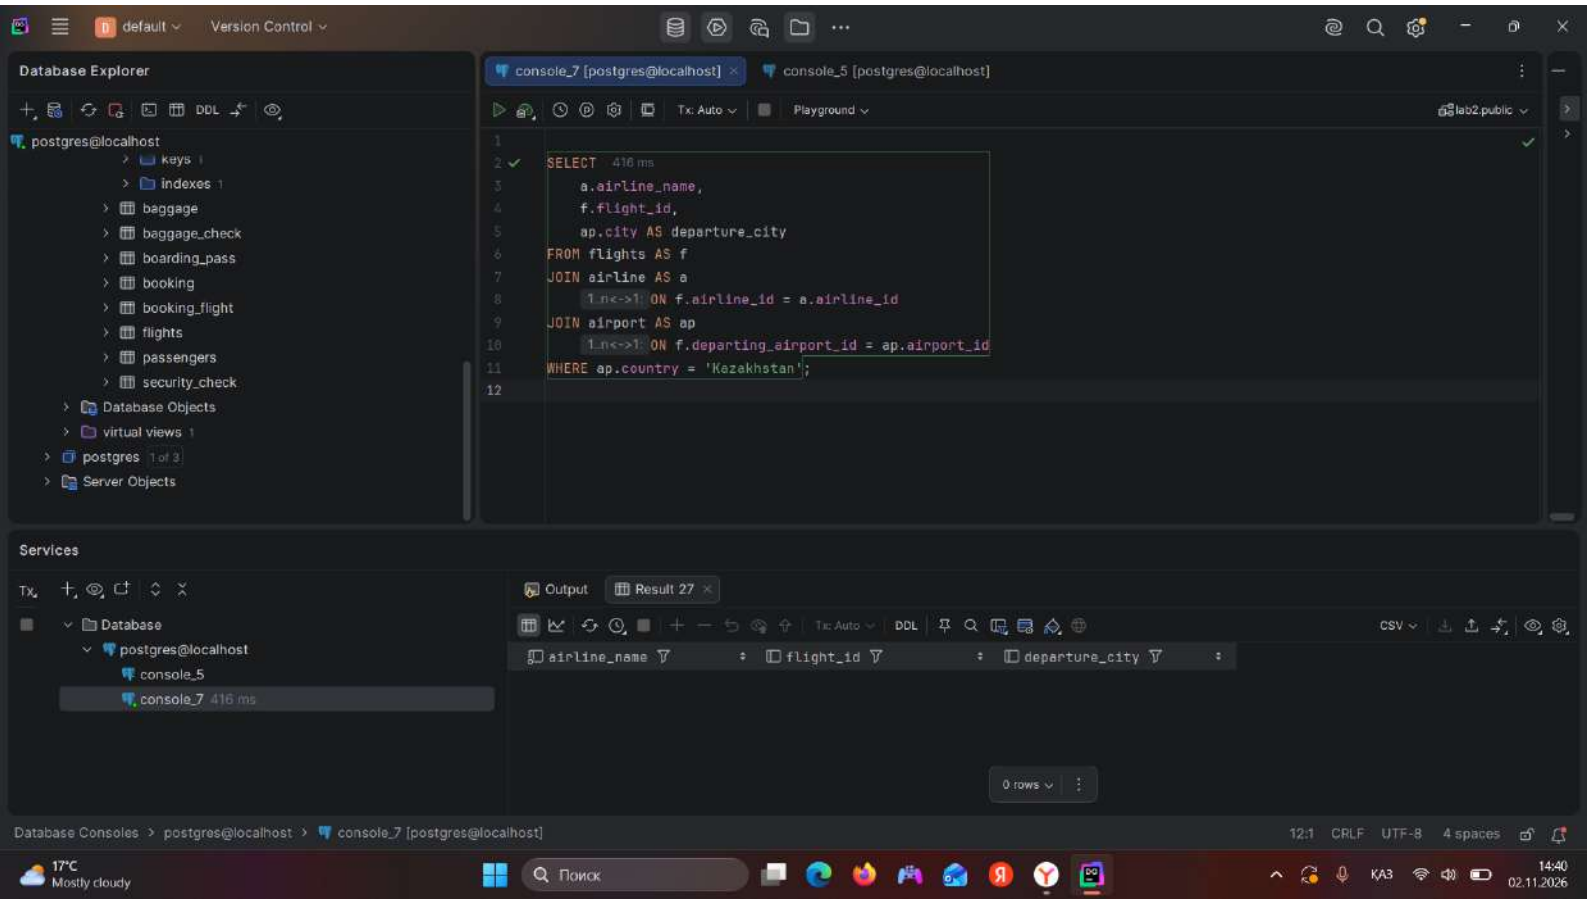

default
Version Control
Database Explorer
DDL
postgres@localhost
keys 1
indexes 1
baggage
baggage_check
boarding_pass
booking
booking_flight
flights
passengers
security_check
Database Objects
virtual views 1
postgres 1 of 3
Server Objects
console_7 [postgres@localhost]
console_5 [postgres@localhost]
Tx: Auto
Playground
lab2.public
SELECT 453 ms
f.flight_id,
a.airline_name,
dep.airport_name AS departure_airport,
arr.airport_name AS arrival_airport
FROM flights AS f
JOIN airline AS a
1_n<->1 ON f.airline_id = a.airline_id
JOIN airport AS dep
1_n<->1 ON f.departing_airport_id = dep.airport_id
JOIN airport AS arr
1_n<->1 ON f.arriving_airport_id = arr.airport_id;
Services
Database
postgres@localhost
console_5
console_7 453 ms
Output
Result 22
CSV
flight_id
airline_name
departure_airport
arrival_airport
0 rows
Database Consoles > postgres@localhost > console_7 [postgres@localhost]
12:47 CRLF UTF-8 4 spaces
16°C
Mostly cloudy
Поиск
ҚАЗ
14:37
02.11.2026


default
Version Control
Database Explorer
DDL
postgres@localhost
keys 1
indexes 1
baggage
baggage_check
boarding_pass
booking
booking_flight
flights
passengers
security_check
Database Objects
virtual views 1
postgres 1 of 3
Server Objects
console_7 [postgres@localhost]
console_5 [postgres@localhost]
Tx: Auto
Playground
lab2.public
SELECT 423 ms
p.first_name || ' ' || p.last_name AS full_name,
f.flight_id
FROM passengers AS p
JOIN booking AS b
1<->1_n: ON p.passenger_id = b.passenger_id
JOIN flights AS f
ON b.flight_id = f.flight_id
JOIN airline AS a
1_n<->1: ON f.airline_id = a.airline_id
WHERE a.airline_id = 5;
Services
Database
postgres@localhost
console_5
console_7 423 ms
Output
Result 23
CSV
full_name
flight_id
0 rows
Database Consoles > postgres@localhost > console_7 [postgres@localhost]
13:1 CRLF UTF-8 4 spaces
17°C
Mostly cloudy
Поиск
ҚАЗ
14:38
02.11.2026


default
Version Control
Database Explorer
DDL
postgres@localhost
keys 1
indexes 1
baggage
baggage_check
boarding_pass
booking
booking_flight
flights
passengers
security_check
Database Objects
virtual views 1
postgres 1 of 3
Server Objects
console_7 [postgres@localhost]
console_5 [postgres@localhost]
Tx: Auto
Playground
lab2.public
SELECT 466 ms
f.flight_id,
ap.country AS destination_country,
COUNT(DISTINCT b.passenger_id) AS passenger_count
FROM flights AS f
JOIN airport AS ap
1..n<->1 ON f.arriving_airport_id = ap.airport_id
LEFT JOIN booking AS b
ON f.flight_id = b.flight_id
GROUP BY f.flight_id, ap.country;
Services
Database
postgres@localhost
console_5
console_7 466 ms
Output
Result 24
CSV
flight_id
destination_c...
passenger_cou...
0 rows
Database Consoles > postgres@localhost > console_7 [postgres@localhost]
12:1 CRLF UTF-8 4 spaces
17°C
Mostly cloudy
Поиск
ҚАЗ
14:39
02.11.2026


default
Version Control
Database Explorer
DDL
postgres@localhost
keys 1
indexes 1
baggage
baggage_check
boarding_pass
booking
booking_flight
flights
passengers
security_check
Database Objects
virtual views 1
postgres 1 of 3
Server Objects
console_7 [postgres@localhost]
console_5 [postgres@localhost]
Tx: Auto
Playground
lab2.public
SELECT 405 ms
p.passenger_id,
p.first_name,
p.last_name
FROM passengers AS p
LEFT JOIN booking AS b
1<->0..n: ON p.passenger_id = b.passenger_id
WHERE b.booking_id IS NULL;
Services
Database
postgres@localhost
console_5
console_7 405 ms
Output
lab2.public.passengers
Tx: Auto
DDL
CSV
passenger_id
first_name
last_name
0 rows
Database Consoles > postgres@localhost > console_7 [postgres@localhost]
10:1
CRLF
UTF-8
4 spaces
17°C
Mostly cloudy
Поиск
ҚАЗ
14:39
02.11.2026


default
Version Control
Database Explorer
DDL
postgres@localhost
keys 1
indexes 1
baggage
baggage_check
boarding_pass
booking
booking_flight
flights
passengers
security_check
Database Objects
virtual views 1
postgres 1 of 3
Server Objects
console_7 [postgres@localhost]
console_5 [postgres@localhost]
Tx: Auto
Playground
lab2.public
SELECT 532 ms
a.airline_name,
COUNT(f.flight_id) AS total_flights
FROM airline AS a
LEFT JOIN flights AS f
1<->0..n: ON a.airline_id = f.airline_id
GROUP BY a.airline_id, a.airline_name
ORDER BY total_flights DESC;
Services
Database
postgres@localhost
console_5
console_7 532 ms
Output
Result 26
CSV
airline_name
total_flights
1 AirEasy 0
2 FlyFly 0
3 FlyHigh 0
4 KazAir
4 rows
Database Consoles > postgres@localhost > console_7 [postgres@localhost]
10:1 CRLF UTF-8 4 spaces
17°C
Mostly cloudy
Поиск
ҚАЗ
14:39
02.11.2026


default
Version Control
Database Explorer
console_7 [postgres@localhost]
console_5 [postgres@localhost]
Tx: Auto
Playground
lab2.public
postgres@localhost
keys 1
indexes 1
baggage
baggage_check
boarding_pass
booking
booking_flight
flights
passengers
security_check
Database Objects
virtual views 1
postgres 1 of 3
Server Objects
SELECT 416 ms
a.airline_name,
f.flight_id,
ap.city AS departure_city
FROM flights AS f
JOIN airline AS a
1_n<->1 ON f.airline_id = a.airline_id
JOIN airport AS ap
1_n<->1 ON f.departing_airport_id = ap.airport_id
WHERE ap.country = 'Kazakhstan';
Services
Database
postgres@localhost
console_5
console_7 416 ms
Output
Result 27
DDL
CSV
airline_name
flight_id
departure_city
0 rows
Database Consoles > postgres@localhost > console_7 [postgres@localhost]
12:1 CRLF UTF-8 4 spaces
17°C
Mostly cloudy
Поиск
ҚАЗ
14:40
02.11.2026