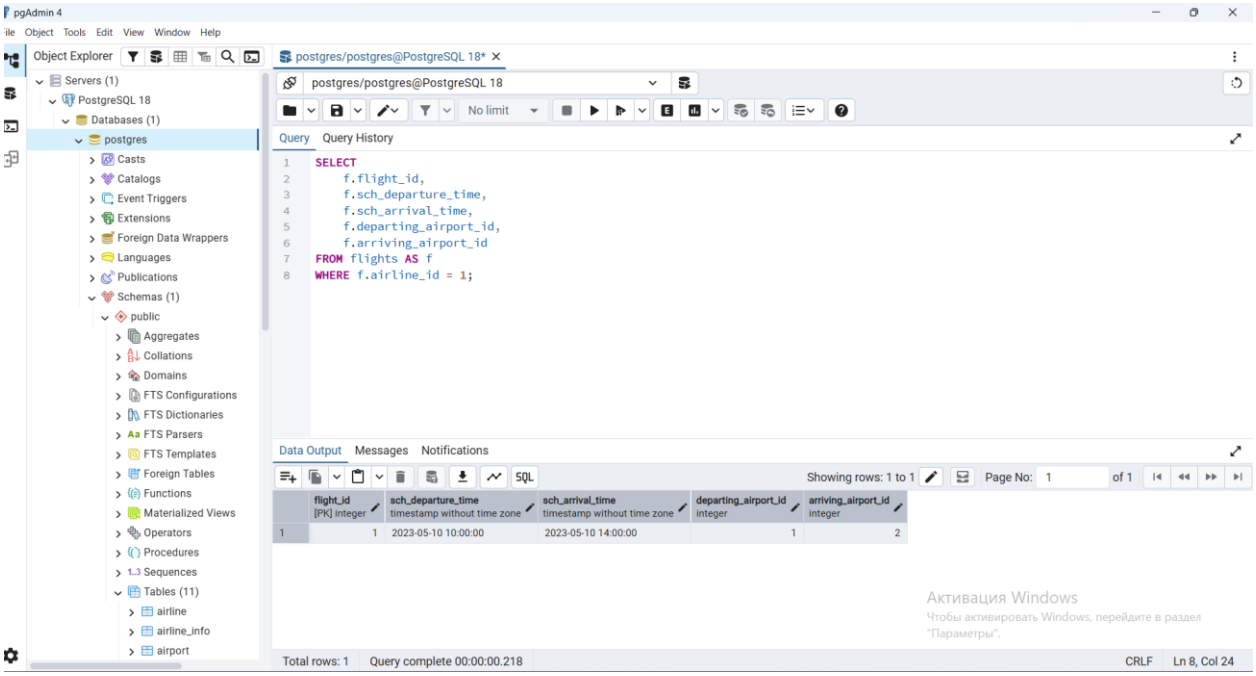
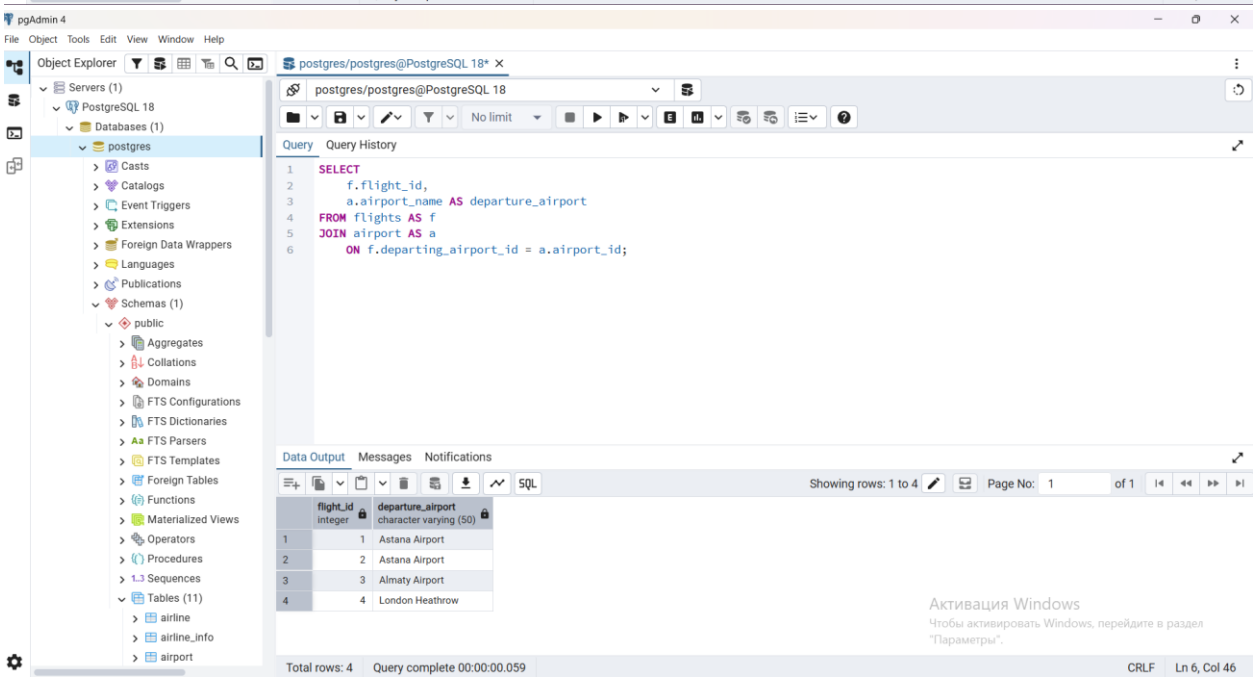
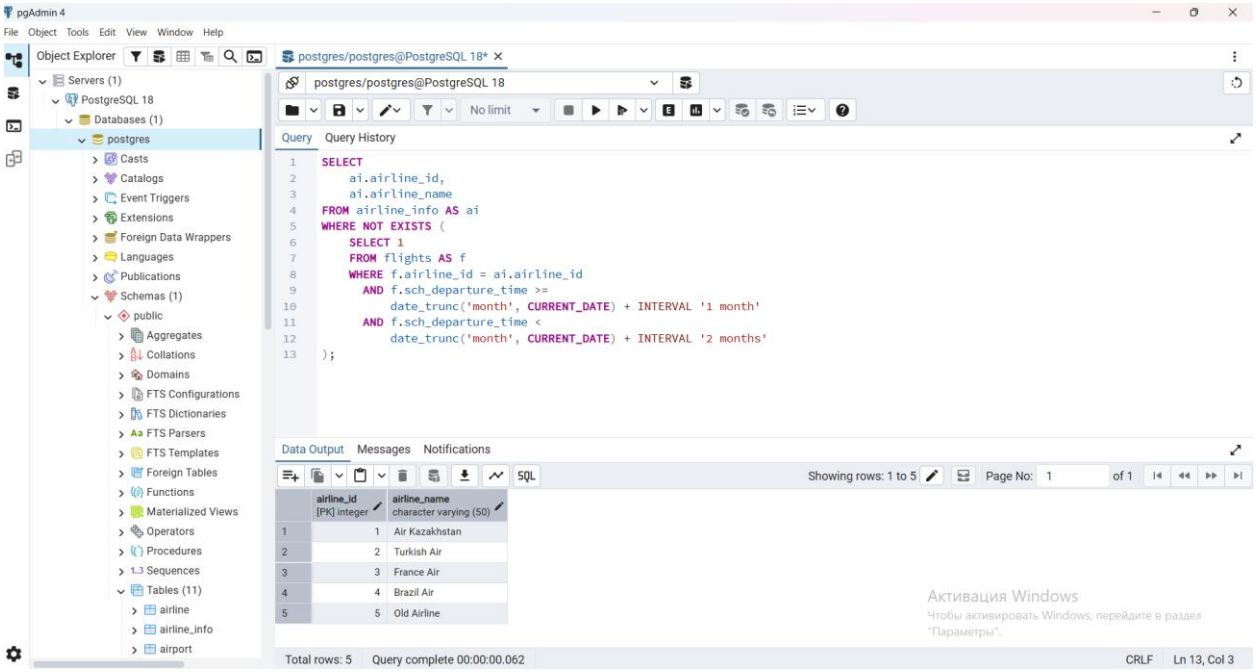
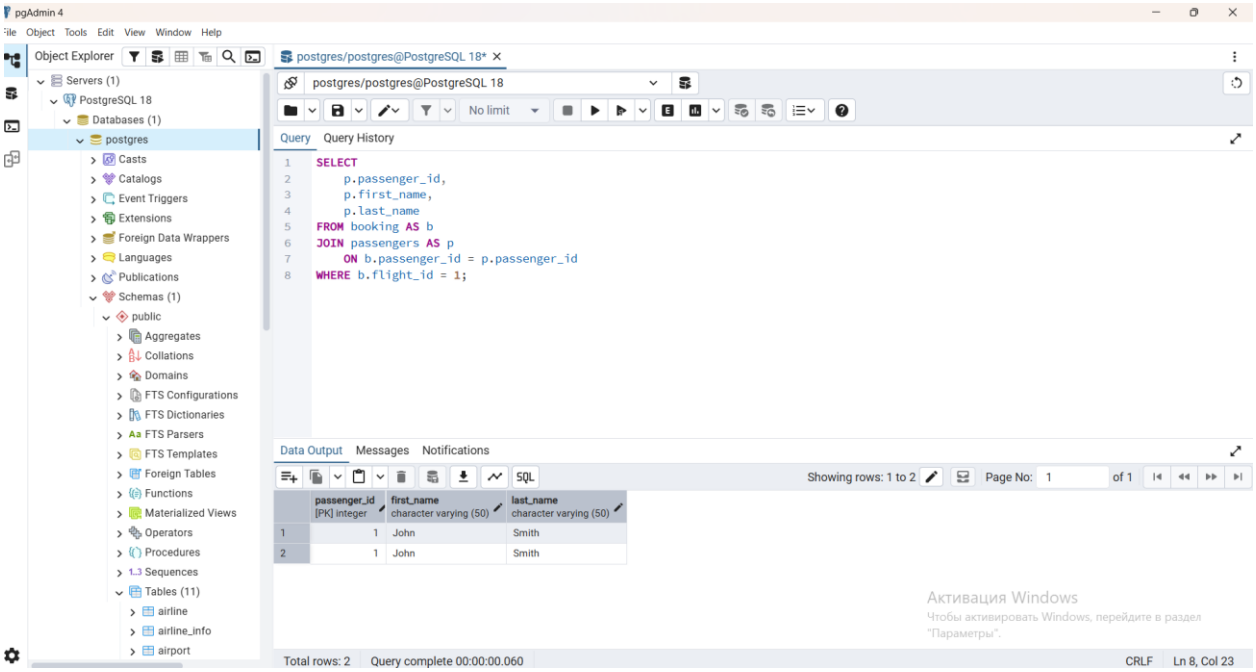
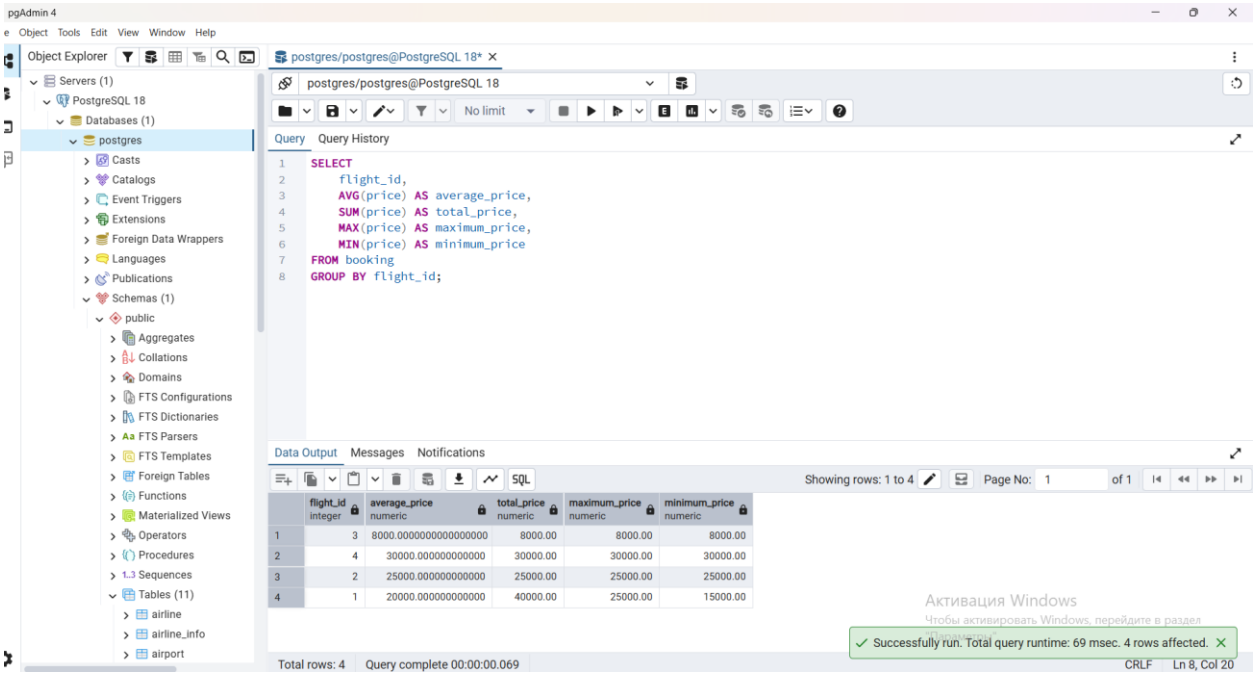
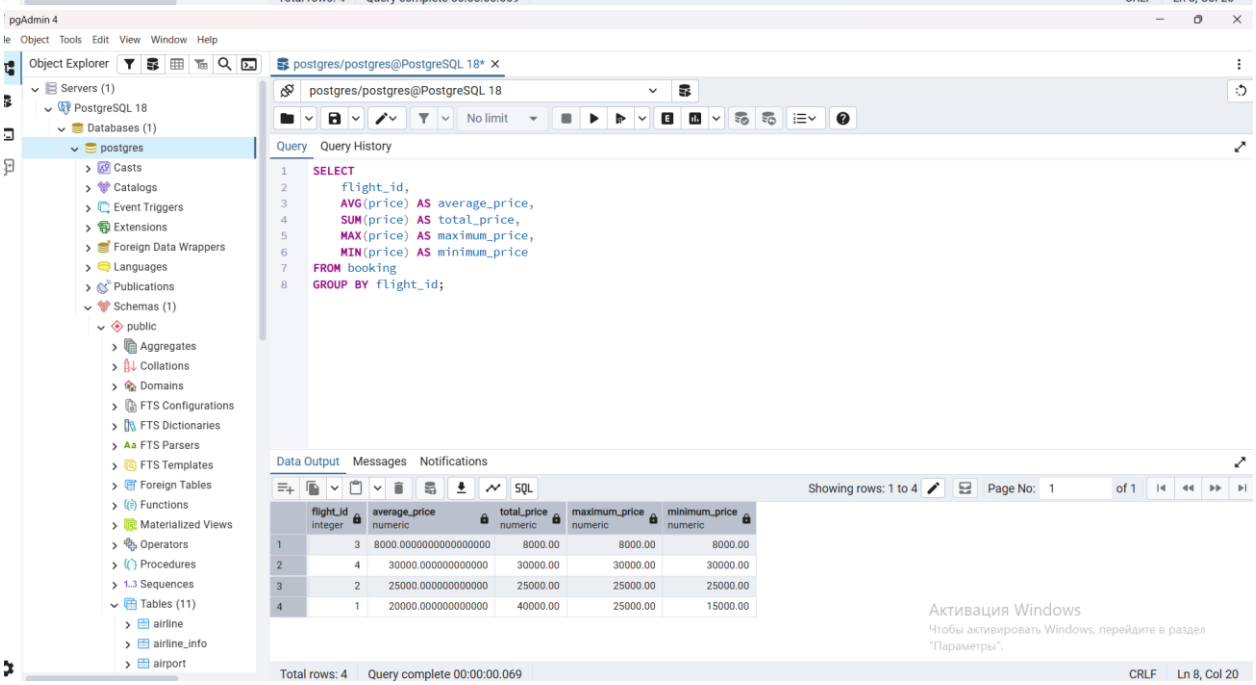

pgAdmin 4
File Object Tools Edit View Window Help
Object Explorer
Servers (1)
PostgreSQL 18
Databases (1)
postgres
Casts
Catalogs
Event Triggers
Extensions
Foreign Data Wrappers
Languages
Publications
Schemas (1)
public
Aggregates
Collations
Domains
FTS Configurations
FTS Dictionaries
FTS Parsers
FTS Templates
Foreign Tables
Functions
Materialized Views
Operators
Procedures
Sequences
Tables (11)
airline
airline_info
airport
postgres/postgres@PostgreSQL 18*
postgres/postgres@PostgreSQL 18
No limit
Query
Query History
SELECT
f.flight_id,
f.sch_departure_time,
f.sch_arrival_time,
f.departing_airport_id,
f.arriving_airport_id
FROM flights AS f
WHERE f.airline_id = 1;
Data Output
Messages
Notifications
SQL
Showing rows: 1 to 1
Page No: 1 of 1
flight_id [PK] integer
sch_departure_time timestamp without time zone
sch_arrival_time timestamp without time zone
departing_airport_id integer
arriving_airport_id integer
1 1 2023-05-10 10:00:00 2023-05-10 14:00:00 1 2
Активация Windows
Чтобы активировать Windows, перейдите в раздел "Параметры".
Total rows: 1
Query complete 00:00:00.218
CRLF
Ln 8, Col 24

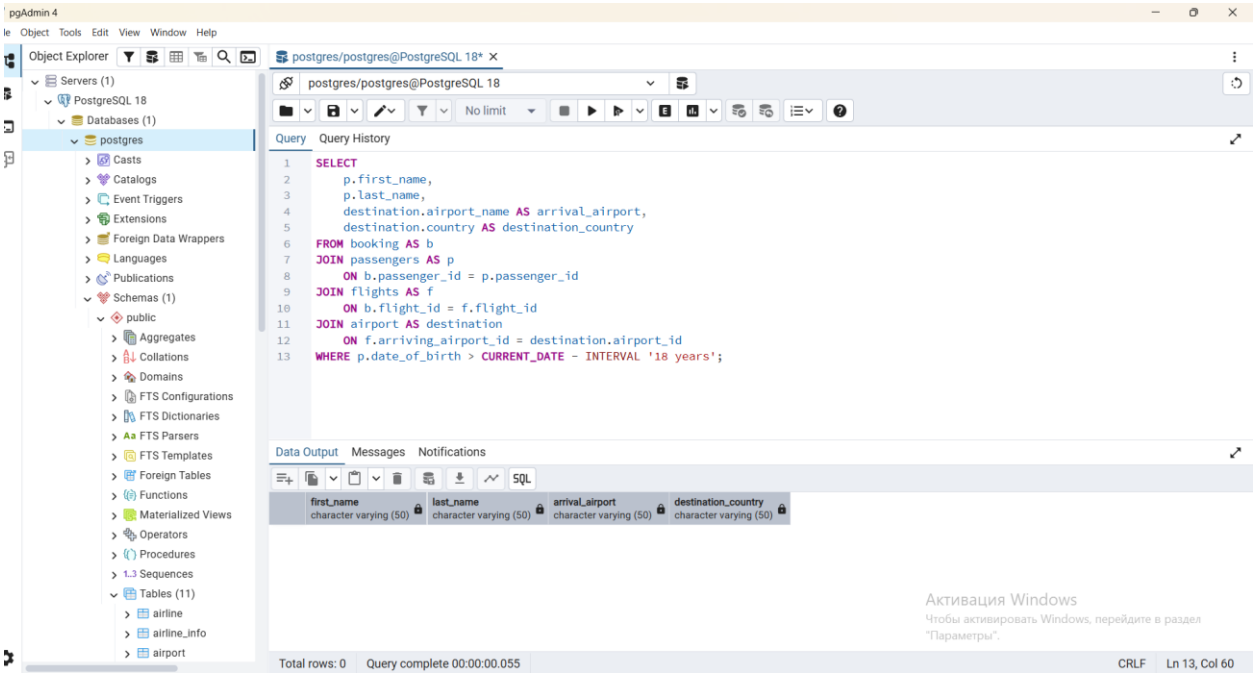

pgAdmin 4
File Object Tools Edit View Window Help
Object Explorer
Servers (1)
PostgreSQL 18
Databases (1)
postgres
Casts
Catalogs
Event Triggers
Extensions
Foreign Data Wrappers
Languages
Publications
Schemas (1)
public
Aggregates
Collations
Domains
FTS Configurations
FTS Dictionaries
FTS Parsers
FTS Templates
Foreign Tables
Functions
Materialized Views
Operators
Procedures
Sequences
Tables (11)
airline
airline_info
airport
postgres/postgres@PostgreSQL 18*
postgres/postgres@PostgreSQL 18
No limit
Query
Query History
SELECT
f.flight_id,
a.airport_name AS departure_airport
FROM flights AS f
JOIN airport AS a
ON f.departing_airport_id = a.airport_id;
Data Output
Messages
Notifications
SQL
Showing rows: 1 to 4
Page No: 1 of 1
flight_id integer
departure_airport character varying (50)
1 1 Astana Airport
2 2 Astana Airport
3 3 Almaty Airport
4 4 London Heathrow
Активация Windows
Чтобы активировать Windows, перейдите в раздел "Параметры".
Total rows: 4
Query complete 00:00:00.059
CRLF
Ln 6, Col 46

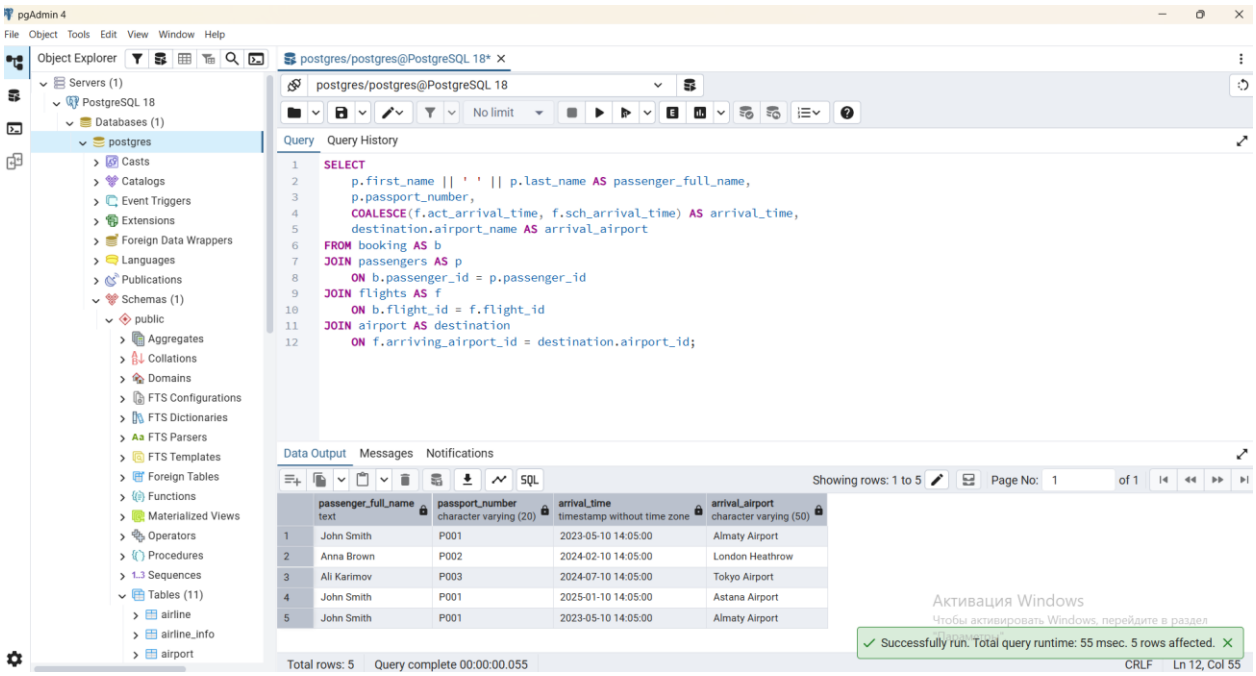

pgAdmin 4
File Object Tools Edit View Window Help
Object Explorer
Servers (1)
PostgreSQL 18
Databases (1)
postgres
Casts
Catalogs
Event Triggers
Extensions
Foreign Data Wrappers
Languages
Publications
Schemas (1)
public
Aggregates
Collations
Domains
FTS Configurations
FTS Dictionaries
FTS Parsers
FTS Templates
Foreign Tables
Functions
Materialized Views
Operators
Procedures
Sequences
Tables (11)
airline
airline_info
airport
postgres/postgres@PostgreSQL 18*
postgres/postgres@PostgreSQL 18
No limit
Query
Query History
SELECT
ai.airline_id,
ai.airline_name
FROM airline_info AS ai
WHERE NOT EXISTS (
SELECT 1
FROM flights AS f
WHERE f.airline_id = ai.airline_id
AND f.sch_departure_time >=
date_trunc('month', CURRENT_DATE) + INTERVAL '1 month'
AND f.sch_departure_time <
date_trunc('month', CURRENT_DATE) + INTERVAL '2 months'
);
Data Output
Messages
Notifications
SQL
Showing rows: 1 to 5
Page No: 1
of 1
airline_id [PK] integer
airline_name character varying (50)
1 1 Air Kazakhstan
2 2 Turkish Air
3 3 France Air
4 4 Brazil Air
5 5 Old Airline
Активация Windows
Чтобы активировать Windows, перейдите в раздел "Параметры".
Total rows: 5
Query complete 00:00:00.062
CRLF
Ln 13, Col 3

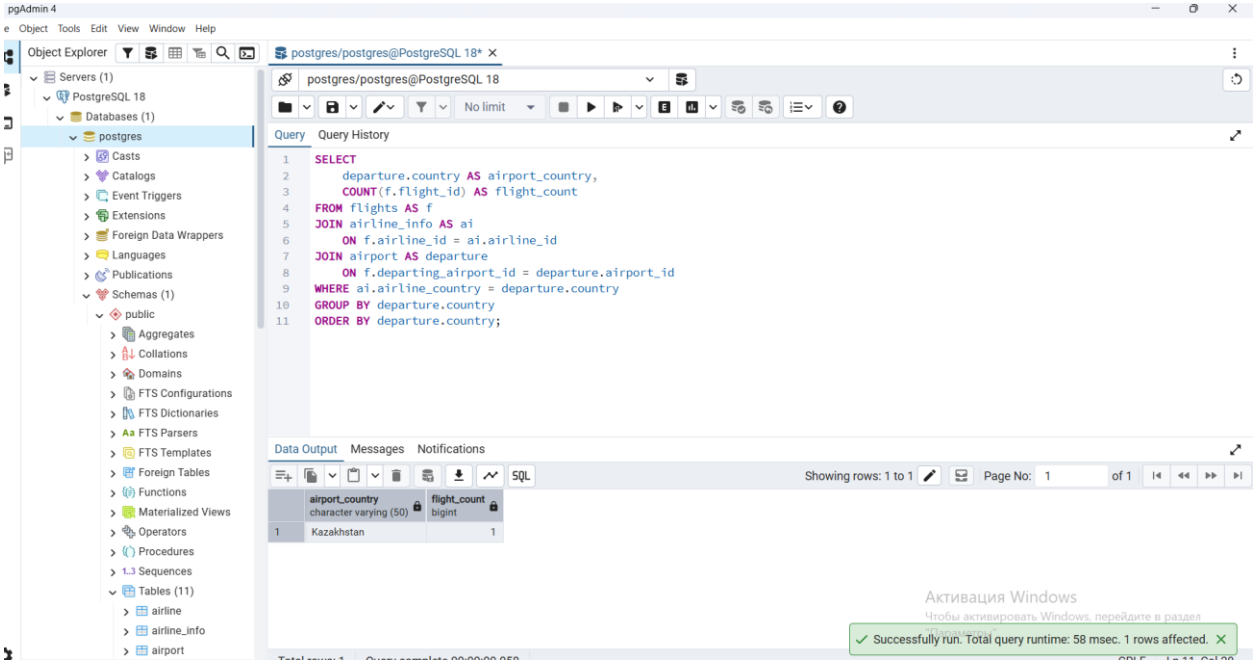

pgAdmin 4
File Object Tools Edit View Window Help
Object Explorer
Servers (1)
PostgreSQL 18
Databases (1)
postgres
Casts
Catalogs
Event Triggers
Extensions
Foreign Data Wrappers
Languages
Publications
Schemas (1)
public
Aggregates
Collations
Domains
FTS Configurations
FTS Dictionaries
FTS Parsers
FTS Templates
Foreign Tables
Functions
Materialized Views
Operators
Procedures
Sequences
Tables (11)
airline
airline_info
airport
postgres/postgres@PostgreSQL 18*
postgres/postgres@PostgreSQL 18
No limit
Query
Query History
SELECT
p.passenger_id,
p.first_name,
p.last_name
FROM booking AS b
JOIN passengers AS p
ON b.passenger_id = p.passenger_id
WHERE b.flight_id = 1;
Data Output
Messages
Notifications
SQL
Showing rows: 1 to 2
Page No: 1
of 1
passenger_id [PK] integer
first_name character varying (50)
last_name character varying (50)
1 1 John Smith
2 1 John Smith
Активация Windows
Чтобы активировать Windows, перейдите в раздел "Параметры".
Total rows: 2
Query complete 00:00:00.060
CRLF
Ln 8, Col 23

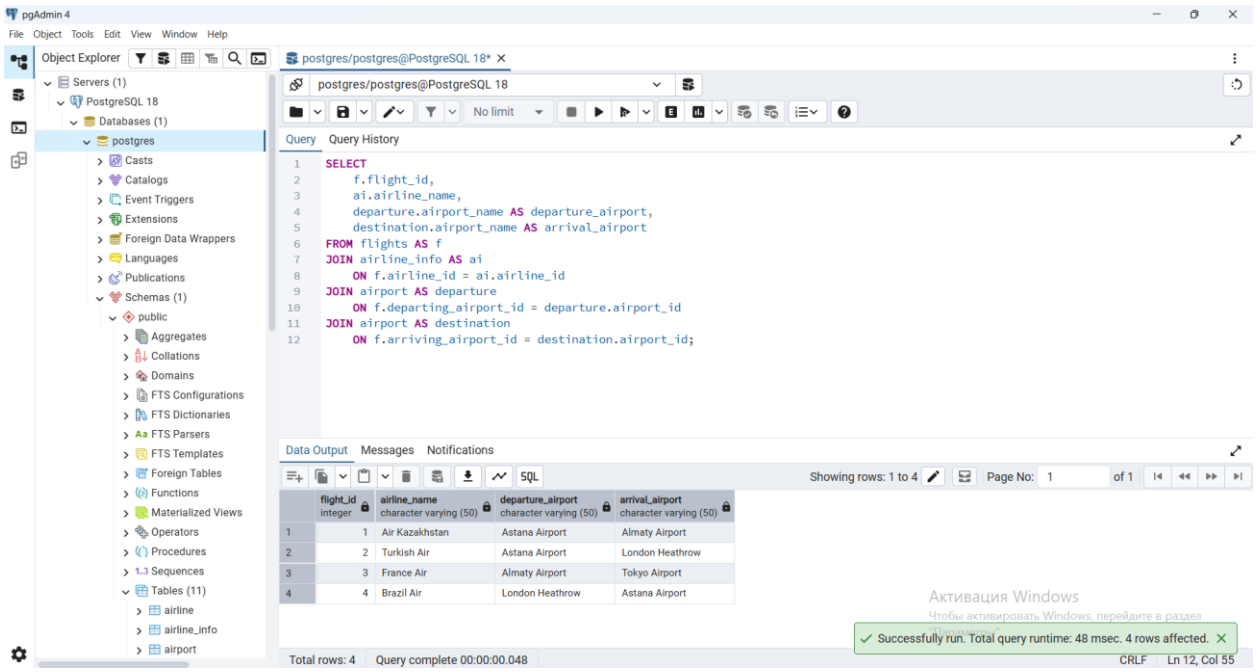

pgAdmin 4
Object Explorer
postgres/postgres@PostgreSQL 18*
postgres/postgres@PostgreSQL 18
No limit
Query
Query History
SELECT
flight_id,
AVG(price) AS average_price,
SUM(price) AS total_price,
MAX(price) AS maximum_price,
MIN(price) AS minimum_price
FROM booking
GROUP BY flight_id;
Data Output
Messages
Notifications
Showing rows: 1 to 4
Page No: 1
of 1
flight_id integer
average_price numeric
total_price numeric
maximum_price numeric
minimum_price numeric
1 3 8000.0000000000000000 8000.00 8000.00 8000.00
2 4 30000.000000000000 30000.00 30000.00 30000.00
3 2 25000.000000000000 25000.00 25000.00 25000.00
4 1 20000.000000000000 40000.00 25000.00 15000.00
Активация Windows
Чтобы активировать Windows, перейдите в раздел "Параметры".
Successfully run. Total query runtime: 69 msec. 4 rows affected.
Total rows: 4
Query complete 00:00:00.069
CRLF
Ln 8, Col 20

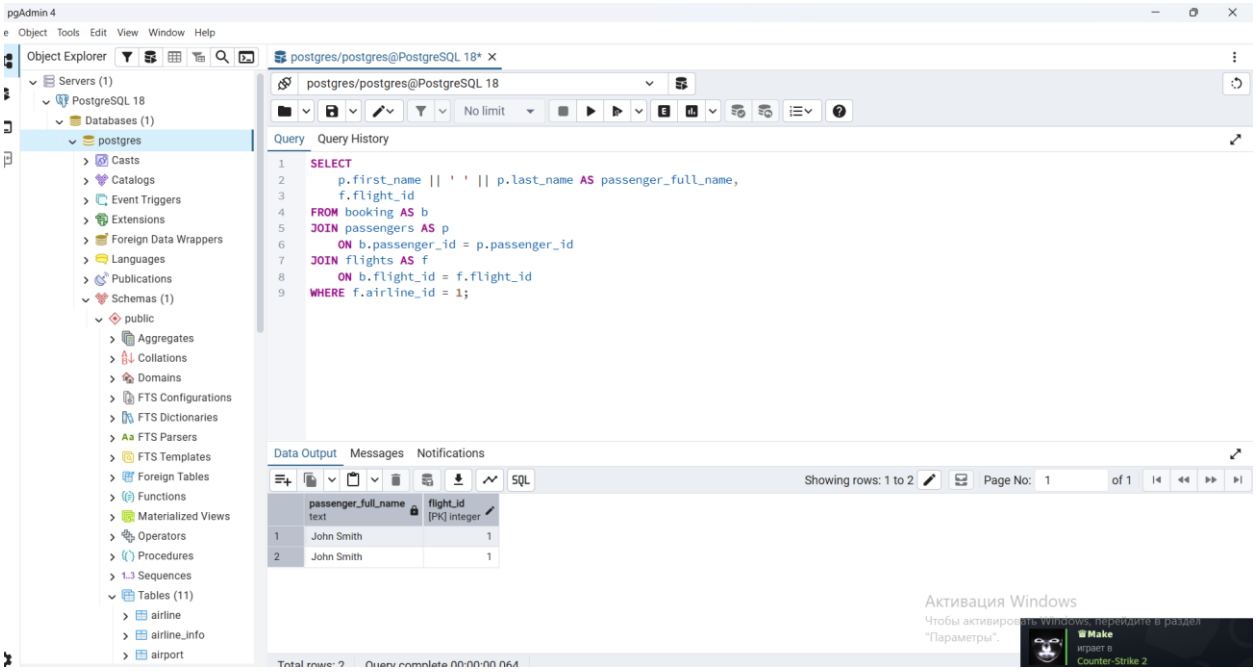

pgAdmin 4
Object Explorer
postgres/postgres@PostgreSQL 18*
postgres/postgres@PostgreSQL 18
No limit
Query
Query History
SELECT
flight_id,
AVG(price) AS average_price,
SUM(price) AS total_price,
MAX(price) AS maximum_price,
MIN(price) AS minimum_price
FROM booking
GROUP BY flight_id;
Data Output
Messages
Notifications
Showing rows: 1 to 4
Page No: 1
of 1
flight_id integer
average_price numeric
total_price numeric
maximum_price numeric
minimum_price numeric
1 3 8000.0000000000000000 8000.00 8000.00 8000.00
2 4 30000.000000000000 30000.00 30000.00 30000.00
3 2 25000.000000000000 25000.00 25000.00 25000.00
4 1 20000.000000000000 40000.00 25000.00 15000.00
Активация Windows
Чтобы активировать Windows, перейдите в раздел "Параметры".
Total rows: 4
Query complete 00:00:00.069
CRLF
Ln 8, Col 20

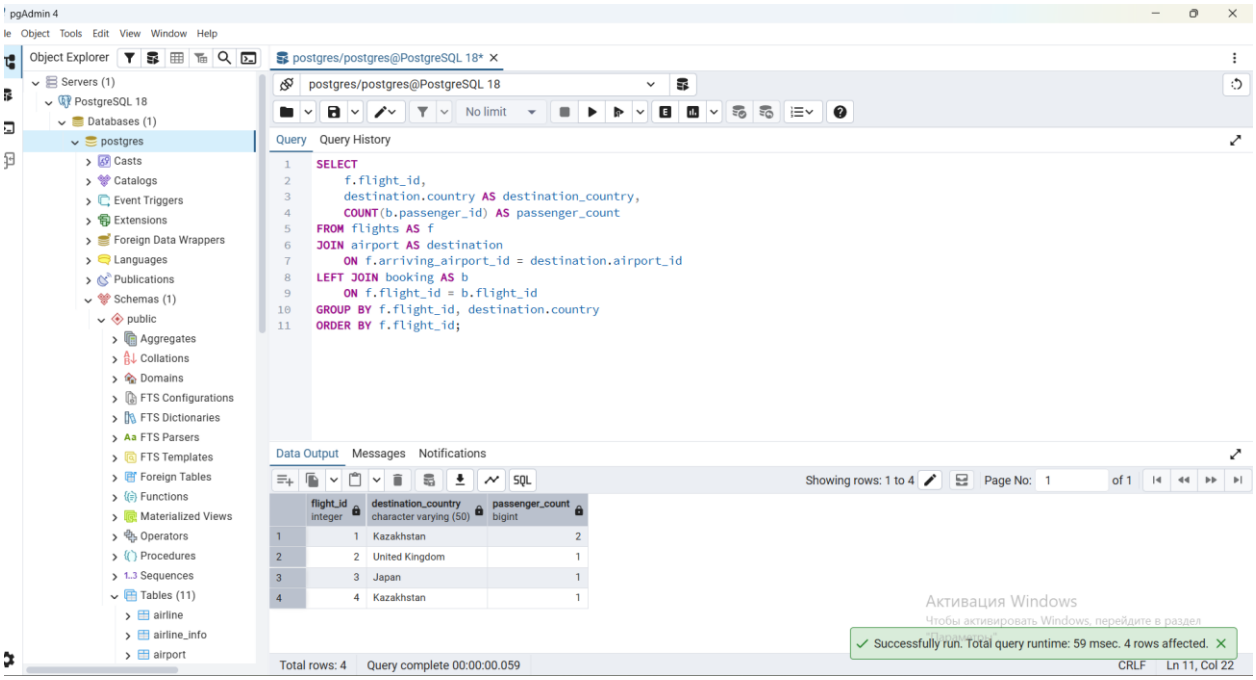

pgAdmin 4
Object Explorer
postgres/postgres@PostgreSQL 18*
Query
Query History
SELECT
p.first_name,
p.last_name,
destination.airport_name AS arrival_airport,
destination.country AS destination_country
FROM booking AS b
JOIN passengers AS p
ON b.passenger_id = p.passenger_id
JOIN flights AS f
ON b.flight_id = f.flight_id
JOIN airport AS destination
ON f.arriving_airport_id = destination.airport_id
WHERE p.date_of_birth > CURRENT_DATE - INTERVAL '18 years';
Data Output
Messages
Notifications
first_name
last_name
arrival_airport
destination_country
Total rows: 0
Query complete 00:00:00.055
CRLF
Ln 13, Col 60

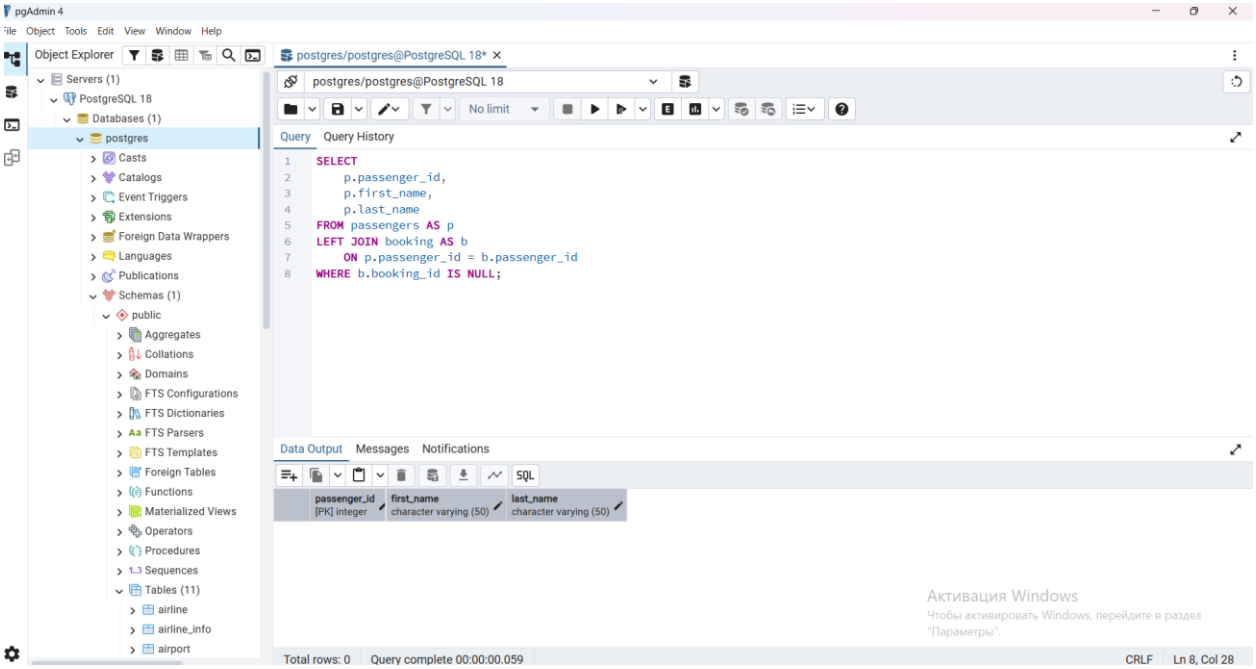

pgAdmin 4
Object Explorer
postgres/postgres@PostgreSQL 18*
Query
Query History
SELECT
p.first_name || ' ' || p.last_name AS passenger_full_name,
p.passport_number,
COALESCE(f.act_arrival_time, f.sch_arrival_time) AS arrival_time,
destination.airport_name AS arrival_airport
FROM booking AS b
JOIN passengers AS p
ON b.passenger_id = p.passenger_id
JOIN flights AS f
ON b.flight_id = f.flight_id
JOIN airport AS destination
ON f.arriving_airport_id = destination.airport_id;
Data Output
Messages
Notifications
passenger_full_name
passport_number
arrival_time
arrival_airport
1 John Smith P001 2023-05-10 14:05:00 Almaty Airport
2 Anna Brown P002 2024-02-10 14:05:00 London Heathrow
3 Ali Karimov P003 2024-07-10 14:05:00 Tokyo Airport
4 John Smith P001 2025-01-10 14:05:00 Astana Airport
5 John Smith P001 2023-05-10 14:05:00 Almaty Airport
Successfully run. Total query runtime: 55 msec. 5 rows affected.
Total rows: 5
Query complete 00:00:00.055
CRLF
Ln 12, Col 55

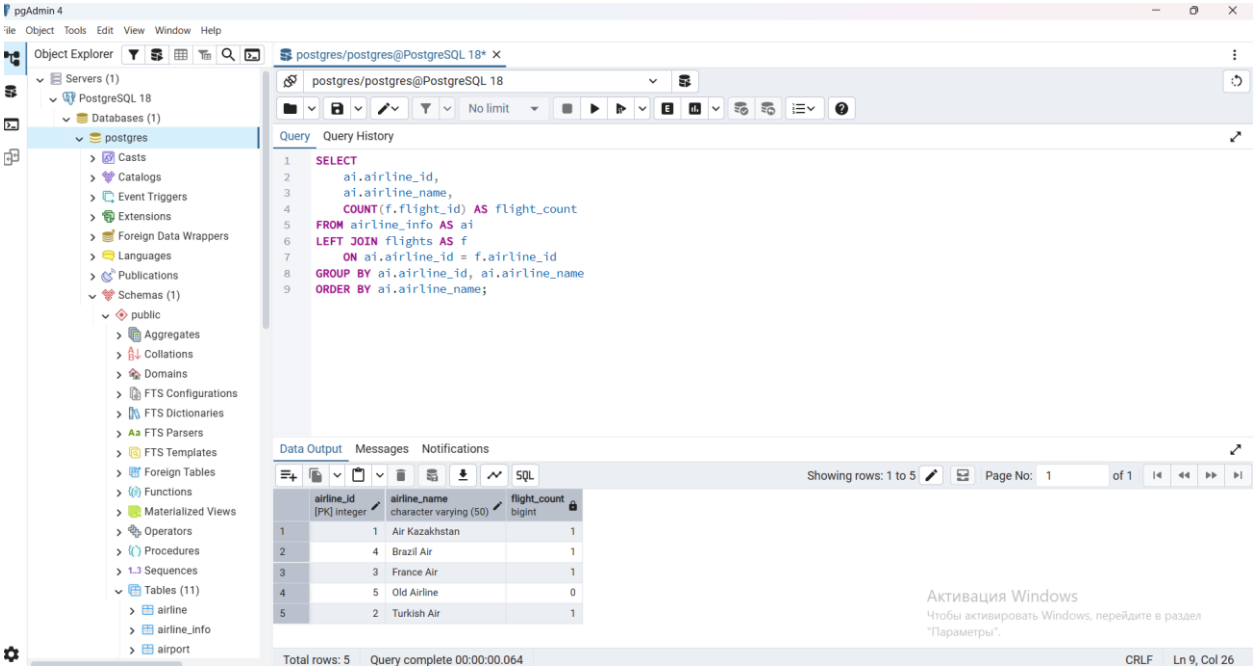

pgAdmin 4
Object Explorer
postgres/postgres@PostgreSQL 18*
Servers (1)
PostgreSQL 18
Databases (1)
postgres
Casts
Catalogs
Event Triggers
Extensions
Foreign Data Wrappers
Languages
Publications
Schemas (1)
public
Aggregates
Collations
Domains
FTS Configurations
FTS Dictionaries
FTS Parsers
FTS Templates
Foreign Tables
Functions
Materialized Views
Operators
Procedures
Sequences
Tables (11)
airline
airline_info
airport
No limit
Query
Query History
SELECT
departure.country AS airport_country,
COUNT(f.flight_id) AS flight_count
FROM flights AS f
JOIN airline_info AS ai
ON f.airline_id = ai.airline_id
JOIN airport AS departure
ON f.departing_airport_id = departure.airport_id
WHERE ai.airline_country = departure.country
GROUP BY departure.country
ORDER BY departure.country;
Data Output
Messages
Notifications
SQL
Showing rows: 1 to 1
Page No: 1
of 1
airport_country
character varying (50)
flight_count
bigint
1
Kazakhstan
1
Активация Windows
Чтобы активировать Windows, перейдите в раздел
Successfully run. Total query runtime: 58 msec. 1 rows affected.

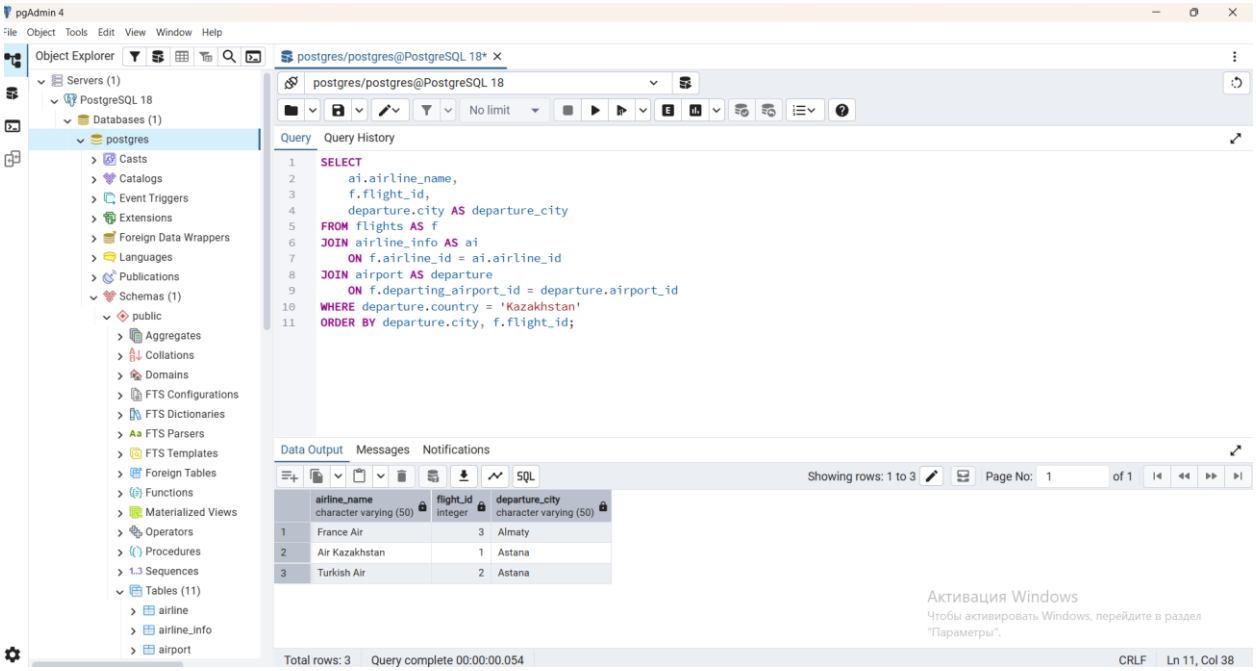

pgAdmin 4
File
Object
Tools
Edit
View
Window
Help
Object Explorer
postgres/postgres@PostgreSQL 18*
Servers (1)
PostgreSQL 18
Databases (1)
postgres
Casts
Catalogs
Event Triggers
Extensions
Foreign Data Wrappers
Languages
Publications
Schemas (1)
public
Aggregates
Collations
Domains
FTS Configurations
FTS Dictionaries
FTS Parsers
FTS Templates
Foreign Tables
Functions
Materialized Views
Operators
Procedures
Sequences
Tables (11)
airline
airline_info
airport
No limit
Query
Query History
SELECT
f.flight_id,
ai.airline_name,
departure.airport_name AS departure_airport,
destination.airport_name AS arrival_airport
FROM flights AS f
JOIN airline_info AS ai
ON f.airline_id = ai.airline_id
JOIN airport AS departure
ON f.departing_airport_id = departure.airport_id
JOIN airport AS destination
ON f.arriving_airport_id = destination.airport_id;
Data Output
Messages
Notifications
SQL
Showing rows: 1 to 4
Page No: 1
of 1
flight_id
integer
airline_name
character varying (50)
departure_airport
character varying (50)
arrival_airport
character varying (50)
1
1
Air Kazakhstan
Astana Airport
Almaty Airport
2
2
Turkish Air
Astana Airport
London Heathrow
3
3
France Air
Almaty Airport
Tokyo Airport
4
4
Brazil Air
London Heathrow
Astana Airport
Активация Windows
Чтобы активировать Windows, перейдите в раздел
Successfully run. Total query runtime: 48 msec. 4 rows affected.
Total rows: 4
Query complete 00:00:00.048
CRLF
Ln 12, Col 55


pgAdmin 4
Object Explorer
postgres/postgres@PostgreSQL 18*
Query
Query History
SELECT
p.first_name || ' ' || p.last_name AS passenger_full_name,
f.flight_id
FROM booking AS b
JOIN passengers AS p
ON b.passenger_id = p.passenger_id
JOIN flights AS f
ON b.flight_id = f.flight_id
WHERE f.airline_id = 1;
Data Output
Messages
Notifications
Showing rows: 1 to 2
Page No: 1
of 1
passenger_full_name text
flight_id [PK] integer
1 John Smith 1
2 John Smith 1
Активация Windows


pgAdmin 4
Object Explorer
postgres/postgres@PostgreSQL 18*
Query
Query History
SELECT
f.flight_id,
destination.country AS destination_country,
COUNT(b.passenger_id) AS passenger_count
FROM flights AS f
JOIN airport AS destination
ON f.arriving_airport_id = destination.airport_id
LEFT JOIN booking AS b
ON f.flight_id = b.flight_id
GROUP BY f.flight_id, destination.country
ORDER BY f.flight_id;
Data Output
Messages
Notifications
Showing rows: 1 to 4
Page No: 1
of 1
flight_id integer
destination_country character varying (50)
passenger_count bigint
1 1 Kazakhstan 2
2 2 United Kingdom 1
3 3 Japan 1
4 4 Kazakhstan 1
Активация Windows
Successfully run. Total query runtime: 59 msec. 4 rows affected.
Total rows: 4
Query complete 00:00:00.059
CRLF
Ln 11, Col 22


pgAdmin 4
File Object Tools Edit View Window Help
Object Explorer
Servers (1)
PostgreSQL 18
Databases (1)
postgres
Casts
Catalogs
Event Triggers
Extensions
Foreign Data Wrappers
Languages
Publications
Schemas (1)
public
Aggregates
Collations
Domains
FTS Configurations
FTS Dictionaries
FTS Parsers
FTS Templates
Foreign Tables
Functions
Materialized Views
Operators
Procedures
Sequences
Tables (11)
airline
airline_info
airport
postgres/postgres@PostgreSQL 18*
postgres/postgres@PostgreSQL 18
No limit
Query
Query History
SELECT
p.passenger_id,
p.first_name,
p.last_name
FROM passengers AS p
LEFT JOIN booking AS b
ON p.passenger_id = b.passenger_id
WHERE b.booking_id IS NULL;
Data Output
Messages
Notifications
SQL
passenger_id
[PK] integer
first_name
character varying (50)
last_name
character varying (50)
Активация Windows
Чтобы активировать Windows, перейдите в раздел "Параметры".
Total rows: 0
Query complete 00:00:00.059
CRLF
Ln 8, Col 28


pgAdmin 4
File Object Tools Edit View Window Help
Object Explorer
Servers (1)
PostgreSQL 18
Databases (1)
postgres
Casts
Catalogs
Event Triggers
Extensions
Foreign Data Wrappers
Languages
Publications
Schemas (1)
public
Aggregates
Collations
Domains
FTS Configurations
FTS Dictionaries
FTS Parsers
FTS Templates
Foreign Tables
Functions
Materialized Views
Operators
Procedures
Sequences
Tables (11)
airline
airline_info
airport
postgres/postgres@PostgreSQL 18*
postgres/postgres@PostgreSQL 18
No limit
Query
Query History
SELECT
ai.airline_id,
ai.airline_name,
COUNT(f.flight_id) AS flight_count
FROM airline_info AS ai
LEFT JOIN flights AS f
ON ai.airline_id = f.airline_id
GROUP BY ai.airline_id, ai.airline_name
ORDER BY ai.airline_name;
Data Output
Messages
Notifications
SQL
Showing rows: 1 to 5
Page No: 1
of 1
airline_id
[PK] integer
airline_name
character varying (50)
flight_count
bigint
1 1 Air Kazakhstan 1
2 4 Brazil Air 1
3 3 France Air 1
4 5 Old Airline 0
5 2 Turkish Air 1
Активация Windows
Чтобы активировать Windows, перейдите в раздел "Параметры".
Total rows: 5
Query complete 00:00:00.064
CRLF
Ln 9, Col 26


pgAdmin 4
File Object Tools Edit View Window Help
Object Explorer
Servers (1)
PostgreSQL 18
Databases (1)
postgres
Casts
Catalogs
Event Triggers
Extensions
Foreign Data Wrappers
Languages
Publications
Schemas (1)
public
Aggregates
Collations
Domains
FTS Configurations
FTS Dictionaries
FTS Parsers
FTS Templates
Foreign Tables
Functions
Materialized Views
Operators
Procedures
Sequences
Tables (11)
airline
airline_info
airport
postgres/postgres@PostgreSQL 18*
postgres/postgres@PostgreSQL 18
No limit
Query
Query History
SELECT
ai.airline_name,
f.flight_id,
departure.city AS departure_city
FROM flights AS f
JOIN airline_info AS ai
ON f.airline_id = ai.airline_id
JOIN airport AS departure
ON f.departing_airport_id = departure.airport_id
WHERE departure.country = 'Kazakhstan'
ORDER BY departure.city, f.flight_id;
Data Output
Messages
Notifications
SQL
Showing rows: 1 to 3
Page No: 1 of 1
airline_name character varying (50)
flight_id integer
departure_city character varying (50)
1 France Air 3 Almaty
2 Air Kazakhstan 1 Astana
3 Turkish Air 2 Astana
Активация Windows
Чтобы активировать Windows, перейдите в раздел "Параметры".
Total rows: 3
Query complete 00:00:00.054
CRLF
Ln 11, Col 38