



VL — Visual Localization and Grounding (demand by reasoning correctness, per model, train)

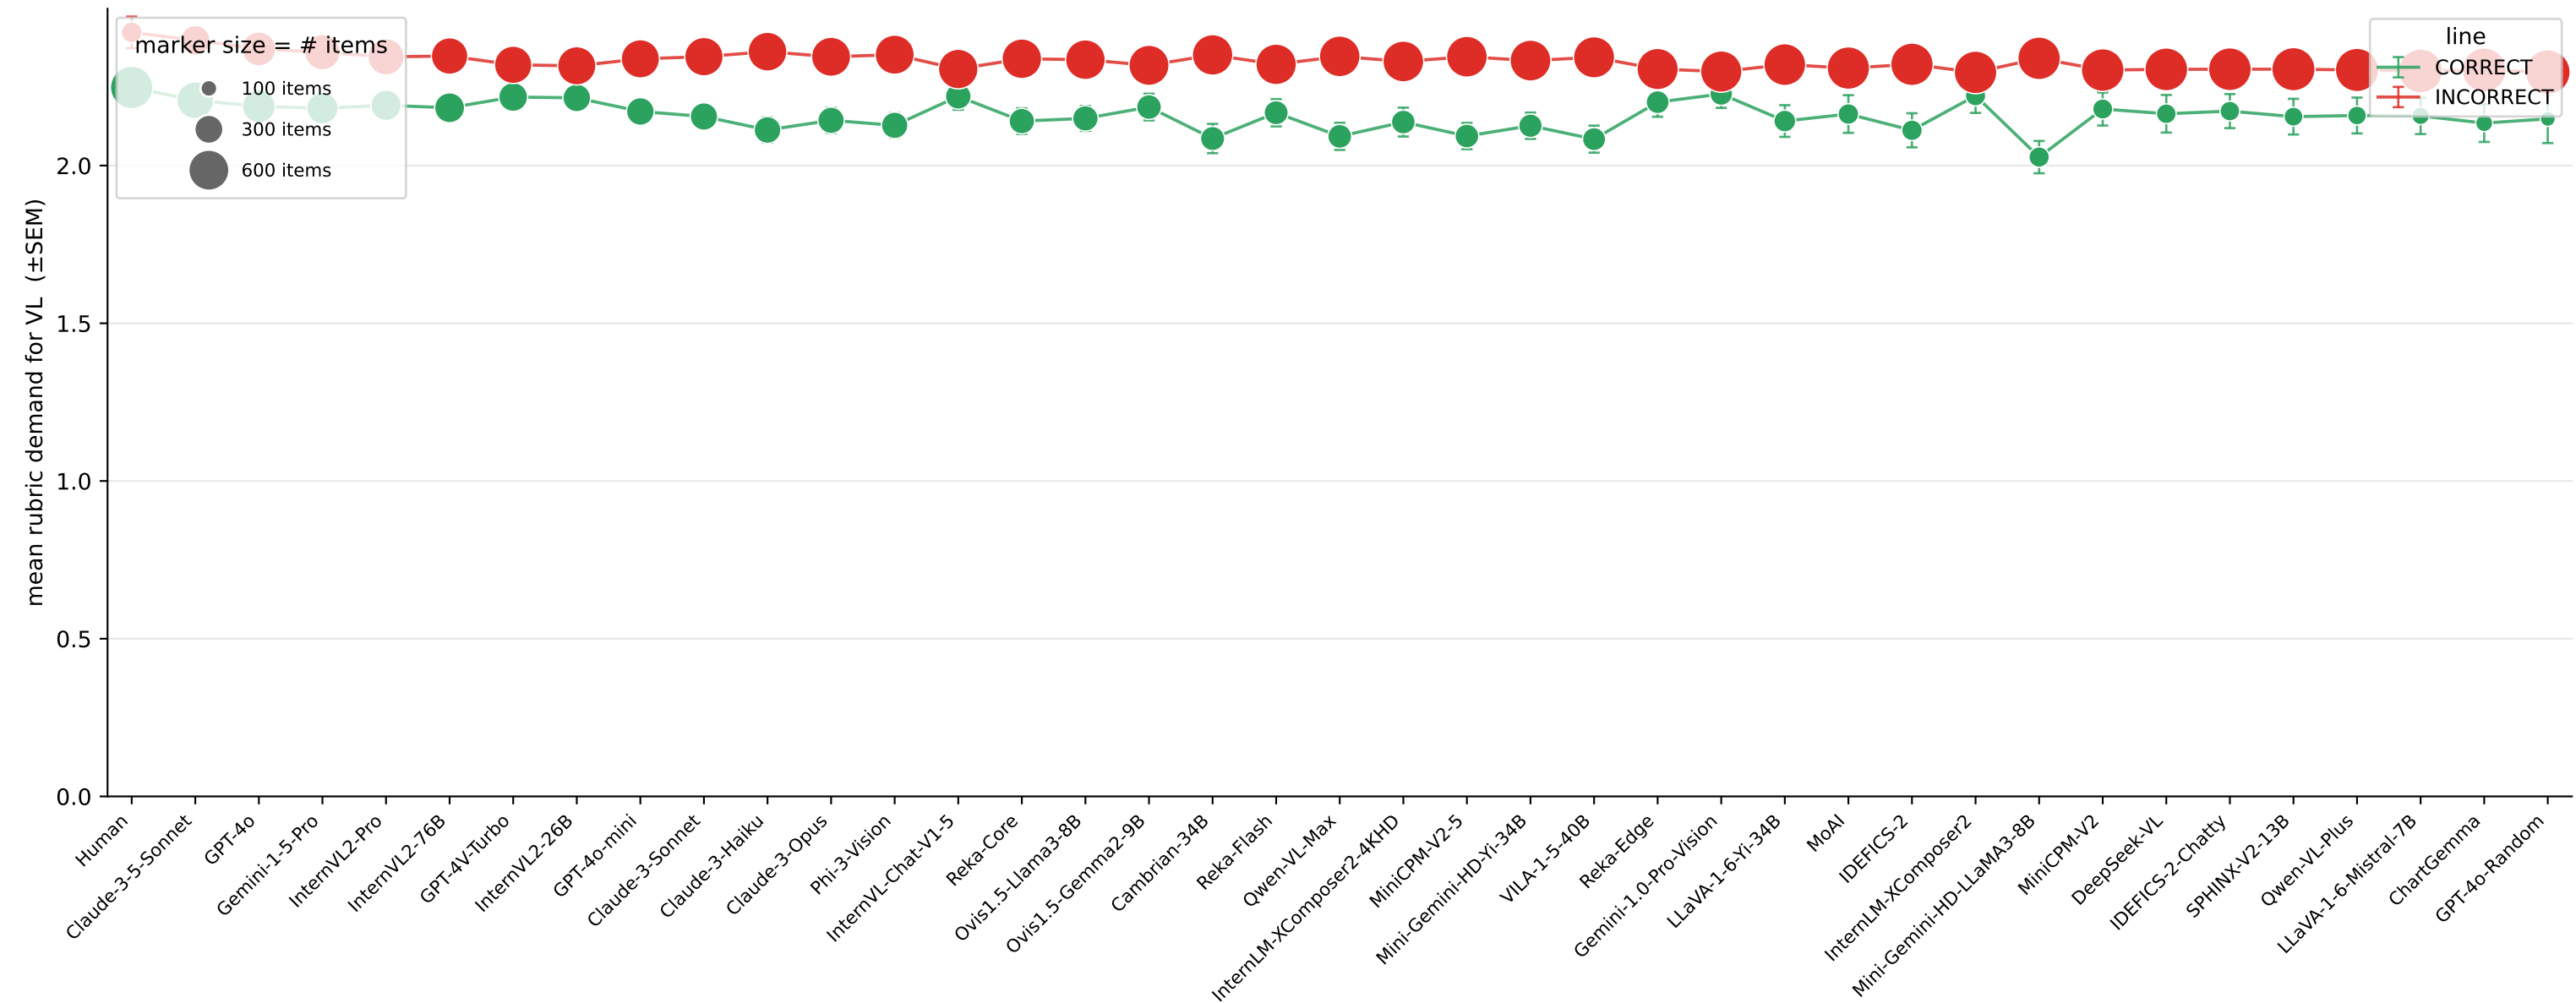


Models ordered by reasoning accuracy (left=highest). Marker area $\propto$ # correct/incorrect items behind each mean. Error bars = SEM (SD / $\sqrt{n}$) of demand within group.

AS — Attention and Scan (demand by reasoning correctness, per model, train)

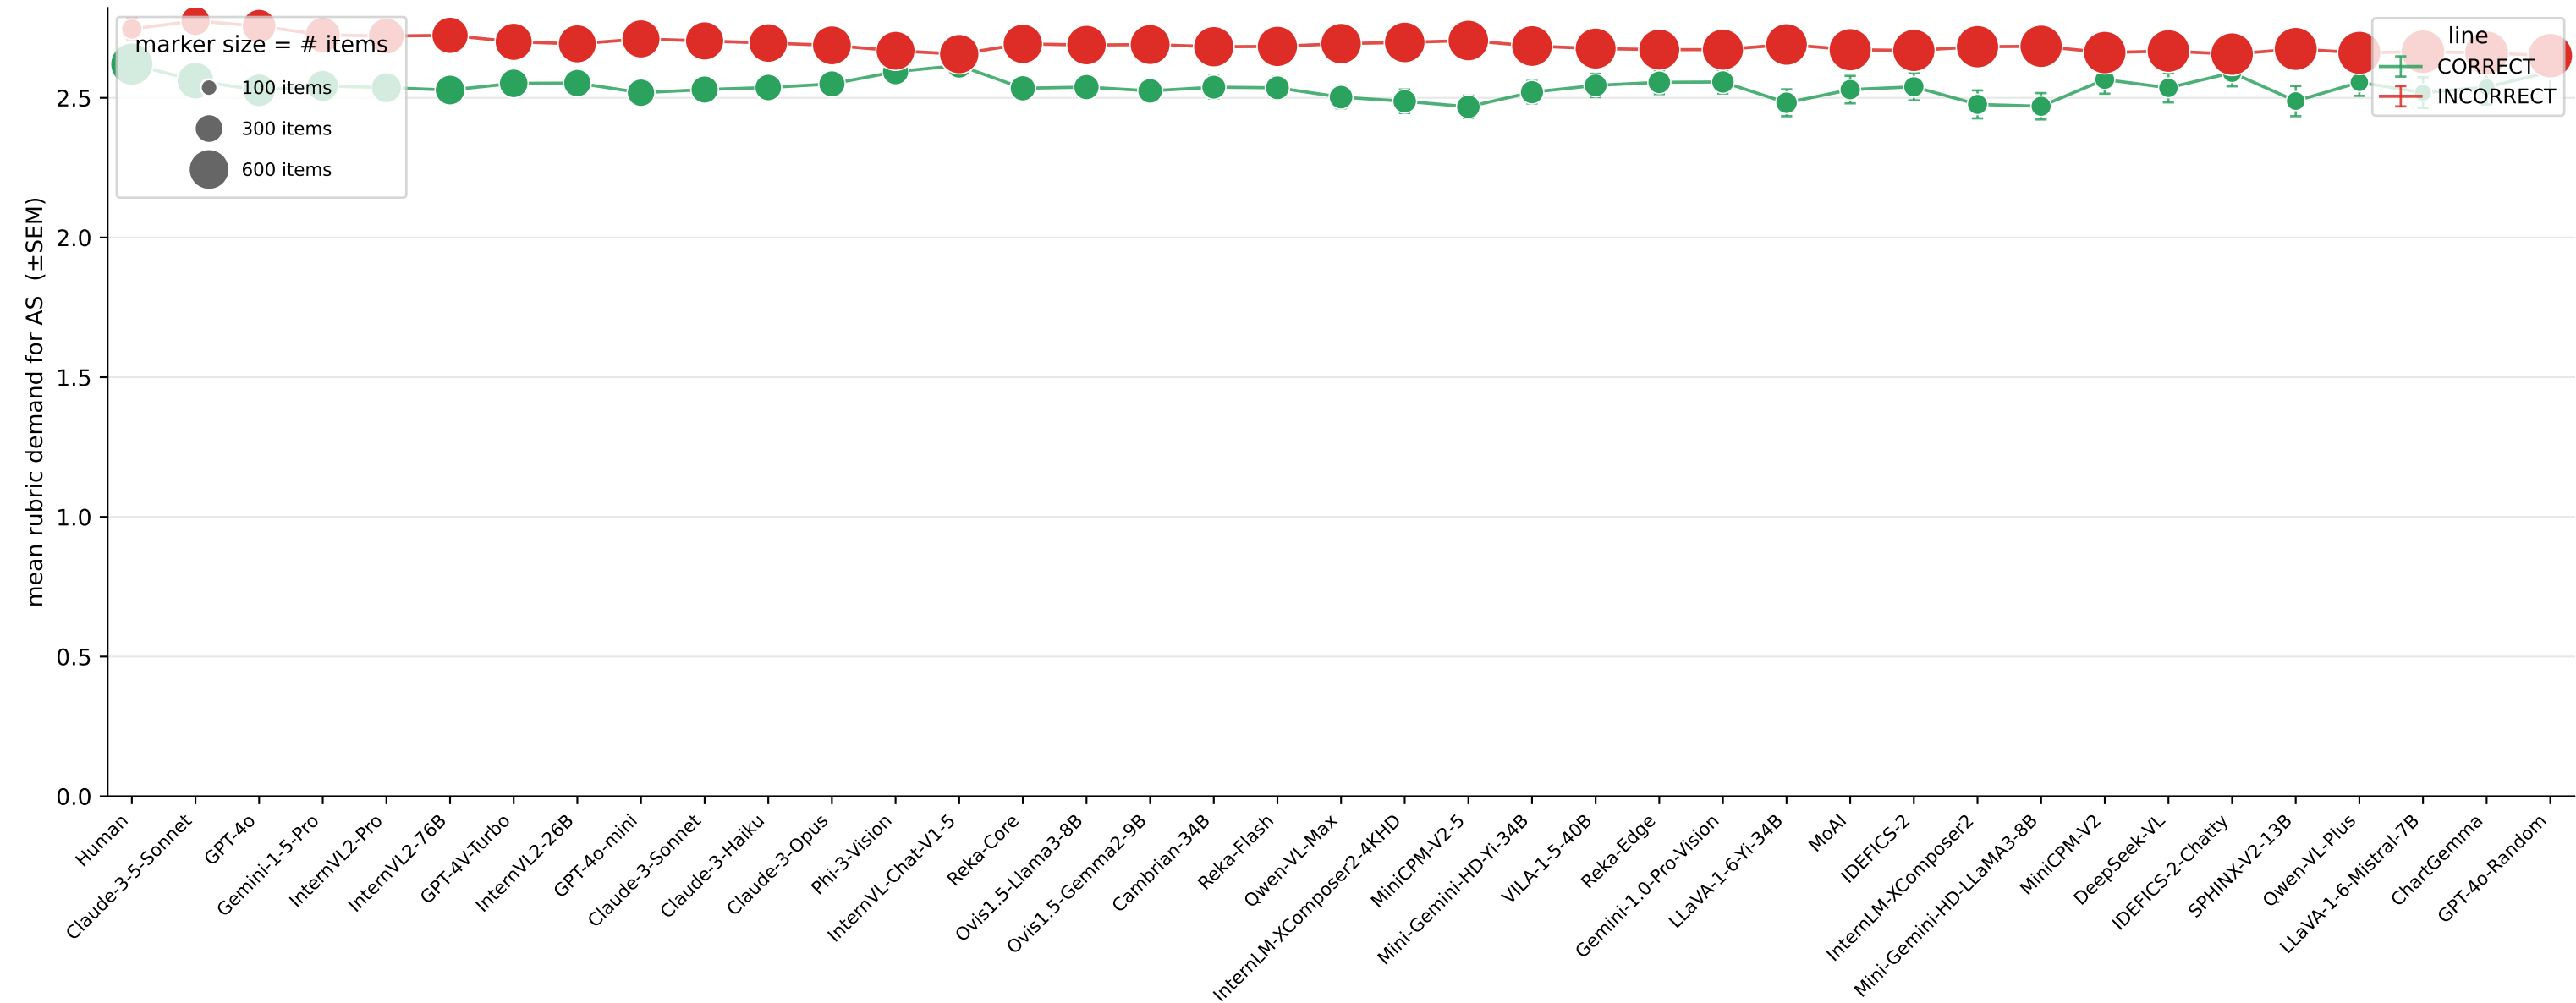


Models ordered by reasoning accuracy (left=highest). Marker area $\propto$ # correct/incorrect items behind each mean. Error bars = SEM ($SD / \sqrt{n}$) of demand within group.

MCr — Identifying Relevant Information (demand by reasoning correctness, per model, train)

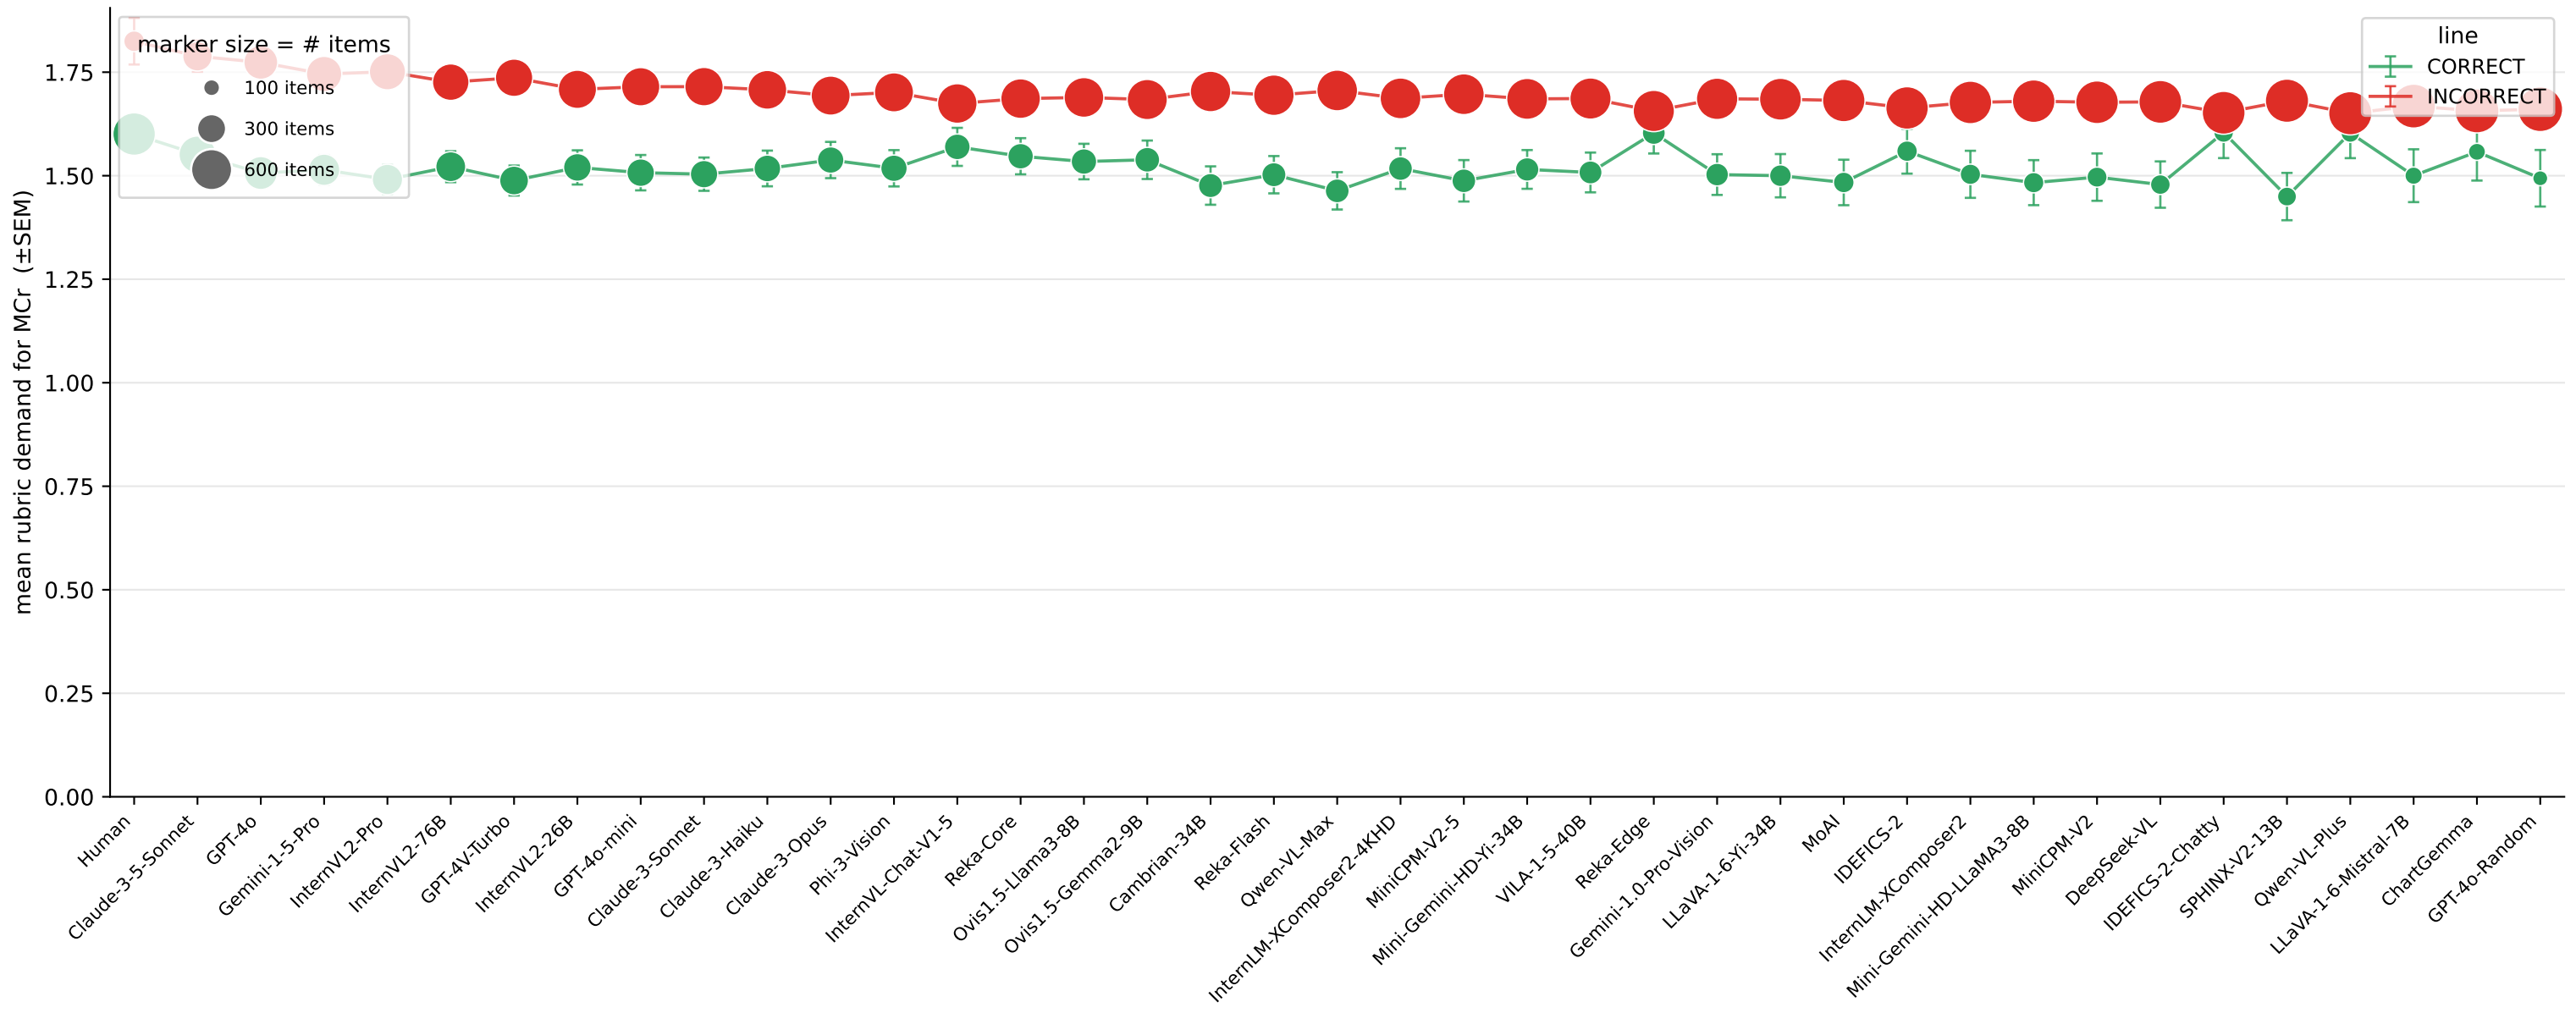


Models ordered by reasoning accuracy (left=highest). Marker area $\propto$ # correct/incorrect items behind each mean. Error bars = SEM (SD / $\sqrt{n}$) of demand within group.

MCu — Calibrating Knowns and Unknowns (demand by reasoning correctness, per model, train)

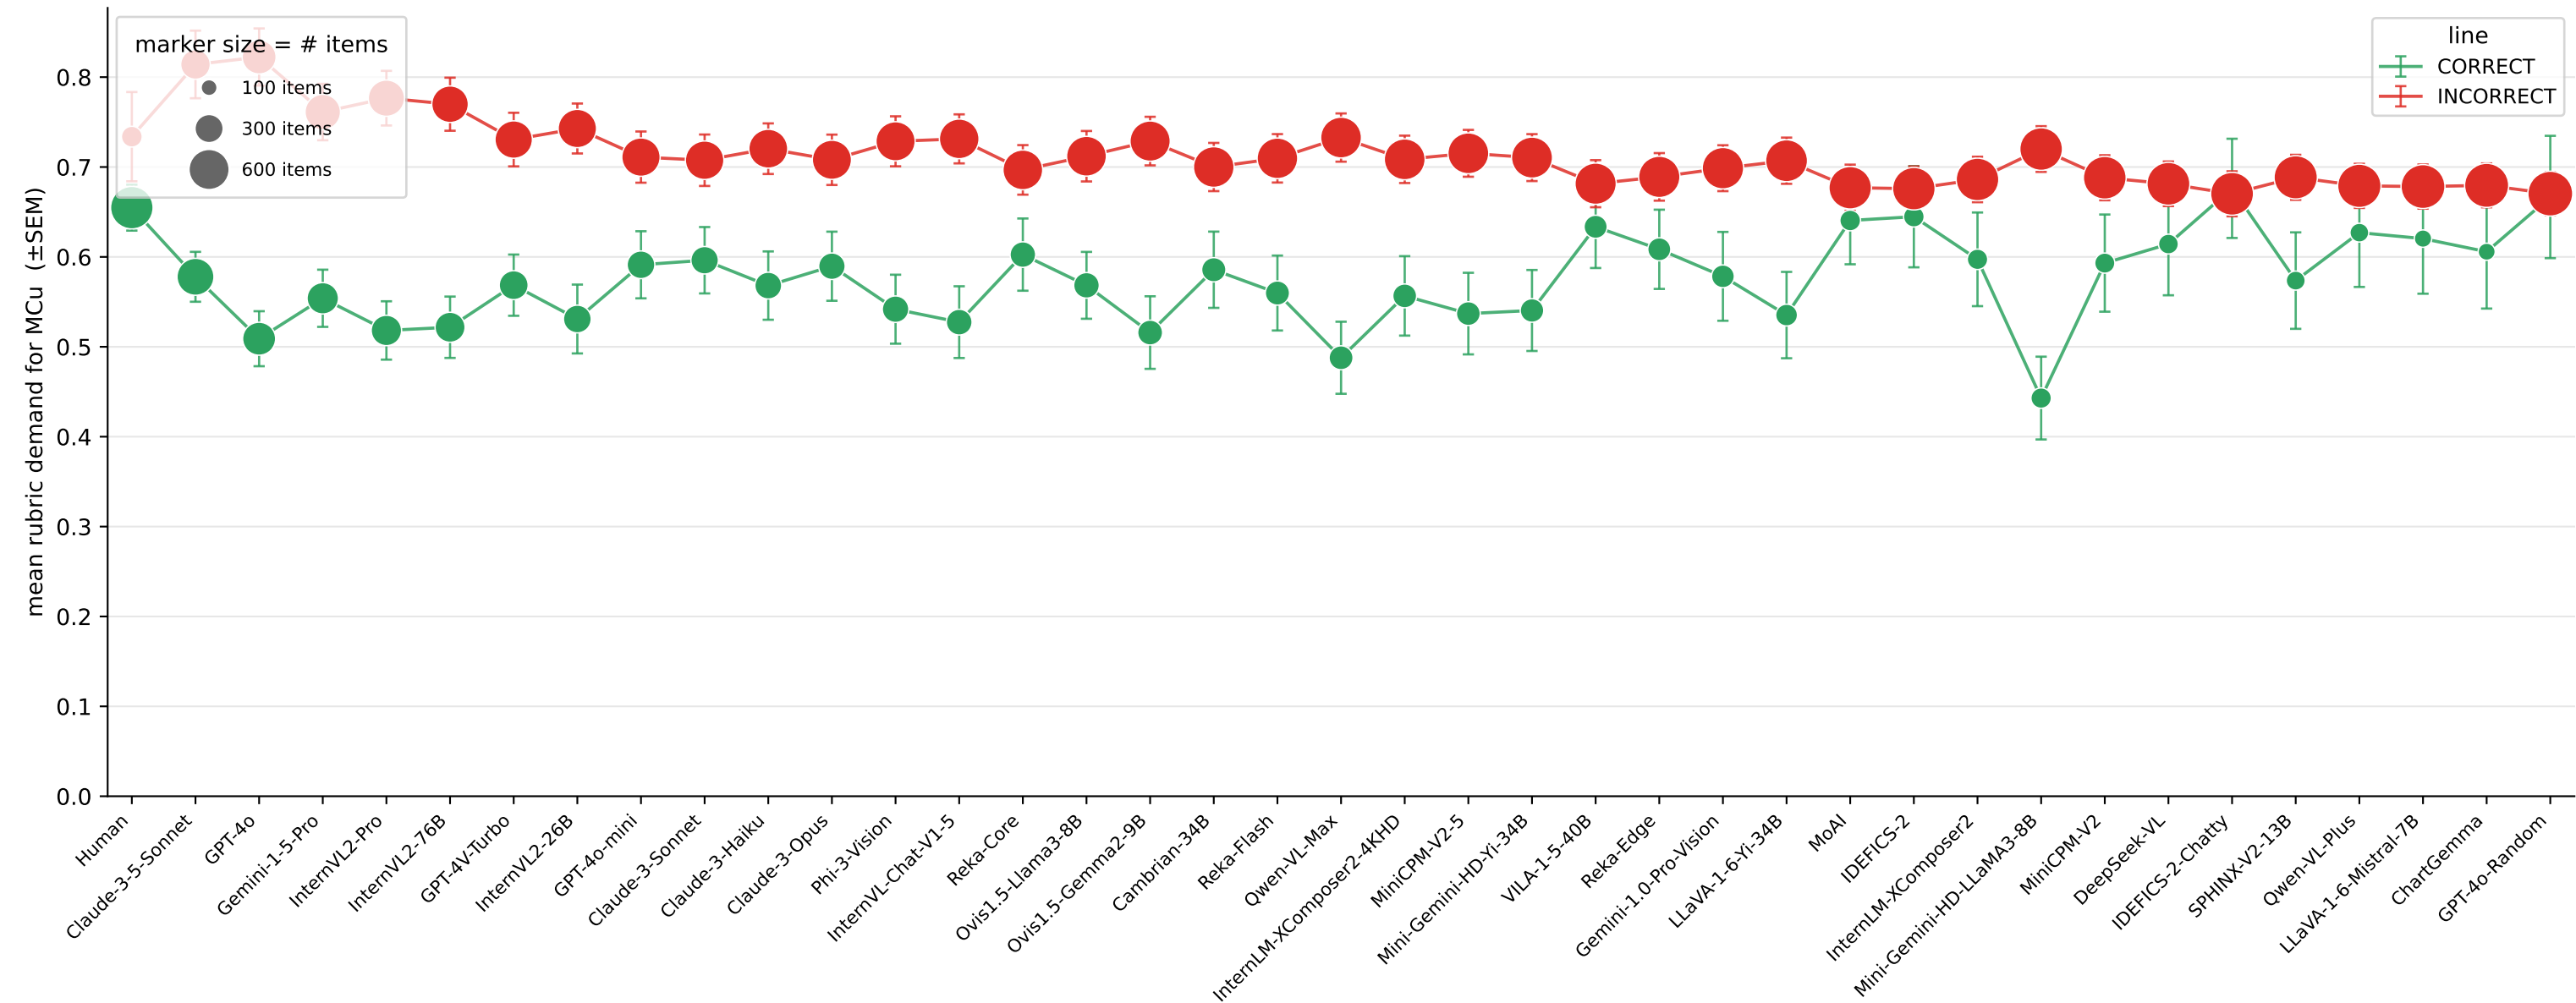


Models ordered by reasoning accuracy (left=highest). Marker area $\propto$ # correct/incorrect items behind each mean. Error bars = SEM ($SD / \sqrt{n}$) of demand within group.

MA — Multi-Element Visual Aggregation (demand by reasoning correctness, per model, train)

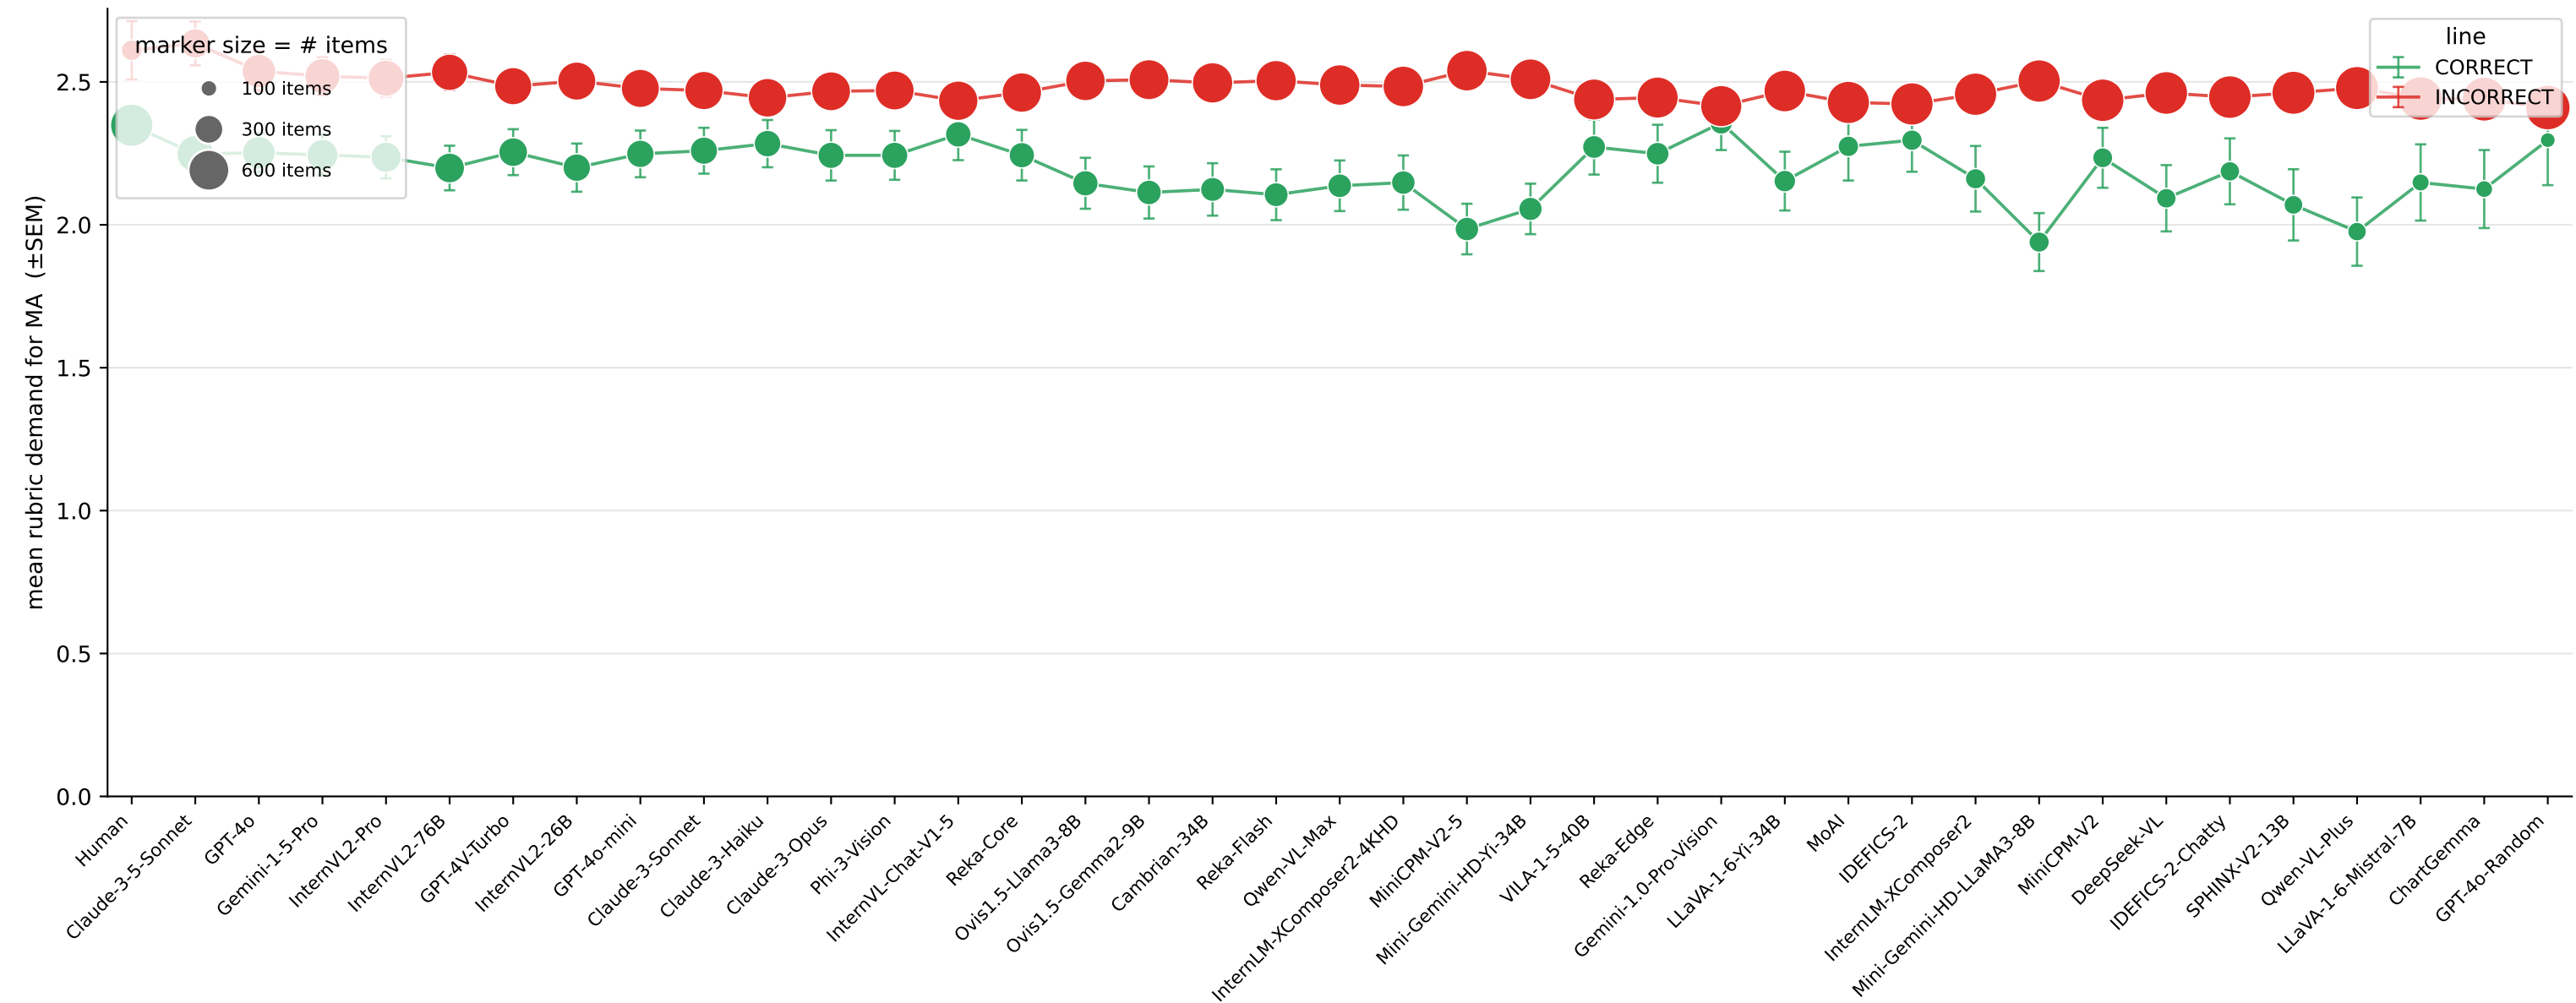


Models ordered by reasoning accuracy (left=highest). Marker area $\propto$ # correct/incorrect items behind each mean. Error bars = SEM ($SD / \sqrt{n}$) of demand within group.

VO — Volume (demand by reasoning correctness, per model, train)

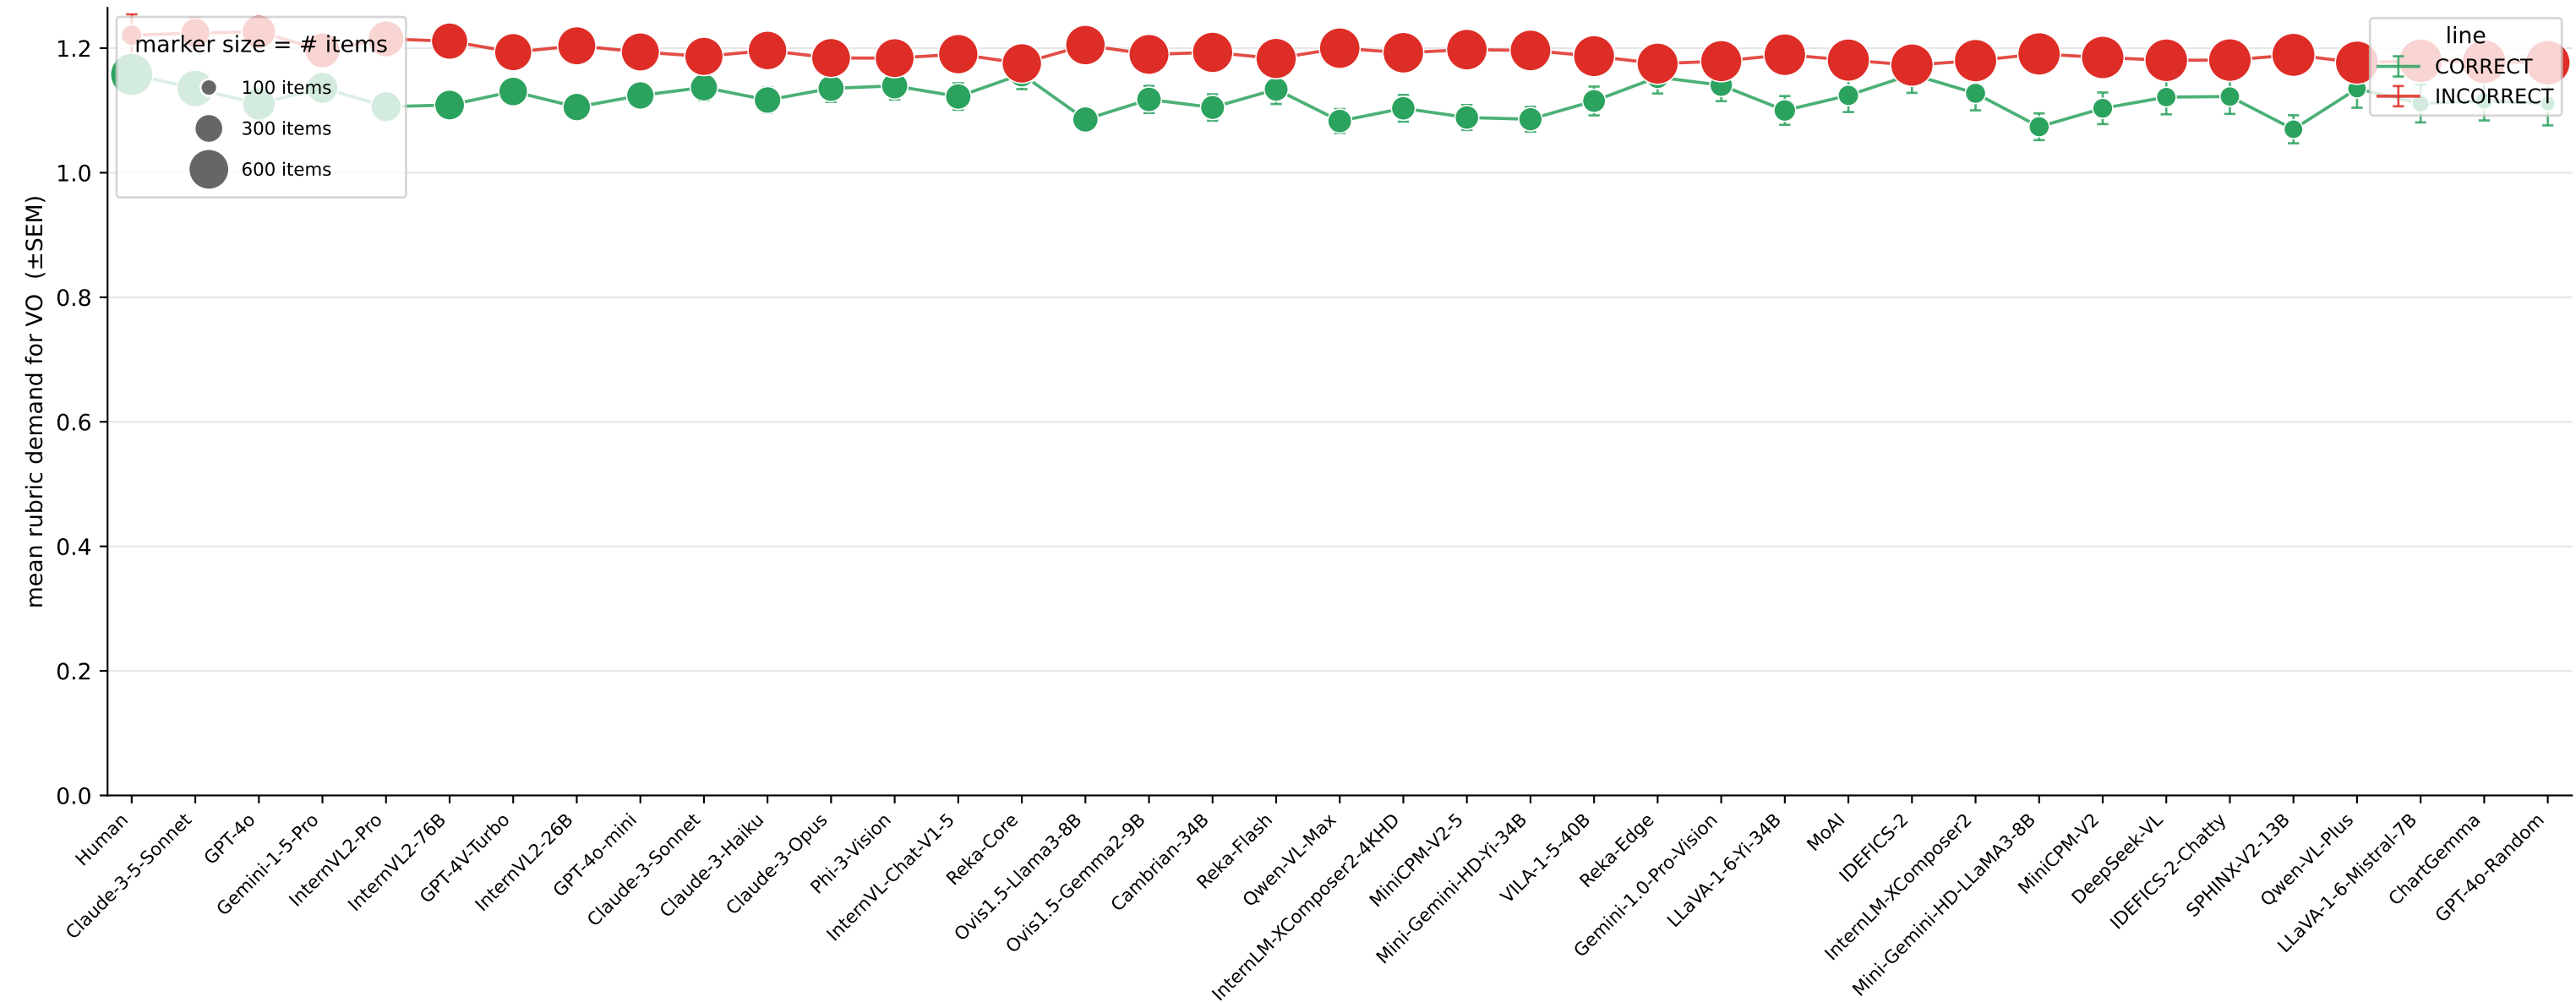


Models ordered by reasoning accuracy (left=highest). Marker area $\propto$ # correct/incorrect items behind each mean. Error bars = SEM ($SD / \sqrt{n}$) of demand within group.

AT — Atypicality (demand by reasoning correctness, per model, train)

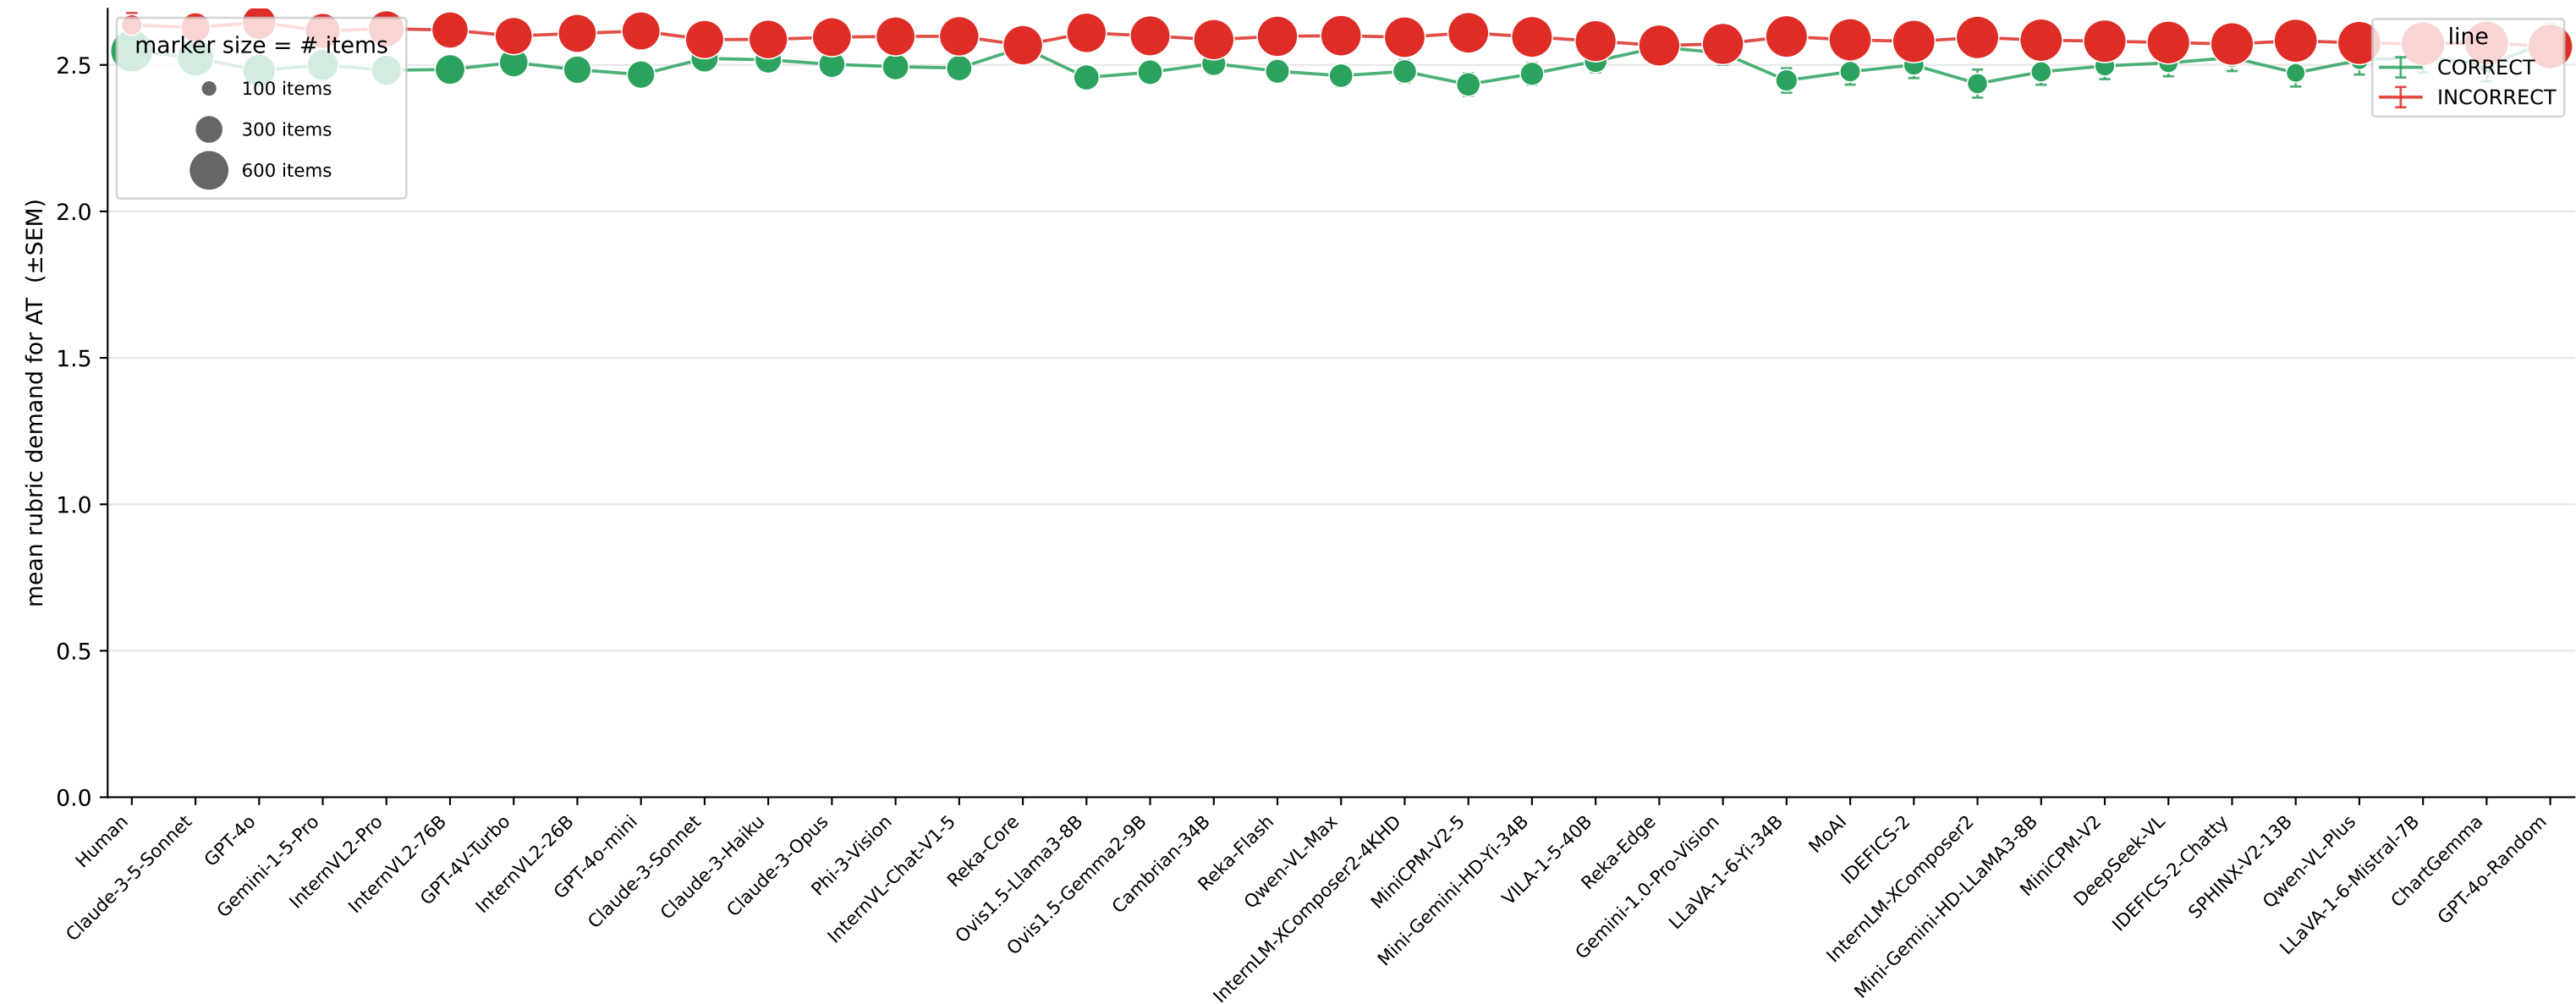


Models ordered by reasoning accuracy (left=highest). Marker area $\propto$ # correct/incorrect items behind each mean. Error bars = SEM ($SD / \sqrt{n}$) of demand within group.

GS — Gestalt and Shape Judgment (demand by reasoning correctness, per model, train)

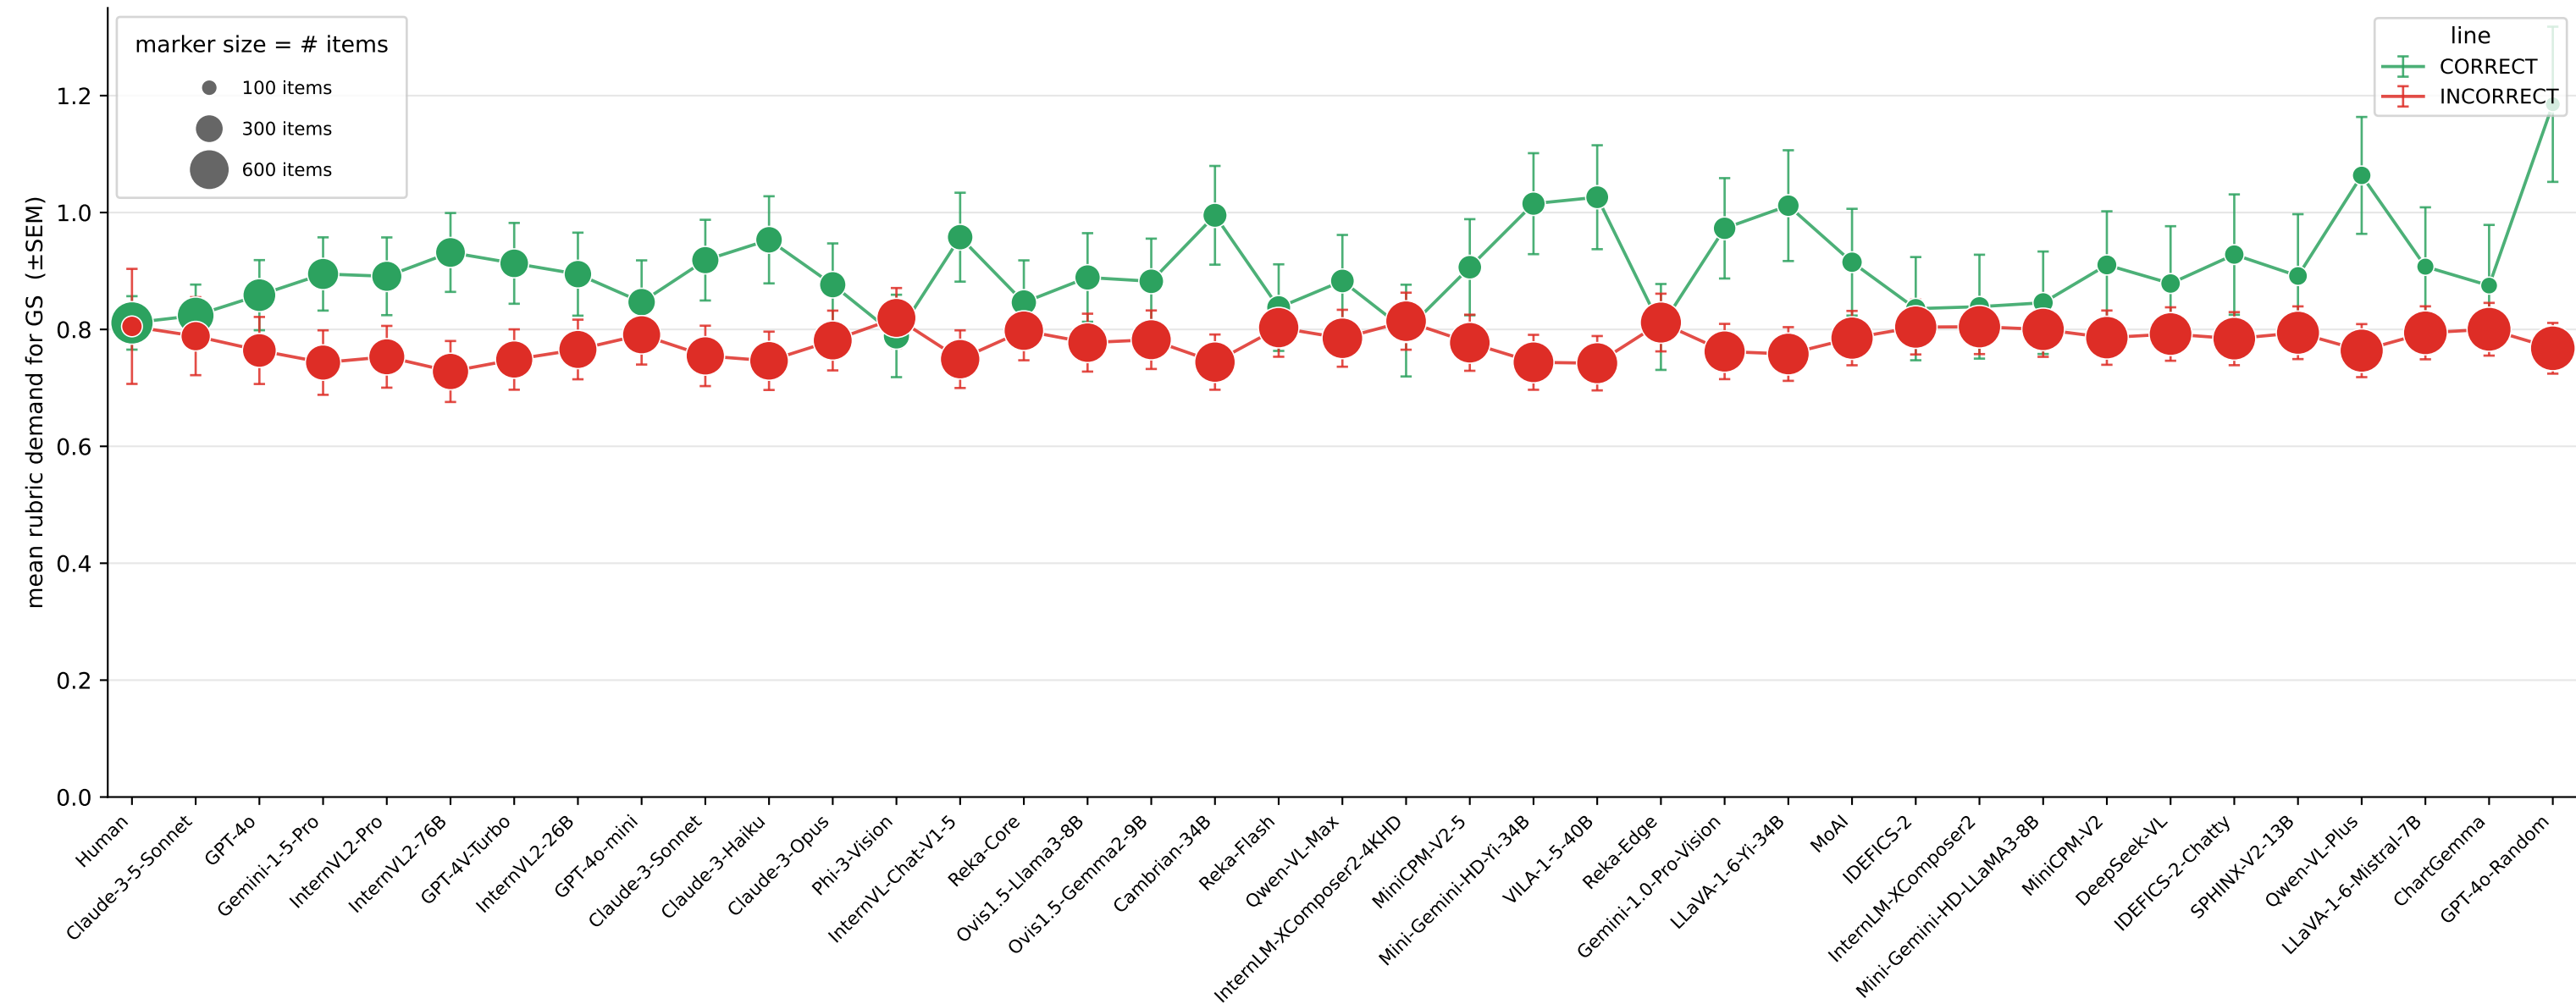


Models ordered by reasoning accuracy (left=highest). Marker area ∝ # correct/incorrect items behind each mean. Error bars = SEM (SD / √n) of demand within group.

QLI — Logical Reasoning (demand by reasoning correctness, per model, train)

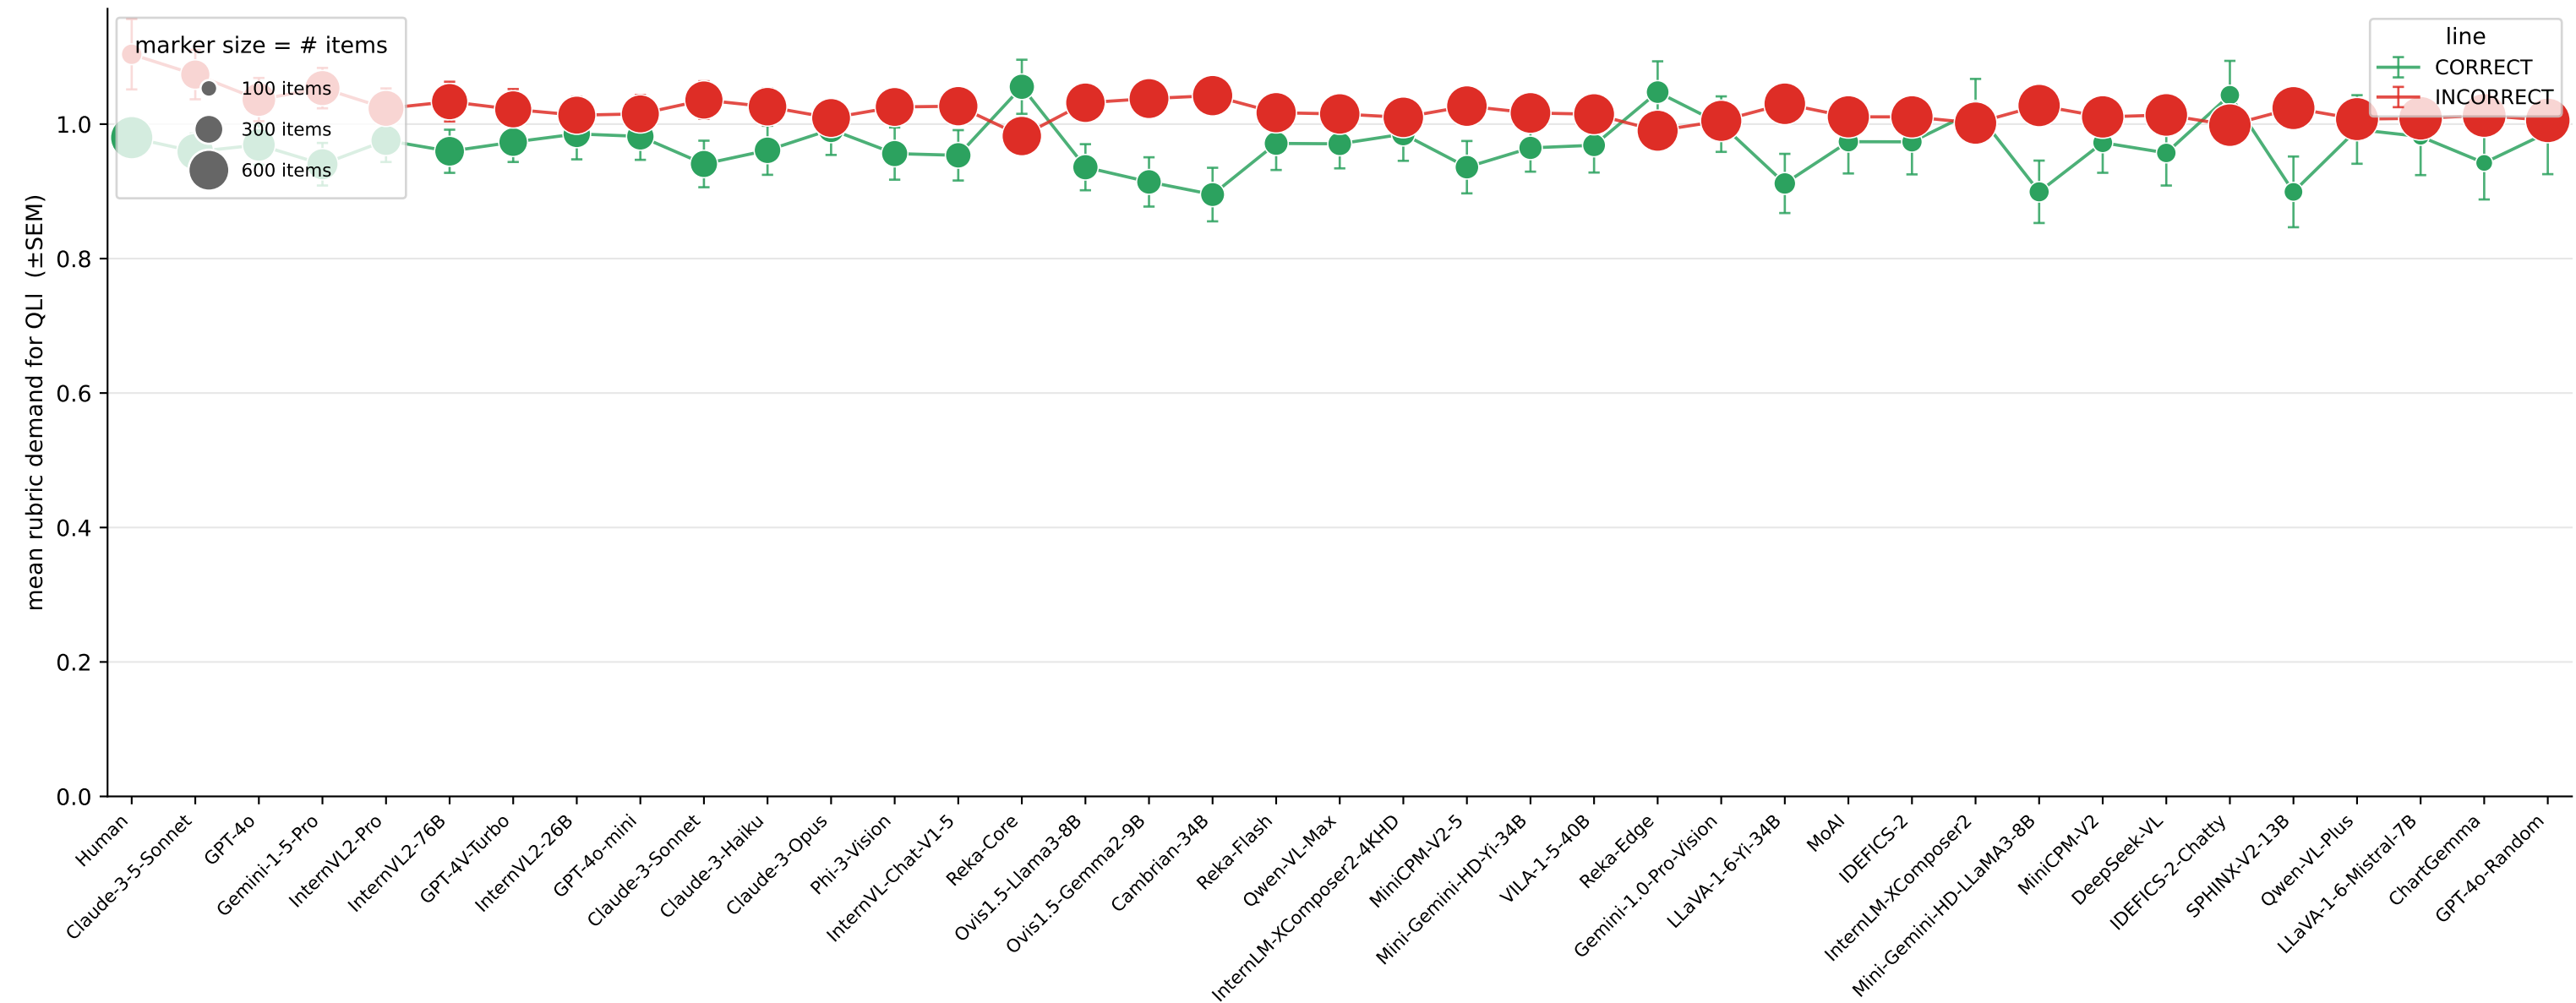


Models ordered by reasoning accuracy (left=highest). Marker area $\propto$ # correct/incorrect items behind each mean. Error bars = SEM ($SD / \sqrt{n}$) of demand within group.

KNf — Formal Sciences (demand by reasoning correctness, per model, train)

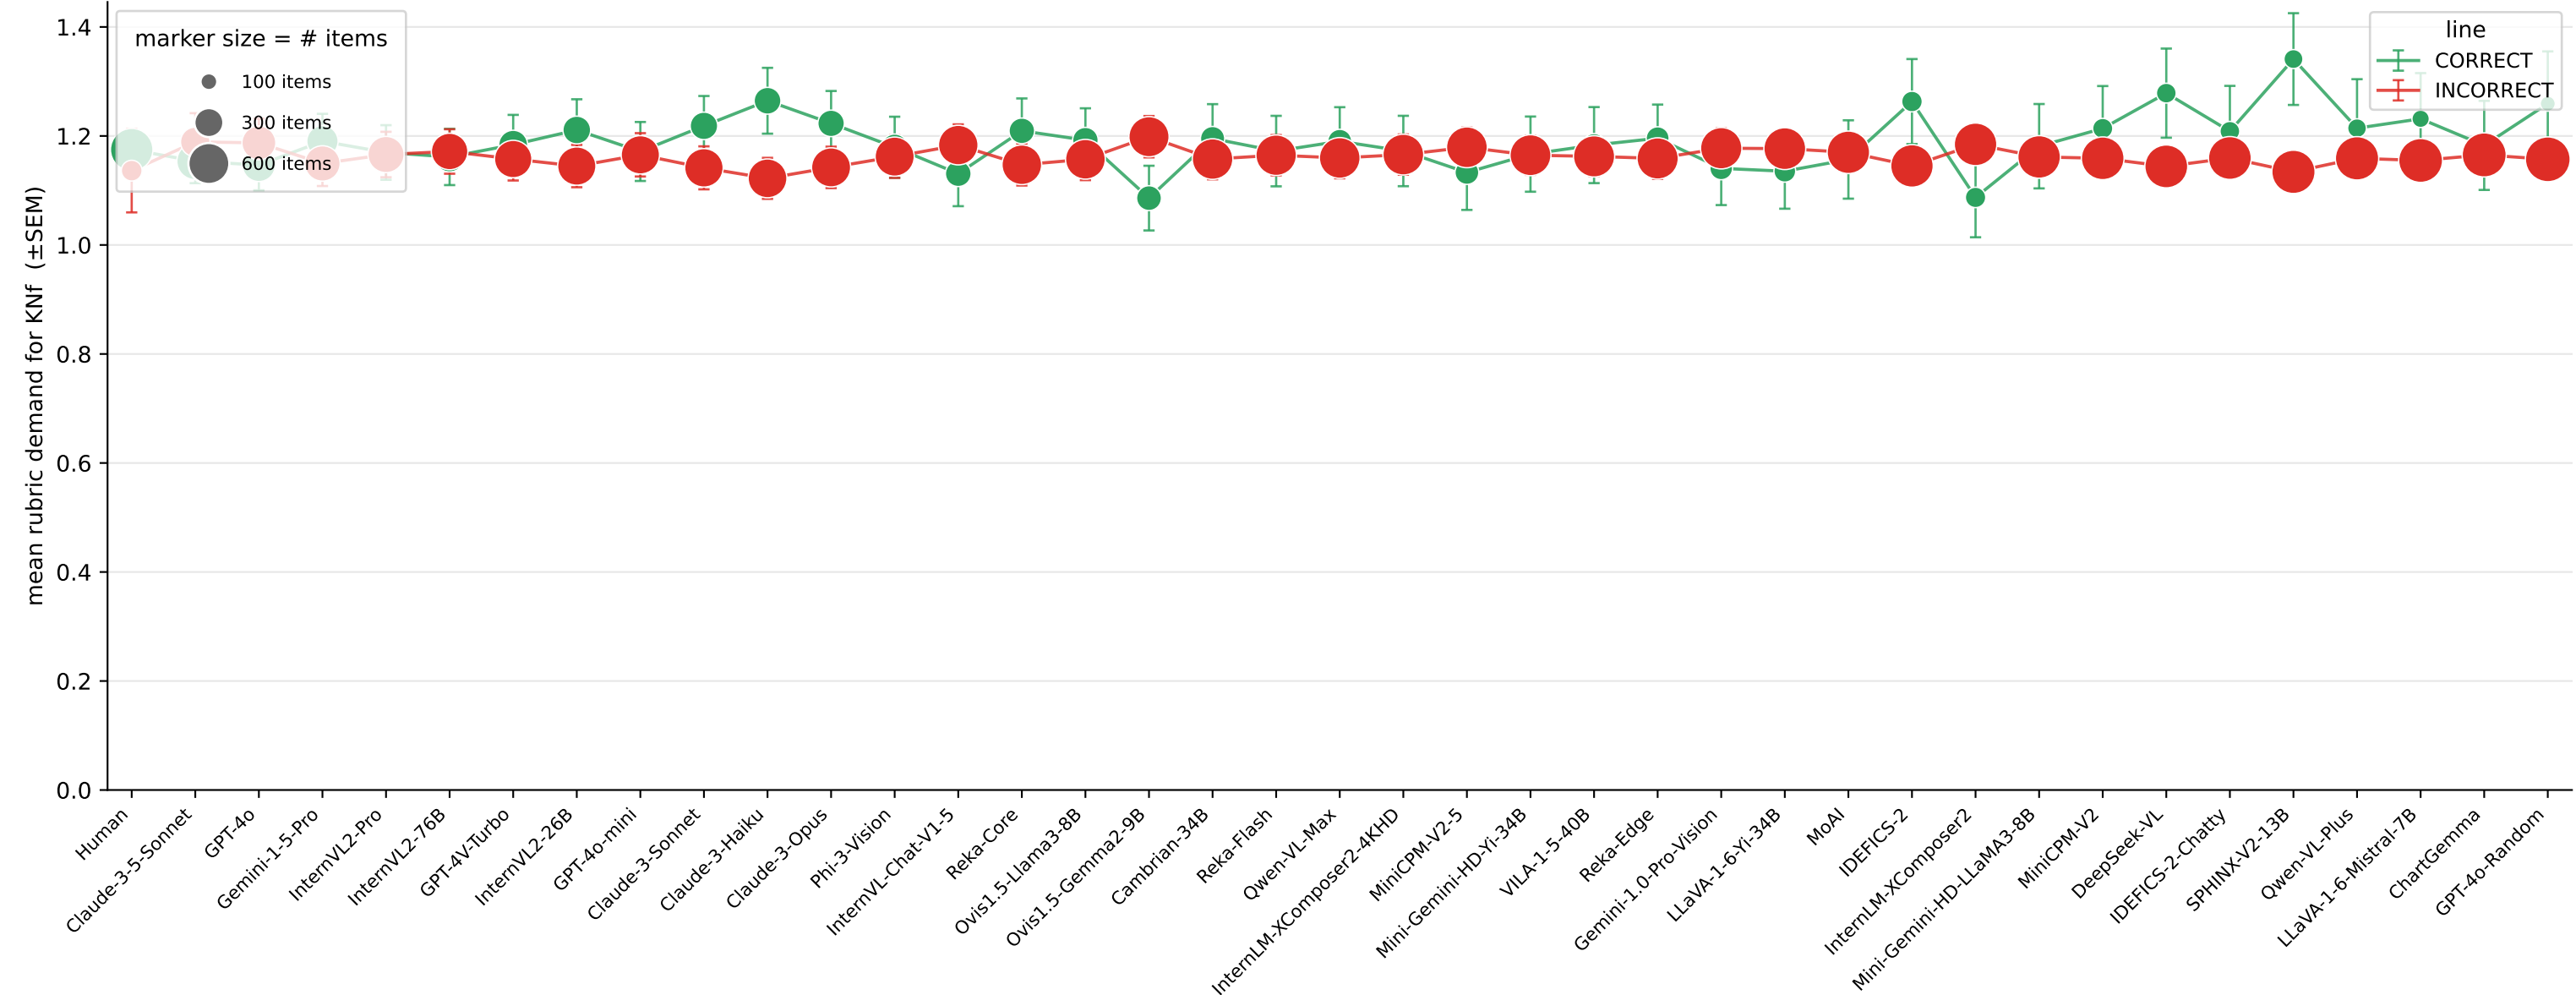


QLq — Quantitative Reasoning (demand by reasoning correctness, per model, train)

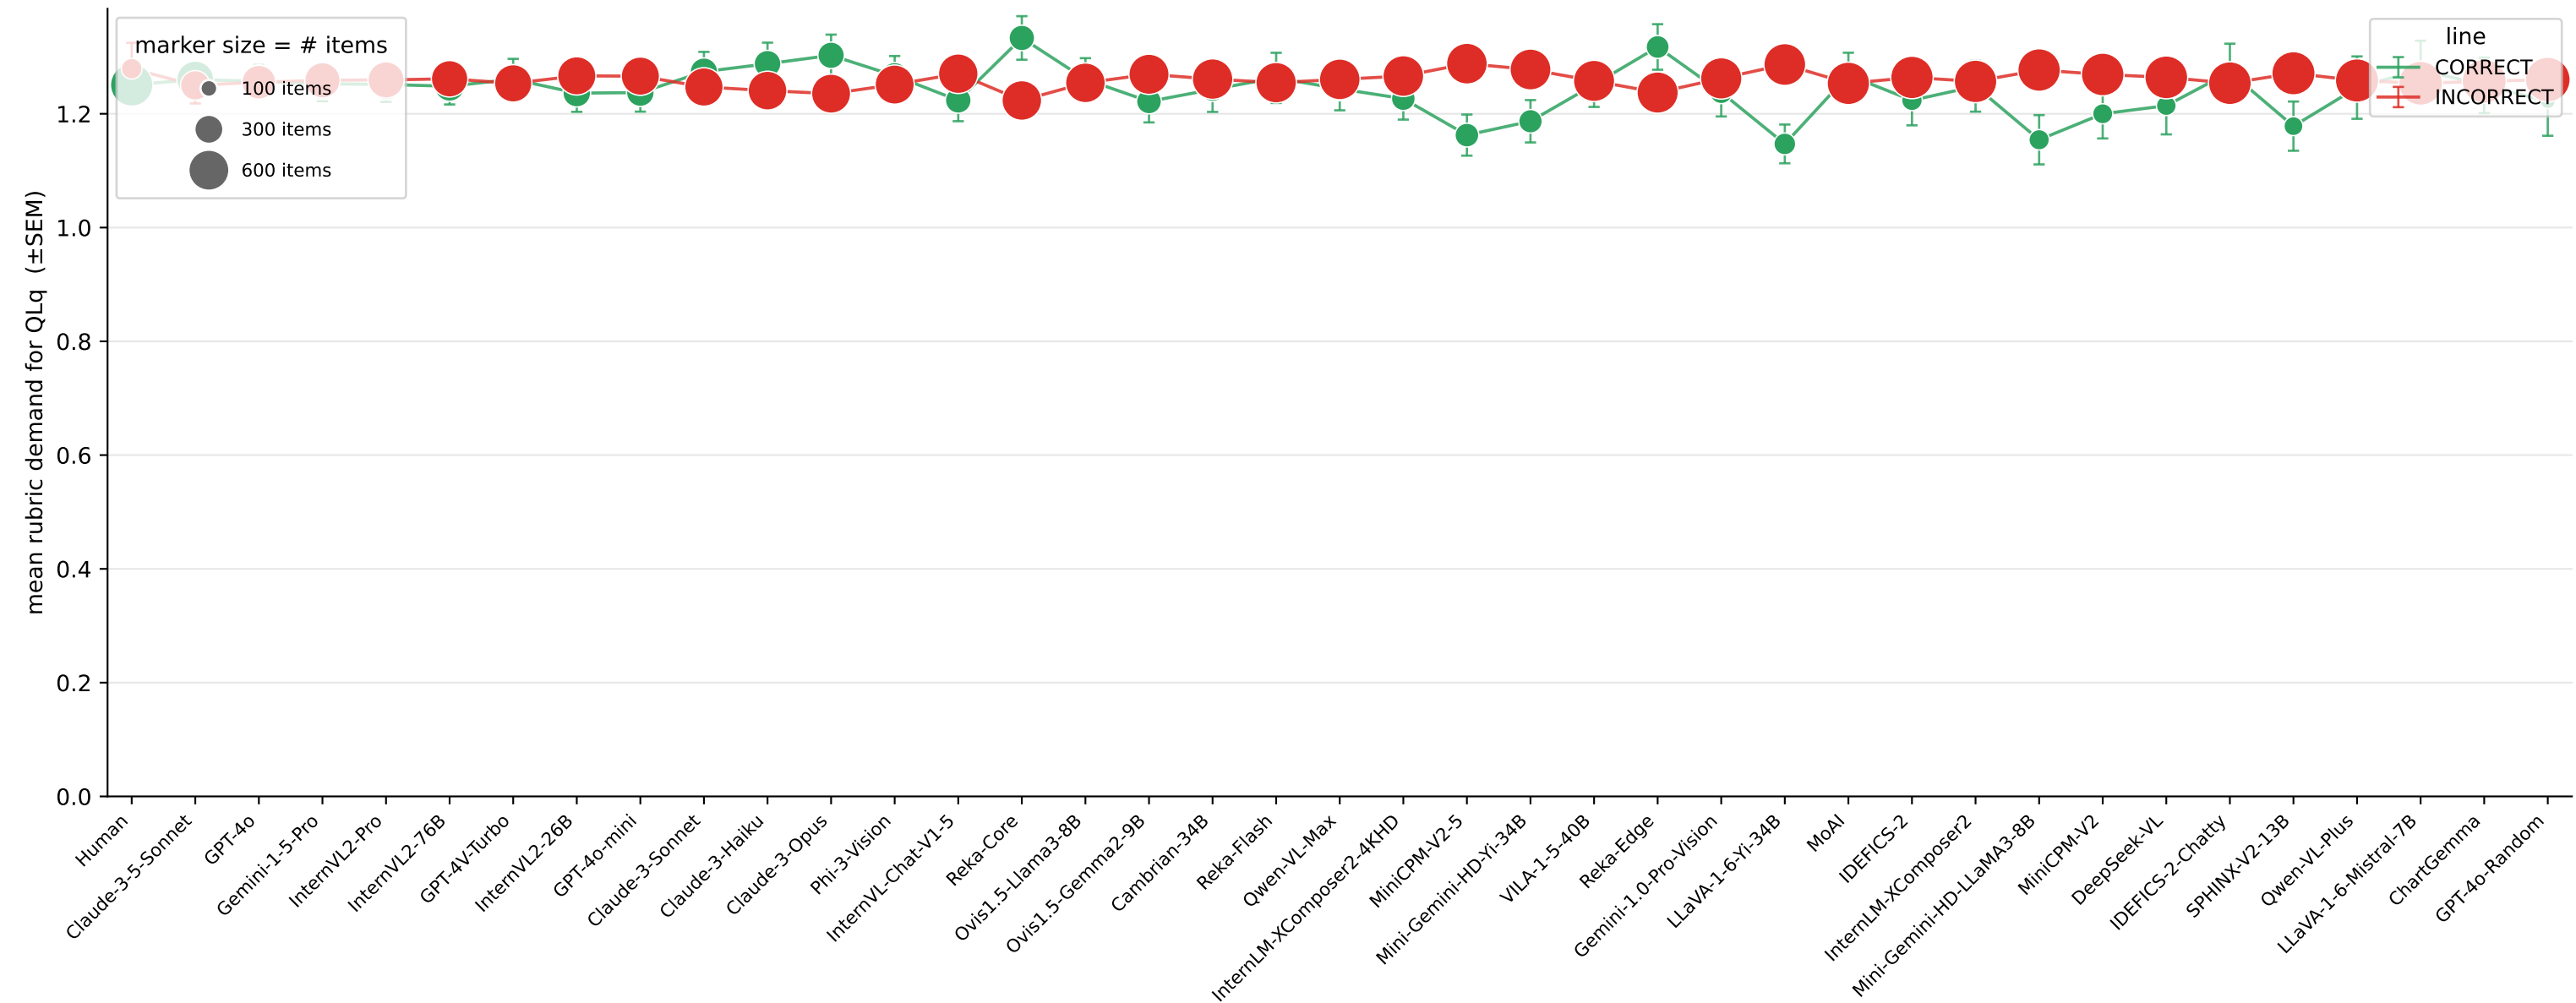

Models ordered by reasoning accuracy (left=highest). Marker area $\propto$ # correct/incorrect items behind each mean. Error bars = SEM ($SD / \sqrt{n}$) of demand within group.

CL — Conceptualisation, Learning, and Abstraction (demand by reasoning correctness, per model, train)

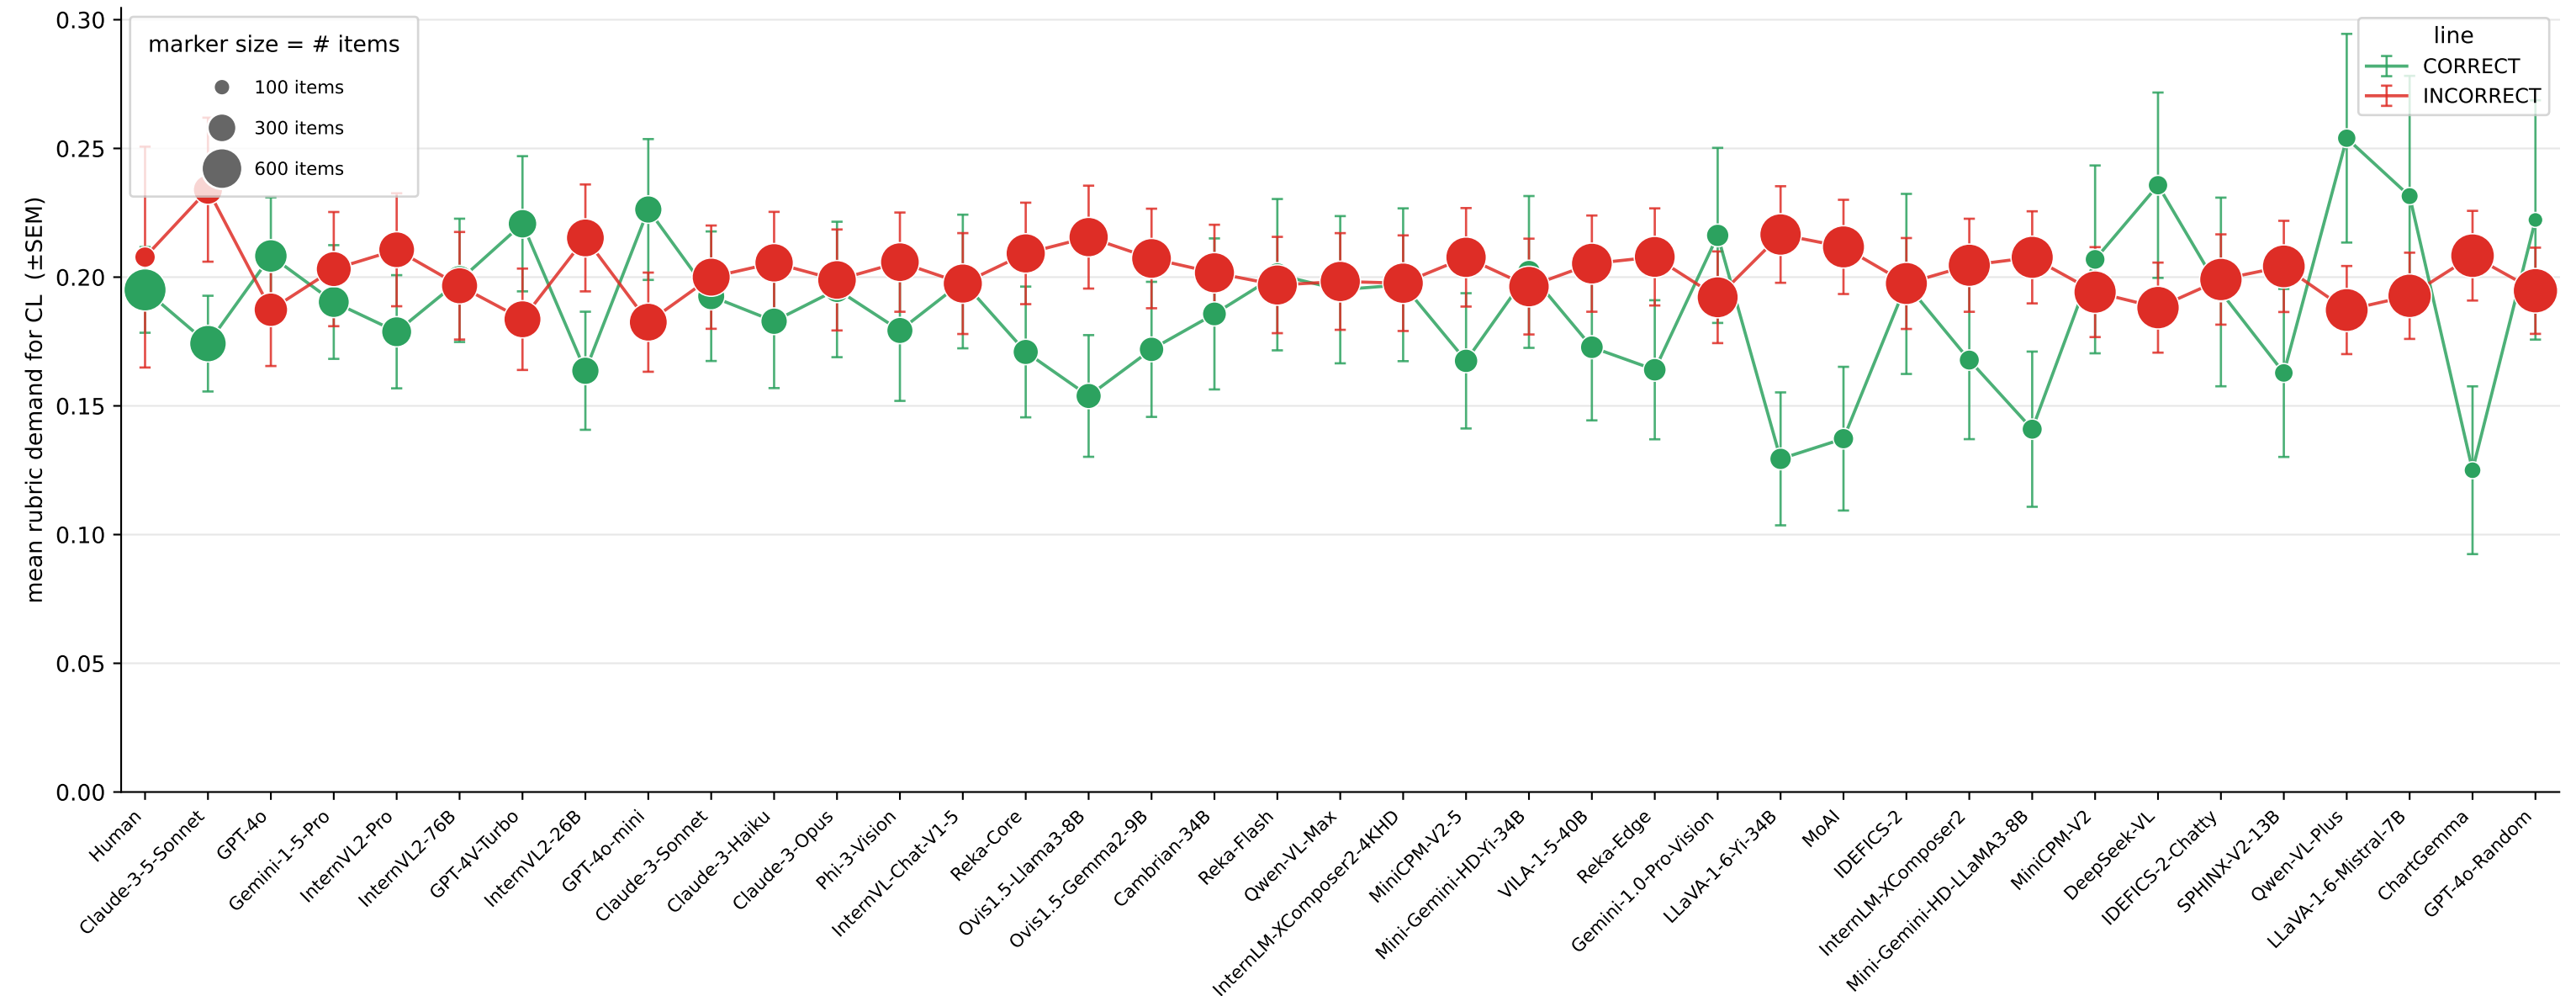Models ordered by reasoning accuracy (left=highest). Marker area $\propto$ # correct/incorrect items behind each mean. Error bars = SEM ($SD / \sqrt{n}$) of demand within group.