UX/UI DESIGN · IMPACT PROJECT

Vextaro: from research to a hand-off-ready app

Focus area: mobile UX and UI for an online shopping app, centered on a fit-confirmation checkpoint and an AI fit estimate.

Eric Ariel De La Paz · Flyrank AI internship · 8 weeks

OUTCOME 1

Fit-confirmation checkpoint

Shaped by 10+ competitive audits and added before the cart.

OUTCOME 2

Token-based design system

9 components, 35 variants, in Dark and Light modes.

OUTCOME 3

Engineering hand-off package

146 prototype links checked, 5 annotated screens, 15-check accessibility audit (7 pass, 5 fixed, 3 noted).

WEEK-BY-WEEK JOURNEY MAP

Eight weeks, from workspace to hand-off. Claude every week.

Week	Focus	Key deliverable	AI tools
1	Workspace, capstone, AI toolkit	Figma workspace and capstone scope	Claude
2	Persona, journey map, AI research synthesis	Marcus persona, emotional journey map	Claude
3	Users, jobs, and flows	Information architecture and user flows	Claude
4	“Kill Your Darlings” cut-down	Scope cut to the core flow	Claude
5	Wireframes: AI draft vs hand-built	Hand-built wireframes, fit-check flow	Claude, Figma AI agent
6	Design system foundations	Tokens, 9 components, 35 variants	Claude, Scripter scripts
7	Accessibility and polish pass	Hi-fi screens, 15-check audit, fixes	Claude, Scripter scripts
8	Hand-off package, final submission	Annotated screens, component index	Claude, Scripter scripts

AI INTEGRATION LOG

Three prompts that saved time, one that taught me more.

TIME-SAVER 1

Assemble screens from components

Asked for a Scripter script that builds 4 new screens and 9 state screens from existing components. I reviewed every screen.

TIME-SAVER 2

Name every layer for hand-off

Asked for a script that renames layers consistently, so engineers get clean names without hours of manual renaming.

TIME-SAVER 3

Compute contrast, write the audit


Gave Claude the tokens and asked for contrast ratios and an audit table. It exposed a failing Light-mode value, fixed at the token.

FAILED PROMPT · LESSON


An AI-written Scripter script called **figma.createAutoLayout**, which does not exist, and failed. I swapped in a createFrame helper. **Lesson:** run AI scripts on one small frame first, then scale up.

KEY ARTIFACTS · 1 OF 2


Research and wireframes

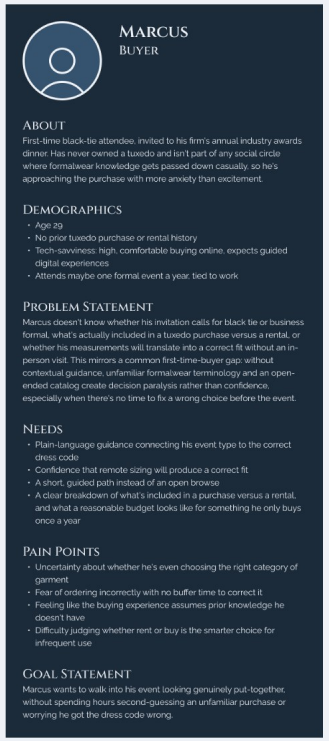

Persona: Marcus

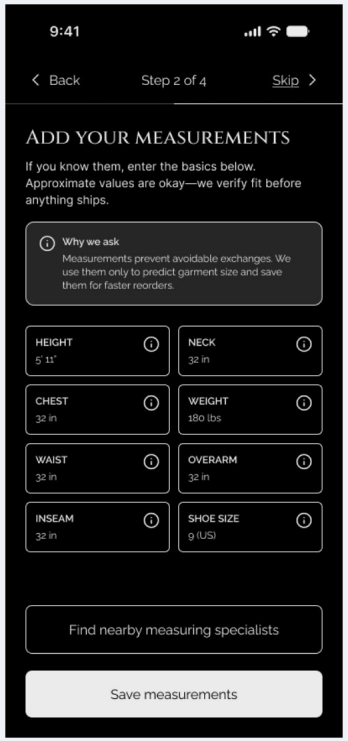

Fit-check wireframe

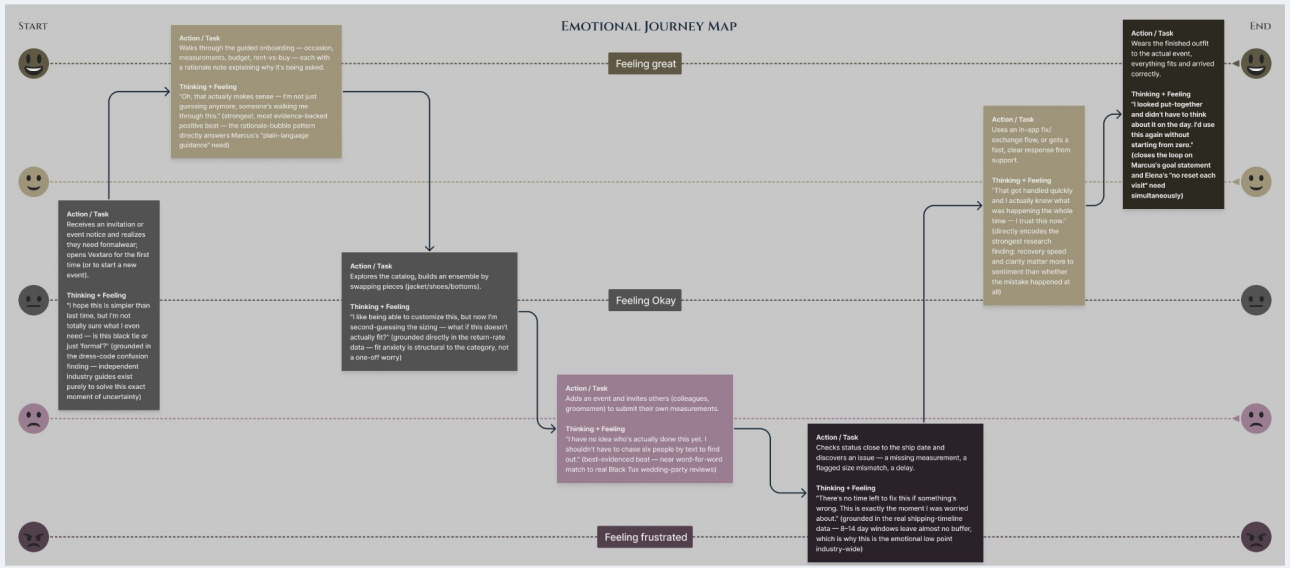


Emotional journey map

KEY ARTIFACTS · 2 OF 2


High-fidelity screens and the hand-off




Home

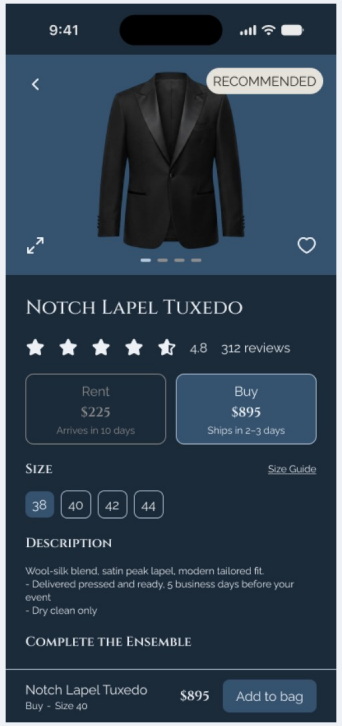

Product

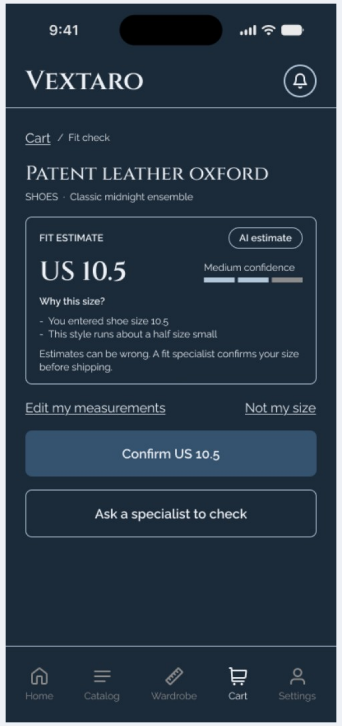

AI fit estimate

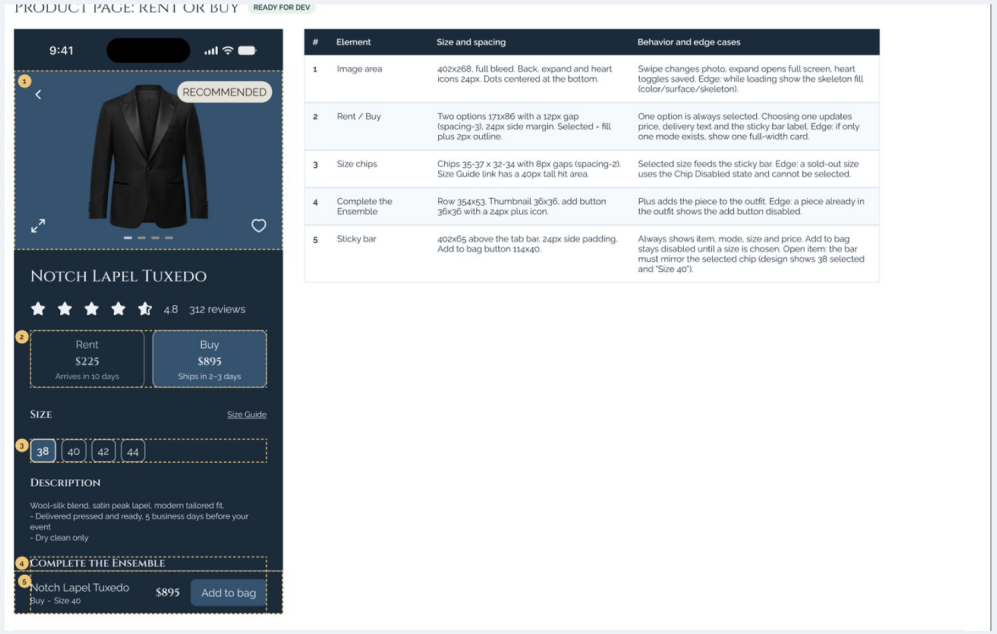

Hand-off: annotated product page

TANGIBLE ASSETS SHIPPED

One Figma file, eight deliverables

Every link opens the Vextaro Internship Capstone file in Figma.

Research	Persona, journey map, audits	Open in Figma
IA and flows	Sitemap and user flows	Open in Figma
Wireframes	Hand-built, including fit check	Open in Figma
Design system	Tokens, 9 components, 35 variants	Open in Figma
Prototypes	Linked screens, 146 links checked	Open in Figma
Accessibility audit	15 checks: 7 pass, 5 fixed, 3 noted	Open in Figma
Hand-off package	Component index, assets, open items	Open in Figma
Annotated screens	5 screens with engineering notes	Open in Figma

REFLECTION

Three learnings and one hard problem

1. Fix it at the token level

One contrast fix in a token corrected every component that used it.

2. AI builds fast, I decide

I rejected an AI type-scale rescale, a full-width Swap button, and AI product imagery.

3. Design the unhappy path

Uncertain, slow, and correction states matter as much as the happy path.

MAJOR CHALLENGE

Making an AI fit estimate trustworthy in an app with no AI.

The screen says “AI estimate”, shows a confidence meter with words, explains “Why this size?”, and adds a disclaimer. Users can Edit measurements, say Not my size, or Ask a specialist. Uncertain, slow, and correction states are designed and documented. Not yet user-tested, so trust is a design hypothesis.