



SPECCHIO Virtualbox

Version: 3.3.0.0
Date: 24.09.2017
Status: Approved
Authors: A. Hueni (UZH)
File: SPECCHIO_VM.docx
Pages: 23

Classification:
Distribution: SPECCHIO Users



1 Contents

1	Contents	2
2	Introduction	3
2.1	Document scope.....	3
2.2	Intended audience	3
2.3	SPECCHIO ownership and access	3
2.4	Copyright and licensing.....	3
2.5	For Further Information	3
3	Installation, Configuration and Usage	4
3.1	Prerequisites	4
3.2	Installing the SPECCHIO Virtual Machine.....	4
3.3	Logging into the Virtual Machine	4
3.4	Virtual Machine Configuration	4
3.5	Accessing SPECCHIO via the Web Interface	5
3.6	Launching the SPECCHIO Application.....	6
3.7	Creating a User Account	7
3.8	Networking Access to the SPECCHIO Server.....	8
3.9	Accessing SPECCHIO from the Host Machine	10
3.10	Accessing SPECCHIO from Outside the Virtual Machine.....	11
3.11	Accessing SPECCHIO from Outside the Virtual Machine using the VM Name	12
3.12	Accessing SPECCHIO VM in the Field without any existing Network.....	13
3.13	Mounting a host folder into the VM	15
3.14	Handling larger database requirements	15
4	Upgrading the SPECCHIO System	16
4.1	Server and Client Software Upgrades.....	16
4.1.1	Automatic Upgrade	16
4.1.2	Manual Upgrade.....	17
4.2	SPECCHIO Database Upgrades	18
Appendix A:	Change History	20
Appendix B:	Installing the Automatic Updating Script.....	21
Appendix C:	Bridged Networking under MacOS – Ethernet and WiFi	22

2 Introduction

This document introduces the SPECCHIO Virtualbox. It is a complete SPECCHIO server and client installed under a virtual CentOS 6.4 installation using Virtualbox.

2.1 Document scope

This Guide details operation of the Virtualbox installation of SPECCHIO only.

2.2 Intended audience

SPECCHIO users who want to run the full system locally, either on their personal machines or on a server at their own institution and who do not want to go through the hassle of a full system installation themselves.

2.3 SPECCHIO ownership and access

SPECCHIO was originally built by the Remote Sensing Laboratories at the University of Zurich, and extended by Intersect for the School of Earth and Environmental Sciences at the University of Wollongong.

2.4 Copyright and licensing

SPECCHIO is licensed under the Creative Commons Attribution-ShareAlike 3.0 Unported Licence. Therefore its source is readily available for inspection and development. It can be found in LICENCE.html and at <http://creativecommons.org/licenses/by-sa/3.0/>.

2.5 For Further Information

Please refer to the following documents for more information about SPECCHIO. Unless otherwise stated, they can be found in the SPECCHIO Installation kit.

SPECCHIO_ReleaseNotes.pdf can be found in each Installation Kit and provides installation instructions for the SPECCHIO Client.

SPECCHIO_Tutorial.pdf provides instruction in the operation of key areas of the SPECCHIO Client.

SPECCHIO_ServerInstallation.pdf provides system administrators with information to assist in managing and maintaining a SPECCHIO Server System.

SPECCHIO Web Site (www.specchio.ch) General information about SPECCHIO. Some of this information may be related to other non-UOW versions of SPECCHIO.

SPECCHIO UoW (<https://specchio.uow.edu.au>) Installation kits for University of Wollongong version of the SPECCHIO Client and documentation for that version.

SPECCHIO DC10 GitHub (<https://github.com/IntersectAustralia/dc10>) Source code for the University of Wollongong version of SPECCHIO.

SPECCHIO GitHub (<https://github.com/ahueni/SPECCHIO>) Source code for the community version of SPECCHIO, currently developed under the lead of RSL (University of Zurich).

3 Installation, Configuration and Usage

3.1 Prerequisites

Download the SPECCHIO virtual machine image (~4.2 GB) from http://specchio.ch/vm_download.php (or use any other SPECCHIO image that you have received).

Install the Virtualbox on your computer (<https://www.virtualbox.org>).

Install the Virtualbox Extension Pack (<https://www.virtualbox.org>): this will, among other things, give you access to USB ports, better mouse support.

3.2 Installing the SPECCHIO Virtual Machine

Caveat: this virtual machine has been setup using a MacOS 10.9 system as host and the Virtualbox extension pack was installed. Non-MacOS host installations may have to be slightly reconfigured.

Double-click the SPECCHIO-3.X.X.X-VM.ova file and it should show up as virtual machine in the Virtualbox Manager.





3.3 Logging into the Virtual Machine

Login as user 'centos' using the password 'reverse'.

3.4 Virtual Machine Configuration


Depending on your host machine, you may have to configure the keyboard to be used by the VM. To do this, select 'System Tools'-'Settings'-'Keyboard' from the menu

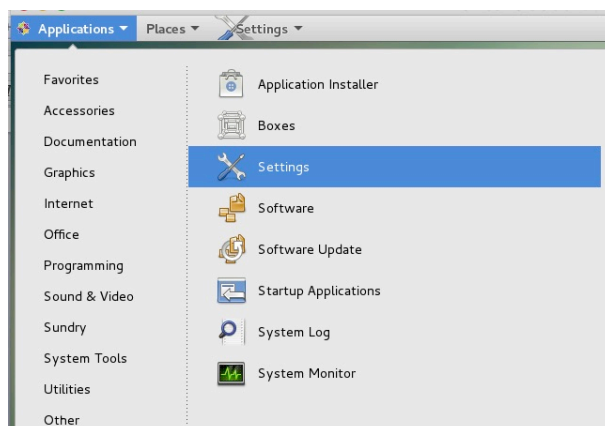

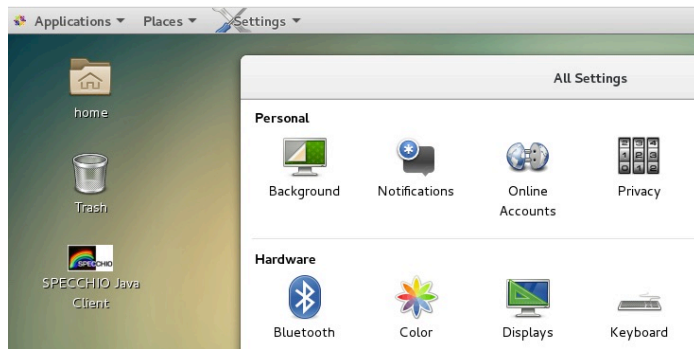


3.5 Accessing SPECCHIO via the Web Interface

SPECCHIO features a new interface via a web browser, starting with version 3.2.1.6. The SPECCHIO VM comes pre-installed with the web interface. To start it open a browser in the VM and enter localhost:8080 as address:

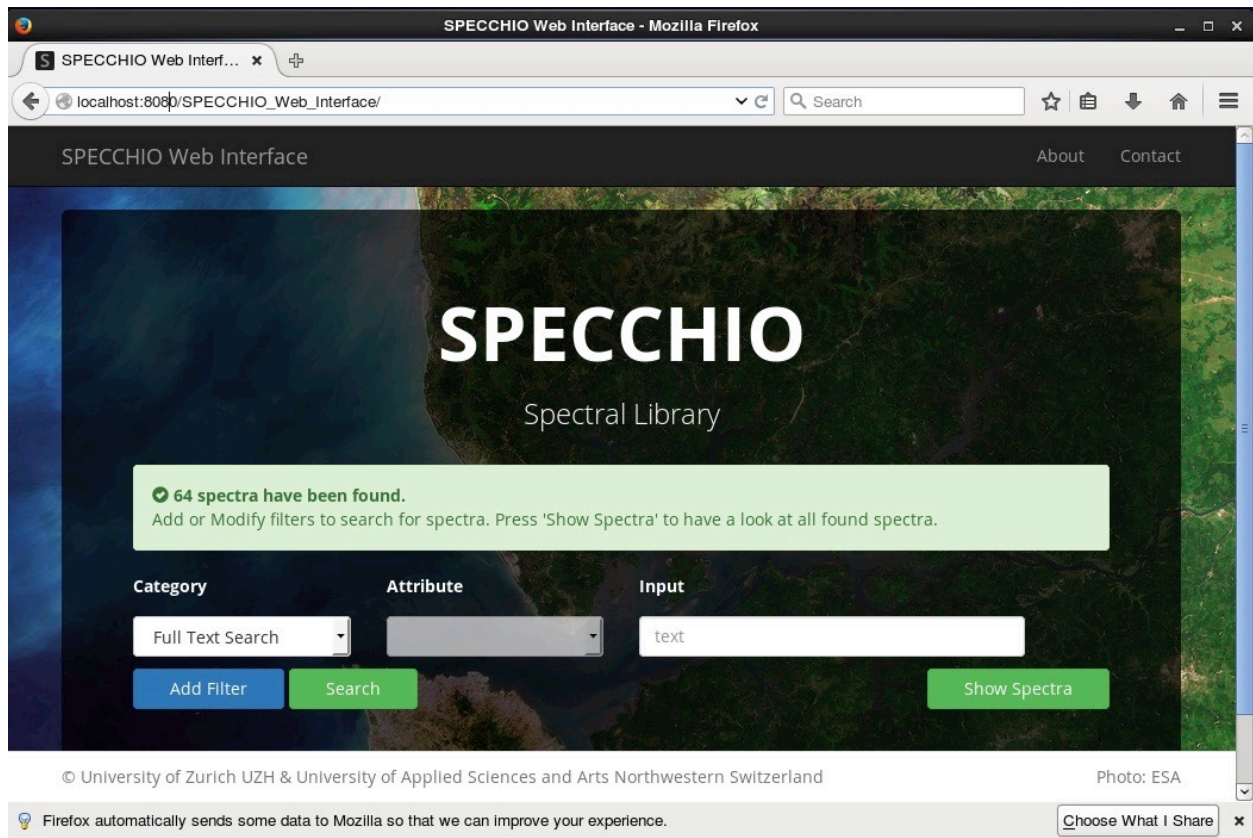

To access the web interface from host system, no further configurations are required, as port 8080 is by default forwarded to the SPECCHIO VM. Hence, in your host system type localhost:8080 into the address field:

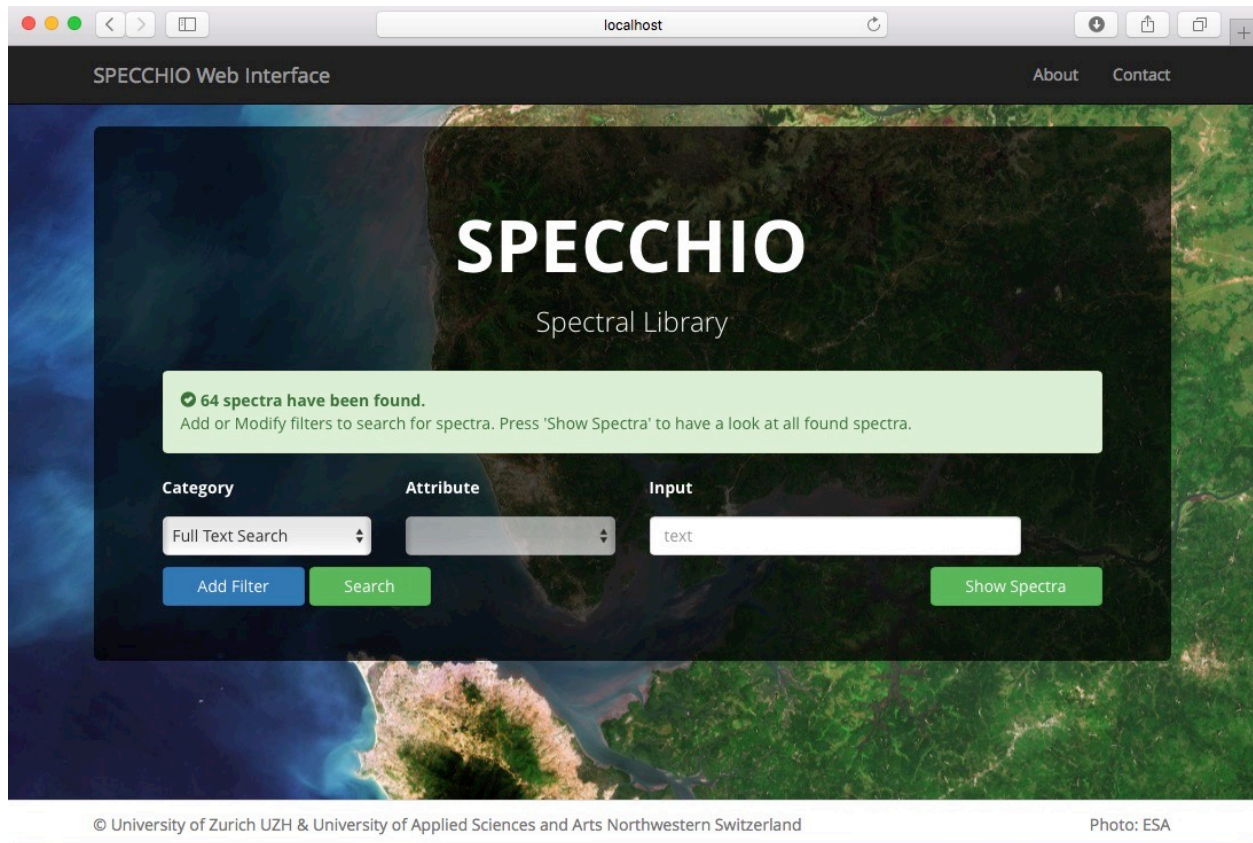

3.6 Launching the SPECCHIO Application

Double-click the SPECCHIO Client App icon on the desktop and a few seconds later the SPECCHIO application is launched.¹






Figure 1: SPECCHIO client launching icon on the desktop

Use the existing connection using port 8080 to connect to the database as SPECCHIO database administrator (sdb_admin).

¹ The SPECCHIO application is installed in /usr/local/SPECCHIO

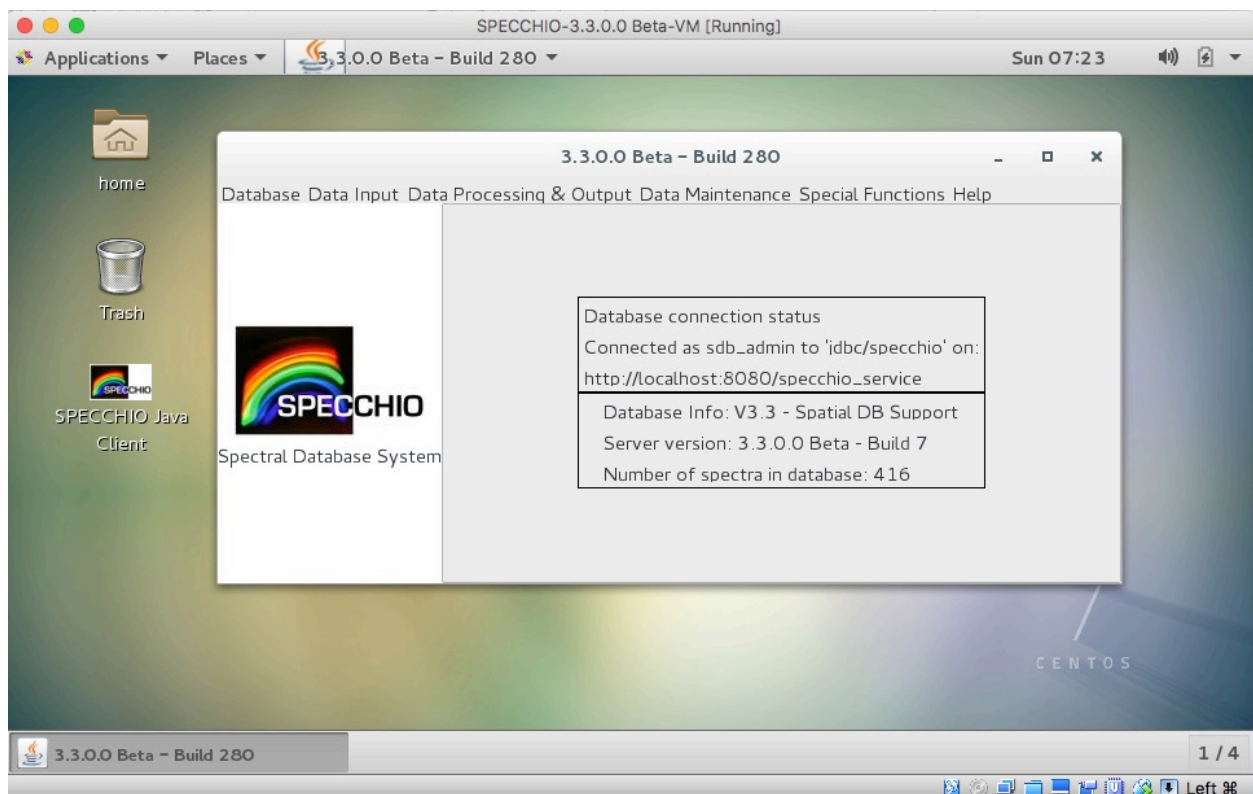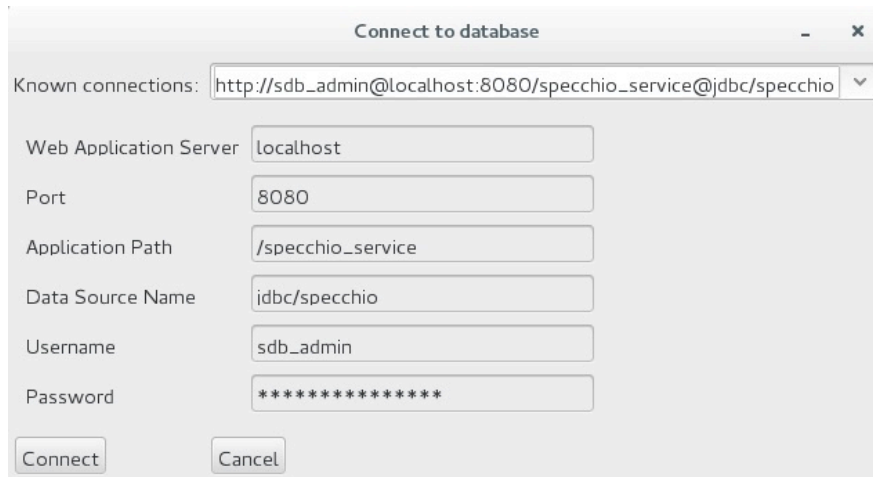

3.7 Creating a User Account

Note: this SPECCHIO server is preconfigured for use with the sdb_admin user. Adding a new user is not strictly required.

User Accounts can be created by connecting to the https port 8181.

This works without any further configuration from within the SPECCHIO VM.

Connecting from outside of the VM with a SPECCHIO Client to port 8181 requires a DNS that can resolve specchiovm2.specchio.ch to the SPECCHIO VM IP (see also 3.10). Note that the connection **must** be done via specchiovm2.specchio.ch and not via an IP; this is a restriction imposed by the certificate definition used by the SPECCHIO server.

The easiest solution is therefore to create the account for a SPECCHIO client installed on a different machine is using the SPECCHIO client within the VM and then copy the

generated connection string from the db_config file and paste it into the db_config file of the SPECCHIO application installed on the target machine.




3.8 Networking Access to the SPECCHIO Server


The SPECCHIO server running inside the VM can be accessed from the network. The following options exist:

- Connect to SPECCHIO server from the host machine, i.e. the machine running the VM (see 3.9)
- Connect to SPECCHIO server from a machine different from the host machine (see 3.10)


The SPECCHIO VM comes preconfigured in the NAT networking mode. Connections to the VM are established via port forwarding rules.

By default the localhost, i.e. the host machine is preconfigured for the port forwarding. To open the port forwarding option dialogue, open the 'Settings' dialogue of your VM, then select the 'Network' tab and display the 'Advanced' settings, then click on the 'Port Forwarding' button.

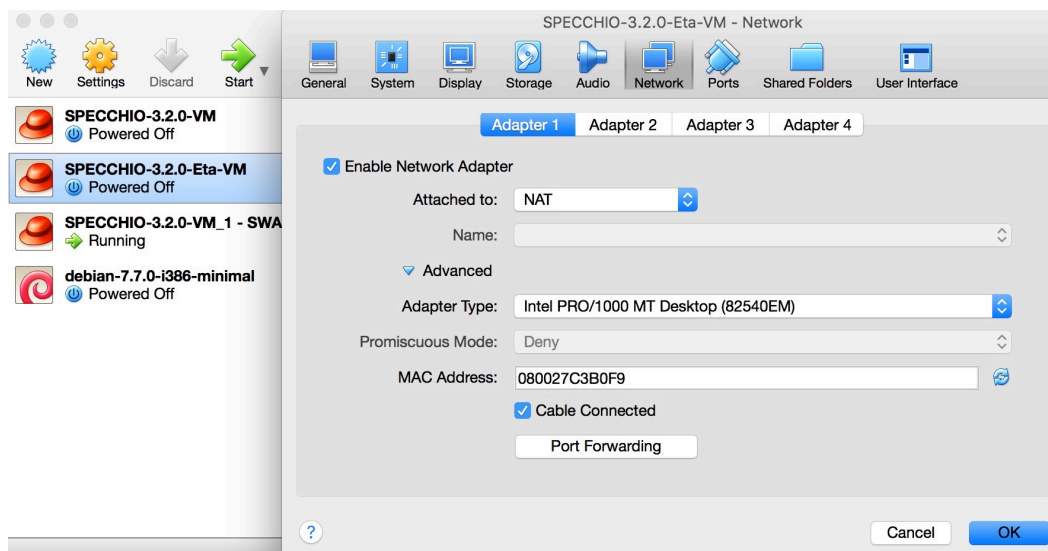

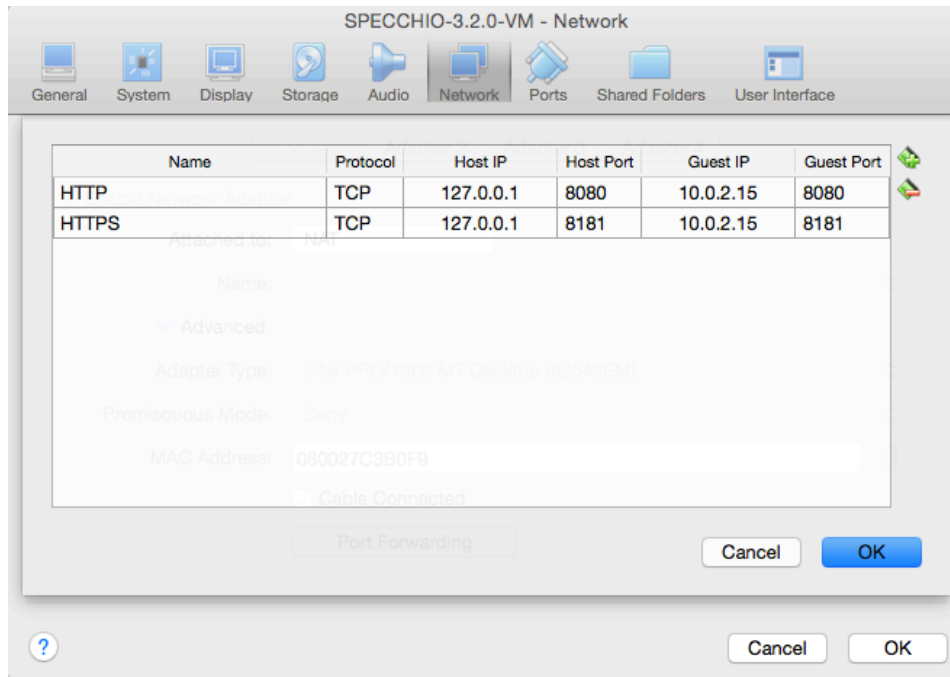


If access to the SPECCHIO VM is required from other machines in the network, then the forwarding rule must be defined with the IP of the host machine. The port forwarding defines which packets reaching a port on the host shall be forwarded to a certain port in the VM. The example below defines two forwarding rules (a) all connections on the host via port 8080 or 8181 are forwarded to the VM, and (b) all connections from external to the host (which in this example got the dynamic IP 130.60.16.221) on port 8080 or 8181 are forwarded to the VM. Note that the guest IP remains the same once the networking is configured as NAT. The only problem that presents itself is the changing IP of the host machine. Ideally the host has a static IP, otherwise, once the IP is assigned via DHCP, the port forwarding table must be updated. If the IP is defined by DHCP then the rules must be adapted each time the IP changes, usually a re-lease is triggered by disconnecting the machine from the network and not reconnecting for a certain time. Thus, the easiest solution is to keep the host machine running the SPECCHIO VM connected to the network as long as it must be accessible via the network. Optionally, a fix IP would solve this issue once and for all, but this may only be feasible for servers.

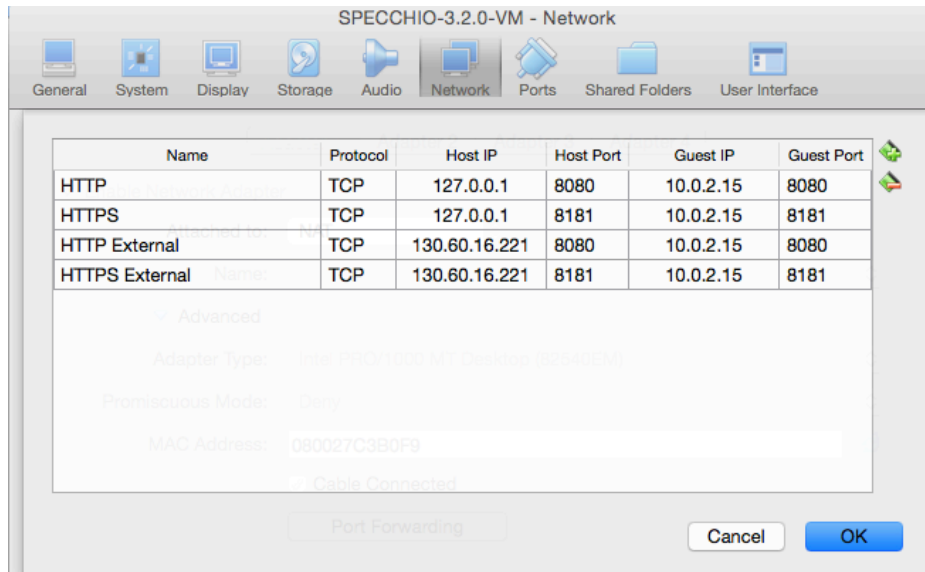


3.9 Accessing SPECCHIO from the Host Machine

You can connect to the virtual SPECCHIO server from the hosting machine using the SPECCHIO Client.

Open the SPECCHIO db_config.txt file in the Virtual Machine by selecting 'Edit db_config file' from the SPECCHIO menu and copy the http connection string to the db_config file on the host machine.

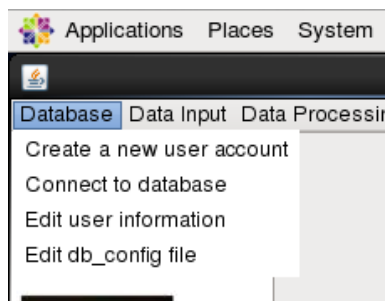

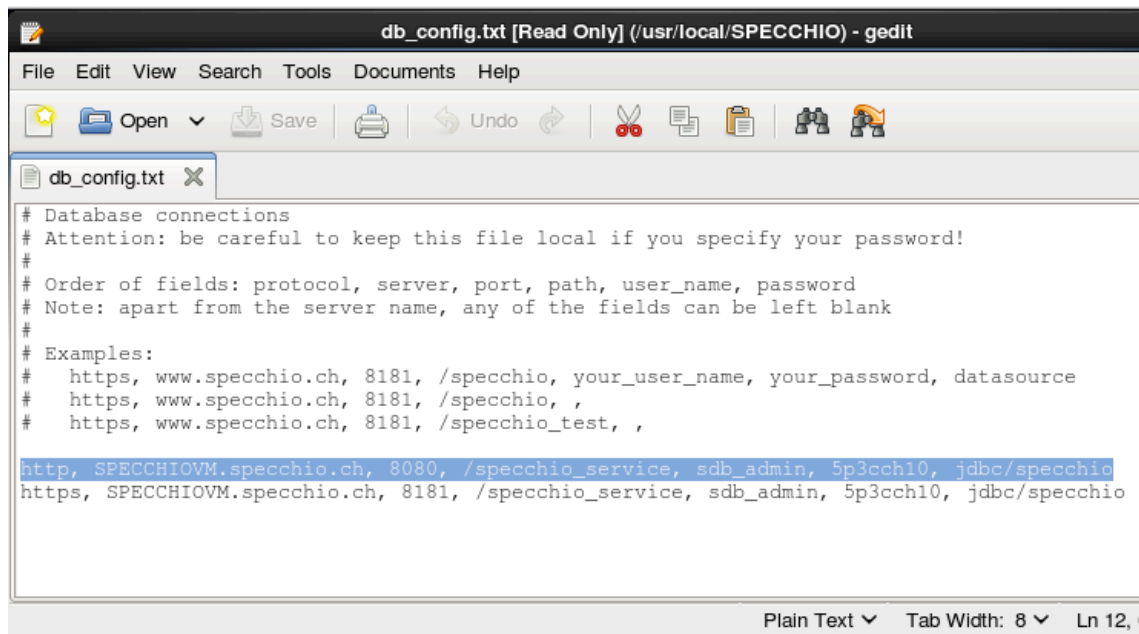


```
# Database connections
# Attention: be careful to keep this file local if you specify your password!
#
# Order of fields: protocol, server, port, path, user_name, password
# Note: apart from the server name, any of the fields can be left blank
#
# Examples:
# https, www.specchio.ch, 8181, /specchio, your_user_name, your_password, datasource
# https, www.specchio.ch, 8181, /specchio, ,
# https, www.specchio.ch, 8181, /specchio_test, ,
http, SPECCHIOVM.specchio.ch, 8080, /specchio_service, sdb_admin, 5p3cch10, jdbc/specchio
https, SPECCHIOVM.specchio.ch, 8181, /specchio_service, sdb_admin, 5p3cch10, jdbc/specchio
```

In the db_config file on the host machine replace the server name 'specchiovm2.specchio.ch' with 'localhost':

```
http, localhost, 8080, /specchio_service, sdb_admin, 5p3cch10_SDB_VM, jdbc/specchio
```

Connect to the SPECCHIO server running in the Virtual Machine:

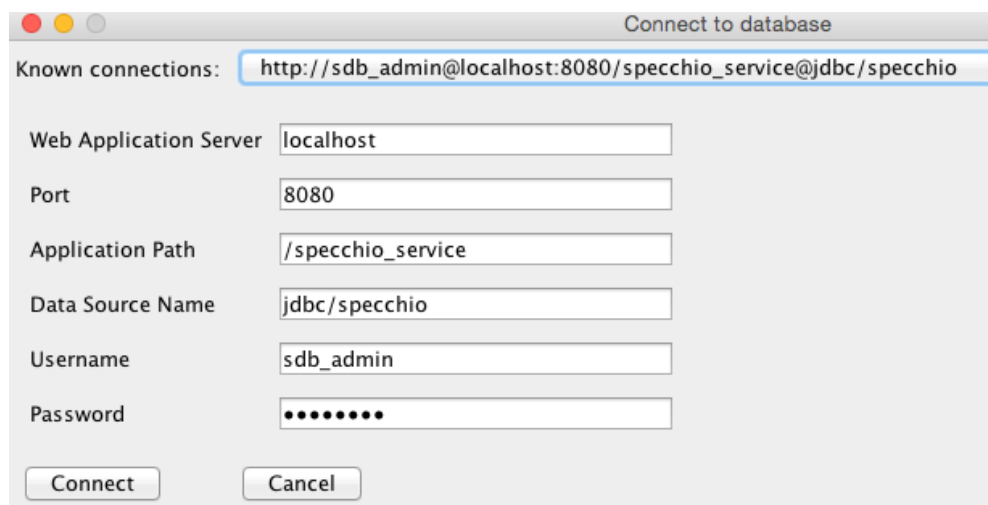

Connect to database

Known connections: `http://sdb_admin@localhost:8080/specchio_service@jdbc/specchio`

Web Application Server:

Port:

Application Path:

Data Source Name:

Username:

Password:

3.10 Accessing SPECCHIO from Outside the Virtual Machine

Connecting from outside² of the VM with a SPECCHIO Client requires a connection via the IP of the host machine, the connection is then automatically forwarded to the VM³.


² The host machine itself qualifies as well as 'outside' of the VM; i.e. the connection option described here works as well for the host machine, but using localhost as described in section 3.9 is the better option.

³ Ensure that the forwarding rules are defined in the VM.

Copy the connection details as described in section 3.9. In the db_config file on the external machine replace the server name 'specchiovm2.specchio.ch' with the IP of the host, e.g. for 130.60.16.221:

```
http, 130.60.16.221, 8080, /specchio_service, sdb_admin, 5p3cch10_SDB_VM, jdbc/specchio
```

Connect to the SPECCHIO server running in the Virtual Machine:

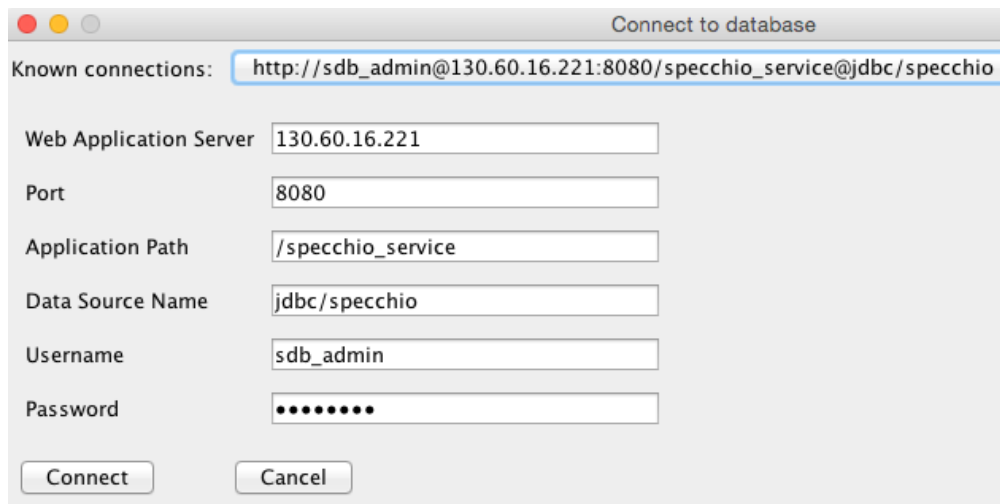

3.11 Accessing SPECCHIO from Outside the Virtual Machine using the VM Name

Connecting from outside of the VM with a SPECCHIO Client using the specchiovm2.specchio.ch machine name requires a DNS that can resolve specchiovm2.specchio.ch to the SPECCHIO VM IP. Using the VM name 'specchiovm2.specchio.ch' instead of the IP is mandatory if a HTTPS connection is required, e.g. to create a new user account ⁴.

Once the port forwarding for external connections to the host is defined, the hosts file of a client machine wishing to connect to the SPECCHIO VM must be updated to map the host IP to the SPECCHIO VM hostname. On a Mac, this would be defined in the /etc/hosts file, on Windows, the C:\Windows\System32\drivers\etc\hosts file is used. Of course, this gets inconvenient if the host IP changes frequently.

Table 1: Edited hosts file to map the IP of the host running the VM to specchiovm2.specchio.ch


```
##
# Host Database
#
# localhost is used to configure the loopback interface
# when the system is booting. Do not change this entry.
##
```

⁴ Essentially only required to create a new SPECCHIO user account; all other connections can be made via HTTP on port 8080

```
127.0.0.1    localhost
255.255.255.255 broadcasthost
::1         localhost
fe80::1%lo0 localhost
130.60.16.221 specchiovm2.specchio.ch
```

To be able to connect via HTTPS the SPECCHIO App on non-host machines must have the correct keystore file that contains the certificate of the SPECCHIO VM. Copy the `specchio.keystore` file from the VM (`/usr/local/SPECCHIO/specchio.keystore`) into the appropriate SPECCHIO directory on the non-host machine, essentially replacing the existing keystore file with the VM keystore file.⁵ If you somehow lost the keystore file because of an update of the SPECCHIO client App then a copy of the SPECCHIO VM keystore file can be found on the VM in `/root/Documents/SPECCHIO_Installation`.

The SPECCHIO App can now be configured to connect to the SPECCHIO VM via https:

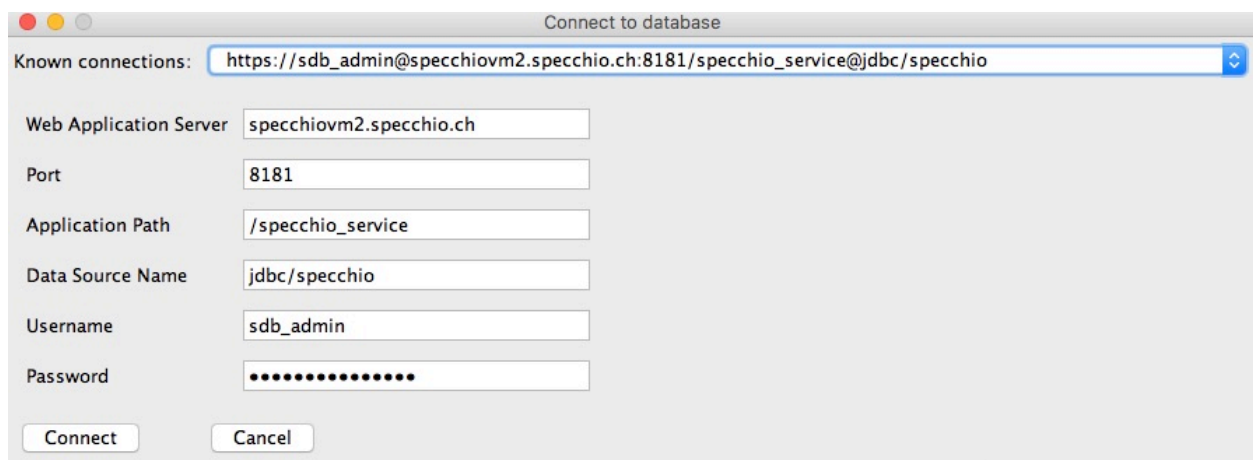

To access the SPECCHIO VM from the host machine via `specchiovm2.specchio.ch`, edit the hosts file as follows:

```
##
# Host Database
#
# localhost is used to configure the loopback interface
# when the system is booting. Do not change this entry.
##
127.0.0.1    localhost
255.255.255.255 broadcasthost
::1         localhost
fe80::1%lo0 localhost
127.0.0.1    specchiovm2.specchio.ch
```

3.12 Accessing SPECCHIO VM in the Field without any existing Network

⁵ Future SPECCHIO App releases will come preconfigured to already include the SPECCHIO VM certificate.

In Work ... This section is not yet finished. More information will be added when practical tests have been conducted.

This assumes that the SPECCHIO VM is used in a setting where no Ethernet or WiFi connection is existing per se.

Using the SPECCHIO VM on a single machine is no problem as no network is required.

Using the SPECCHIO VM running on one machine and connection from other machines to it requires the setup of an ad-hoc wireless.

This will be machine dependent and only the case of MacOS is used to illustrate this.

On the host machine running the SPECCHIO VM create a WiFi network:




If the SPECCHIO VM is configured to have a static IP, the VM should be accessible to all machines connecting to the new wireless network.

3.13 Mounting a host folder into the VM

This is not specific to the SPECCHIO VM, but useful to know anyway:

Add the folder of the host machine to be shared with the VM in the Shared Folders list and give it a name, in the case below 'Documents':

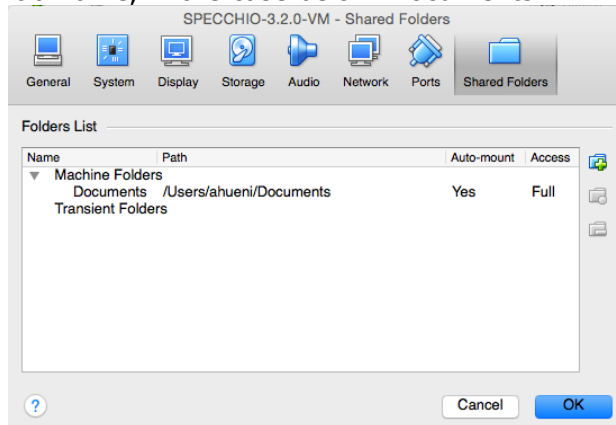

Assume you want to share your Documents folder and mount it in /mnt in the VM. In the VM, mount the shared folder by opening a terminal window and type:

```
mount -t vboxsf Documents /mnt
```

3.14 Handling larger database requirements

The size of the VM is limited by means of configuration. For larger databases it is suggested that the database physical files are not held within the database but put onto a different server that will then be visible to the SPECCHIO VM. This could for example be achieved by putting the database file on the host machine and linking the directory into the VM.

While theoretically possible, this option has not yet been implemented, thus, no details can be presented here.

4 Upgrading the SPECCHIO System

SPECCHIO remains under active development and both the client application and the web service binary as well as the SPECCHIO database require occasional updates.

4.1 Server and Client Software Upgrades

4.1.1 Automatic Upgrade

The SPECCHIO server and client can be automatically upgraded.

To do so **log into the VM as 'root'** (The root password is also 'reverse').

On the desktop there is an application launch icon called 'SPECCHIO Software Update'. Double click the icon and a terminal window will open, carrying out the update script.



Figure 2: SPECCHIO Software Update icon

The upgrade first downloads and deploys the newest SPECCHIO server binary; check the terminal output to see if no errors occur. If all works as planned, the output will be similar to:

```
Downloading latest SPECCHIO web service binary ...
--2016-02-27 22:19:05-- https://github.com/ahueni/SPECCHIO/raw/SPECCHIO_Master/pkg/specchio-webapp.war
Resolving github.com... 192.30.252.130
Connecting to github.com|192.30.252.130|:443... connected.
HTTP request sent, awaiting response... 302 Found
Location: https://raw.githubusercontent.com/ahueni/SPECCHIO/SPECCHIO_Master/pkg/specchio-webapp.war [following]
--2016-02-27 22:19:05-- https://raw.githubusercontent.com/ahueni/SPECCHIO/SPECCHIO_Master/pkg/specchio-webapp.war
Resolving raw.githubusercontent.com... 185.31.17.133
Connecting to raw.githubusercontent.com|185.31.17.133|:443... connected.
HTTP request sent, awaiting response... 200 OK
Length: 5098587 (4.9M) [application/octet-stream]
Saving to: "../domains/domain1/bin/specchio-webapp.war"

100%[=====>] 5,098,587 2.89M/s in 1.7s

2016-02-27 22:19:08 (2.89 MB/s) - "../domains/domain1/bin/specchio-webapp.war" saved [5098587/5098587]

Deploying SPECCHIO web service binary ...
Application deployed with name specchio-webapp.
Command deploy executed successfully.
Waiting for the domain to stop ..
Command stop-domain executed successfully.
Waiting for domain1 to start .....
Successfully started the domain : domain1
domain Location: /opt/glassfish3/glassfish/domains/domain1
Log File: /opt/glassfish3/glassfish/domains/domain1/logs/server.log
Admin Port: 4848
Command start-domain executed successfully.
SPECCHIO service is updated.
```

In a second step, the client installer is downloaded and started.

```
Downloading and starting client install script ...
--2016-02-27 22:56:34-- https://github.com/ahueni/SPECCHIO/raw/SPECCHIO_Master/pkg/specchio-client-installer.jar
Resolving github.com... 192.30.252.131
Connecting to github.com|192.30.252.131|:443... connected.
HTTP request sent, awaiting response... 302 Found
Location: https://raw.githubusercontent.com/ahueni/SPECCHIO/SPECCHIO_Master/pkg/specchio-client-installer.jar [following]
--2016-02-27 22:56:34-- https://raw.githubusercontent.com/ahueni/SPECCHIO/SPECCHIO_Master/pkg/specchio-client-installer.jar
Resolving raw.githubusercontent.com... 185.31.17.133
Connecting to raw.githubusercontent.com|185.31.17.133|:443... connected.
HTTP request sent, awaiting response... 200 OK
Length: 15451078 (15M) [application/octet-stream]
Saving to: "/root/Documents/SPECCHIO_Installation/specchio-client-installer.jar"

100%[=====>] 15,451,078 2.30M/s in 6.2s

2016-02-27 22:56:41 (2.37 MB/s) - "/root/Documents/SPECCHIO_Installation/specchio-client-installer.jar" saved [15451078/15451078]

Feb 27, 2016 10:56:41 PM INFO: Logging initialized at level 'INFO'
Feb 27, 2016 10:56:41 PM INFO: Commandline arguments:
Feb 27, 2016 10:56:41 PM INFO: Detected platform: linux,version=2.6.32-504.23.4.el6.i686,arch=x86,symbolicName=null,javaVersion=1.7.0_79
Feb 27, 2016 10:56:42 PM WARNING: Resource customicons.xml not defined. No custom icons available
```

The installation dialogue will be displayed, guiding you through the installation process:



4.1.2 Manual Upgrade

Follow these instructions if:

- You have no network access in the VM but have the binaries on some disk.
- The automatic upgrade fails for some reason.
- The binaries you want to install are not the ones on GitHub (e.g. if you get a test version)

4.1.2.1 Manual Web Service Update

Download the new binary `specchio-webapp.war` from the SPECCHIO github page ⁶:








V3.2.0 Eta Binaries			
 ahueni authored on Aug 17		latest commit 1c357935ea 	
..			
 specchio-client-MacOSX-installer.jar	V3.2.0 Eta		2 months ago
 specchio-client-installer.jar	V3.2.0 Eta		2 months ago
 specchio-client.zip	V3.2.0 Eta Binaries		2 months ago
 specchio-database-definition.zip	Packaged for SPECCHIO V3.1.3		8 months ago
 specchio-webapp.war	Bugfix to deal with pre-loaded data caches for several jdbc data sour...		2 months ago

Figure 3: Github SPECCHIO package page

- Login as root in the SPECCHIO VM (The root password is also 'reverse')
- Copy the new binary into `/opt/glassfish3/glassfish/domains/domain1/bin`

⁶ https://github.com/ahueni/SPECCHIO/tree/SPECCHIO_Master/pkg

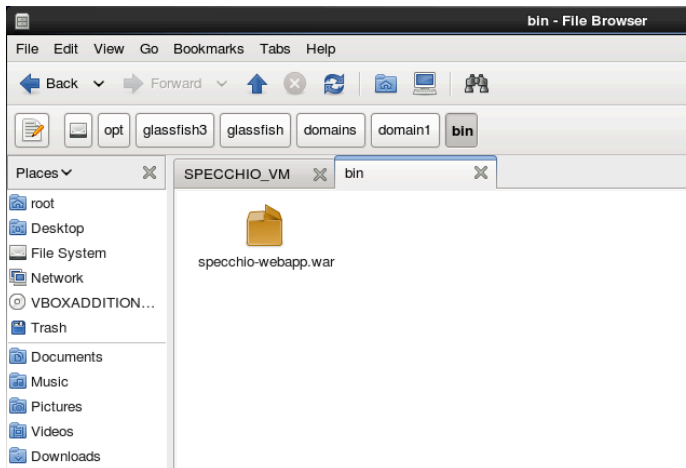


Figure 4: Location of the web service binary

- Deploy the new binary by the following commands in the shell:

```
cd /opt/glassfish3/glassfish/bin
./asadmin deploy --force ../domains/domain1/bin/specchio-webapp.war
./asadmin stop-domain
./asadmin start-domain domain1
```

4.1.2.2 Manual SPECCHIO Client Update

Login as centos user or root.

Download the latest cross-platform client installation package from

http://specchio.ch/app_download.php and run the installation package. The SPECCHIO client is installed in /usr/local/SPECCHIO.

4.2 SPECCHIO Database Upgrades

NOTE: Always dump the current version of the SPECCHIO database to a file before carrying out a database upgrade!

A database dump is easiest created from the command line when logged in as root in the VM:

```
mysqldump --user=root -p --max_allowed_packet=512M --host=127.0.0.1 --default-character-set=utf8 "specchio" --result-file=specchio_dump.sql
```

When prompted for the password, enter the MySQL password of the MySQL root user:
5p3cch10_MySql_Root


To restore a dump in case something went wrong during an upgrade use:

```
sudo mysql -u root
mysql> use specchio
mysql> source specchio_dump.sql
```


Note: SPECCHIO V3.3 and higher requires MYSQL 5.5 or higher due to the spatial extension. Old versions of the VM (pre 3.3.) cannot be upgraded by this routine. The easiest solution is to dump the database, install the SPECCHIO VM 3.3.0.0 or higher and import the dump. Then carry out the database upgrade as described below.

Starting with server and client version 3.3.0.0 an automatic upgrading process is part of SPECCHIO. This is relevant, as some upgrades, e.g. the spatial upgrade in V3.3.0.0, require more complex operations that are encoded on the server side within the SPECCHIO web application Java code.

1. Install the new war file (V3.3.0.0 or higher)
2. Install the new client application (V3.3.0.0 or higher)
3. Start client application, login as admin user
4. Select 'Upgrade database' from the Database menu

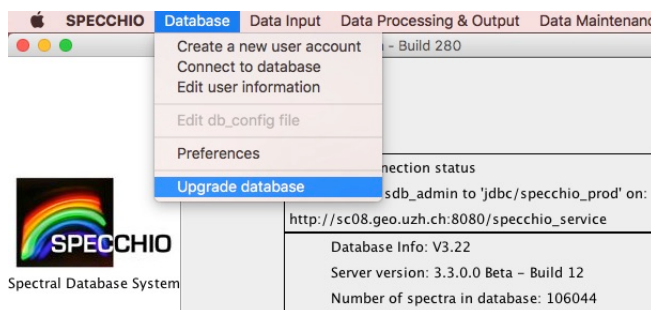

5. The current version and the available upgrades are displayed. Click OK to install all required upgrades in sequential order.

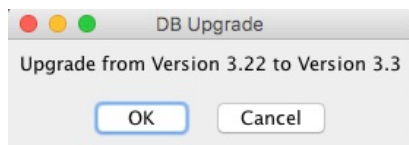

Appendix A: Change History

Date	Version	Changes
18.06.2015	3.2.0.1	Added networking details and fixes for MacOS. Updated VM Machine Name Fixed the authentication issue: user accounts can be created in the VM.
01.07.2015	3.2.0.2	More info on static IPs in connection with the NAT networking and port forwarding. Added info on how to mount a host folder in the VM.
07.10.2015	3.2.0.3	Added info on how to upgrade the system to new SPECCHIO binaries. Updates on the networking configuration.
26.2.2016	3.2.1.0	Added automatic installation info. Updates to reflect new client launch icons.
20.9.2016	3.2.1.3	Update to add info on the keyboard configuration and version number update.
25.1.2017		Update on how to set up the host file on Windows to use the VM name.
04.04.2017	3.2.1.6	DB and java binaries update. Installation of new SPECCHIO WWW interface. Update of update shell script to properly restart the glassfish service.
17.09.2017	3.3.0.0	Updated the to CentOS 7 and MySQL 5.7 to allow the MySQL and SPECCHIO spatial extension to be installed. Updated the password of sdb_admin. Added upgrade instructions.
23.9.2017	3.3.0.1	Updated the specchio keystore to include certificate of new SPECCHIO VM. Updated the description on how to create a user account and connect to the VM.
17.10.2017	3.3.0.1	Included details on how to dump and restore the SPECCHIO MySQL database.

Appendix B: Installing the Automatic Updating Script

Starting from V3.2.1 the SPECCHIO VM has an automatic updating script built in. Older VM versions can be set up to achieve the same.

1. Login as root
2. Make sure that the VM can access the internet
3. Open terminal and run:
 - a. `rpm -ivh http://rpms.famillecollet.com/enterprise/remi-release-6.rpm`
 - b. `yum install wget`
4. Create a new shell script (downloadable from http://specchio.ch/vm_download.php):

```
#!/bin/bash
#-----#
# 2016-02-16 ahueni
# Get webapp war file from github and deploy
#-----#

cd /opt/glassfish3/glassfish/bin
mv -f ../domains/domain1/bin/specchio-webapp.war ../domains/domain1/bin/specchio-
webapp.bk.war
echo "Downloading latest SPECCHIO web service binary ..."
wget --directory-prefix=../domains/domain1/bin/
https://github.com/ahueni/SPECCHIO/raw/SPECCHIO_Master/pkg/specchio-webapp.war

echo "Deploying SPECCHIO web service binary ..."
./asadmin deploy --force ../domains/domain1/bin/specchio-webapp.war
./asadmin stop-domain
nohup ./asadmin start-domain domain1 &

echo "SPECCHIO service is updated."
echo "Downloading and starting client install script ..."

cd /root/Documents/SPECCHIO_Installation
mv specchio-client-installer.jar specchio-client-installer.bk.jar


wget --directory-prefix=/root/Documents/SPECCHIO_Installation
https://github.com/ahueni/SPECCHIO/raw/SPECCHIO_Master/pkg/specchio-client-
installer.jar

java -jar specchio-client-installer.jar
echo "SPECCHIO client is updated. Have a nice day!"
```


Appendix C: Bridged Networking under MacOS – Ethernet and WiFi

The SPECCHIO VM is shipped with the networking set to NAT. The information hereafter is intended for user who want to user Bridged Networking under MacOS.

The SPECCHIO VM is then configured with the networking set to 'Bridged Adapter' and 'en0: Ethernet' selected ⁷.

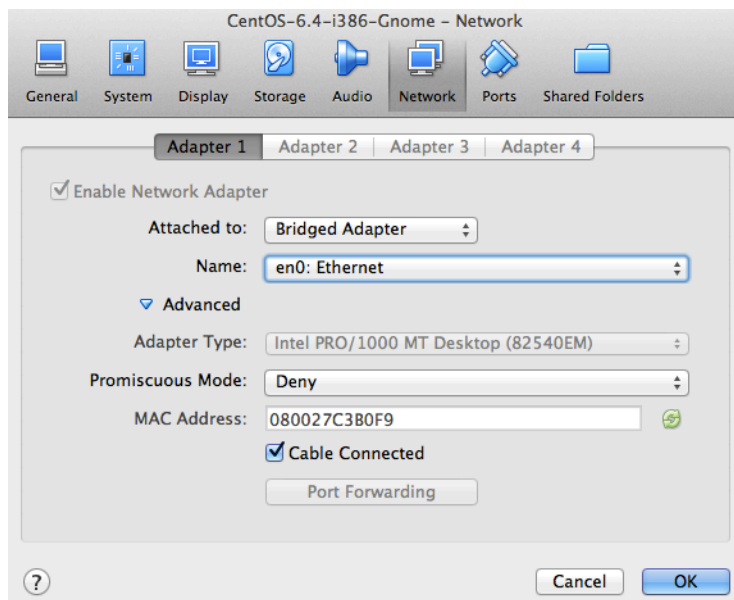

This allows the VM to access the Internet and to receive an IP from the DHCP. If using an Internet connection via WiFi, then this should be switched to Wi-Fi. ⁸

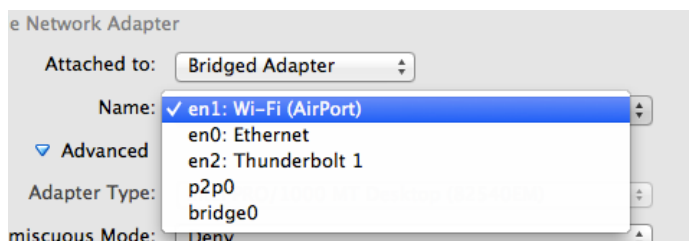

When using the MacOS host machine connected to the Ethernet, the DHCP will assign an IP to the virtual machine. If connected to WiFi then the bridging does not work at all, i.e. no connection to the Internet is possible from the VM. This is a persistent bug⁹.


There is however a workaround:

- On the Mac, open the 'Sharing' menu in the System Settings and select to share the Internet of the WiFi connection via Thunderbolt Bridge


⁷ This is presumably so, I actually do not know if these settings are part of the stored VM image. Should anyone know, give me notice of the fact.

⁸ I have not tested this yet, as on the Mac it does not work anyway.

⁹ <https://www.virtualbox.org/ticket/10019>

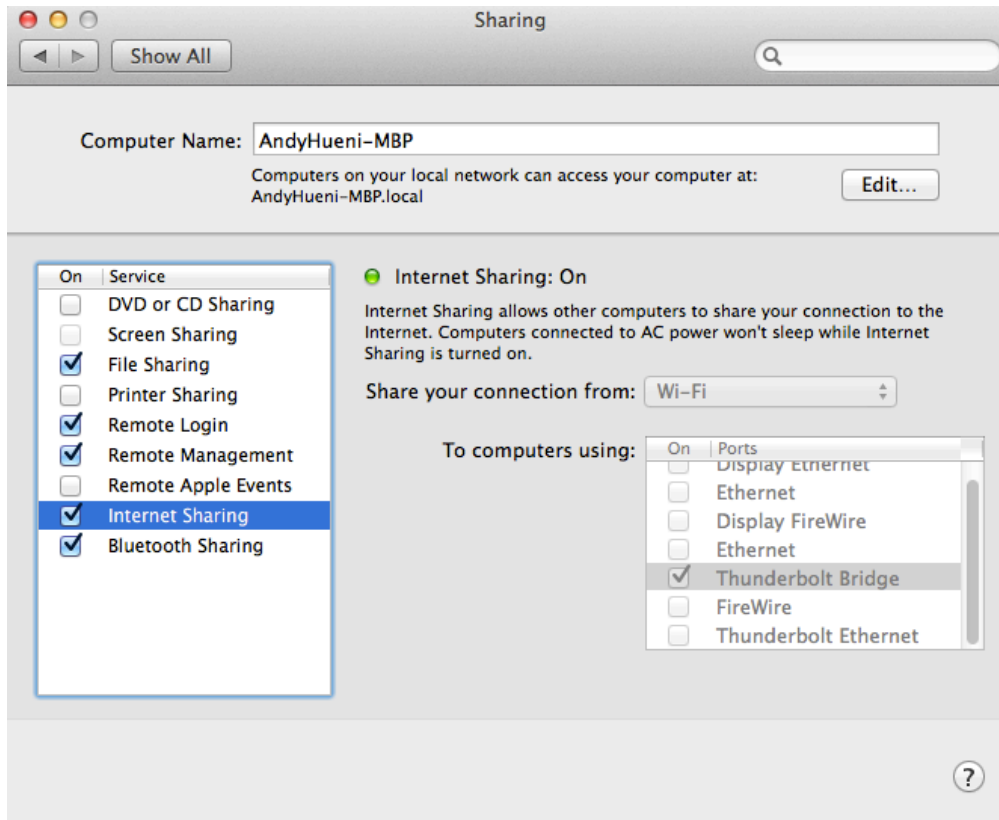

- In the VM, select 'en2: Thunderbolt 1'

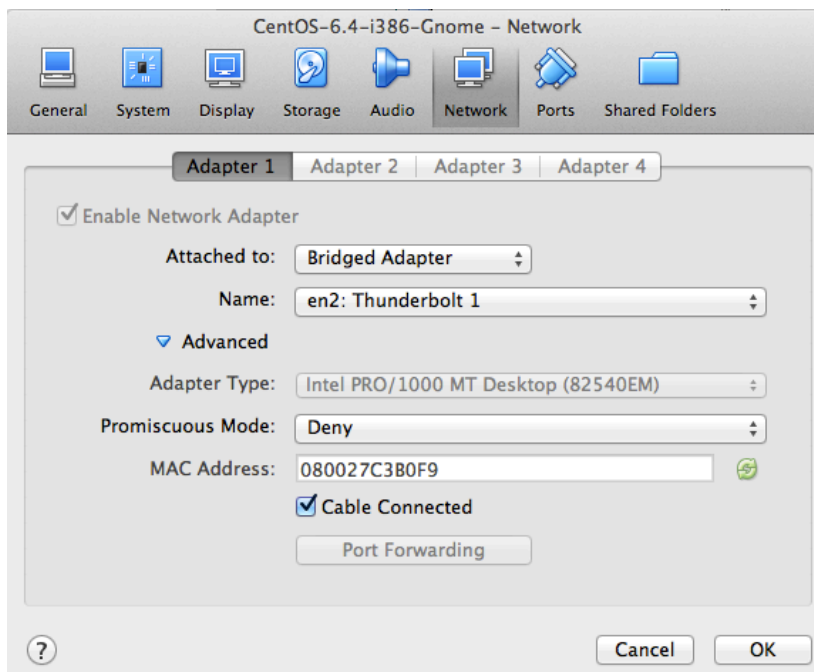

- The VM should now receive an IP from the DHCP and be able to access the Internet