



First Aid Copilot

The dispatcher leads.
The Agent assists.

Call information, AED tasks,
and the handoff in one place.

TEAM:05-高果糖玉米糖漿

 Call 119



The call is only one part of the job.

Different people hold different pieces of the same emergency.



Primary rescuer

Make the call.
Keep a record.

Where is the entrance?



AED runner

Find the device.
Report the outcome.

What if access is blocked?



Ambulance greeter

Meet the crew.
Show the way in.

Which entrance should I use?



EMS recipient

Read the scene.
Continue the response.

What has already happened?

Shared facts and clear tasks, without interrupting the dispatcher.

Call first. Keep the screen useful.

The screen supports the call; it does not compete with it.



Start with the call

CALL FOR HELP

No form before the call.
No model startup to wait for.



During the call

Call guide + quick event log

Location, situation,
and reported actions

Visual rhythm cue



When guidance resumes

**Fixed templates,
read by the device**

Repeat

Stop

Correct

Switch on explicit user report.



Redial → mute immediately → keep the record.

Enter it once. Keep every view aligned.

Keep the source, confirmation state, and update time with each field.

Capture the scene

- Location and access
- What happened
- Patient reports
- People present
- Hazards

GPS, entrance, floor, and notes

Shared scene snapshot

Source	Who reported it
Confirmation	Confirmed or uncertain
Freshness	When it was updated

Unknown is a valid answer.

Call guide



Ambulance greeter

EMS handoff

Timestamped events and append-only corrections keep the history traceable.

An inaccessible AED triggers a new assignment.

Start dispatch once. Let each report drive the next step.

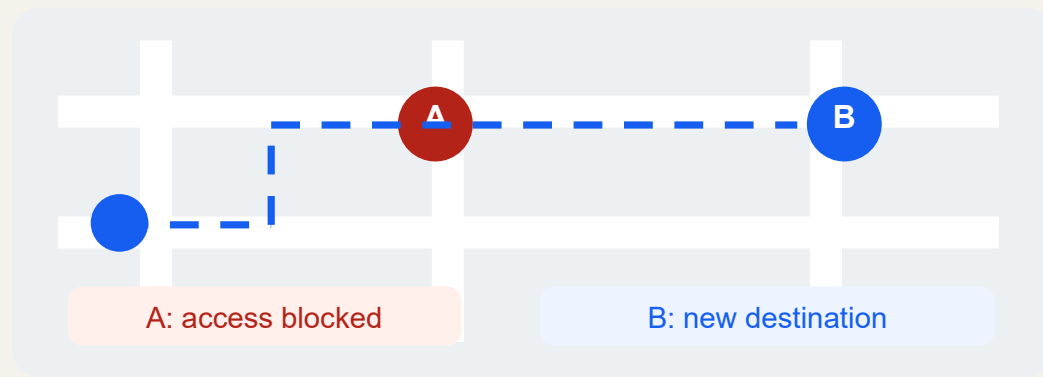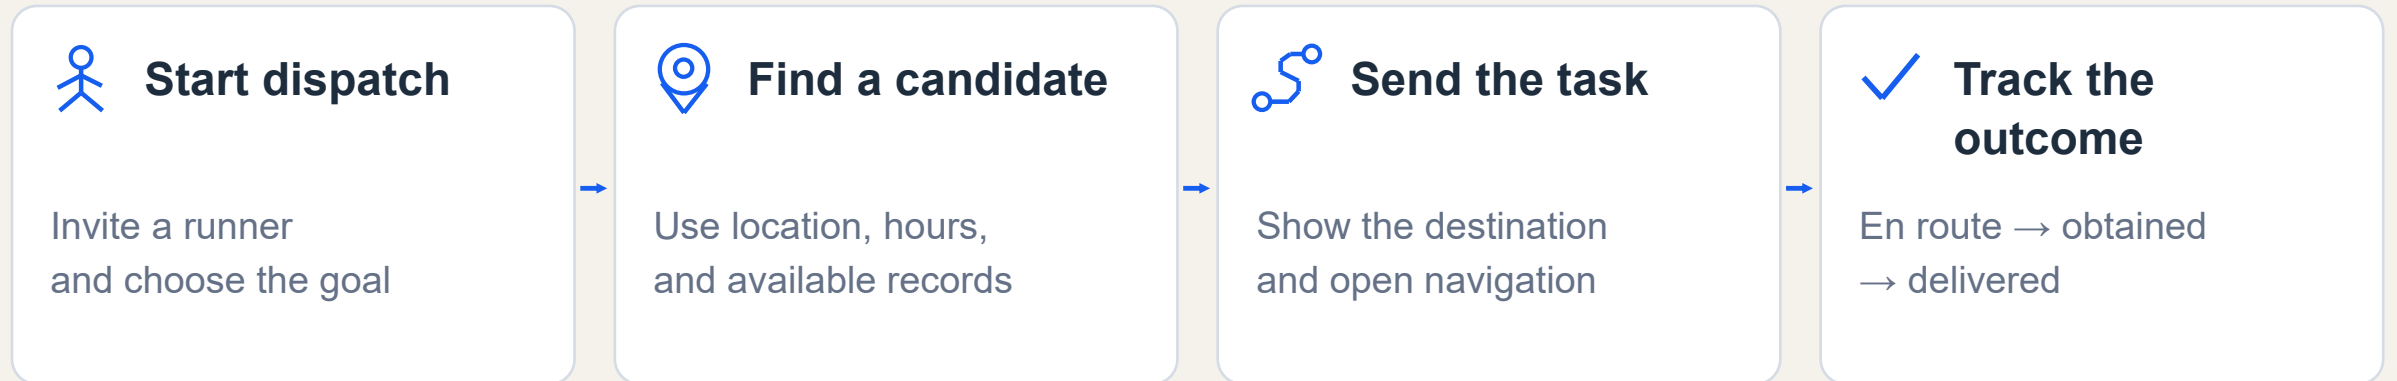

Report once. The backend reassigns.

Exclude the inaccessible AED.


Return a new destination or “no candidate.”

Completion still requires the helper’s report.

The handoff should not start from scratch.

Give each role the information needed for its part of the job.

Scan to join



One-time
invitation

Runner Assigned task

Greeter Scene snapshot

EMS Full handoff

Snapshot

The current scene

Location
Patient reports
Known hazards

Same scene revision

MIST

Recorded evidence

M Mechanism

I Injuries

S Signs

T Reported treatment

Timeline

What happened, when

- **Report**
Source + time
- **Update**
Confirmed or unknown
- **Helper**
Progress and outcome

Refresh with stale-data cues

Gemini turns speech into something people can check.


The model proposes an observation. A person confirms it before it becomes evidence.



Demonstration rule content requires clinical review before real-world use.


One app, with a clear job for each service.

REST for records and tasks. Live WebSocket for media and control.

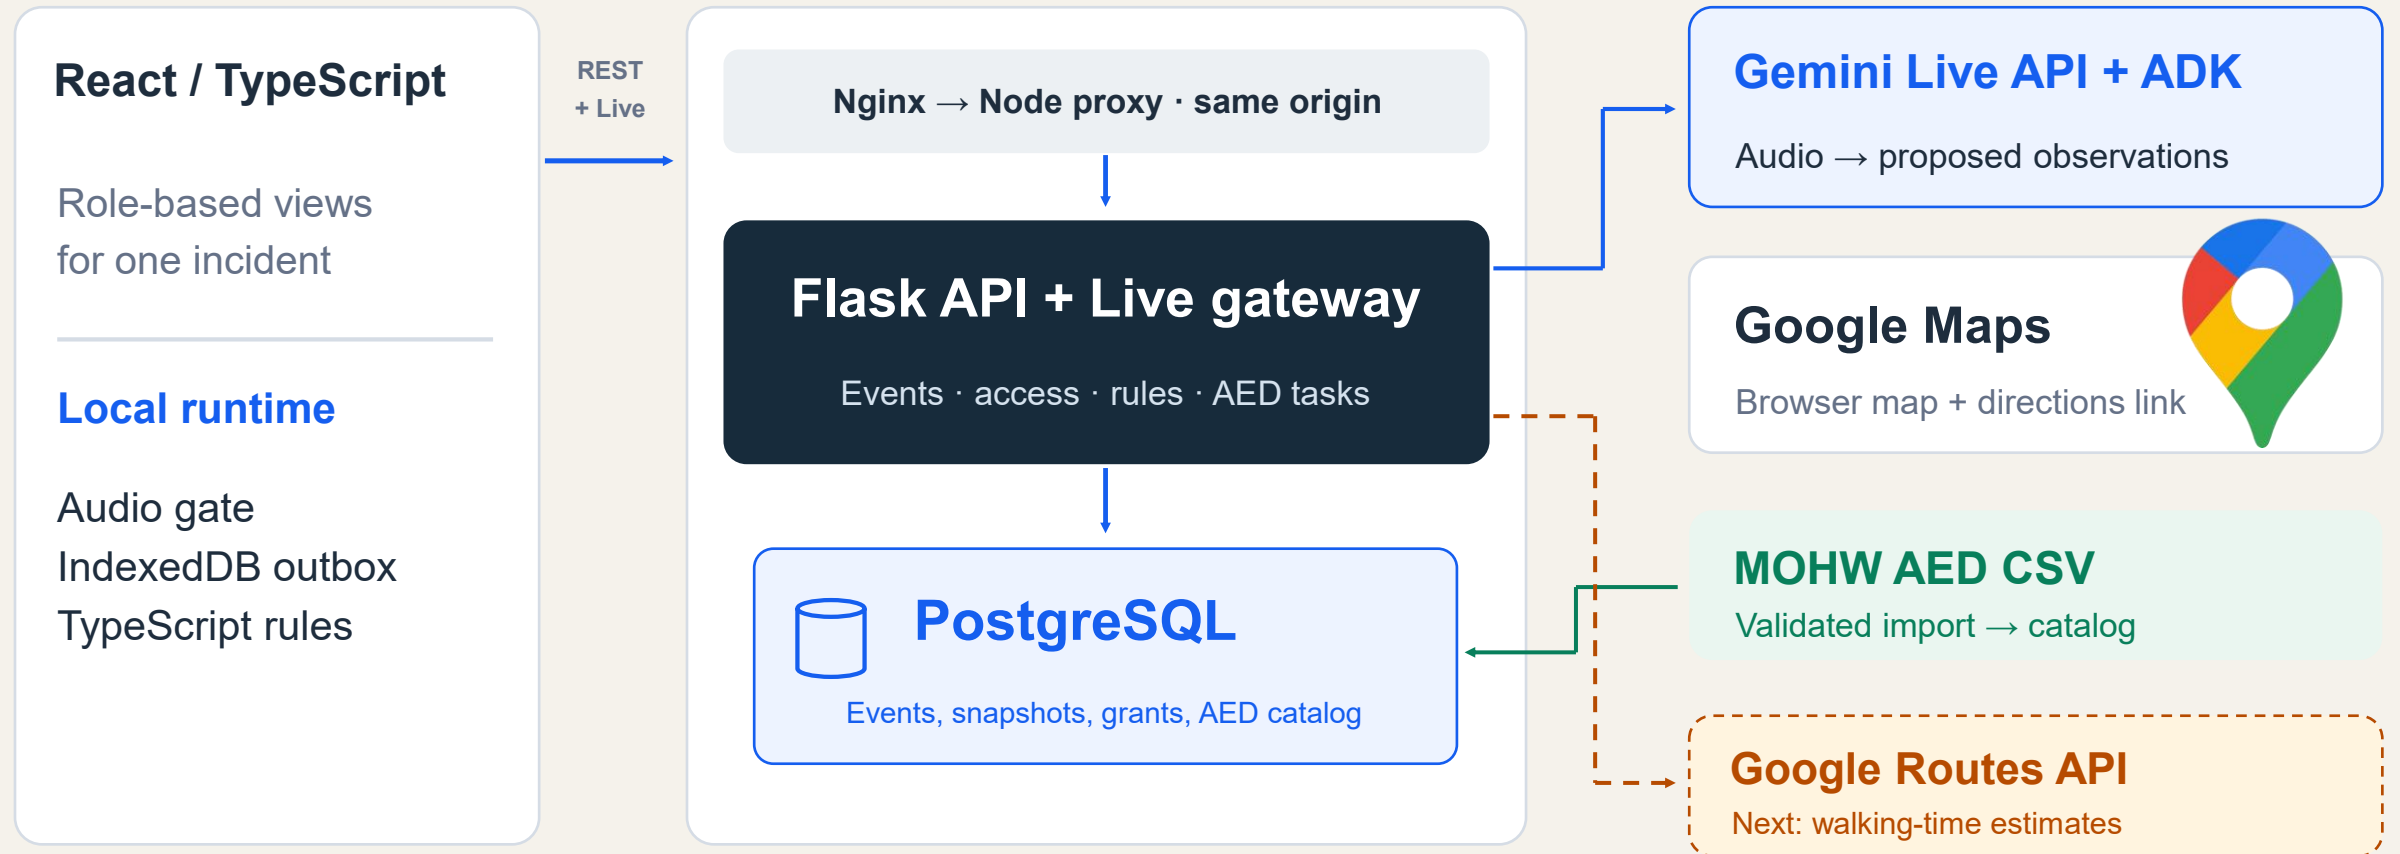

A dropped connection should not erase the record.

Store locally. Reconcile when connected. Keep audio control on the device.

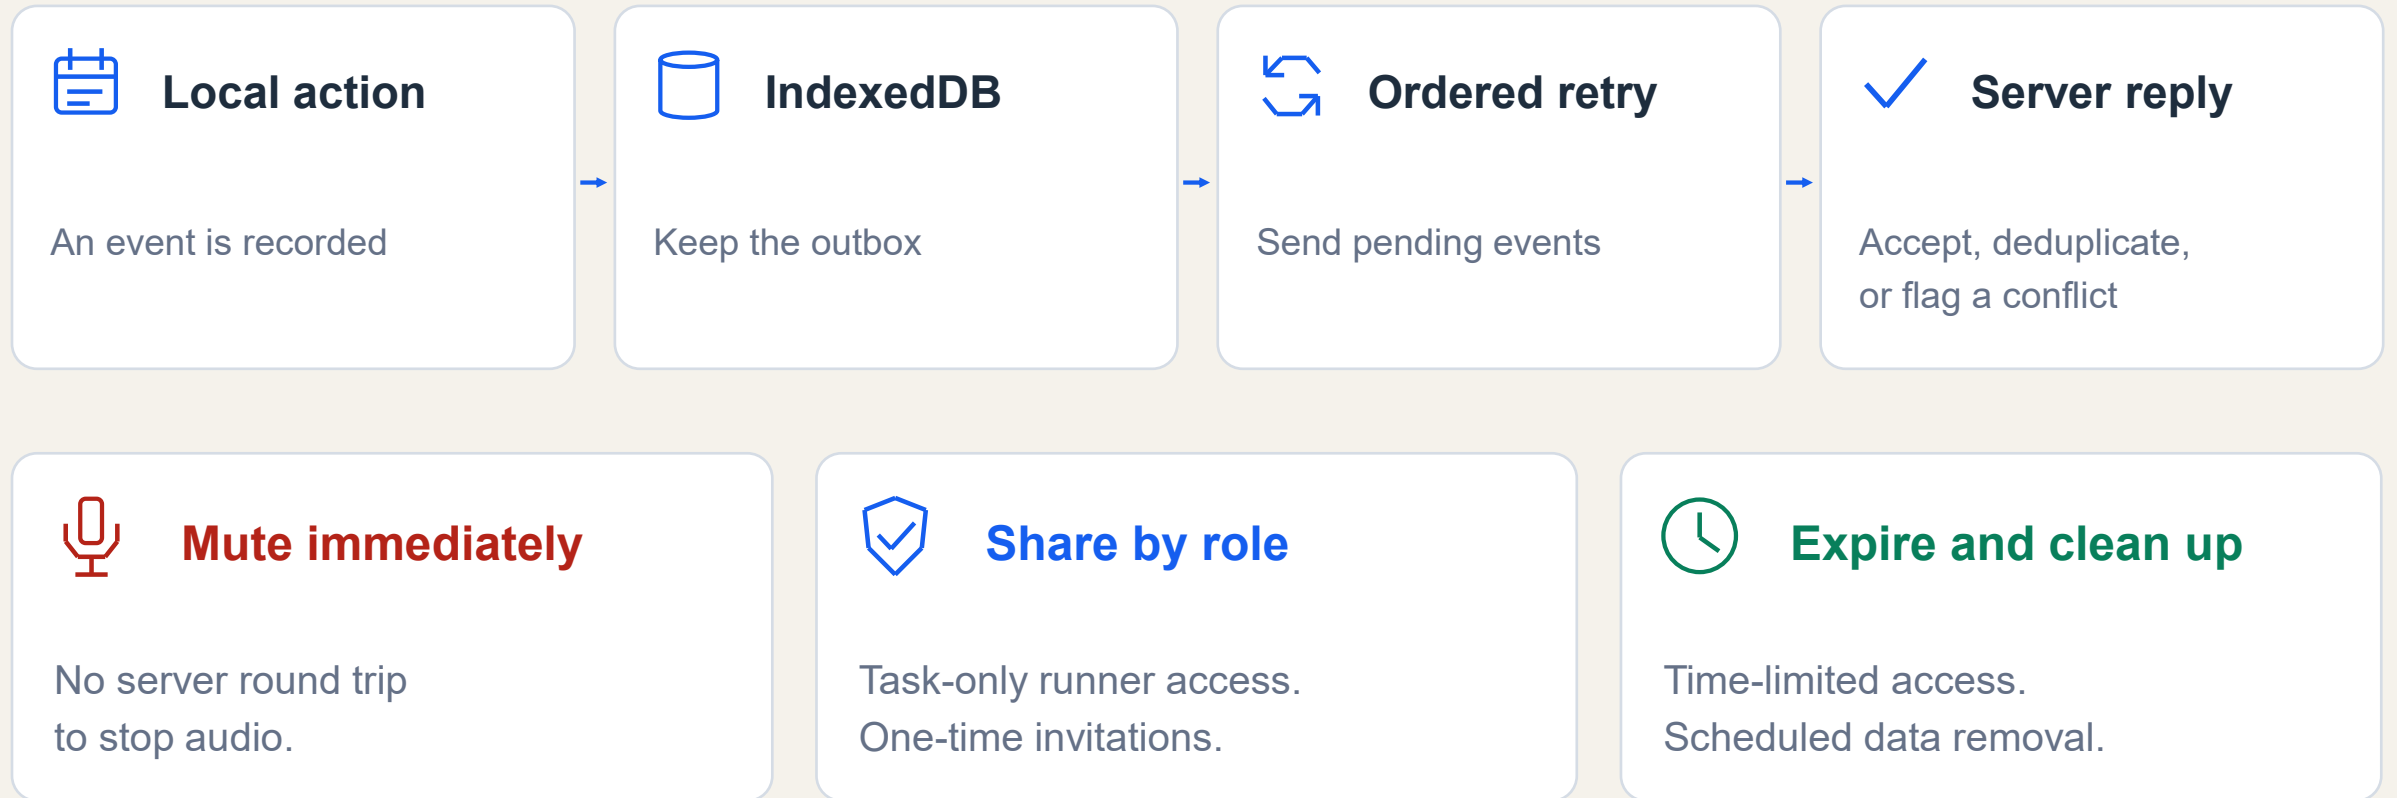

Retries are safe; unresolved conflicts stay visible.

Demo Time

We tested what happens when plans change.

Local checks focus on what happens after an interruption or a failed task.



Call switching

Changing modes preserves the event record.



Inaccessible AED

A report changes the assigned destination.



Offline recovery

Retries keep their identities and order.



Snapshot-first handoff

The summary and timeline use the same evidence.

Synthetic local checks. Live-service, browser, and clinical validation are separate steps.

Keep everyone on the same page.



Information for the call.



Follow-through for the AED task.



A record for the handoff.

The dispatcher leads. The Agent assists.

Test the workflow with the people who will use it.

Measure the quality of coordination before claiming an impact.



Information retained

Which required details
were captured correctly?



Task follow-through

Does a reassigned task
reach a reported outcome?



Handoff clarity

How quickly can the next
person understand the scene?

Professional review

Matched scenarios

Small-scale drills

Five workstreams. One shared product.

The work is split by interfaces, with shared contracts between teams.



Agent & API

Flask, Live, ADK / Gen AI SDK,
Gemini connection, tool adapters



Rescuer Experience

Dial-first flow, call guide,
quick actions, shared UI



Browser Runtime

Media, audio gate, sync,
IndexedDB, TypeScript rules



Helpers & Handoff

QR entry, location reports, maps,
greeter view, EMS handoff



Rules & Data

Python rules, AED ingestion and reassignment,
snapshots, persistence, access, retention

Shared API contracts · Shared rule fixtures · One React application

An AED pin is useful only if people can reach it.

Use opening hours and access notes, and show uncertainty instead of hiding it.

AED20260919

15,891

records retained
from 15,896 source rows

5 rows rejected

3,312 opening-hours warnings

Validate

Coordinates, fields,
and duplicate IDs



Version

Keep source and
import metadata



Search & assign

Use the active
AED catalog

Hours

Unknown stays unknown.

Access

Keep placement notes and restrictions.


Freshness

Retain source and update information.

Maps supports display and navigation. Routes-based walking-time estimates are next.

One event log keeps the team in sync.

Record once, project consistently, and make conflicts explicit.

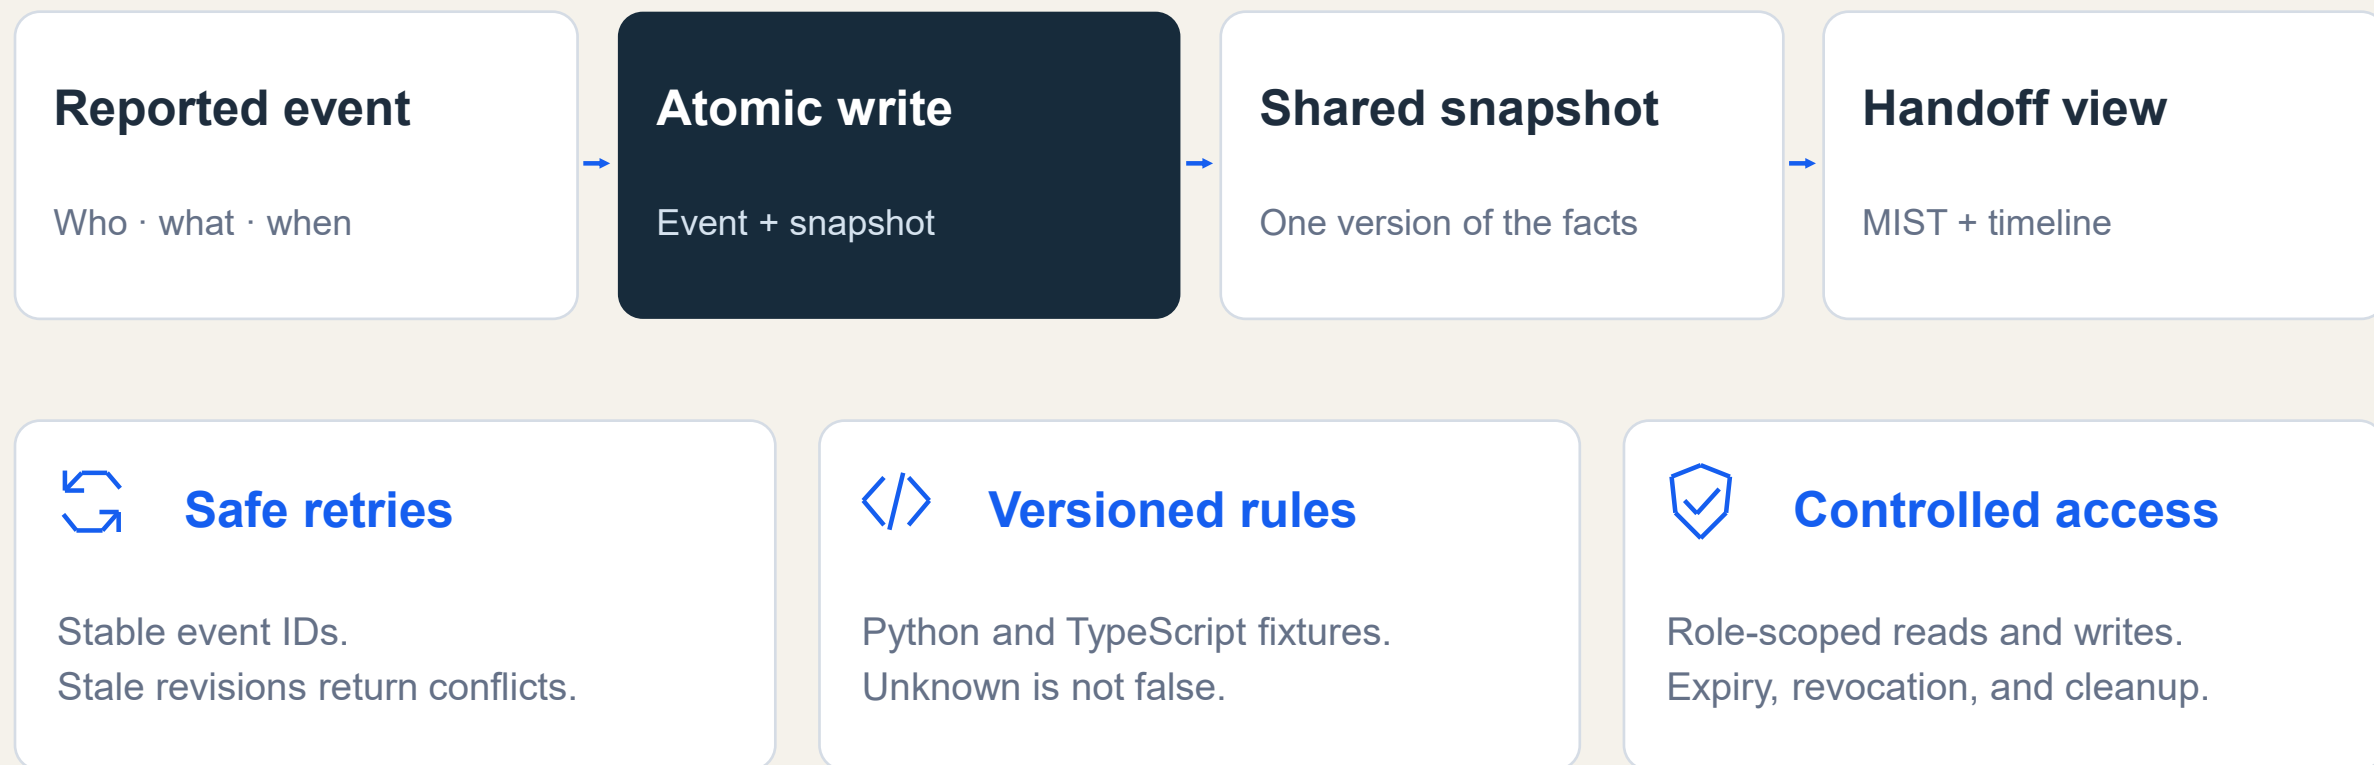

Corrections keep the original record. A failed transaction commits neither event nor snapshot.