



Title of the
Talk

Author's name

Introduction

Advanced
code

References

Title of the Talk

Author's name

05 May 2021



Table of
Contents

Author's name

Introduction

Advanced
code

References

1 Introduction

2 Advanced code



Title of the
Table

Author's name

Introduction

Advanced
code

References

Introduction



R Markdown

Table of
Contents

Author's name

Introduction

Advanced
code

References

This is an R Markdown presentation. Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents. For more details on using R Markdown see <http://rmarkdown.rstudio.com>.

When you click the **Knit** button a document will be generated that includes both content as well as the output of any embedded R code chunks within the document.



Beamer Presentation Template

Table of
Contents

Author's name

Introduction

Advanced
code

References

This template has the same features as others in the **memoiR** package except for multi-language support (no `lang` item in the header).

See the code of the following slides for some specific code of slides.



Title of the
Table

Author's name

Introduction

Advanced
code

References

Advanced code



Slide with Incremental Bullets

Table of
Contents

Author's name

Introduction

Advanced
code

References

Incremental bullets start with > - instead of -:

- Bullet 1



Slide with Incremental Bullets

Table of
Contents

Author's name

Introduction

Advanced
code

References

Incremental bullets start with > - instead of -:

- Bullet 1
- A reference: Xie (2016).



Slide with Incremental Bullets

Table of
Contents

Author's name

Introduction

Advanced
code

References

Incremental bullets start with > - instead of -:

- Bullet 1
- A reference: Xie (2016).
- Bullet 3



Slide with R Output

Table of Contents

Author's name

Introduction

Advanced
code

References

R code chunks are displayed as follows:

```
head(cars)
```

speed	dist
4	2
4	10
7	4
7	22
8	16
9	10



Slide with a Centered Plot


Title of the
Table

Author's name

Introduction

Advanced
code

References

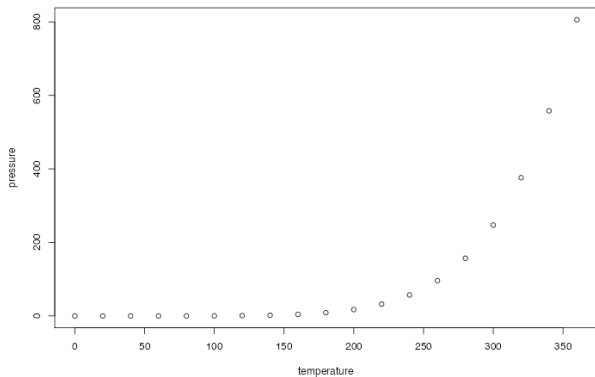



Two Column Layout

Title in
Top

Author's name

Introduction


Advanced
code

References

This slide has two columns.

In Beamer, each column is between `\begincol` and `\endcol`.

In HTML, the `{.columns-2}` option is added to the slide title and `<p class="forceBreak"></p>` allows forcing column break.





Documentation

Help for the
Tool

Author's name

Introduction

Advanced
code

References

See R Markdown: The Definitive Guide for full documentation about HTML slides.

Note:

- `{.flexbox .vcenter}` to center the HTML slide with plot.
- `out.width='90%'` to reduce the size of the plot in the Two Column Layout slide.

Keep the code below to have a slide for references, allow two-column slides in *ioslides* (but not in *Slidy*) and allow scrolling oversized slides.



Table of
Contents

Author's name

Introduction

Advanced
code

References

Xie, Y. (2016). *bookdown: Authoring Books and Technical Documents with R Markdown*. Boca Raton, Florida: Chapman and Hall/CRC.