Title of the Talk

Author's name

04 May 2021

Title of the
Talk

Author's name

First Part
Second part
References

1 First Part

2 Second part

First Part

This is an R Markdown presentation. Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents. For more details on using R Markdown see http://rmarkdown.rstudio.com.

When you click the **Knit** button a document will be generated that includes both content as well as the output of any embedded R code chunks within the document.

Table Header	Second Header
Table Cell	Cell 2
Cell 3	Cell 4

Slide with Incremental Bullets

- Bullet 1

Slide with Incremental Bullets

- Bullet 1
- A reference: Xie (2016).

Slide with Incremental Bullets

- Bullet 1
- A reference: Xie (2016).
- Bullet 3

Slide with R Output

```r
head(cars)
```

speed	dist
4	2
4	10
7	4
7	22
8	16
9	10

Second part

Slide with a Plot
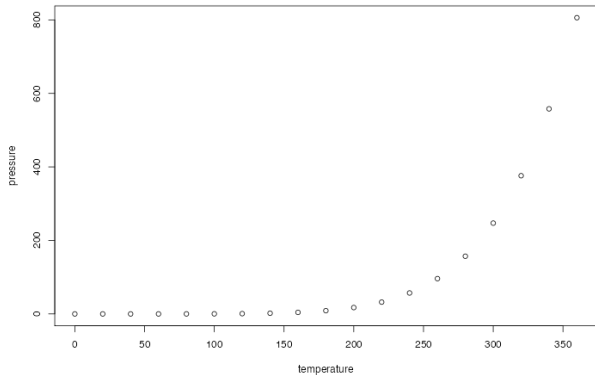
memoiR

Title of the Talk

Author's name

First Part

Second part

References

```r
plot(pressure)
```

Two Column Layout

This slide has two columns. In Beamer, each column in between \begincol and \endcol. In HTML, the {.columns-2} option is added to the slide title and <p class="forceBreak"></p> allows forcing column break.

```
plot(pressure)
```

See R Markdown: The Definitive Guide for full documentation about HTML slides.

Note:

- {.flexbox .vcenter} to center the HTML slide with plot.
- out.width='90%' to reduce the size of the plot in the Two Column Layout slide.

Keep the code below to have a slide for references and allow two-column slides in *ioslides* (but not in *Slidy*) and allow scrolling oversized slides.

Xie, Y. (2016). *bookdown: Authoring Books and Technical Documents with R Markdown*. Boca Raton, Florida: Chapman and Hall/CRC.