

S

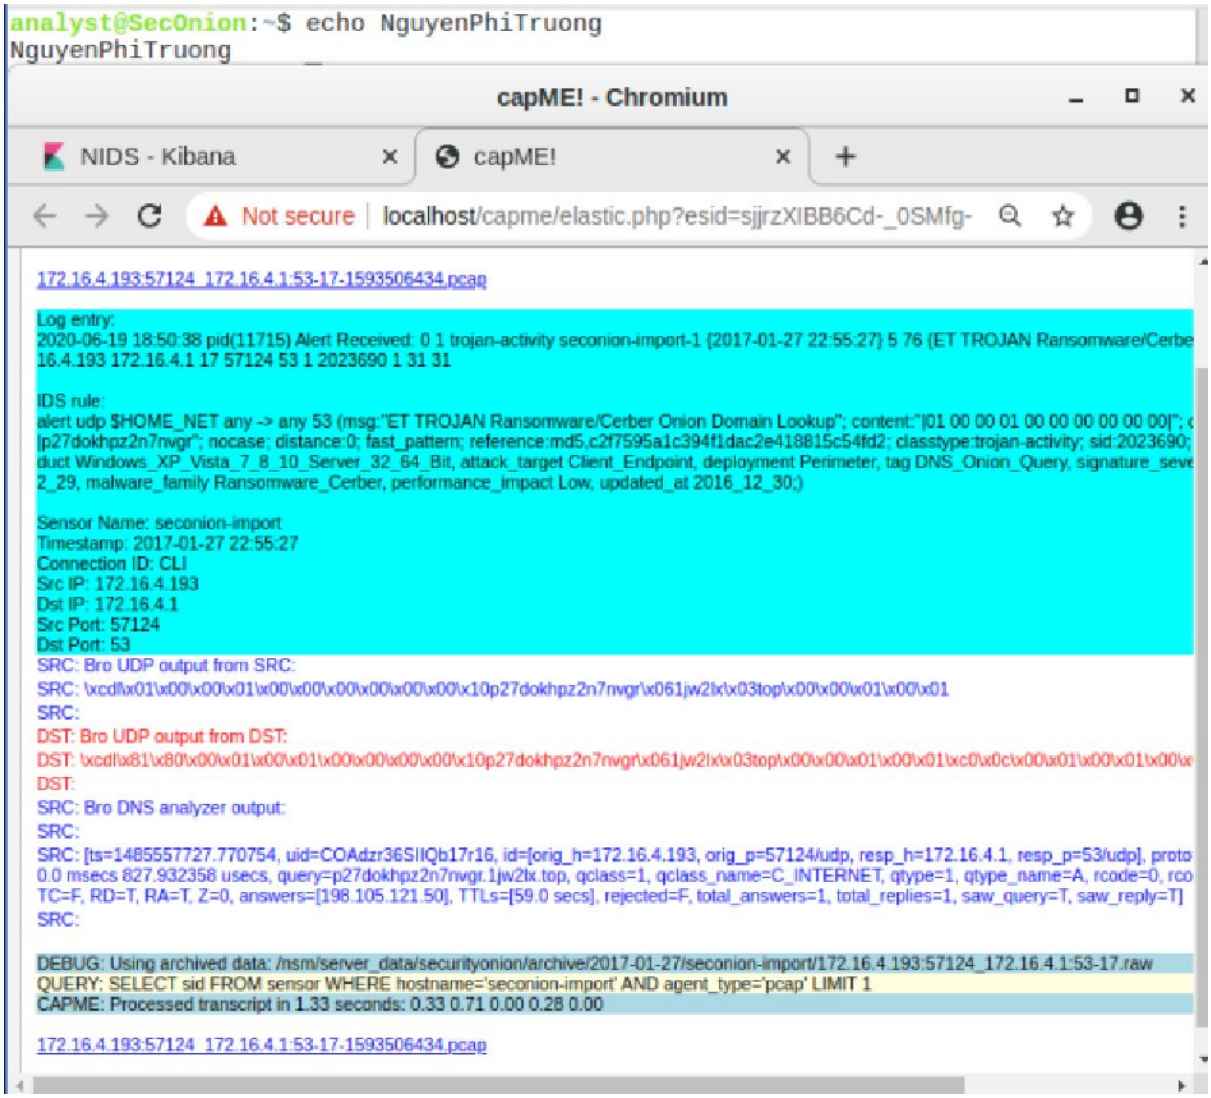

The blue section shows an IDS (Intrusion Detection System) alert named **"ET TROJAN Ransomware/Cerber Onion Domain Lookup"**. The text below the blue box breaks down the network communication. It shows the source IP (172.16.4.193) making a DNS request (Destination Port 53) for a randomly generated, suspicious domain (p27dokhpz2n7nvgr.1jw2tx.top). This is the Cerber ransomware attempting to communicate with its Command and Control (C2) server.

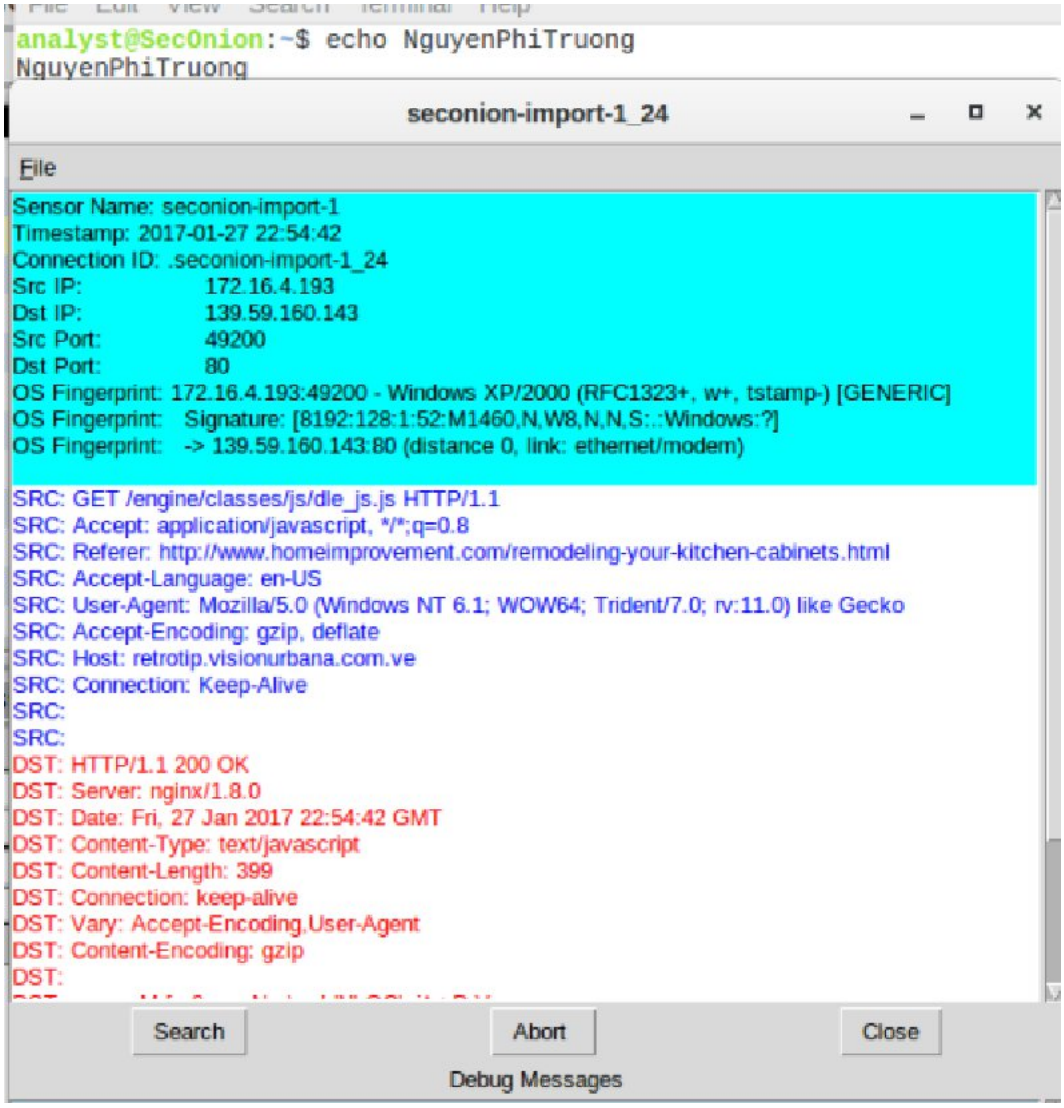

The window shows a network traffic transcript from Sguil. The blue header details the connection information, showing communication from the source IP (172.16.4.193) to the destination IP (139.59.160.143) over Destination Port 80 (HTTP).
The blue text (SRC) shows the client making an HTTP GET request to download a JavaScript file (/engine/classes/js/dle_js.js).

- The Referer line indicates the user was actively browsing http://www.homeimprovement.com/.... This legitimate site likely contained a compromised iframe or link that silently requested the script from the malicious Host (retrotip.visionurbana.com.ve).
- The red text (DST) is the server's response (HTTP/1.1 200 OK), confirming the successful delivery of the JavaScript payload to the victim's machine.

1. **How can discrepancies in timestamp between Kibana and Sguil affect the analysis of a security incident, and what steps can be taken to reconcile them?**
    - Discrepancies in timestamps can disrupt the timeline of an attack, making it difficult for analysts to correlate events (for example, matching an IDS alert in Sguil to a specific HTTP request log in Kibana). This can lead to misinterpretation of the attack sequence, delayed incident response, or missed connections between malicious activities. Steps to reconcile: * Verify if the tools are displaying different time zones (e.g., local time vs. UTC) and standardize all analysis to UTC**.**
        - Calculate the time offset between the two tools if a discrepancy is found, and apply that mathematical offset when cross-referencing logs.

        - For long-term prevention, ensure all network sensors, servers, and analysis tools are strictly synchronized using a reliable Network Time Protocol (NTP) server.

2. **In what situations would you prioritize using Sguil over Kibana during threat hunting or intrusion analysis? Provide specific examples.**
    - Sguil should be prioritized over Kibana when an analyst needs to conduct Deep Packet Inspection (DPI), examine the raw payload of a specific alert, or quickly pivot to packet analysis tools. While Kibana excels at high-level metadata visualization and log searching, Sguil provides direct access to raw Packet Captures (PCAP) and session transcripts.