


Docker

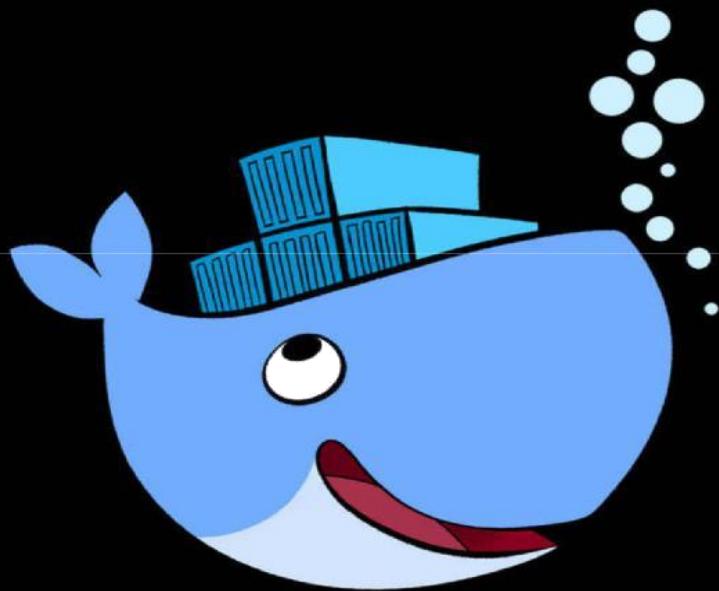

BUILD. SHIP. RUN.

DENNIS HUTTEN

Docker

BUILD. SHIP. RUN.

Dennis Hutten

Docker Tutorial

This tutorial explains the various aspects of the Docker Container service. Starting with the basics of Docker which focuses on the installation and configuration of Docker, it gradually moves on to advanced topics such as Networking and Registries. The last few chapters of this tutorial cover the development aspects of Docker and how you can get up and running on the development environments using Docker Containers.

Audience

This tutorial is meant for those who are interested in learning Docker as a container service. This product has spread like wildfire across the industry and is really making an impact on the development of new generation applications. So anyone who is interested in learning all the aspects of Docker should go through this tutorial.

Prerequisites

The prerequisite is that the readers should be familiar with the basic concepts of Windows and the various programs that are already available on the Windows operating system. In addition, it would help if the readers have some exposure to Linux.

Table of Contents

[Docker Tutorial](#)

[Audience](#)

[Prerequisites](#)

[Table of Contents](#)

[Docker - Overview](#)

[Installing Docker on Linux](#)

[Docker - Installation](#)

[Docker - Hub](#)

[Docker - Images](#)

[Docker - Containers](#)

[Docker - Working with Containers](#)

[Docker - Architecture](#)

[Docker - Container and Hosts](#)

[Docker - Configuring](#)

[Docker - Containers and Shells](#)

[Docker - File](#)

[Docker - Building Files](#)

[Docker - Public Repositories](#)

[Docker - Managing Ports](#)

[Docker - Private Registries](#)

[Docker - Building a Web Server Docker File](#)

[Docker - Instruction Commands](#)

[Docker - Container Linking](#)

[Docker - Storage](#)

[Docker - Networking](#)

[Docker - Setting Node.js](#)

[Docker - Setting MongoDB](#)

[Docker - Setting NGINX](#)

[Docker - Toolbox](#)

[Docker - Setting ASP.Net](#)

[Docker - Cloud](#)

[Docker - Logging](#)

[Docker - Compose](#)

[Docker - Continuous Integration](#)


[Docker - Kubernetes Architecture](#)

[Docker - Working of Kubernetes](#)

Docker - Overview

Docker is a container management service. The keywords of Docker are develop, ship and run anywhere. The whole idea of Docker is for developers to easily develop applications, ship them into containers which can then be deployed anywhere.

The initial release of Docker was in March 2013 and since then, it has become the buzzword for modern world development, especially in the face of Agile-based projects.

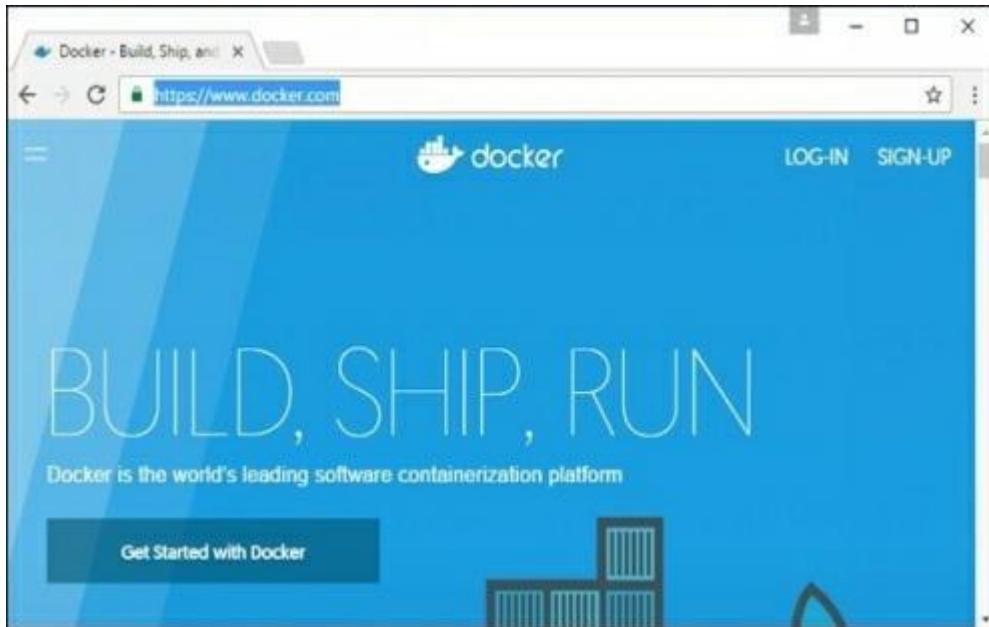

Features of Docker

Docker has the ability to reduce the size of development by providing a smaller footprint of the operating system via containers.

With containers, it becomes easier for teams across different units, such as development, QA and Operations to work seamlessly across applications.

You can deploy Docker containers anywhere, on any physical and virtual machines and even on the cloud.

Since Docker containers are pretty lightweight, they are very easily scalable.

Components of Docker

Docker has the following components

- Docker for Mac – It allows one to run Docker containers on the Mac OS.
- Docker for Linux – It allows one to run Docker containers on the Linux OS.
- Docker for Windows – It allows one to run Docker containers on the Windows OS.
- Docker Engine – It is used for building Docker images and creating Docker containers.
- Docker Hub – This is the registry which is used to host various Docker images.
- Docker Compose – This is used to define applications using multiple Docker containers.

We will discuss all these components in detail in the subsequent chapters.

The official site for Docker is <https://www.docker.com/>. The site has all information and documentation about the Docker software. It also has the download links for various operating systems.

Installing Docker on Linux

To start the installation of Docker, we are going to use an Ubuntu instance. You can use Oracle Virtual Box to setup a virtual Linux instance, in case you don't have it already.

The following screenshot shows a simple Ubuntu server which has been installed on Oracle Virtual Box. There is an OS user named demo which has been defined on the system having entire root access to the sever.



To install Docker, we need to follow the steps given below.

Step 1 – Before installing Docker, you first have to ensure that you have the right Linux kernel version running. Docker is only designed to run on Linux kernel version 3.8 and higher. We can do this by running the following command.

uname

This method returns the system information about the Linux system.

Syntax

```
uname -a
```

Options

a – This is used to ensure that the system information is returned.

Return Value

This method returns the following information on the Linux system-

- kernel name
- node name
- kernel release
- kernel version
- machine
- processor
- hardware platform
- operating system

Example

```
uname -a
```

Output

When we run above command, we will get the following result –

```
demo@ubuntu:~$ uname -a
Linux ubuntu 4.2.0-27-generic #32~14.04.1-Ubuntu SMP Fri Jan 22 15:32:27 UTC 201
6 i686 i686 i686 GNU/Linux
demo@ubuntu:~$ _
```

From the output, we can see that the Linux kernel version is 4.2.0-27 which is higher

than version 3.8, so we are good to go.

Step 2 – You need to update the OS with the latest packages, which can be done via the following command –

```
apt-get
```

This method installs packages from the Internet on to the Linux system.

Syntax

```
sudo apt-get update
```

Options

- sudo – The sudo command is used to ensure that the command runs with root access.
- update – The update option is used ensure that all packages are updated on the Linux system.

Return Value

None

Example

```
sudo apt-get update
```

Output

When we run the above command, we will get the following result –

```
Hit http://us.archive.ubuntu.com trusty-backports/universe Sources
Hit http://us.archive.ubuntu.com trusty-backports/multiverse Sources
Hit http://us.archive.ubuntu.com trusty-backports/main i386 Packages
Hit http://us.archive.ubuntu.com trusty-backports/restricted i386 Packages
Hit http://us.archive.ubuntu.com trusty-backports/universe i386 Packages
Hit http://us.archive.ubuntu.com trusty-backports/multiverse i386 Packages
Hit http://us.archive.ubuntu.com trusty-backports/main Translation-en
Hit http://us.archive.ubuntu.com trusty-backports/multiverse Translation-en
Hit http://us.archive.ubuntu.com trusty-backports/restricted Translation-en
Hit http://us.archive.ubuntu.com trusty-backports/universe Translation-en
Hit http://us.archive.ubuntu.com trusty Release
Hit http://us.archive.ubuntu.com trusty/main Sources
Hit http://us.archive.ubuntu.com trusty/restricted Sources
Hit http://us.archive.ubuntu.com trusty/universe Sources
Hit http://us.archive.ubuntu.com trusty/multiverse Sources
Hit http://us.archive.ubuntu.com trusty/main i386 Packages
Hit http://us.archive.ubuntu.com trusty/restricted i386 Packages
Hit http://us.archive.ubuntu.com trusty/universe i386 Packages
Hit http://us.archive.ubuntu.com trusty/multiverse i386 Packages
Hit http://us.archive.ubuntu.com trusty/main Translation-en
Hit http://us.archive.ubuntu.com trusty/multiverse Translation-en
Hit http://us.archive.ubuntu.com trusty/restricted Translation-en
Hit http://us.archive.ubuntu.com trusty/universe Translation-en
Ign http://us.archive.ubuntu.com trusty/main Translation-en_US
Ign http://us.archive.ubuntu.com trusty/multiverse Translation-en_US
Ign http://us.archive.ubuntu.com trusty/restricted Translation-en_US
Ign http://us.archive.ubuntu.com trusty/universe Translation-en_US
Fetched 3,906 kB in 21s (184 kB/s)
Reading package lists... Done
demo@ubuntu:~$
```

This command will connect to the internet and download the latest system packages for Ubuntu.

Step 3 – The next step is to install the necessary certificates that will be required to work with the Docker site later on to download the necessary Docker packages. It can be done with the following command.

```
sudo apt-get install apt-transport-https ca-certificates
```

```
demo@ubuntudemo:~$ sudo apt-get install apt-transport-https ca-certificates
Reading package lists... Done
Building dependency tree
Reading state information... Done
The following packages will be upgraded:
  apt-transport-https ca-certificates
2 upgraded, 0 newly installed, 0 to remove and 105 not upgraded.
Need to get 215 kB of archives.
After this operation, 8,192 B disk space will be freed.
Get:1 http://us.archive.ubuntu.com/ubuntu/ trusty-updates/main apt-transport-https amd64 1.0.1ubuntu2.15 [25.0 kB]
Get:2 http://us.archive.ubuntu.com/ubuntu/ trusty-updates/main ca-certificates all 20160104ubuntu0.14.04.1 [190 kB]
Fetched 215 kB in 1s (152 kB/s)
Preconfiguring packages ...
(Reading database ... 52694 files and directories currently installed.)
Preparing to unpack .../apt-transport-https_1.0.1ubuntu2.15_amd64.deb ...
Unpacking apt-transport-https (1.0.1ubuntu2.15) over (1.0.1ubuntu2.11) ...
Preparing to unpack .../ca-certificates_20160104ubuntu0.14.04.1_all.deb ...
Unpacking ca-certificates (20160104ubuntu0.14.04.1) over (20141019ubuntu0.14.04.1) ...
Processing triggers for man-db (2.6.7.1-1ubuntu1) ...
Setting up apt-transport-https (1.0.1ubuntu2.15) ...
Setting up ca-certificates (20160104ubuntu0.14.04.1) ...
Processing triggers for ca-certificates (20160104ubuntu0.14.04.1) ...
Updating certificates in /etc/ssl/certs... 19 added, 19 removed; done.
Running hooks in /etc/ca-certificates/update.d/...done.
demo@ubuntudemo:~$
```


Step 4 – The next step is to add the new GPG key. This key is required to ensure that all data is encrypted when downloading the necessary packages for Docker.

The following command will download the key with the ID 58118E89F3A912897C070ADBF76221572C52609D from the keyserver hkp://ha.pool.sks-keyservers.net:80 and adds it to the adv keychain. Please note that this particular key is required to download the necessary Docker packages.

```
demo@ubuntudemo:~$ sudo apt-key adv --keyserver hkp://ha.pool.sks-keyservers.net:80 \ --recv-keys 58118E89F3A912897C070ADBF76221572C52609D
Executing: gpg --ignore-time-conflict --no-options --no-default-keyring --homedir /tmp/tmp.KcaZ3WImGt --no-auto-check-trustdb --trust-model always --keyring /etc/apt/trusted.gpg --primary-keyring /etc/apt/trusted.gpg --keyserver hkp://ha.pool.sks-keyservers.net:80 --recv-keys 58118E89F3A912897C070ADBF76221572C52609D
gpg: requesting key 2C52609D from hkp server ha.pool.sks-keyservers.net
gpg: key 2C52609D: public key "Docker Release Tool (releasedocker) <docker@dockr.com>" imported
gpg: Total number processed: 1
gpg:                         imported: 1 (RSA: 1)
demo@ubuntudemo:~$
```

Step 5 – Next, depending on the version of Ubuntu you have, you will need to add the relevant site to the docker.list for the apt package manager, so that it will be able to detect the Docker packages from the Docker site and download them accordingly.

- Precise 12.04 (LTS) – deb <https://apt.dockerproject.org/repo/ubuntu-precise> main
- Trusty 14.04 (LTS) – deb <https://apt.dockerproject.org/repo/ubuntu-trusty> main
- Wily 15.10 – deb <https://apt.dockerproject.org/repo/ubuntu-wily> main
- Xenial 16.04 (LTS) - <https://apt.dockerproject.org/repo> ubuntu-xenial main

Since our OS is Ubuntu 14.04, we will use the Repository name as “deb <https://apt.dockerproject.org/repo> ubuntu-trusty main”.

And then, we will need to add this repository to the docker.list as mentioned above.

```
echo "deb https://apt.dockerproject.org/repo ubuntu-trusty main"  
| sudo tee /etc/apt/sources.list.d/docker.list
```

```
demo@ubuntudemo:~$ echo "deb https://apt.dockerproject.org/repo ubuntu-trusty  
in" | sudo tee /etc/apt/sources.list.d/docker.list  
deb https://apt.dockerproject.org/repo ubuntu-trusty main  
demo@ubuntudemo:~$ _
```

Step 6 – Next, we issue the apt-get update command to update the packages on the Ubuntu system.

```
Hit http://us.archive.ubuntu.com trusty-backports/multiverse 1300 Packages
Hit http://us.archive.ubuntu.com trusty-backports/main Translation-en
Hit http://us.archive.ubuntu.com trusty-backports/multiverse Translation-en
Hit http://us.archive.ubuntu.com trusty-backports/restricted Translation-en
Hit http://us.archive.ubuntu.com trusty-backports/universe Translation-en
Hit http://us.archive.ubuntu.com trusty Release
Hit http://us.archive.ubuntu.com trusty/main Sources
Hit http://us.archive.ubuntu.com trusty/restricted Sources
Hit http://us.archive.ubuntu.com trusty/universe Sources
Hit http://us.archive.ubuntu.com trusty/multiverse Sources
Hit http://us.archive.ubuntu.com trusty/main amd64 Packages
Hit http://us.archive.ubuntu.com trusty/restricted amd64 Packages
Hit http://us.archive.ubuntu.com trusty/universe amd64 Packages
Hit http://us.archive.ubuntu.com trusty/multiverse amd64 Packages
Hit http://us.archive.ubuntu.com trusty/main i386 Packages
Hit http://us.archive.ubuntu.com trusty/restricted i386 Packages
Hit http://us.archive.ubuntu.com trusty/universe i386 Packages
Hit http://us.archive.ubuntu.com trusty/multiverse i386 Packages
Hit http://us.archive.ubuntu.com trusty/main Translation-en
Hit http://us.archive.ubuntu.com trusty/multiverse Translation-en
Hit http://us.archive.ubuntu.com trusty/restricted Translation-en
Hit http://us.archive.ubuntu.com trusty/universe Translation-en
Ign http://us.archive.ubuntu.com trusty/main Translation-en_US
Ign http://us.archive.ubuntu.com trusty/multiverse Translation-en_US
Ign http://us.archive.ubuntu.com trusty/restricted Translation-en_US
Ign http://us.archive.ubuntu.com trusty/universe Translation-en_US
Fetched 3,333 kB in 36s (90.8 kB/s)
Reading package lists... Done
demo@ubuntudemo:~$
```

Step 7 – If you want to verify that the package manager is pointing to the right repository, you can do it by issuing the apt-cache command.

```
apt-cache policy docker-engine
```

In the output, you will get the link to <https://apt.dockerproject.org/repo/>

```
Hit http://us.archive.ubuntu.com trusty-backports/multiverse 1500 Packages
Hit http://us.archive.ubuntu.com trusty-backports/main Translation-en
Hit http://us.archive.ubuntu.com trusty-backports/multiverse Translation-en
Hit http://us.archive.ubuntu.com trusty-backports/restricted Translation-en
Hit http://us.archive.ubuntu.com trusty-backports/universe Translation-en
Hit http://us.archive.ubuntu.com trusty Release
Hit http://us.archive.ubuntu.com trusty/main Sources
Hit http://us.archive.ubuntu.com trusty/restricted Sources
Hit http://us.archive.ubuntu.com trusty/universe Sources
Hit http://us.archive.ubuntu.com trusty/multiverse Sources
Hit http://us.archive.ubuntu.com trusty/main amd64 Packages
Hit http://us.archive.ubuntu.com trusty/restricted amd64 Packages
Hit http://us.archive.ubuntu.com trusty/universe amd64 Packages
Hit http://us.archive.ubuntu.com trusty/multiverse amd64 Packages
Hit http://us.archive.ubuntu.com trusty/main i386 Packages
Hit http://us.archive.ubuntu.com trusty/restricted i386 Packages
Hit http://us.archive.ubuntu.com trusty/universe i386 Packages
Hit http://us.archive.ubuntu.com trusty/multiverse i386 Packages
Hit http://us.archive.ubuntu.com trusty/main Translation-en
Hit http://us.archive.ubuntu.com trusty/multiverse Translation-en
Hit http://us.archive.ubuntu.com trusty/restricted Translation-en
Hit http://us.archive.ubuntu.com trusty/universe Translation-en
Ign http://us.archive.ubuntu.com trusty/main Translation-en_US
Ign http://us.archive.ubuntu.com trusty/multiverse Translation-en_US
Ign http://us.archive.ubuntu.com trusty/restricted Translation-en_US
Ign http://us.archive.ubuntu.com trusty/universe Translation-en_US
Fetched 3,333 kB in 36s (90.8 kB/s)
Reading package lists... Done
deno@ubuntudemo:~$
```

Step 8 – Issue the apt-get update command to ensure all the packages on the local system are up to date.

```
Hit http://us.archive.ubuntu.com trusty-backports/main Translation-en
Hit http://us.archive.ubuntu.com trusty-backports/multiverse Translation-en
Hit http://us.archive.ubuntu.com trusty-backports/restricted Translation-en
Hit http://us.archive.ubuntu.com trusty-backports/universe Translation-en
Hit http://us.archive.ubuntu.com trusty Release
Hit http://us.archive.ubuntu.com trusty/main Sources
Hit http://us.archive.ubuntu.com trusty/restricted Sources
Hit http://us.archive.ubuntu.com trusty/universe Sources
Hit http://us.archive.ubuntu.com trusty/multiverse Sources
Hit http://us.archive.ubuntu.com trusty/main amd64 Packages
Hit http://us.archive.ubuntu.com trusty/restricted amd64 Packages
Hit http://us.archive.ubuntu.com trusty/universe amd64 Packages
Hit http://us.archive.ubuntu.com trusty/multiverse amd64 Packages
Hit http://us.archive.ubuntu.com trusty/main i386 Packages
Hit http://us.archive.ubuntu.com trusty/restricted i386 Packages
Hit http://us.archive.ubuntu.com trusty/universe i386 Packages
Hit http://us.archive.ubuntu.com trusty/multiverse i386 Packages
Hit http://us.archive.ubuntu.com trusty/main Translation-en
Hit http://us.archive.ubuntu.com trusty/multiverse Translation-en
Hit http://us.archive.ubuntu.com trusty/restricted Translation-en
Hit http://us.archive.ubuntu.com trusty/universe Translation-en
Ign http://us.archive.ubuntu.com trusty/main Translation-en_US
Ign http://us.archive.ubuntu.com trusty/multiverse Translation-en_US
Ign http://us.archive.ubuntu.com trusty/restricted Translation-en_US
Ign http://us.archive.ubuntu.com trusty/universe Translation-en_US
Fetched 30.2 kB in 15s (1,980 B/s)
Reading package lists... Done
demo@ubuntudemo:~$
```

Step 9 – For Ubuntu Trusty, Wily, and Xenial, we have to install the linux-image-extra-* kernel packages, which allows one to use the aufs storage driver. This driver is used by the newer versions of Docker.

It can be done by using the following command.

```
sudo apt-get install linux-image-extra-$(uname -r)  
linux-image-extra-virtual
```

```
Generating grub configuration file ...  
Found linux image: /boot/vmlinuz-4.2.0-27-generic  
Found initrd image: /boot/initrd.img-4.2.0-27-generic  
Found linux image: /boot/vmlinuz-3.13.0-105-generic  
Found initrd image: /boot/initrd.img-3.13.0-105-generic  
Found memtest86+ image: /memtest86+.elf  
Found memtest86+ image: /memtest86+.bin  
done  
Setting up linux-image-extra-3.13.0-105-generic (3.13.0-105.152) ...  
run-parts: executing /etc/kernel/postinst.d/apt-auto-removal 3.13.0-105-generic  
/boot/vmlinuz-3.13.0-105-generic  
run-parts: executing /etc/kernel/postinst.d/initramfs-tools 3.13.0-105-generic  
boot/vmlinuz-3.13.0-105-generic  
update-initramfs: Generating /boot/initrd.img-3.13.0-105-generic  
run-parts: executing /etc/kernel/postinst.d/update-notifier 3.13.0-105-generic  
boot/vmlinuz-3.13.0-105-generic  
run-parts: executing /etc/kernel/postinst.d/zz-update-grub 3.13.0-105-generic  
boot/vmlinuz-3.13.0-105-generic  
Generating grub configuration file ...  
Found linux image: /boot/vmlinuz-4.2.0-27-generic  
Found initrd image: /boot/initrd.img-4.2.0-27-generic  
Found linux image: /boot/vmlinuz-3.13.0-105-generic  
Found initrd image: /boot/initrd.img-3.13.0-105-generic  
Found memtest86+ image: /memtest86+.elf  
Found memtest86+ image: /memtest86+.bin  
done  
Setting up linux-image-generic (3.13.0.105.113) ...  
Setting up linux-image-extra-virtual (3.13.0.105.113) ...  
demo@ubuntudemo:~$
```

Step 10 – The final step is to install Docker and we can do this with the following command –

```
sudo apt-get install -y docker-engine
```

Here, apt-get uses the install option to download the Docker-engine image from the Docker website and get Docker installed.

The Docker-engine is the official package from the Docker Corporation for Ubuntu-based systems.

```
Selecting previously unselected package liberror-perl.
Preparing to unpack .../liberror-perl_0.17-1.1_all.deb ...
Unpacking liberror-perl (0.17-1.1) ...
Selecting previously unselected package git-man.
Preparing to unpack .../git-man_1%3a1.9.1-1ubuntu0.3_all.deb ...
Unpacking git-man (1:1.9.1-1ubuntu0.3) ...
Selecting previously unselected package git.
Preparing to unpack .../git_1%3a1.9.1-1ubuntu0.3_amd64.deb ...
Unpacking git (1:1.9.1-1ubuntu0.3) ...
Selecting previously unselected package cgroup-lite.
Preparing to unpack .../cgrouplite_1.9_all.deb ...
Unpacking cgrouplite (1.9) ...
Processing triggers for man-db (2.6.7.1-1ubuntu1) ...
Processing triggers for ureadahead (0.100.0-16) ...
ureadahead will be reprofiled on next reboot
Setting up libltdl7:amd64 (2.4.2-1.7ubuntu1) ...
Setting up libsystemd-journal0:amd64 (204-Subuntu20.20) ...
Setting up aufs-tools (1:3.2+20130722-1.1) ...
Setting up docker-engine (1.12.3-0~trusty) ...
docker start/running, process 22612
Setting up liberror-perl (0.17-1.1) ...
Setting up git-man (1:1.9.1-1ubuntu0.3) ...
Setting up git (1:1.9.1-1ubuntu0.3) ...
Setting up cgrouplite (1.9) ...
cgrouplite start/running
Processing triggers for libc-bin (2.19-0ubuntu6.7) ...
Processing triggers for ureadahead (0.100.0-16) ...
demo@ubuntudemo:"$
```

In the next section, we will see how to check for the version of Docker that was installed.

Docker Version

To see the version of Docker running, you can issue the following command –

Syntax

```
docker version
```

Options

- `version` – It is used to ensure the Docker command returns the Docker version installed.

Return Value

The output will provide the various details of the Docker version installed on the system.

Example

```
sudo docker version
```

Output

When we run the above program, we will get the following result –

```
Selecting previously unselected package liberror-perl.
Preparing to unpack .../liberror-perl_0.17-1.1_all.deb ...
Unpacking liberror-perl (0.17-1.1) ...
Selecting previously unselected package git-man.
Preparing to unpack .../git-man_1%3a1.9.1-1ubuntu0.3_all.deb ...
Unpacking git-man (1:1.9.1-1ubuntu0.3) ...
Selecting previously unselected package git.
Preparing to unpack .../git_1%3a1.9.1-1ubuntu0.3_amd64.deb ...
Unpacking git (1:1.9.1-1ubuntu0.3) ...
Selecting previously unselected package cgroup-lite.
Preparing to unpack .../cgrouplite_1.9_all.deb ...
Unpacking cgrouplite (1.9) ...
Processing triggers for man-db (2.6.7.1-1ubuntu1) ...
Processing triggers for ureadahead (0.100.0-16) ...
ureadahead will be reprofiled on next reboot
Setting up libltdl7:amd64 (2.4.2-1.7ubuntu1) ...
Setting up libsystemd-journal0:amd64 (204-5ubuntu20.20) ...
Setting up aufs-tools (1:3.2+20130722-1.1) ...
Setting up docker-engine (1.12.3-0~trusty) ...
docker start/running, process 22612
Setting up liberror-perl (0.17-1.1) ...
Setting up git-man (1:1.9.1-1ubuntu0.3) ...
Setting up git (1:1.9.1-1ubuntu0.3) ...
Setting up cgrouplite (1.9) ...
cgrouplite start/running
Processing triggers for libc-bin (2.19-0ubuntu6.7) ...
Processing triggers for ureadahead (0.100.0-16) ...
demo@ubuntudemo:~$
```

Docker Info

To see more information on the Docker running on the system, you can issue the following command –

Syntax

```
docker info
```

Options

- info – It is used to ensure that the Docker command returns the detailed information on the Docker service installed.

Return Value

The output will provide the various details of the Docker installed on the system such as –

- Number of containers
- Number of images
- The storage driver used by Docker
- The root directory used by Docker
- The execution driver used by Docker

Example

```
sudo docker info
```

Output

When we run the above command, we will get the following result –

```
Backing Filesystem: extfs
Dirs: 0
Dirperm1 Supported: true
Logging Driver: json-file
Cgroup Driver: cgroupfs
Plugins:
  Volume: local
  Network: bridge null host overlay
  Swarm: inactive
  Runtimes: runc
  Default Runtime: runc
  Security Options: apparmor
  Kernel Version: 4.2.0-27-generic
  Operating System: Ubuntu 14.04.4 LTS
  OSType: linux
  Architecture: x86_64
  CPUs: 1
  Total Memory: 993.1 MiB
  Name: ubuntudemo
  ID: ECDA:IFR3:ZCQJ:FNXL:APJR:BT6Y:JJ75:FUE6:DNP5:PD7B:A0AD:YVB4
  Docker Root Dir: /var/lib/docker
  Debug Mode (client): false
  Debug Mode (server): false
  Registry: https://index.docker.io/v1/
  WARNING: No swap limit support
  Insecure Registries:
    127.0.0.0/8
demo@ubuntudemo:~$
```

Docker for Windows

Docker has out-of-the-box support for Windows, but you need to have the following configuration in order to install Docker for Windows.

System Requirements

Windows OS	Windows 10 64 bit
Memory	2 GB RAM (recommended)

You can download Docker for Windows from –

<https://docs.docker.com/docker-for-windows/>



Docker ToolBox

Docker ToolBox has been designed for older versions of Windows, such as Windows 8.1 and Windows 7. You need to have the following configuration in order to install Docker for Windows.

System Requirements

Windows OS	Windows 7 , 8, 8.1
------------	--------------------

Memory	2 GB RAM (recommended)
Virtualization	This should be enabled.

You can download Docker ToolBox from –

<https://www.docker.com/products/docker-toolbox>


Docker - Installation

Let's go through the installation of each product.

Docker for Windows

Once the installer has been downloaded, double-click it to start the installer and then follow the steps given below.

Step 1 – Click on the Agreement terms and then the Install button to proceed ahead with the installation.

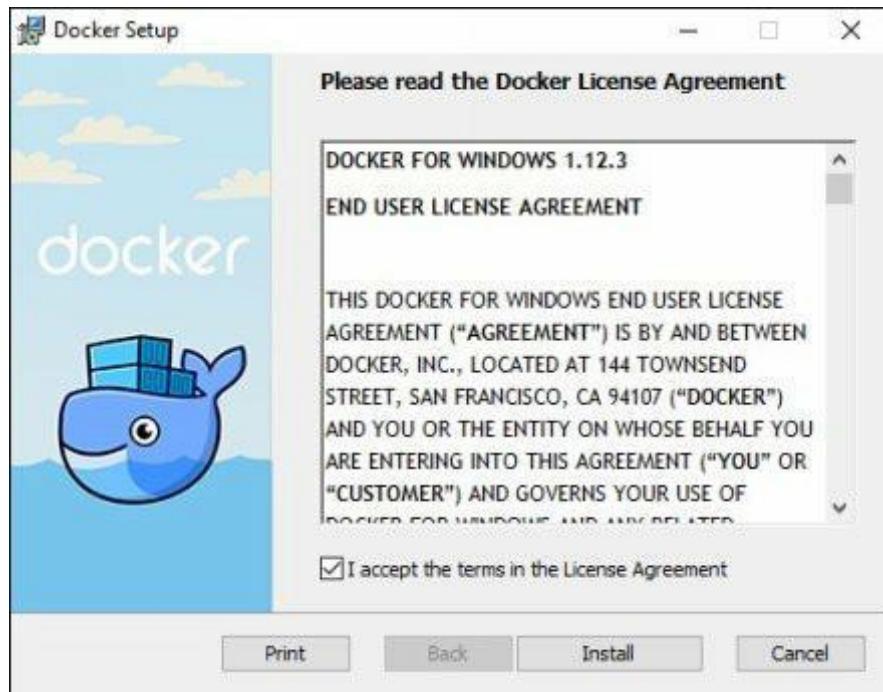

Step 2 – Once complete, click the Finish button to complete the installation.




Docker ToolBox

Once the installer has been downloaded, double-click it to start the installer and then follow the steps given below.


Step 1 – Click the Next button on the start screen.




Step 2 – Keep the default location on the next screen and click the Next button.

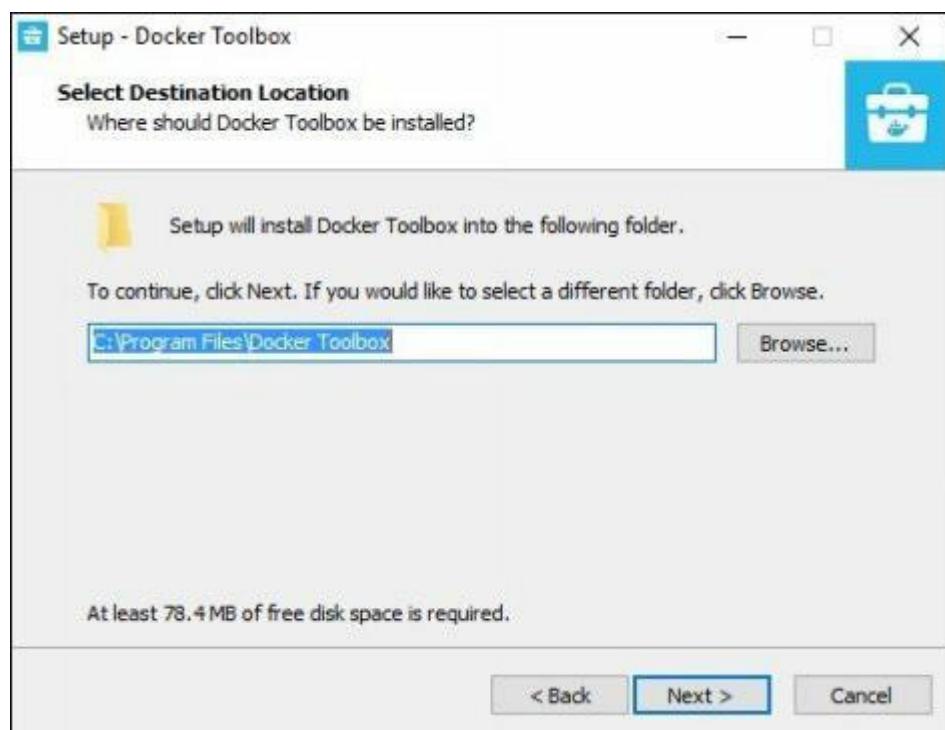


Step 3 – Keep the default components and click the Next button to proceed.

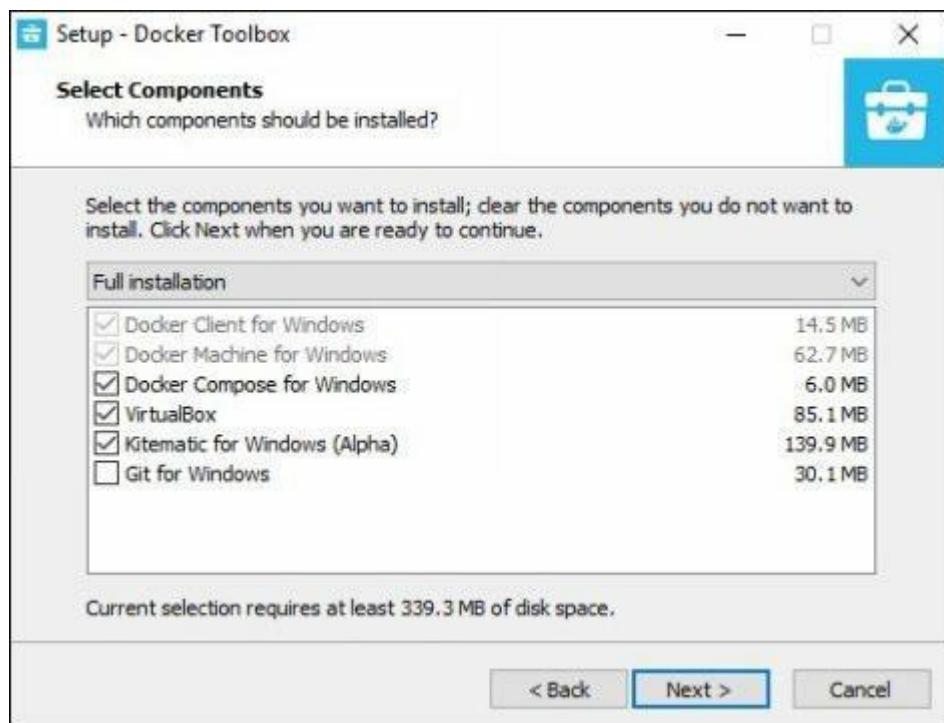

Step 4 – Keep the Additional Tasks as they are and then click the Next button.

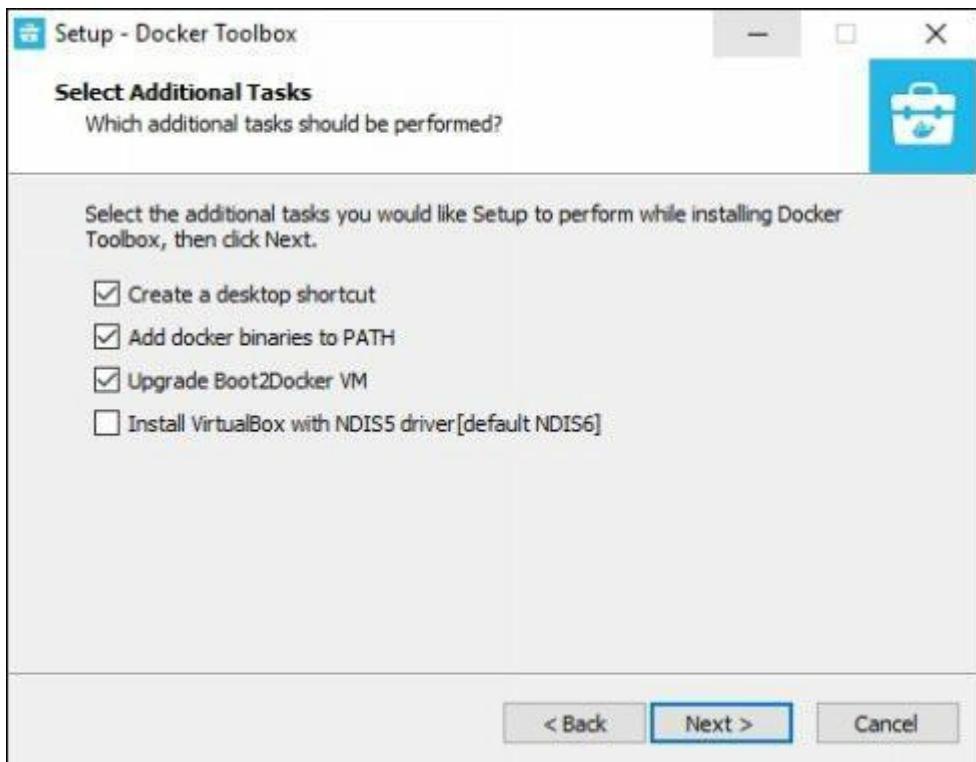

Step 5 – On the final screen, click the Install button.

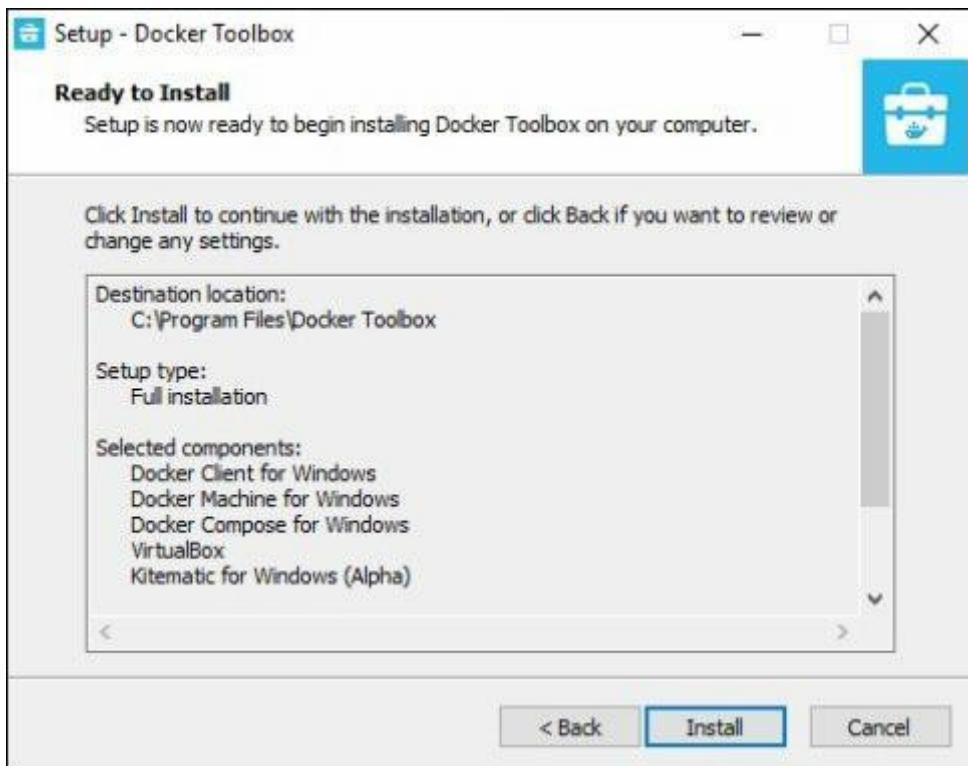

Working with Docker Toolbox

Let's now look at how Docker Toolbox can be used to work with Docker containers on Windows. The first step is to launch the Docker Toolbox application for which the shortcut is created on the desktop when the installation of Docker toolbox is carried out.




Next, you will see the configuration being carried out when Docker toolbox is launched.

```
(default) Starting the VM...
(default) Check network to re-create if needed...
(default) Windows might ask for the permission to create a network adapter. Sometimes, such confirmation window is minimized in the taskbar.
(default) Found a new host-only adapter: "VirtualBox Host-Only Ethernet Adapter #3"
(default) Windows might ask for the permission to configure a network adapter. Sometimes, such confirmation window is minimized in the taskbar.
(default) Windows might ask for the permission to configure a dhcp server. Sometimes, such confirmation window is minimized in the taskbar.
(default) Waiting for an IP...
```

A screenshot of a terminal window titled "Docker Quickstart Terminal". The window is black with white text. It displays several lines of log output from the Docker Quickstart Terminal, detailing the configuration process of the Docker VM, including the creation of network adapters and waiting for an IP address.

Once done, you will see Docker configured and launched. You will get an interactive shell for Docker.

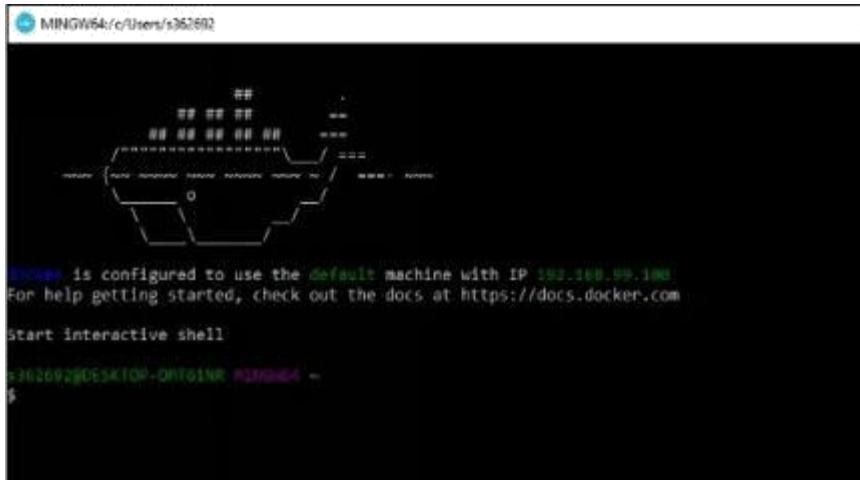

To test that Docker runs properly, we can use the Docker run command to download and run a simple HelloWorld Docker container.

The working of the Docker run command is given below –

```
docker run
```

This command is used to run a command in a Docker container.

Syntax

```
docker run image
```

Options

- Image – This is the name of the image which is used to run the container.

Return Value

The output will run the command in the desired container.


Example

```
sudo docker run hello-world
```

This command will download the hello-world image, if it is not already present, and run the hello-world as a container.

Output

When we run the above command, we will get the following result –

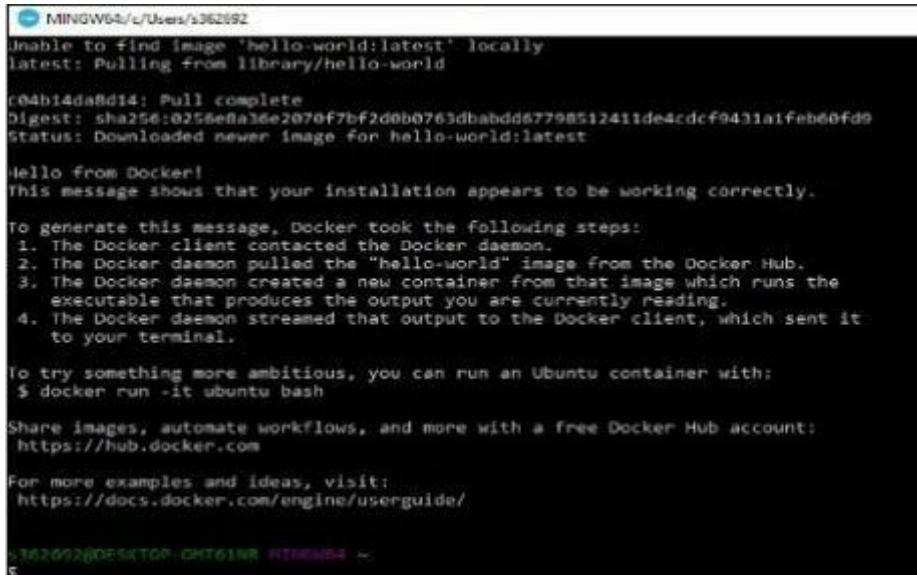

```
MINGW64 /c/Users/s362092
Unable to find image 'hello-world:latest' locally
latest: Pulling from library/hello-world
c04b14da0d14: Pull complete
Digest: sha256:02556ea36e2070f7bf2d0b0763dbabdd67798512411de4cdcf9431a1feb60fd0
Status: Downloaded newer image for hello-world:latest

Hello from Docker!
This message shows that your installation appears to be working correctly.

To generate this message, Docker took the following steps:
1. The Docker client contacted the Docker daemon.
2. The Docker daemon pulled the "hello-world" image from the Docker Hub.
3. The Docker daemon created a new container from that image which runs the
   executable that produces the output you are currently reading.
4. The Docker daemon streamed that output to the Docker client, which sent it
   to your terminal.

To try something more ambitious, you can run an Ubuntu container with:
$ docker run -it ubuntu bash


Share images, automate workflows, and more with a free Docker Hub account:
https://hub.docker.com

For more examples and ideas, visit:
https://docs.docker.com/engine/userguide/
```

If you want to run the Ubuntu OS on Windows, you can download the Ubuntu Image using the following command –

Docker run –it Ubuntu bash

Here you are telling Docker to run the command in the interactive mode via the –it option.

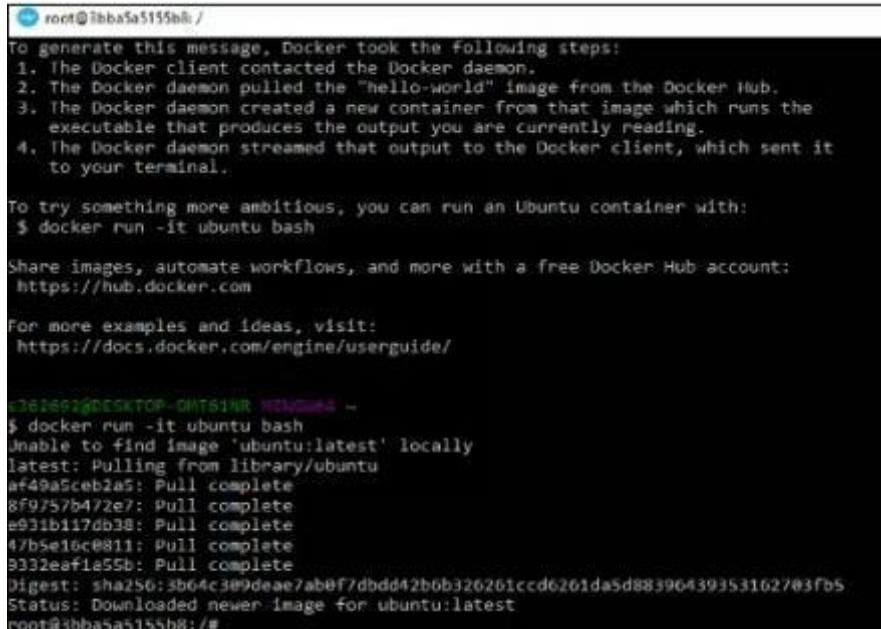

```
root@3bbba5a5155b8:/
To generate this message, Docker took the following steps:
1. The Docker client contacted the Docker daemon.
2. The Docker daemon pulled the "hello-world" image from the Docker Hub.
3. The Docker daemon created a new container from that image which runs the
   executable that produces the output you are currently reading.
4. The Docker daemon streamed that output to the Docker client, which sent it
   to your terminal.

To try something more ambitious, you can run an Ubuntu container with:
$ docker run -it ubuntu bash

Share images, automate workflows, and more with a free Docker Hub account:
https://hub.docker.com

For more examples and ideas, visit:
https://docs.docker.com/engine/userguide/
```

```
s362092@DESKTOP-QM761NR MINGW64 ~
$ docker run -it ubuntu bash
Unable to find image 'ubuntu:latest' locally
latest: Pulling from library/ubuntu
af49a5ceb2a8: Pull complete
8f9757b472e7: Pull complete
e931b117db38: Pull complete
4/b5e16c0811: Pull complete
9332eaef1a55b: Pull complete
Digest: sha256:3b64c3d9deae/abef7dbdd42b0b320261cc6201da5d883964393531627e3fb5
Status: Downloaded newer image for ubuntu:latest
root@3bbba5a5155b8:/#
```

In the output you can see that the Ubuntu image is downloaded and run and then you

will be logged in as a root user in the Ubuntu container.

Docker - Hub

Docker Hub is a registry service on the cloud that allows you to download Docker images that are built by other communities. You can also upload your own Docker built images to Docker hub. In this chapter, we will see how to download and the use the Jenkins Docker image from Docker hub.

The official site for Docker hub is – https://www.docker.com/community-edition#/add_ons


Step 1 – First you need to do a simple sign-up on Docker hub.




Step 2 – Once you have signed up, you will be logged into Docker Hub.



Step 3 – Next, let's browse and find the Jenkins image.

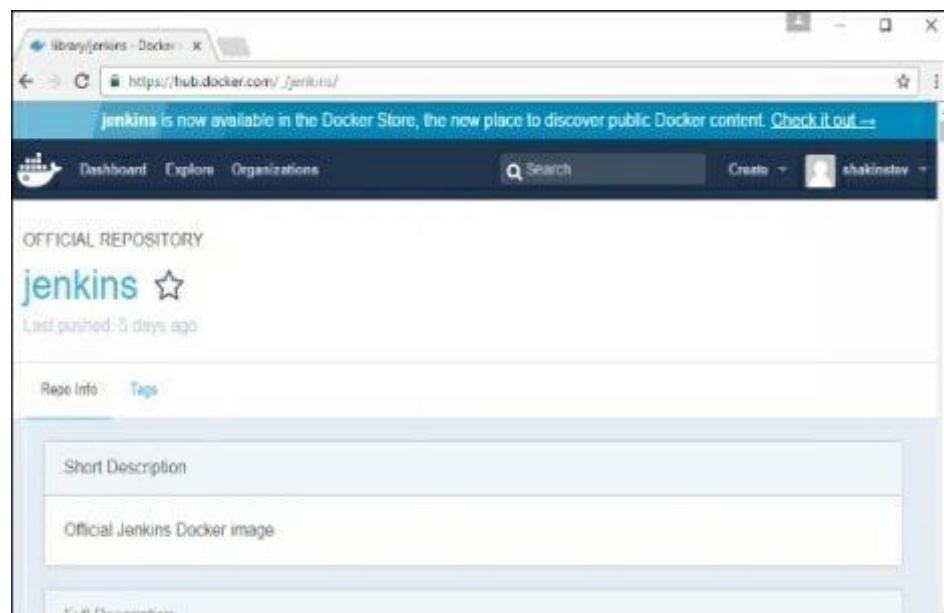

Step 4 – If you scroll down on the same page, you can see the Docker pull command. This will be used to download the Jenkins image onto the local Ubuntu server.

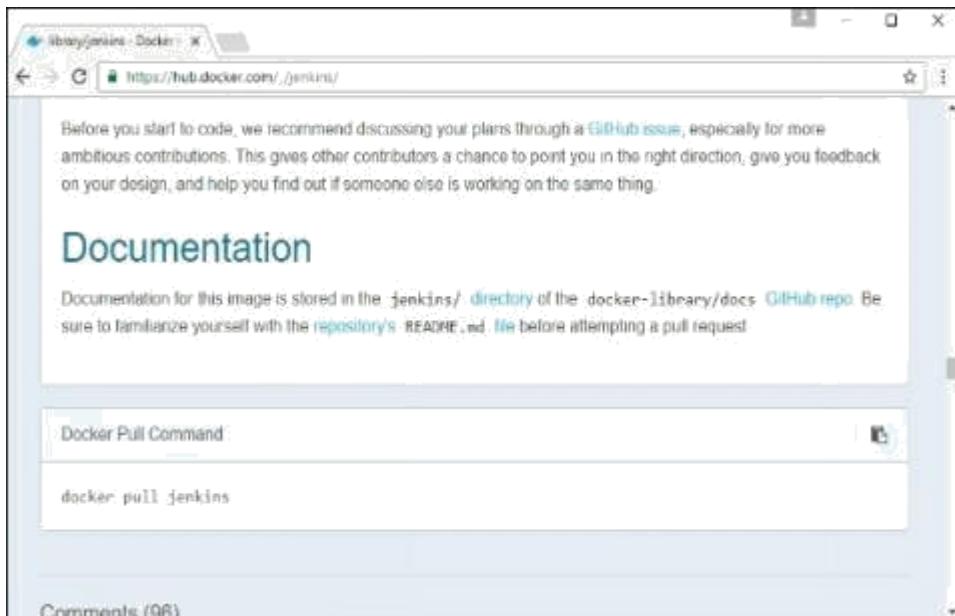

Before you start to code, we recommend discussing your plans through a GitHub issue, especially for more ambitious contributions. This gives other contributors a chance to point you in the right direction, give you feedback on your design, and help you find out if someone else is working on the same thing.

Documentation

Documentation for this image is stored in the `jenkins/` directory of the `docker-library/docs` GitHub repo. Be sure to familiarize yourself with the repository's `README.md` file before attempting a pull request!

Docker Pull Command:

```
docker pull jenkins
```

Comments (96)

Step 5 – Now, go to the Ubuntu server and run the following command –

```
sudo docker pull jenkins
```

```
a079defbaeff: Pull complete
66181a89effa: Pull complete
f4d8f7d94b9c: Pull complete
98e5c3e00215: Pull complete
992fde0f3336: Pull complete
65b58e072256: Pull complete
9b0b6d6525a1: Pull complete
4e7171e4505a: Pull complete
469745638476: Pull complete
49d5aaafff78: Pull complete
c01281524fd6: Pull complete
00a759703a0b: Pull complete
da411a858795: Pull complete
7b8a0b4fd7d0: Pull complete
cbd9e145ea6b: Pull complete
700f8f527cd7: Pull complete
88d27231965c: Pull complete
a067af206313: Pull complete
211049e028a4: Pull complete
7249723069d8: Pull complete
6465c437f020: Pull complete
954c67861e66: Pull complete
6a14c8afb3a: Pull complete
ec070f7e511e: Pull complete
983246da862f: Pull complete
998d1854867e: Pull complete
Digest: sha256:878e055f96c90af9281fd859f7c69ac289e0178594ff36bbb85e53b78969
Status: Downloaded newer image for jenkins:latest
demo@ubuntuserver:~$
```

To run Jenkins, you need to run the following command –

```
sudo docker run -p 8080:8080 -p 50000:50000 jenkins
```

Note the following points about the above sudo command –

- We are using the sudo command to ensure it runs with root access.
- Here, jenkins is the name of the image we want to download from Docker hub and install on our Ubuntu machine.
- -p is used to map the port number of the internal Docker image to our main Ubuntu server so that we can access the container accordingly.

```
*****
Jenkins initial setup is required. An admin user has been created and a password
generated.
Please use the following password to proceed to installation:

69a504bd19634390b4e67fdd0a908e6?

This may also be found at: /var/jenkins_home/secrets/initialAdminPassword

*****
--> setting agent port for jnlp
--> setting agent port for jnlp... done
Dec 01, 2016 8:16:21 PM hudson.model.UpdateSite updateData
INFO: Obtained the latest update center data file for UpdateSource default
Dec 01, 2016 8:16:22 PM hudson.model.UpdateSite updateData
INFO: Obtained the latest update center data file for UpdateSource default
Dec 01, 2016 8:16:22 PM hudson.model.DownloadService$Downloadable load
INFO: Obtained the updated data file for hudson.tasks.Maven.MavenInstaller
Dec 01, 2016 8:16:22 PM hudson.WebAppMain$3 run
INFO: Jenkins is fully up and running
Dec 01, 2016 8:16:25 PM hudson.model.DownloadService$Downloadable load
INFO: Obtained the updated data file for hudson.tools.JDKInstaller
Dec 01, 2016 8:16:25 PM hudson.model.AsyncPeriodicWork$1 run
INFO: Finished Download metadata. 18,218 ms
```

You will then have Jenkins successfully running as a container on the Ubuntu machine.

Docker - Images

In Docker, everything is based on Images. An image is a combination of a file system and parameters. Let's take an example of the following command in Docker.

```
docker run hello-world
```

- The Docker command is specific and tells the Docker program on the Operating System that something needs to be done.
- The run command is used to mention that we want to create an instance of an image, which is then called a container.
- Finally, "hello-world" represents the image from which the container is made.

Now let's look at how we can use the CentOS image available in Docker Hub to run CentOS on our Ubuntu machine. We can do this by executing the following command on our Ubuntu machine –

```
sudo docker run centos –it /bin/bash
```

Note the following points about the above sudo command –

- We are using the sudo command to ensure that it runs with root access.
- Here, centos is the name of the image we want to download from Docker Hub and install on our Ubuntu machine.
- –it is used to mention that we want to run in interactive mode.
- /bin/bash is used to run the bash shell once CentOS is up and running.

Displaying Docker Images

To see the list of Docker images on the system, you can issue the following command.

```
docker images
```

This command is used to display all the images currently installed on the system.

Syntax

```
docker images
```

Options

None

Return Value

The output will provide the list of images on the system.

Example

```
sudo docker images
```

Output

When we run the above command, it will produce the following result –

```
demo@ubuntuserver:~$ sudo docker images
[sudo] password for demo:
REPOSITORY          TAG      IMAGE ID      CREATED
newcentos           latest   7a86f8ffcb25    9 days ago
jenkins             latest   998d1854867e    2 weeks ago
centos              latest   97cad5e16cb6    4 weeks ago
demo@ubuntuserver:~$ _
```

From the above output, you can see that the server has three images: centos, newcentos, and jenkins. Each image has the following attributes –

- TAG – This is used to logically tag images.
- Image ID – This is used to uniquely identify the image.
- Created – The number of days since the image was created.
- Virtual Size – The size of the image.

Downloading Docker Images

Images can be downloaded from Docker Hub using the Docker run command. Let's see in detail how we can do this.

Syntax

The following syntax is used to run a command in a Docker container.

```
docker run image
```

Options

- Image – This is the name of the image which is used to run the container.

Return Value

The output will run the command in the desired container.

Example

```
sudo docker run centos
```

This command will download the centos image, if it is not already present, and run the OS as a container.

Output

When we run the above command, we will get the following result –

```
demo@ubuntuserver:~$ sudo docker run centos
Unable to find image 'centos:latest' locally
latest: Pulling from centos

3690474eb5b4: Pull complete
af0819ed1fac: Pull complete
05fe84bf6d3f: Pull complete
97cad5e16cb6: Pull complete
Digest: sha256:934ff980b04db1b7484595bac0c8e6f838e1917ad3a38f904ece64f70bbc
Status: Downloaded newer image for centos:latest
demo@ubuntuserver:~$ _
```

You will now see the CentOS Docker image downloaded. Now, if we run the Docker images command to see the list of images on the system, we should be able to see the centos image as well.

```
demo@ubuntuserver:~$ sudo docker run centos
Unable to find image 'centos:latest' locally
latest: Pulling from centos

3690474eb5b4: Pull complete
af0819ed1fac: Pull complete
05fe84bf6d3f: Pull complete
97cad5e16cb6: Pull complete
Digest: sha256:934ff980b04db1b7484595bac0c8e6f838e1917ad3a38f904ece64f70bbc
Status: Downloaded newer image for centos:latest
demo@ubuntuserver:~$ sudo docker images
REPOSITORY          TAG           IMAGE ID            CREATED             VIRTUAL SIZE
jenkins             latest        998d1854867e   2 weeks ago        714.1 MB
centos              latest        97cad5e16cb6   4 weeks ago        196.5 MB
demo@ubuntuserver:~$
```

Removing Docker Images

The Docker images on the system can be removed via the docker rmi command. Let's look at this command in more detail.

`docker rmi`

This command is used to remove Docker images.

Syntax

`docker rmi ImageID`

Options

- ImageID – This is the ID of the image which needs to be removed.

Return Value

The output will provide the Image ID of the deleted Image.

Example

```
sudo docker rmi 7a86f8ffcb25
```

Here, 7a86f8ffcb25 is the Image ID of the newcentos image.

Output

When we run the above command, it will produce the following result –

```
demo@ubuntuserver:~$ sudo docker rmi 7a86f8ffcb25
Untagged: newcentos:latest
Deleted: 7a86f8ffcb258e42c11d971a04b1145151b80122e566bc2b544f8fc3f94caf1e
demo@ubuntuserver:~$
```

Let's see some more Docker commands on images.

docker images -q

This command is used to return only the Image ID's of the images.

Syntax

```
docker images
```

Options

- q – It tells the Docker command to return the Image ID's only.

Return Value

The output will show only the Image ID's of the images on the Docker host.

Example

```
sudo docker images -q
```

Output

When we run the above command, it will produce the following result –

```
demo@ubuntuserver:~$ sudo docker images -q
998d1854867e
97cad5e16cb6
demo@ubuntuserver:~$ _
```

docker inspect

This command is used see the details of an image or container.

Syntax

```
docker inspect Repository
```

Options

- Repository – This is the name of the Image.

Return Value

The output will show detailed information on the Image.

Example

```
sudo docker inspect jenkins
```

Output

When we run the above command, it will produce the following result –

```
    "Hostname": "6b3797ab1e90",
    "Image": "sha256:532b1ef702484a402708f3b65a61e6ddf307bbf2fdfa01be55
a7678ce6c",
    "Labels": {},
    "MacAddress": "",
    "Memory": 0,
    "MemorySwap": 0,
    "NetworkDisabled": false,
    "OnBuild": [],
    "OpenStdin": false,
    "PortSpecs": null,
    "StdinOnce": false,
    "Tty": false,
    "User": "jenkins",
    "Volumes": {
        "/var/jenkins_home": {}
    },
    "WorkingDir": ""
},
"Created": "2016-11-16T20:52:37.568557509Z",
"DockerVersion": "1.12.3",
"Id": "998d1854867eb7873a9f45ff4c3ab25bcf5378c77fc955d344e47cb27e5df723
"Os": "linux",
"Parent": "983246da862f43a967b36cc2fc1af580df3f79760dfd841c1954e7325301
"Size": 5960,
"VirtualSize": 714121162
}
]
demo@ubuntuserver:~$
```

Docker - Containers

Containers are instances of Docker images that can be run using the Docker run command. The basic purpose of Docker is to run containers. Let's discuss how to work with containers.

Running a Container

Running of containers is managed with the Docker run command. To run a container in an interactive mode, first launch the Docker container.

```
sudo docker run -it centos /bin/bash
```

Then hit Crtl+p and you will return to your OS shell.

```
demo@ubuntuserver:~$ sudo docker run -it centos /bin/bash
[root@9f215ed0b0d3 ~]#
```

You will then be running in the instance of the CentOS system on the Ubuntu server.

Listing of Containers

One can list all of the containers on the machine via the docker ps command. This command is used to return the currently running containers.

```
docker ps
```

Syntax

```
docker ps
```

Options

None

Return Value

The output will show the currently running containers.

Example

```
sudo docker ps
```

Output

When we run the above command, it will produce the following result –

```
demo@ubuntuserver:~$ sudo docker ps
CONTAINER ID        IMAGE               COMMAND             CREATED            STATUS              NAMES
9f215ed0b0d3        centos:latest      "/bin/bash"        About a minute ago   Up About a minute   cocky_colden
demo@ubuntuserver:~$
```

Let's see some more variations of the docker ps command.

docker ps - a

This command is used to list all of the containers on the system

Syntax

```
docker ps -a
```

Options

- -a – It tells the docker ps command to list all of the containers on the system.

Return Value

The output will show all containers.

Example

```
sudo docker ps -a
```

Output

When we run the above command, it will produce the following result –

CONTAINER ID	IMAGE	COMMAND	CREATED
STATUS	PORTS		
NAMES			
9f215ed0b0d3	centos:latest	"/bin/bash"	4 minutes ago
Up 4 minutes			
cocky_colden			
e5a02936065a	centos:latest	"/bin/bash"	39 minutes ago
Exited (0) 39 minutes ago			
ecstatic_hodgkin			
9b286dd1f16a	jenkins:latest	"/bin/tini -- /usr/l	18 hours ago
Exited (0) About an hour ago	0.0.0.0:8080->8080/tcp, 0.0.0.0:50000->50000		
cp_jolly_wright			
3646aa260a2d	jenkins:latest	"/bin/tini -- /usr/l	9 days ago
Exited (0) 9 days ago	0.0.0.0:8080->8080/tcp, 0.0.0.0:50000->50000		
cp_reverent_norse			
demo@ubuntuserver:~\$			

docker history

With this command, you can see all the commands that were run with an image via a container.

Syntax

```
docker history ImageID
```

Options

- ImageID – This is the Image ID for which you want to see all the commands that were run against it.

Return Value

The output will show all the commands run against that image.

Example

```
sudo docker history centos
```

The above command will show all the commands that were run against the centos image.

Output

When we run the above command, it will produce the following result –

```
demo@ubuntuserver:~$ sudo docker images
REPOSITORY          TAG      IMAGE ID      CREATED
VIRTUAL SIZE
jenkins            latest   998d1854867e    2 weeks ago
714.1 MB
centos             latest   97cad5e16cb6    4 weeks ago
196.5 MB
demo@ubuntuserver:~$ sudo docker history centos
IMAGE              CREATED      CREATED BY
SIZE
97cad5e16cb6      4 weeks ago   /bin/sh -c #(nop)  CMD ["/bin/bash"]
0 B
05fe84bf6d3f      4 weeks ago   /bin/sh -c #(nop)  LABEL name=CentOS B
e Ina 0 B
af0819ed1fac      4 weeks ago   /bin/sh -c #(nop) ADD file:54df3580ac9
66389 196.5 MB
3690474eb5b4      3 months ago  /bin/sh -c #(nop)  MAINTAINER https://
thub. 0 B
demo@ubuntuserver:~$ _
```

Docker - Working with Containers

In this chapter, we will explore in detail what we can do with containers.

docker top

With this command, you can see the top processes within a container.

Syntax

```
docker top ContainerID
```

Options

- ContainerID – This is the Container ID for which you want to see the top processes.

Return Value

The output will show the top-level processes within a container.

Example

```
sudo docker top 9f215ed0b0d3
```

The above command will show the top-level processes within a container.

Output

When we run the above command, it will produce the following result –

```
demo@ubuntuserver:~$ sudo docker ps
CONTAINER ID        IMAGE               COMMAND             CREATED            STATUS              NAMES
9f215ed0b0d3        centos:latest      "/bin/bash"        12 minutes ago   Up 12 minutes       cocky_colden

demo@ubuntuserver:~$ sudo docker top 9f215ed0b0d3
JID           PID    PPID   C
STIME          TTY    TIME   CMD
root          1606   678    0
18:13          pts/0  00:00:00  /bin/bash

demo@ubuntuserver:~$
```

docker stop

This command is used to stop a running container.

Syntax

```
docker stop ContainerID
```

Options

- ContainerID – This is the Container ID which needs to be stopped.

Return Value

The output will give the ID of the stopped container.

Example

```
sudo docker stop 9f215ed0b0d3
```

The above command will stop the Docker container 9f215ed0b0d3.

Output

When we run the above command, it will produce the following result –

```
demo@ubuntuserver:~$ sudo docker ps
CONTAINER ID        IMAGE               COMMAND             CREATED            STATUS              NAMES
9f215ed0b0d3        centos:latest      "/bin/bash"        22 minutes ago   Up 22 minutes   cocky_colden
demo@ubuntuserver:~$ sudo docker stop 9f215ed0b0d3
9f215ed0b0d3
demo@ubuntuserver:~$ sudo docker rm 9f215ed0b0d3
9f215ed0b0d3
```

docker rm

This command is used to delete a container.

Syntax

```
docker rm ContainerID
```

Options

- ContainerID – This is the Container ID which needs to be removed.

Return Value

The output will give the ID of the removed container.

Example

```
sudo docker rm 9f215ed0b0d3
```

The above command will remove the Docker container 9f215ed0b0d3.

Output

When we run the above command, it will produce the following result –

```
demo@ubuntuserver:~$ sudo docker ps
CONTAINER ID        IMAGE       COMMAND
STATUS              PORTS
9f215ed0b0d3      centos:latest "/bin/bash"
Up 22 minutes      cocky_colden
demo@ubuntuserver:~$ sudo docker stop 9f215ed0b0d3
9f215ed0b0d3
demo@ubuntuserver:~$ sudo docker rm 9f215ed0b0d3
9f215ed0b0d3
```

docker stats

This command is used to provide the statistics of a running container.

Syntax

```
docker stats ContainerID
```

Options

- ContainerID – This is the Container ID for which the stats need to be provided.

Return Value

The output will show the CPU and Memory utilization of the Container.

Example

```
sudo docker stats 9f215ed0b0d3
```

The above command will provide CPU and memory utilization of the Container 9f215ed0b0d3.

Output

When we run the above command, it will produce the following result –

CONTAINER	CPU %	MEM USAGE/LIMIT	MEM %
NET I/O 07b0b6f434fe 648 B/648 B	0.00%	416 KiB/1.416 GiB	0.03%

docker attach

This command is used to attach to a running container.

Syntax

```
docker attach ContainerID
```

Options

- ContainerID – This is the Container ID to which you need to attach.

Return Value

None

Example

```
sudo docker attach 07b0b6f434fe
```

The above command will attach to the Docker container 07b0b6f434fe.

Output

When we run the above command, it will produce the following result –

```
deno@ubuntuserver:~$ sudo docker ps
CONTAINER ID        IMAGE               COMMAND             CREATED            STATUS              NAMES
07b0b6f434fe        centos:latest      "/bin/bash"        3 minutes ago    Up 3 minutes       cocky_pare
deno@ubuntuserver:~$ sudo docker attach 07b0b6f434fe
[root@07b0b6f434fe ~]# _
```

Once you have attached to the Docker container, you can run the above command to see the process utilization in that Docker container.

```
top - 15:24:06 up 2:06, 0 users,  load average: 0.00, 0.01, 0.02
Tasks: 2 total, 1 running, 1 sleeping, 0 stopped, 0 zombie
%Cpu(s): 0.0 us, 0.3 sy, 0.0 ni, 99.7 id, 0.0 wa, 0.0 hi, 0.0 si, 0.0 st
KiB Mem : 1484856 total, 1057152 free, 52368 used, 375336 buff/cache
KiB Swap: 1519612 total, 1519612 free, 0 used. 1403868 avail Mem

 PID USER      PR  NI    VIRT    RES   SHR S %CPU %MEM     TIME+ COMMAND
  1 root      20   0  11784  2992  2644 S  0.0  0.2  0:00.01 bash
 15 root      20   0  51864  3772  3272 R  0.0  0.3  0:00.00 top
```

docker pause

This command is used to pause the processes in a running container.

Syntax

```
docker pause ContainerID
```

Options

- ContainerID – This is the Container ID to which you need to pause the processes in the container.

Return Value

The ContainerID of the paused container.

Example

```
sudo docker pause 07b0b6f434fe
```

The above command will pause the processes in a running container 07b0b6f434fe.

Output

When we run the above command, it will produce the following result –

```
demo@ubuntuserver:~$ sudo docker ps
[sudo] password for demo:
CONTAINER ID        IMAGE               COMMAND             CREATED            STATUS              NAMES
07b0b6f434fe        centos:latest      "/bin/bash"        18 minutes ago   Up 18 minutes   cocky_pare
demo@ubuntuserver:~$ sudo docker pause 07b0b6f434fe
07b0b6f434fe
demo@ubuntuserver:~$ sudo docker ps
CONTAINER ID        IMAGE               COMMAND             CREATED            STATUS              NAMES
07b0b6f434fe        centos:latest      "/bin/bash"        19 minutes ago   Up 19 minutes (Paused)   cocky_pare
demo@ubuntuserver:~$ _
```

docker unpause

This command is used to unpause the processes in a running container.

Syntax

```
docker unpause ContainerID
```

Options

- ContainerID – This is the Container ID to which you need to unpause the processes in the container.

Return Value

The ContainerID of the running container.

Example

```
sudo docker unpause 07b0b6f434fe
```

The above command will unpause the processes in a running container:
07b0b6f434fe

Output

When we run the above command, it will produce the following result –

```
demo@ubuntuserver:~$ sudo docker unpause 07b0b6f434fe  
07b0b6f434fe  
demo@ubuntuserver:~$
```

docker kill

This command is used to kill the processes in a running container.

Syntax

```
docker kill ContainerID
```

Options

- ContainerID – This is the Container ID to which you need to kill the processes in the container.

Return Value

The ContainerID of the running container.

Example

```
sudo docker kill 07b0b6f434fe
```

The above command will kill the processes in the running container 07b0b6f434fe.


Output

When we run the above command, it will produce the following result –

```
demo@ubuntuserver:~$ sudo docker ps
CONTAINER ID        IMAGE               COMMAND             CREATED            STATUS              NAMES
07b0b6f434fe        centos:latest      "/bin/bash"        23 minutes ago   Up 23 minutes   cocky_pare
demo@ubuntuserver:~$ sudo docker kill 07b0b6f434fe
07b0b6f434fe
demo@ubuntuserver:~$
```

Docker – Container Lifecycle


The following illustration explains the entire lifecycle of a Docker container.

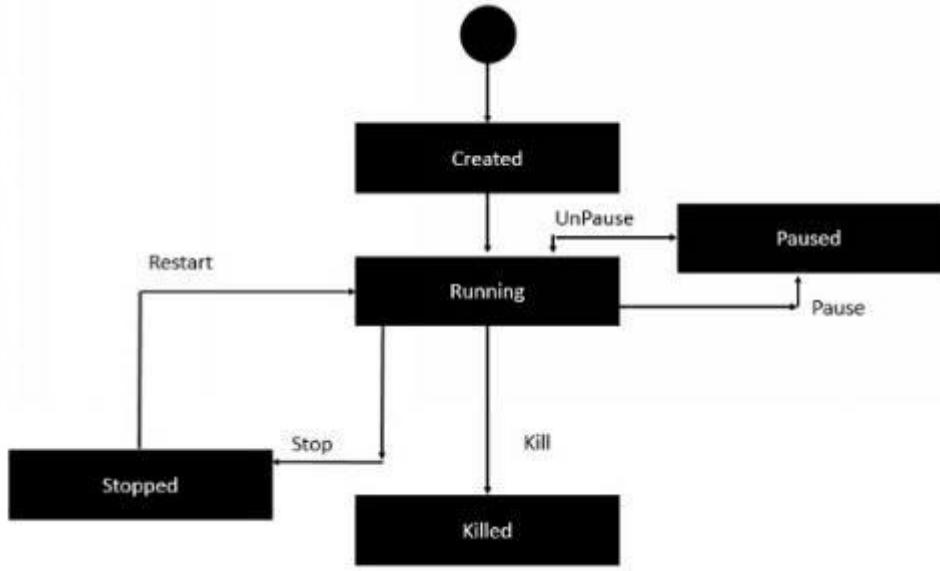

- Initially, the Docker container will be in the created state.
- Then the Docker container goes into the running state when the Docker run command is used.
- The Docker kill command is used to kill an existing Docker container.
- The Docker pause command is used to pause an existing Docker container.
- The Docker stop command is used to pause an existing Docker container.
- The Docker run command is used to put a container back from a stopped state to a running state.


Docker - Architecture

The following image shows the standard and traditional architecture of virtualization.

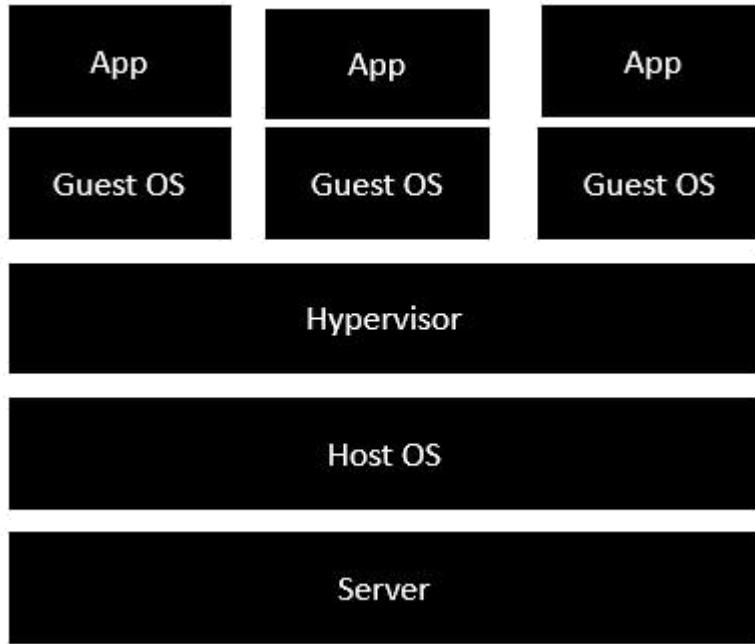

- The server is the physical server that is used to host multiple virtual machines.
- The Host OS is the base machine such as Linux or Windows.
- The Hypervisor is either VMWare or Windows Hyper V that is used to host virtual machines.
- You would then install multiple operating systems as virtual machines on top of the existing hypervisor as Guest OS.
- You would then host your applications on top of each Guest OS.

The following image shows the new generation of virtualization that is enabled via Dockers. Let's have a look at the various layers.

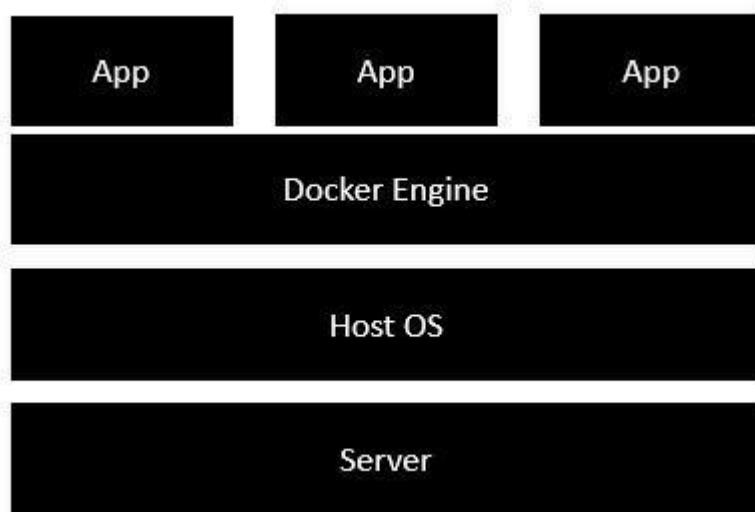

- The server is the physical server that is used to host multiple virtual machines. So this layer remains the same.

- The Host OS is the base machine such as Linux or Windows. So this layer remains the same.
- Now comes the new generation which is the Docker engine. This is used to run the operating system which earlier used to be virtual machines as Docker containers.
- All of the Apps now run as Docker containers.

The clear advantage in this architecture is that you don't need to have extra hardware for Guest OS. Everything works as Docker containers.

Docker - Container and Hosts

The good thing about the Docker engine is that it is designed to work on various operating systems. We have already seen the installation on Windows and seen all the Docker commands on Linux systems. Now let's see the various Docker commands on the Windows OS.

Docker Images

Let's run the Docker images command on the Windows host.



The screenshot shows a terminal window titled 'MINGW64 / c/Users/z362692' with the following text:

```
##
```

```
--
```

```
MINIKUBE is configured to use the Default machine with IP 102.168.99.100
For help getting started, check out the docs at https://docs.docker.com
```

```
start interactive shell
```

```
z362692@DESKTOP-6D4H0NR ~
$ docker images
REPOSITORY      TAG      IMAGE ID      CREATED      SIZE
ubuntu          latest   4ca3e192ff2a   2 days ago   128.2 MB
hello-world     latest   c54a2cc56cbb   5 months ago  1.040 kB
z362692@DESKTOP-6D4H0NR ~
$
```

From here, we can see that we have two images – ubuntu and hello-world.

Running a Container

Now let's run a container in the Windows Docker host.

```

root@5a827a13c12e:/
# 
# 
# 
# 
# 
# 
# 
# 
# 
# 

root@5a827a13c12e:~#
root@5a827a13c12e:~# docker images
REPOSITORY      TAG      IMAGE ID      CREATED      SIZE
ubuntu          latest   4ca3a197ff2a  2 days ago   128.7 MB
hello-world     latest   c54a2cc56cbb  5 months ago  1.848 KB
root@5a827a13c12e:~#
root@5a827a13c12e:~# docker run -it ubuntu /bin/bash
root@5a827a13c12e:~

```

We can see that by running the container, we can now run the Ubuntu container on a Windows host.

List All Containers

Let's list all the containers on the Windows host.

CONTAINER ID	IMAGE	COMMAND	CREATED	STATUS	PORTS
5a827a13c12e	ubuntu	"/bin/bash"	About a minute ago	Up About a minute	
bbba5a5155b8	ubuntu	"bash"	20 hours ago	Up 20 hours	
reverent_booth					

Stopping a Container

Let's now stop a running container on the Windows host.

```

root@5a827a13c12e:~#
root@5a827a13c12e:~# docker ps
CONTAINER ID        IMAGE       COMMAND      CREATED      STATUS      PORTS
 NAMES
5a827a13c12e        ubuntu      "/bin/bash"   About a minute ago   Up About a minute
admiring_bardeen    ubuntu      "bash"        20 hours ago    Up 20 hours
reverent_booth      ubuntu      "bash"        20 hours ago    Up 20 hours
root@5a827a13c12e:~#
root@5a827a13c12e:~# docker stop 5a827a13c12e
5a827a13c12e
root@5a827a13c12e:~#

```

So you can see that the Docker engine is pretty consistent when it comes to different Docker hosts and it works on Windows in the same way it works on Linux.

Docker - Configuring

In this chapter, we will look at the different options to configure Docker.

service docker stop

This command is used to stop the Docker daemon process.

Syntax

```
service docker stop
```

Options

None

Return Value

A message showing that the Docker process has stopped.

Example

```
sudo service docker stop
```

Output

When we run the above command, it will produce the following result –

```
demo@ubuntuserver:~$ sudo service docker stop
[sudo] password for demo:
docker stop/waiting
demo@ubuntuserver:~$
```

service docker start

This command is used to start the Docker daemon process.

Syntax

```
service docker start
```

Options

None

Return Value

A message showing that the Docker process has started.

Example

```
sudo service docker start
```

Output

When we run the above command, it will produce the following result –

```
demo@ubuntuserver:~$ sudo service docker stop
[sudo] password for demo:
docker stop/waiting
demo@ubuntuserver:~$ sudo service docker start
docker start/running, process 1942
demo@ubuntuserver:~$ _
```

Docker - Containers and Shells

By default, when you launch a container, you will also use a shell command while launching the container as shown below. This is what we have seen in the earlier chapters when we were working with containers.

```
demo@ubuntuserver:~$ sudo docker run -it centos /bin/bash
[root@d76d00fbce4c ~]# demo@ubuntuserver:~$ 
demo@ubuntuserver:~$ sudo docker ps
CONTAINER ID        IMAGE               COMMAND             CREATED            STATUS              NAMES
STATUS
d76d00fbce4c      centos:latest      "/bin/bash"        7 seconds ago    Up 6 seconds   boring_goldstine
Up 6 seconds
demo@ubuntuserver:~$
```

In the above screenshot, you can observe that we have issued the following command –

```
sudo docker run -it centos /bin/bash
```

We used this command to create a new container and then used the Ctrl+P+Q command to exit out of the container. It ensures that the container still exists even after we exit from the container.

We can verify that the container still exists with the Docker ps command. If we had to exit out of the container directly, then the container itself would be destroyed.

Now there is an easier way to attach to containers and exit them cleanly without the need of destroying them. One way of achieving this is by using the nsenter command.

Before we run the nsenter command, you need to first install the nsenterimage. It can be done by using the following command –

```
docker run --rm -v /usr/local/bin:/target jpetazzo/nsenter
```

```
78ddc5c32d95: Pull complete
f68a85041029: Pull complete
a82810b57d94: Pull complete
b7593cf24c20: Pull complete
9cb2fb8d9656: Pull complete
f362bdd62dfa: Pull complete
fc5370e1cb31: Pull complete
5e3c4cd314f8: Pull complete
f3e4e1652690: Pull complete
29c0847bbd97: Pull complete
5cc9b463abfd: Pull complete
f36b6bd8d305: Pull complete
3731cc001b90: Pull complete
7b05e8e06727: Pull complete
1a0a7e2eaebe: Pull complete
a249cf324221: Pull complete
Digest: sha256:17dc70210e269e76d2f99c575bc9788ba9565aa9cb70b7132f895a6e846db86
Status: Downloaded newer image for jpetazzo/nsenter:latest
Installing nsenter to /target
Installing docker-enter to /target
Installing importenv to /target
tomo@ubuntudemo:~$
```

Before we use the nsenter command, we need to get the Process ID of the container, because this is required by the nsenter command. We can get the Process ID via the Docker inspect command and filtering it via the Pid.

```
root@ubuntudemo:~# sudo docker ps
CONTAINER ID        IMAGE       COMMAND      CREATED
STATUS              PORTS      NAMES
ef42a4c5e663        centos:latest "/bin/bash"   2 minutes ago
Up 2 minutes
root@ubuntudemo:~# sudo docker inspect ef42a4c5e663 | grep Pid
    "PidMode": "",  

    "Pid": 2978,  

root@ubuntudemo:~#
```

As seen in the above screenshot, we have first used the docker ps command to see the running containers. We can see that there is one running container with the ID of ef42a4c5e663.

We then use the Docker inspect command to inspect the configuration of this container and then use the grep command to just filter the Process ID. And from the output, we can see that the Process ID is 2978.

Now that we have the process ID, we can proceed forward and use the nsenter command to attach to the Docker container.

nsenter

This method allows one to attach to a container without exiting the container.

Syntax

```
nsenter -m -u -n -p -i -t containerID command
```

Options

- -u is used to mention the Uts namespace
- -m is used to mention the mount namespace
- -n is used to mention the network namespace
- -p is used to mention the process namespace
- -i is to make the container run in interactive mode.
- -t is used to connect the I/O streams of the container to the host OS.
- containerID – This is the ID of the container.
- Command – This is the command to run within the container.

Return Value

None

Example

```
sudo nsenter -m -u -n -p -i -t 2978 /bin/bash
```

Output

```
root@ubuntudemo:~# sudo nsenter -m -u -n -p -i -t 2978 /bin/bash
bash-4.2# exit
root@ubuntudemo:~# sudo docker ps
CONTAINER ID        IMAGE               COMMAND             CREATED            STATUS              NAMES
ef42a4c5e663        centos:latest      "/bin/bash"         9 minutes ago     Up 9 minutes       stoic_banach
root@ubuntudemo:~# _
```

From the output, we can observe the following points –

- The prompt changes to the bash shell directly when we issue the nsenter command.
- We then issue the exit command. Now normally if you did not use the nsenter command, the container would be destroyed. But you would notice that when we run the nsenter command, the container is still up and running.

Docker - File

In the earlier chapters, we have seen the various Image files such as Centos which get downloaded from Docker hub from which you can spin up containers. An example is again shown below.

```
root@ubuntudemo: # sudo docker images
REPOSITORY          TAG      IMAGE ID      CREATED
VIRTUAL SIZE
centos              latest   97cad5e16cb6    4 weeks ago
196.5 MB
jpetazzo/nsenter    latest   a249cf324221    4 months ago
370.9 MB
root@ubuntudemo:"# _
```

If we use the Docker images command, we can see the existing images in our system. From the above screenshot, we can see that there are two images: centos and nsenter.

But Docker also gives you the capability to create your own Docker images, and it can be done with the help of Docker Files. A Docker File is a simple text file with instructions on how to build your images.

The following steps explain how you should go about creating a Docker File.

Step 1 – Create a file called Docker File and edit it using vim. Please note that the name of the file has to be "Dockerfile" with "D" as capital.

```
root@ubuntudemo:~# sudo vim Dockerfile
```

Step 2 – Build your Docker File using the following instructions.

```
#This is a sample Image
FROM ubuntu
MAINTAINER demousr@gmail.com

RUN apt-get update
RUN apt-get install -y nginx
CMD ["echo", "Image created"]
```

The following points need to be noted about the above file –

- The first line "#This is a sample Image" is a comment. You can add comments to the Docker File with the help of the # command
- The next line has to start with the FROM keyword. It tells docker, from which base image you want to base your image from. In our example, we are creating an image from the ubuntu image.
- The next command is the person who is going to maintain this image. Here you specify the MAINTAINER keyword and just mention the email ID.
- The RUN command is used to run instructions against the image. In our case, we first update our Ubuntu system and then install the nginx server on our ubuntu image.
- The last command is used to display a message to the user.
-

Step 3 – Save the file. In the next chapter, we will discuss how to build the image.

```
#This is a sample Image
FROM ubuntu
MAINTAINER demousr@gmail.com
RUN apt-get update
RUN apt-get install -y nginx
CMD ["echo",""Image created"""]
```

Docker - Building Files

We created our Docker File in the last chapter. It's now time to build the Docker File. The Docker File can be built with the following command –

```
docker build
```

Let's learn more about this command.

docker build

This method allows the users to build their own Docker images.

Syntax

```
docker build -t ImageName:TagName dir
```

Options

- -t – is to mention a tag to the image
- ImageName – This is the name you want to give to your image.
- TagName – This is the tag you want to give to your image.
- Dir – The directory where the Docker File is present.

Return Value

None

Example

```
sudo docker build -t myimage:0.1
```

Here, myimage is the name we are giving to the Image and 0.1 is the tag number we are giving to our image.

Since the Docker File is in the present working directory, we used "." at the end of the

command to signify the present working directory.

Output

From the output, you will first see that the Ubuntu Image will be downloaded from Docker Hub, because there is no image available locally on the machine.

```
root@ubuntudemo: # sudo docker build -t myimage:0.1 .
Sending build context to Docker daemon 11.78 kB
Sending build context to Docker daemon
Step 0 : FROM ubuntu
latest: Pulling from ubuntu

4d330285ec99: Downloading 2.535 MB/50.1 MB
497dd7934d13: Download complete
bca38844f775: Download complete
e711979f32e2: Download complete
f38e3ca2b73a: Download complete
103d358b91a9: Download complete
```

Finally, when the build is complete, all the necessary commands would have run on the image.

```
debconf: unable to initialize frontend: Readline
debconf: (Can't locate Term/ReadLine.pm in @INC (you may need to install the Term::ReadLine module) (@INC contains: /etc/perl /usr/local/lib/x86_64-linux-gnu/perl/5.22.1 /usr/local/share/perl/5.22.1 /usr/lib/x86_64-linux-gnu/perl5/5.22 /usr/share/perl5 /usr/lib/x86_64-linux-gnu/perl/5.22 /usr/share/perl/5.22 /usr/local/lib/site_perl /usr/lib/x86_64-linux-gnu/perl-base .) at /usr/share/perl5/Debconf/FrontEnd/Readline.pm line 7.)
debconf: falling back to frontend: Teletype
Setting up nginx-core (1.10.0-0ubuntu0.16.04.4) ...
invoke-rc.d: could not determine current runlevel
invoke-rc.d: policy-rc.d denied execution of start.
Setting up nginx (1.10.0-0ubuntu0.16.04.4) ...
Processing triggers for libc-bin (2.23-0ubuntu4) ...
Processing triggers for sgml-base (1.26+nmu4ubuntu1) ...
Processing triggers for systemd (229-4ubuntu12) ...
    --> e124d8a46ac3
Removing intermediate container e163d67fb876
Step 4 : CMD echo Image created
    --> Running in 445fbe32a3ac
    --> 8f7e840e407c
Removing intermediate container 445fbe32a3ac
Successfully built 8f7e840e407c
root@ubuntudemo:~#
```

You will then see the successfully built message and the ID of the new Image. When you run the Docker images command, you would then be able to see your new image.

```

root@ubuntudemo:~# sudo docker images
REPOSITORY          TAG        IMAGE ID      CREATED
VIRTUAL SIZE
myimage             0.1       8f7e840e407c   About a minute ago
224.5 MB
ubuntu              latest    103d358b91a9   6 days ago
128.2 MB
centos              latest    97cad5e16cb6   4 weeks ago
196.5 MB
jpetazzo/nsenter   latest    a249cf324221   4 months ago
370.9 MB
root@ubuntudemo:~#

```

You can now build containers from your new Image.

Docker - Public Repositories

Public repositories can be used to host Docker images which can be used by everyone else. An example is the images which are available in Docker Hub. Most of the images such as Centos, Ubuntu, and Jenkins are all publicly available for all. We can also make our images available by publishing it to the public repository on Docker Hub.

For our example, we will use the myimage repository built in the "Building Docker Files" chapter and upload that image to Docker Hub. Let's first review the images on our Docker host to see what we can push to the Docker registry.

```

demo@ubuntudemo:~$ sudo docker images
REPOSITORY          TAG        IMAGE ID      CREATED
SIZE
myimage             0.1       7738aa0e1b36   9 minutes ago
225.3 MB
centos              latest    67591570dd29   2 days ago
191.8 MB
ubuntu              latest    104bec311bcd   2 days ago
129 MB
demo@ubuntudemo:~$ 


```

Here, we have our myimage:0.1 image which was created as a part of the "Building Docker Files" chapter. Let's use this to upload to the Docker public repository.


The following steps explain how you can upload an image to public repository.

Step 1 – Log into Docker Hub and create your repository. This is the repository where your image will be stored. Go to <https://hub.docker.com/> and log in with your


credentials.

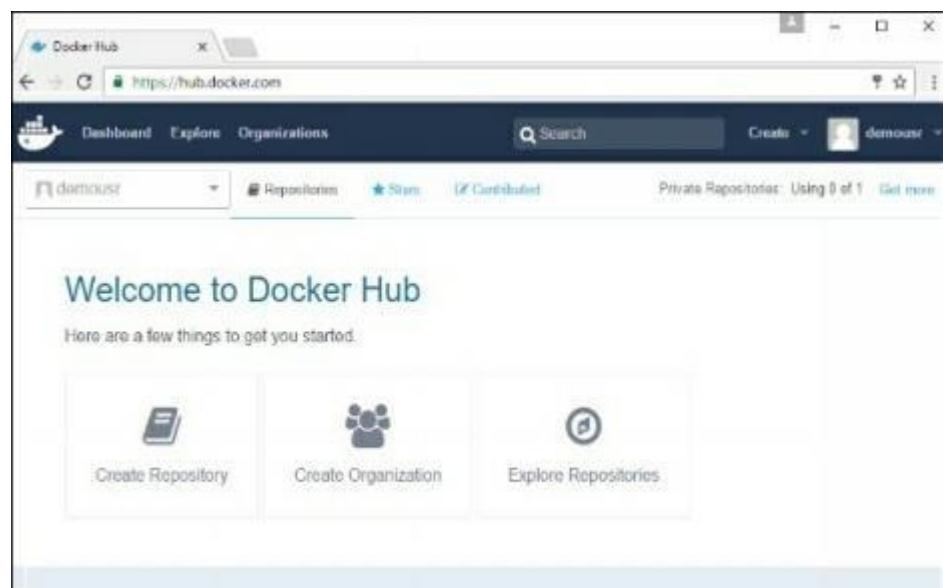

Step 2 – Click the button "Create Repository" on the above screen and create a repository with the name demorep. Make sure that the visibility of the repository is public.

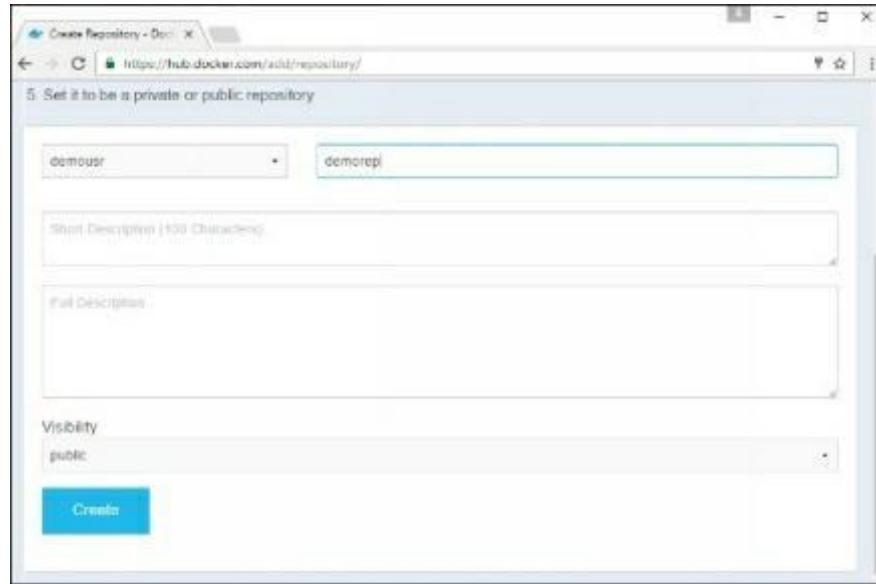

Once the repository is created, make a note of the pull command which is attached to the repository.

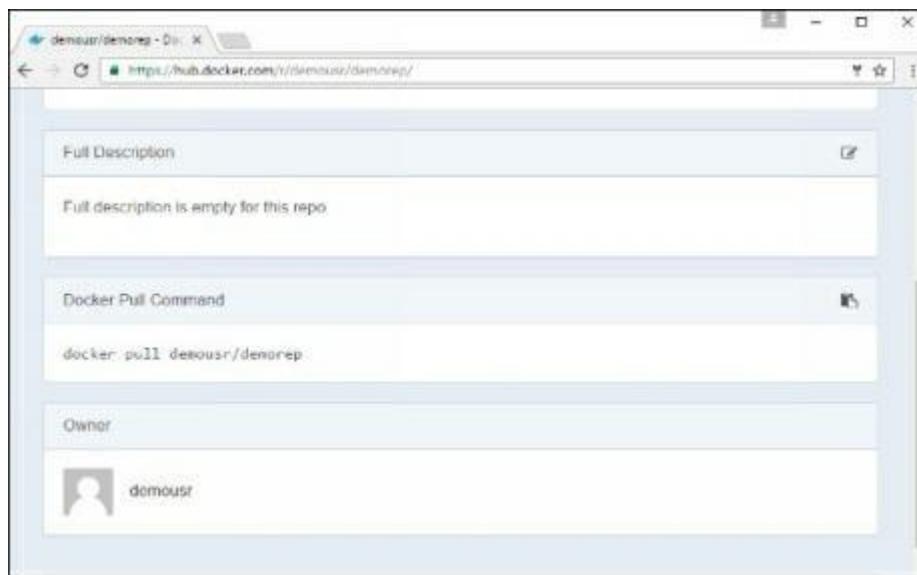

The pull command which will be used in our repository is as follows –

```
docker pull demouser/demorep
```

Step 3 – Now go back to the Docker Host. Here we need to tag our myimage to the new repository created in Docker Hub. We can do this via the Docker tag command.

We will learn more about this tag command later in this chapter.

Step 4 – Issue the Docker login command to login into the Docker Hub repository from the command prompt. The Docker login command will prompt you for the username and password to the Docker Hub repository.

```
demo@ubuntudemo:~$ sudo docker login
Login with your Docker ID to push and pull images from Docker Hub. If you don't
have a Docker ID, head over to https://hub.docker.com to create one.
Username: denousr
Password:
Login Succeeded
demo@ubuntudemo:~$
```

Step 5 – Once the image has been tagged, it's now time to push the image to the Docker Hub repository. We can do this via the Docker push command. We will learn more about this command later in this chapter.

docker tag

This method allows one to tag an image to the relevant repository.

Syntax

```
docker tag imagID Repositoryname
```

Options

- **imagID** – This is the ImagID which needs to be tagged to the repository.
- **Repositoryname** – This is the repository name to which the ImagID needs to be tagged to.

Return Value

None

Example

```
sudo docker tag ab0c1d3744dd demouser/demorep:1.0
```

Output

A sample output of the above example is given below.

```
leno@ubuntudemo:~$ sudo docker images
REPOSITORY          TAG      IMAGE ID      CREATED
SIZE
myimage              0.1      ab0c1d3744dd    6 minutes ago
225.3 MB
centos               latest   67591570dd29    2 days ago
191.8 MB
ubuntu               latest   104bec311bcd    2 days ago
129 MB
demo@ubuntudemo:~$ sudo docker tag ab0c1d3744dd demouser/demorep:1.0
demo@ubuntudemo:~$
```

docker push

This method allows one to push images to the Docker Hub.

Syntax

```
docker push Repositoryname
```

Options

- Repositoryname – This is the repository name which needs to be pushed to the Docker Hub.

Return Value

The long ID of the repository pushed to Docker Hub.


Example

```
sudo docker push demousr/demorep:1.0
```

Output

```
demo@ubuntudemo:~$ sudo docker push demousr/demorep:1.0
The push refers to a repository [docker.io/demousr/demorep]
2fa3ddba4e69: Layer already exists
ef84b80e23cc: Layer already exists
5972ebc5b524: Layer already exists
3d515508d4eb: Layer already exists
bbe6cef52379: Layer already exists
87f1743c24123: Pushed
32d75bc97c41: Layer already exists
1.0: digest: sha256:1bcdcae3a9270a95798f02cd287b91956c5a6cf9fae08d82eb3d11f3a22d4
8d42 size: 1781
demo@ubuntudemo:"$
```

If you go back to the Docker Hub page and go to your repository, you will see the tag name in the repository.

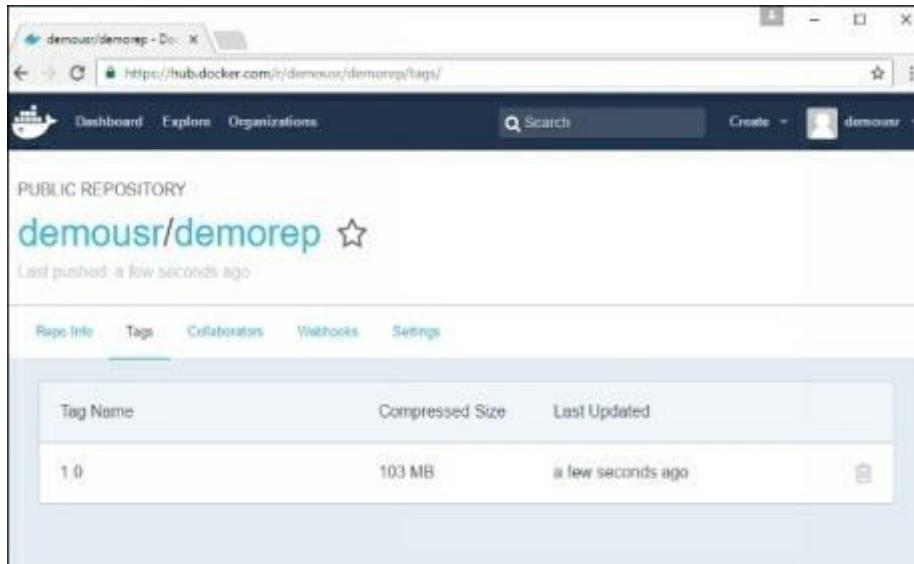

Now let's try to pull the repository we uploaded onto our Docker host. Let's first delete the images, myimage:0.1 and demousr/demorep:1.0, from the local Docker host. Let's use the Docker pull command to pull the repository from the Docker Hub.

```
demo@ubuntudemo:~$ sudo docker images
REPOSITORY          TAG      IMAGE ID      CREATED
SIZE
centos              latest   67591570dd29    2 days ago
191.8 MB
ubuntu              latest   104bec311bcd    2 days ago
129 MB
demo@ubuntudemo:~$ sudo docker pull demousr/demorep:1.0
1.0: Pulling from demousr/demorep
b3e1c725a05f: Already exists
4daad8bdd31: Already exists
63fe8c0068a8: Already exists
4a79713c436f: Already exists
bd842a2105a8: Already exists
9b0dd3bf5478: Pull complete
6d3c35e0a8a2: Pull complete
Digest: sha256:1bcd4ae3a9270a95798f02cd287b91956c5a6cf9fae08d82eb3d11f3a22d48d42
Status: Downloaded newer image for demousr/demorep:1.0
demo@ubuntudemo:~$
```

From the above screenshot, you can see that the Docker pull command has taken our new repository from the Docker Hub and placed it on our machine.

Docker - Managing Ports

In Docker, the containers themselves can have applications running on ports. When you run a container, if you want to access the application in the container via a port number, you need to map the port number of the container to the port number of the Docker host. Let's look at an example of how this can be achieved.

In our example, we are going to download the Jenkins container from Docker Hub. We are then going to map the Jenkins port number to the port number on the Docker host.

Step 1 – First, you need to do a simple sign-up on Docker Hub.




Step 2 – Once you have signed up, you will be logged into Docker Hub.



Step 3 – Next, let's browse and find the Jenkins image.



Step 4 – If you scroll down on the same page, you can see the Docker pull command. This will be used to download the Jenkins Image onto the local Ubuntu server.

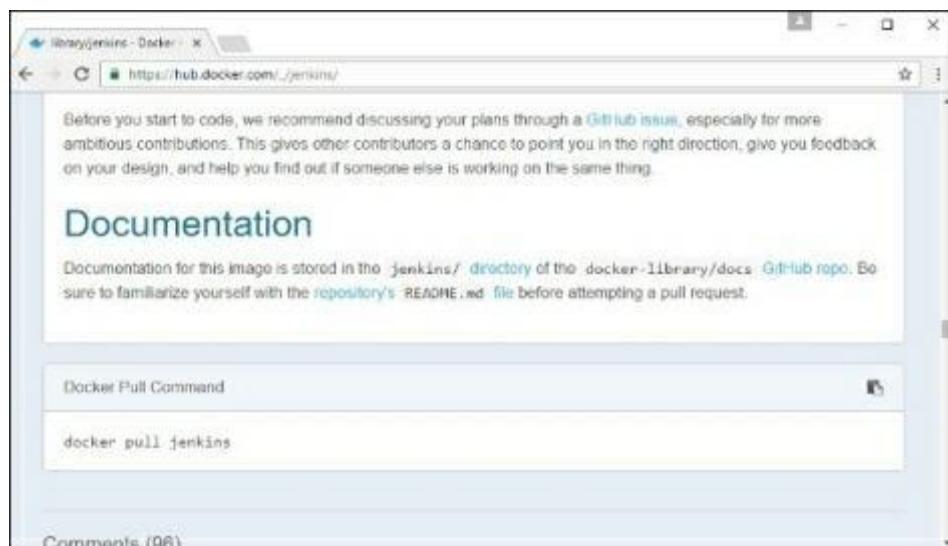

Step 5 – Now go to the Ubuntu server and run the command –

```
sudo docker pull jenkins
```

```
a079defbaeff: Pull complete  
56181a89effa: Pull complete  
f4d8f7d94b9c: Pull complete  
38e5c3e08215: Pull complete  
992fde8f3336: Pull complete  
65b58e072756: Pull complete  
0b0b6d6525a1: Pull complete  
fe7171e4505a: Pull complete  
469745638476: Pull complete  
49d5aaafff78: Pull complete  
c01281524fd6: Pull complete  
00a759703a0b: Pull complete  
da411a858795: Pull complete  
7bb8a0b4fd7d0: Pull complete  
cbd9e145ea6b: Pull complete  
200f8f527cd7: Pull complete  
30d27231965c: Pull complete  
a067af206313: Pull complete  
211049e028a4: Pull complete  
7249723069d8: Pull complete  
6465c437f020: Pull complete  
954c67861e66: Pull complete  
5a14c8afbb3a: Pull complete  
ec070f7e511e: Pull complete  
303246da862f: Pull complete  
398d1854867e: Pull complete  
Digest: sha256:878e055f96c90af9281fd859f7c69ac289e0178594ff36bbb85e53b789691bec  
Status: Downloaded newer image for jenkins:latest  
demo@ubuntuserver:~$  
demo@ubuntuserver:~$
```

Step 6 – To understand what ports are exposed by the container, you should use the Docker inspect command to inspect the image.

Let's now learn more about this inspect command.

docker inspect

This method allows one to return low-level information on the container or image.

Syntax

```
docker inspect Container/Image
```

Options

- Container/Image – The container or image to inspect

Return Value

The low-level information of the image or container in JSON format.

Example

```
sudo docker inspect jenkins
```

Output

```
[{"Id": "sha256:ff6f0051ef574309cc37c29e024f4d2a475d2436c8ebfa1180d45d8ebc9d1f2", "RepoTags": ["jenkins:latest"], "RepoDigests": ["jenkins@sha256:8d39e83e2e97f4f5f1ff6980f9bda7f7b3e7fb9208d94b377d475a7e3054a5b"], "Parent": "", "Comment": "", "Created": "2016-12-01T20:17:24.232532333Z", "Container": "34804931e11a95400d6c40263174f32d498fd3ffff160f6deae807a323365c76", "ContainerConfig": {"Hostname": "6b3797ab1e90", "Domainname": "", "User": "jenkins", "AttachStdin": false, "AttachStdout": false, "AttachStderr": false, "ExposedPorts": {"50000/tcp": {}, "8000/tcp": {}}, "Tty": false, "OpenStdin": false}, "More... (142)"}]
```

The output of the inspect command gives a JSON output. If we observe the output, we can see that there is a section of "ExposedPorts" and see that there are two ports mentioned. One is the data port of 8080 and the other is the control port of 50000.

To run Jenkins and map the ports, you need to change the Docker runcommand and add the 'p' option which specifies the port mapping. So, you need to run the following command –

```
sudo docker run -p 8080:8080 -p 50000:50000 jenkins
```

The left-hand side of the port number mapping is the Docker host port to map to and the right-hand side is the Docker container port number.

When you open the browser and navigate to the Docker host on port 8080, you will see Jenkins up and running.



Docker - Private Registries

You might have the need to have your own private repositories. You may not want to host the repositories on Docker Hub. For this, there is a repository container itself from Docker. Let's see how we can download and use the container for registry.

Step 1 – Use the Docker run command to download the private registry. This can be done using the following command.

```
sudo docker run -d -p 5000:5000 --name registry registry:2
```

The following points need to be noted about the above command –

- Registry is the container managed by Docker which can be used to host private repositories.
- The port number exposed by the container is 5000. Hence with the –p command, we are mapping the same port number to the 5000 port number on our localhost.
- We are just tagging the registry container as “2”, to differentiate it on the Docker host.
- The –d option is used to run the container in detached mode. This is so that the container can run in the background

```
demo@ubuntudeno:~$ sudo docker run -d -p 5000:5000 --name registry registry:2
Unable to find image 'registry:2' locally
2: Pulling from library/registry

3690ec4760f9: Already exists
930045f1e8fb: Already exists
feaa90cbdbc: Already exists
61f85310d350: Already exists
b6082c239858: Already exists
Digest: sha256:1152291c7f93a4ea2ddc95e46d142c31e743b6dd70e194af9e6ebe530f782c17
Status: Downloaded newer image for registry:2
bf47ab9f46963746d8686994339a6a7fc33b4ac889c8f92ffe392cdfa8414068
demo@ubuntudeno:~$
```

Step 2 – Let's do a docker ps to see that the registry container is indeed running.

```
demo@ubuntudemo:~$ sudo docker run -d -p 5000:5000 --name registry registry:2
Unable to find image 'registry:2' locally
2: Pulling from library/registry
3690ec4760f9: Already exists
930045f1e8fb: Already exists
feea90cbdbc: Already exists
61f85310d350: Already exists
b6002c239858: Already exists
Digest: sha256:1152291c7f93a4ea2ddc95e46d142c31e743b6dd70e194af9e6ebe530f782c17
Status: Downloaded newer image for registry:2
bf47ab9f46963746d8686994339a6a7fc33b4ac889c8f92ffe392cdfa8414068
demo@ubuntudemo:~$ sudo docker ps
CONTAINER ID        IMAGE               COMMAND             CREATED            STATUS              PORTS
           NAMES
bf47ab9f4696        registry:2        "/entrypoint.sh /etc/"   About a minute ago   Up About a minute   0.0.0.0:5000->5000/tcp   registry
demo@ubuntudemo:~$ _
```

We have now confirmed that the registry container is indeed running.

Step 3 – Now let's tag one of our existing images so that we can push it to our local repository. In our example, since we have the centos image available locally, we are going to tag it to our private repository and add a tag name of centos.

```
sudo docker tag 67591570dd29 localhost:5000/centos
```

The following points need to be noted about the above command –

- 67591570dd29 refers to the Image ID for the centos image.
- localhost:5000 is the location of our private repository.
- We are tagging the repository name as centos in our private repository.

```
demo@ubuntudemo:~$ sudo docker images
REPOSITORY          TAG      IMAGE ID      CREATED
SIZE
demousr/denorep    1.0      ab0c1d3744dd  24 hours ago
225.3 MB
centos              latest   67591570dd29  3 days ago
191.8 MB
jenkins             latest   ff6f0851ef57  2 weeks ago
714.1 MB
registry            2        c9bd19d022f6  8 weeks ago
33.3 MB
demo@ubuntudemo:~$ sudo docker tag 67591570dd29 localhost:5000/centos
demo@ubuntudemo:~$ -
```

Step 4 – Now let's use the Docker push command to push the repository to our private repository.

```
sudo docker push localhost:5000/centos
```

Here, we are pushing the centos image to the private repository hosted at localhost:5000.

```
demo@ubuntudemo:~$ sudo docker images
REPOSITORY          TAG      IMAGE ID      CREATED
SIZE
demousr/demorep    1.0      ab0c1d3744dd  24 hours ago
225.3 MB
centos              latest   67591570dd29  3 days ago
191.8 MB
jenkins             latest   ff6f0051ef57  2 weeks ago
714.1 MB
registry             2       c9bd19d022f6  8 weeks ago
33.3 MB
demo@ubuntudemo:~$ sudo docker tag 67591570dd29 localhost:5000/centos
demo@ubuntudemo:~$ sudo docker push localhost:5000/centos
The push refers to a repository [localhost:5000/centos]
34e7b85d83e4: Pushed
latest: digest: sha256:c577af3197aacedf79c5a204cd7f493c8e07fffbce7f88f7600bf19c68
8c38799 size: 529
demo@ubuntudemo:~$ _
```

Step 5 – Now let's delete the local images we have for centos using the docker rmi commands. We can then download the required centos image from our private repository.

```
sudo docker rmi centos:latest
```

```
sudo docker rmi 67591570dd29
```

```
demo@ubuntudemo:~$ sudo docker images
REPOSITORY          TAG      IMAGE ID      CREATED
                   SIZE
denouser/denorep    1.0      ab0c1d3744dd  24 hours ago
centos              latest   67591570dd29  3 days ago
localhost:5000/centos  latest   67591570dd29  3 days ago
jenkins             latest   ff6f0851ef57  2 weeks ago
registry             2        c9bd19d022f6  8 weeks ago
                   33.3 MB

demo@ubuntudemo:~$ sudo docker rmi centos:latest
Untagged: centos:latest
Untagged: centos@sha256:c577af3197aacedf79c5a204cd7f493c8e07fffbce7f88f7600bf19c688c38799
demo@ubuntudemo:~$ sudo docker rmi 67591570dd29
Untagged: localhost:5000/centos:latest
Untagged: localhost:5000/centos@sha256:c577af3197aacedf79c5a204cd7f493c8e07fffbce7f88f7600bf19c688c38799
Deleted: sha256:67591570dd29de0e124ee89d50458b099dbd83b12d73e5fdaf8b4dcba4ea50f8
Deleted: sha256:34e7b85d83e48a22bd5dfa2b6b9ee9565b7ef672f09b3d2409c61635f9bca4db
demo@ubuntudemo:~$ _
```

Step 6 – Now that we don't have any centos images on our local machine, we can now use the following Docker pull command to pull the centos image from our private repository.

```
sudo docker pull localhost:5000/centos
```

Here, we are pulling the centos image to the private repository hosted at localhost:5000.

```
demo@ubuntudemo:~$ sudo docker pull localhost:5000/centos
Using default tag: latest
latest: Pulling from centos
45a2e645736c: Pull complete
Digest: sha256:c577af3197aacedf79c5a204cd7f493c8e07fffbce7f88f7600bf19c688c38799
Status: Downloaded newer image for localhost:5000/centos:latest
demo@ubuntudemo:~$ sudo docker images
REPOSITORY          TAG      IMAGE ID      CREATED
                   SIZE
denouser/denorep    1.0      ab0c1d3744dd  24 hours ago
localhost:5000/centos  latest   67591570dd29  3 days ago
jenkins             latest   ff6f0851ef57  2 weeks ago
registry             2        c9bd19d022f6  8 weeks ago
                   33.3 MB

demo@ubuntudemo:~$
```

If you now see the images on your system, you will see the centos image as well.

Docker - Building a Web Server Docker File

We have already learnt how to use Docker File to build our own custom images. Now let's see how we can build a web server image which can be used to build containers.

In our example, we are going to use the Apache Web Server on Ubuntu to build our image. Let's follow the steps given below, to build our web server Docker file.

Step 1 – The first step is to build our Docker File. Let's use vim and create a Docker File with the following information.

```
FROM ubuntu
RUN apt-get update
RUN apt-get install -y apache2
RUN apt-get install -y apache2-utils
RUN apt-get clean
EXPOSE 80 CMD ["apache2ctl", "-D", "FOREGROUND"]
```

The following points need to be noted about the above statements –

- We are first creating our image to be from the Ubuntu base image.
- Next, we are going to use the RUN command to update all the packages on the Ubuntu system.
- Next, we use the RUN command to install apache2 on our image.
- Next, we use the RUN command to install the necessary utility apache2 packages on our image.
- Next, we use the RUN command to clean any unnecessary files from the system.
- The EXPOSE command is used to expose port 80 of Apache in the container to the Docker host.

- Finally, the CMD command is used to run apache2 in the background.

```
FROM ubuntu
MAINTAINER demousr@gmail.com
RUN apt-get update
RUN apt-get install -y apache2
RUN apt-get install -y apache2-utils
RUN apt-get clean
EXPOSE 80
CMD ["apache2ctl", "-D", "FOREGROUND"]
```

Now that the file details have been entered, just save the file.

Step 2 – Run the Docker build command to build the Docker file. It can be done using the following command –

```
sudo docker build -t="mywebserver" .
```

We are tagging our image as mywebserver. Once the image is built, you will get a successful message that the file has been built.

```
Processing triggers for libc-bin (2.23-0ubuntu5) ...
Processing triggers for systemd (229-4ubuntu12) ...
Processing triggers for sgml-base (1.26+nmu4ubuntu1) ...
--> 3deecdb58eea
Removing intermediate container a34fbe45c6f0
Step 5 : RUN apt-get install -y apache2-utils
--> Running in 3924b32e72c0
Reading package lists...
Building dependency tree...
Reading state information...
apache2-utils is already the newest version (2.4.18-2ubuntu3.1).
apache2-utils set to manually installed.
0 upgraded, 0 newly installed, 0 to remove and 4 not upgraded.
--> 9ddc59d1764b
Removing intermediate container 3924b32e72c0
Step 6 : RUN apt-get clean
--> Running in cb73b67c8109
--> 4a13c4c36e57
Removing intermediate container cb73b67c8109
Step 7 : EXPOSE 80
--> Running in 85245722be33
--> e4d2eb0fc674
Removing intermediate container 85245722be33
Step 8 : CMD apache2ctl -D FOREGROUND
--> Running in 49d3437f799f
--> 5ca8134b8d87
Removing intermediate container 49d3437f799f
Successfully built 5ca8134b8d87
demo@ubuntudemo:~$
```

Step 3 – Now that the web server file has been built, it's now time to create a container from the image. We can do this with the Docker run command.

```
sudo docker run -d -p 80:80 mywebserver
```

```

demo@ubuntudemo:~$ sudo docker images
REPOSITORY          TAG      IMAGE ID      CREATED
SIZE
mywebserver        latest   5ca8134b8d87    4 minutes ago
267.6 MB
demouser/demorep  1.0     ab0c1d3744dd    26 hours ago
225.3 MB
ubuntu              latest   104bec311bcd    3 days ago
129 MB
jenkins             latest   ff6f0851ef57    2 weeks ago
714.1 MB
registry            2       c9bd19d022f6    8 weeks ago
33.3 MB
demo@ubuntudemo:~$ sudo docker run -d -p 80:80 mywebserver
42c70f5e90a2915d1954af2207de75657231c906feb9366f15a4e5c128c0675a
demo@ubuntudemo:~$ -

```

The following points need to be noted about the above command –

- The port number exposed by the container is 80. Hence with the `-p` command, we are mapping the same port number to the 80 port number on our localhost.
- The `-d` option is used to run the container in detached mode. This is so that the container can run in the background.

If you go to port 80 of the Docker host in your web browser, you will now see that Apache is up and running.



Docker - Instruction Commands

Docker has a host of instruction commands. These are commands that are put in the Docker File. Let's look at the ones which are available.

CMD Instruction

This command is used to execute a command at runtime when the container is executed.

Syntax

```
CMD command param1
```

Options

- command – This is the command to run when the container is launched.
- param1 – This is the parameter entered to the command.

Return Value

The command will execute accordingly.

Example

In our example, we will enter a simple Hello World echo in our Docker File and create an image and launch a container from it.

Step 1 – Build the Docker File with the following commands –

```
FROM ubuntu
MAINTAINER demousr@gmail.com
CMD ["echo", "hello world"]
```

Here, the CMD is just used to print hello world.

```
FROM ubuntu
MAINTAINER demousr@gmail.com
CMD ["echo", "hello world"]
```

Step 2 – Build the image using the Docker build command.

```
demo@ubuntudemo:~$ sudo docker build -t="mynewdemo"
Sending build context to Docker daemon 21.5 kB
Step 1 : FROM ubuntu
--> 104bec311bcd
Step 2 : MAINTAINER demousr@gmail.com
--> Using cache
--> 429c19673474
Step 3 : CMD echo hello world
--> Running in 6589f66cffd4
--> 90ab8626a009
Removing intermediate container 6589f66cffd4
Successfully built 90ab8626a009
demo@ubuntudemo:~$ _
```

Step 3 – Run a container from the image.

```
demo@ubuntudemo:~$ sudo docker run mynewdemo
hello world
demo@ubuntudemo:~$ _
```

ENTRYPOINT

This command can also be used to execute commands at runtime for the container.
But we can be more flexible with the ENTRYPOINT command.

Syntax

```
ENTRYPOINT command param1
```

Options

- command – This is the command to run when the container is launched.
- param1 – This is the parameter entered into the command.

Return Value

The command will execute accordingly.

Example

Let's take a look at an example to understand more about ENTRYPOINT. In our example, we will enter a simple echo command in our Docker File and create an image and launch a container from it.

Step 1 – Build the Docker File with the following commands –

```
FROM ubuntu
MAINTAINER demousr@gmail.com
ENTRYPOINT ["echo"]
```

```
FROM ubuntu
MAINTAINER demousr@gmail.com
ENTRYPOINT ["echo"]
```

Step 2 – Build the image using the Docker build command.

```
demo@ubuntudemo:~$ sudo docker build -t="entrydemo"
Sending build context to Docker daemon 22.53 kB
Step 1 : FROM ubuntu
--> 104bec311bcd
Step 2 : MAINTAINER demousr@gmail.com
--> Using cache
--> 429c19673474
Step 3 : ENTRYPOINT echo
--> Running in 4a06da685d12
--> c26b8ef5a8c9
Removing intermediate container 4a06da685d12
Successfully built c26b8ef5a8c9
demo@ubuntudemo:~$
```

Step 3 – Run a container from the image.

```
demo@ubuntudemo:~$ sudo docker build -t="entrydemo" .
Sending build context to Docker daemon 22.53 kB
Step 1 : FROM ubuntu
--> 104bec311bcd
Step 2 : MAINTAINER demousr@gmail.com
--> Using cache
--> 429c19673474
Step 3 : ENTRYPOINT echo
--> Running in 4a06da685d12
--> c26b8ef5a8c9
Removing intermediate container 4a06da685d12
Successfully built c26b8ef5a8c9
demo@ubuntudemo:~$ sudo docker run entrydemo Hello World
Hello World
demo@ubuntudemo:~$ _
```

ENV

This command is used to set environment variables in the container.

Syntax

```
ENV key value
```

Options

- Key – This is the key for the environment variable.
- value – This is the value for the environment variable.

Return Value

The command will execute accordingly.

Example

In our example, we will enter a simple echo command in our Docker File and create an image and launch a container from it.

Step 1 – Build the Docker File with the following commands –

```
FROM ubuntu
MAINTAINER demousr@gmail.com
ENV var1=Tutorial var2=point
```

```
FROM ubuntu
MAINTAINER demousr@gmail.com
ENV var1=Tutorial var2=point
```

Step 2 – Build the image using the Docker build command.

```
demo@ubuntudemo:~$ sudo docker build -t="envdemo" .
Sending build context to Docker daemon 23.04 kB
Step 1 : FROM ubuntu
--> 104bec311bcd
Step 2 : MAINTAINER demousr@gmail.com
--> Using cache
--> 429c19673474
Step 3 : ENV var1 Tutorial var2 point
--> Running in 8bd8eccb5986
--> 1def7e9aa854
Removing intermediate container 8bd8eccb5986
Successfully built 1def7e9aa854
demo@ubuntudemo:~$ _
```

Step 3 – Run a container from the image.

```
demo@ubuntudemo:~$ sudo docker build -t="envdemo" .
Sending build context to Docker daemon 23.04 kB
Step 1 : FROM ubuntu
--> 104bec311bcd
Step 2 : MAINTAINER demousr@gmail.com
--> Using cache
--> 429c19673474
Step 3 : ENV var1 Tutorial var2 point
--> Running in 8bd8eccb5986
--> 1def7e9aa854
Removing intermediate container 8bd8eccb5986
Successfully built 1def7e9aa854
demo@ubuntudemo:~$ sudo docker run -it envdemo /bin/bash
root@b48d9e69cc34:/# _
```

Step 4 – Finally, execute the env command to see the environment variables.

```
[root@ubuntudemo ~]# sudo docker run -it envdemo /bin/bash
root@b48d9e69cc31:/# env
var1=Tutorial
var2=point
HOSTNAME=b48d9e69cc34
TERM=xterm
LS_COLORS=rs=0:di=01;34:ln=01;36:nh=00:pi=40;33:so=01;35:do=01;35:bd=40;33:01:cd
=40;33:01:or=40;31:01:mi=00:su=37;41:sg=30;43:ca=30;41:tw=30;42:ow=34;42:st=37;4
4:ex=01;32:*.tar=01:31:*.tgz=01:31:*.arc=01:31:*.arj=01:31:*.taz=01:31:*.lha=01:
31:*.lz4=01:31:*.lzh=01:31:*.lzma=01:31:*.tlz=01:31:*.txz=01:31:*.tzo=01:31:*.t7
z=01:31:*.zip=01:31:*.z=01:31:*.dz=01:31:*.gz=01:31:*.lrz=01:31:*.lz=0
1:31:*.lzo=01:31:*.xz=01:31:*.bz2=01:31:*.bz=01:31:*.tbz=01:31:*.tbz2=01:31:*.tz
=01:31:*.deb=01:31:*.rpm=01:31:*.jar=01:31:*.war=01:31:*.ear=01:31:*.sar=01:31:*
.rar=01:31:*.alz=01:31:*.ace=01:31:*.zoo=01:31:*.cpio=01:31:*.7z=01:31:*.rz=01:3
1:*.cab=01:31:*.jpg=01:35:*,jpeg=01:35:*,gif=01:35:*,bmp=01:35:*,pbm=01:35:*,pgm
=01:35:*,ppm=01:35:*,tga=01:35:*,xbm=01:35:*,xpm=01:35:*,tif=01:35:*,tiff=01:35:
*,png=01:35:*,svg=01:35:*,svgz=01:35:*,mng=01:35:*,pcx=01:35:*,mov=01:35:*,mpg=0
1:35:*,mpeg=01:35:*,m2v=01:35:*,mkv=01:35:*,webm=01:35:*,ogm=01:35:*,mp4=01:35:*
.m4v=01:35:*,mp4v=01:35:*,vob=01:35:*,qt=01:35:*,nuv=01:35:*,umv=01:35:*,asf=01:
35:*,rm=01:35:*,rmvb=01:35:*,flc=01:35:*,avi=01:35:*,fli=01:35:*,fly=01:35:*,gl=
01:35:*,d1=01:35:*,xcf=01:35:*,xwd=01:35:*,gvu=01:35:*,cgm=01:35:*,cnf=01:35:*,o
gv=01:35:*,ogx=01:35:*,aac=00:36:*,au=00:36:*,flac=00:36:*,m4a=00:36:*,mid=00:36
:*,midi=00:36:*,mka=00:36:*,mp3=00:36:*,mpc=00:36:*,ogg=00:36:*,ra=00:36:*,wav=0
0:36:*,oga=00:36:*,opus=00:36:*,spx=00:36:*,xspf=00:36:
PATH=/usr/local/sbin:/usr/local/bin:/usr/sbin:/usr/bin:/sbin:/bin
PWD=/
SHLVL=1
HOME=/root
_=~/usr/bin/env
```

WORKDIR

This command is used to set the working directory of the container.

Syntax

```
WORKDIR dirname
```

Options

- dirname – The new working directory. If the directory does not exist, it will be added.

Return Value


The command will execute accordingly.

Example

In our example, we will enter a simple echo command in our Docker File and create an image and launch a container from it.

Step 1 – Build the Docker File with the following commands –

```
FROM ubuntu
MAINTAINER demousr@gmail.com
WORKDIR /newtemp
CMD pwd
```

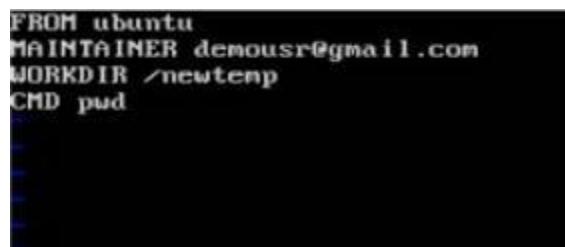

```
FROM ubuntu
MAINTAINER demousr@gmail.com
WORKDIR /newtemp
CMD pwd
```

Step 2 – Build the image using the Docker build command.

```
demo@ubuntudemo:~$ sudo docker build -t="tempdemo"
Sending build context to Docker daemon 23.55 kB
Step 1 : FROM ubuntu
--> 104bec311bcd
Step 2 : MAINTAINER demousr@gmail.com
--> Using cache
--> 429c19673474
Step 3 : WORKDIR /newtemp
--> Using cache
--> e09e6378e765
Step 4 : CMD pwd
--> Using cache
--> c7bedf4e3158
Successfully built c7bedf4e3158
demo@ubuntudemo:~$
```

Step 3 – Run a container from the image.

```
demo@ubuntudemo:~$ sudo docker build -t="tempdemo" .
Sending build context to Docker daemon 23.55 kB
Step 1 : FROM ubuntu
--> 104bec311bcd
Step 2 : MAINTAINER demousr@gmail.com
--> Using cache
--> 429c19673474
Step 3 : WORKDIR /newtemp
--> Using cache
--> e09e6378e765
Step 4 : CMD pwd
--> Using cache
--> c7bedf4e3158
Successfully built c7bedf4e3158
demo@ubuntudemo:~$ sudo docker run tempdemo
/newtemp
demo@ubuntudemo:~$ _
```

Docker - Container Linking

Container Linking allows multiple containers to link with each other. It is a better option than exposing ports. Let's go step by step and learn how it works.

Step 1 – Download the Jenkins image, if it is not already present, using the Jenkins pull command.

```
demo@ubuntudemo:~$ sudo docker jenkins pull_
```

Step 2 – Once the image is available, run the container, but this time, you can specify a name to the container by using the --name option. This will be our source container.

```
demo@ubuntudemo:~$ sudo docker run --name=jenkinsa -d jenkins_
```

Step 3 – Next, it is time to launch the destination container, but this time, we will link it with our source container. For our destination container, we will use the standard Ubuntu image.

```
demo@ubuntudemo:~$ sudo docker run --name=reca --link=jenkinsa:alias-src -it ubuntu:latest /bin/bash_
```

When you do a docker ps, you will see both the containers running.

Step 4 – Now, attach to the receiving container.

```
demo@ubuntudemo:~$ sudo docker ps
[sudo] password for demo:
CONTAINER ID        IMAGE               COMMAND             CREATED            STATUS              PORTS
13ea6d68a149        ubuntu:latest       "/bin/bash"         32 minutes ago   Up 32 minutes
9f55a4963c44        jenkins            "/bin/tini -- /usr/lo" 33 minutes ago   Up 33 minutes     8080/tcp, 50000/tcp   jenkinsa
demo@ubuntudemo:~$ sudo docker attach reca
root@13ea6d68a149:/#
root@13ea6d68a149:/# _
```

Then run the env command. You will notice new variables for linking with the source container.

```
35:*.rm=01:35:*.rmvb=01:35:*.flc=01:35:*.avi=01:35:*.fli=01:35:*.flv=01:35:*.gl=
01:35:*.dl=01:35:*.xcf=01:35:*.xwd=01:35:*.gvu=01:35:*.cgn=01:35:*.emf=01:35:*.o
gv=01:35:*.ogx=01:35:*.aac=00:36:*.au=00:36:*.flac=00:36:*.m4a=00:36:*.mid=00:36
:*.midi=00:36:*.mka=00:36:*.mp3=00:36:*.mpc=00:36:*.ogg=00:36:*.ra=00:36:*.wav=0
0:36:*.oga=00:36:*.opus=00:36:*.spx=00:36:*.xspf=00:36:
ALIAS_SRC_PORT_50000_TCP=tcp://172.17.0.2:50000
ALIAS_SRC_ENV_JENKINS_SLAVE_AGENT_PORT=50000
ALIAS_SRC_PORT_8080_TCP_PORT=8080
ALIAS_SRC_ENV_JAVA_VERSION=8u111
PATH=/usr/local/sbin:/usr/local/bin:/usr/sbin:/usr/bin:/sbin:/bin
PWD=/
ALIAS_SRC_ENV_LANG=C.UTF-8
ALIAS_SRC_ENV_JAVA_DEBIAN_VERSION=8u111-b14-2~bpo8+1
ALIAS_SRC_PORT_50000_TCP_PORT=50000
ALIAS_SRC_PORT_8080_TCP_ADDR=172.17.0.2
ALIAS_SRC_ENV_TINI_VERSION=0.9.0
ALIAS_SRC_PORT_8080_TCP_PROTO=tcp
ALIAS_SRC_ENV_COPY_REFERENCE_FILE_LOG=/var/jenkins_home/copy_reference_file.log
SHLVL=1
HOME=/root
ALIAS_SRC_PORT_50000_TCP_ADDR=172.17.0.2
ALIAS_SRC_ENV_JENKINS_UC=https://updates.jenkins.io
ALIAS_SRC_ENV_TINI_SHA=fad31e20732501c3bb8eeeca423c89ac80ed452
ALIAS_SRC_ENV_JAVA_HOME=/usr/lib/jvm/java-8-openjdk-amd64
ALIAS_SRC_ENV_JENKINS_HOME=/var/jenkins_home
ALIAS_SRC_PORT_8080_TCP=tcp://172.17.0.2:8080
_=~/usr/bin/env
root@13ea6d68a149:/#
root@13ea6d68a149:/#
```

```
demo@ubuntudemo:~$ sudo docker ps
[sudo] password for demo:
CONTAINER ID        IMAGE               COMMAND             CREATED            STATUS              NAMES
13ea6d68a149        ubuntu:latest       "/bin/bash"         32 minutes ago   Up 32 minutes   reca
9f55a4963c44        jenkins            "/bin/tini -- /usr/lo"  33 minutes ago   Up 33 minutes   jenkinsa
demo@ubuntudemo:~$ _
```

Docker - Storage

Storage Drivers

Docker has multiple storage drivers that allow one to work with the underlying storage devices. The following table shows the different storage drivers along with the technology used for the storage drivers.

Technology	Storage Driver
OverlayFS	overlay or overlay2
AUFS	aufs
Btrfs	btrfs
Device Manager	devicemanager
VFS	vfs
ZFS	zfs

Let us now discuss some of the instances in which you would use the various storage drivers –

AUFS

- This is a stable driver; can be used for production-ready applications.
- It has good memory usage and is good for ensuring a smooth Docker experience for containers.
- There is a high-write activity associated with this driver which should be considered.
- It's good for systems which are of Platform as a service type work.

Devicemapper

- This is a stable driver; ensures a smooth Docker experience.
- This driver is good for testing applications in the lab.
- This driver is in line with the main Linux kernel functionality.

Btrfs

- This driver is in line with the main Linux kernel functionality.
- There is a high-write activity associated with this driver which should be considered.
- This driver is good for instances where you maintain multiple build pools.

Ovelay

- This is a stable driver and it is in line with the main Linux kernel functionality.
- It has a good memory usage.
- This driver is good for testing applications in the lab.

ZFS

- This is a stable driver and it is good for testing applications in the lab.
- It's good for systems which are of Platform-as-a-Service type work.

To see the storage driver being used, issue the docker info command.

Syntax

```
docker info
```

Options

None

Return Value

The command will provide all relative information on the Docker component installed on the Docker Host.

Example

```
sudo docker info
```

Output

The following output shows that the main driver used is the aufs driver and that the root directory is stored in /var/lib/docker/aufs.

```
Root Dir: /var/lib/docker/aufs
Backing Filesystem: extfs
Dirs: 75
Dirperm1 Supported: true
Logging Driver: json-file
Cgroup Driver: cgroupfs
Plugins:
  Volume: local
  Network: bridge host overlay null
Swarm: inactive
Runtimes: runc
Default Runtime: runc
Security Options: apparmor
Kernel Version: 4.2.0-27-generic
Operating System: Ubuntu 14.04.4 LTS
OSType: linux
Architecture: x86_64
CPUs: 1
Total Memory: 993.1 MiB
Name: ubuntudemo
ID: ECD6:IFR3:2CQJ:FNXL:APJR:BT6Y:JJ75:FUE6:DNP5:PD7B:AOAD:YUB4
Docker Root Dir: /var/lib/docker
Debug Mode (client): false
Debug Mode (server): false
Username: demouser
Registry: https://index.docker.io/v1/
WARNING: No swap limit support
Insecure Registries:
  127.0.0.0/8
```

Data Volumes

In Docker, you have a separate volume that can be shared across containers.

These are known as data volumes. Some of the features of data volume are –

- They are initialized when the container is created.
- They can be shared and also reused amongst many containers.
- Any changes to the volume itself can be made directly.
- They exist even after the container is deleted.

Let's look at our Jenkins container. Let's do a docker inspect to see the details of this image. We can issue the following command to write the output of the docker inspect command to a text file and then view the file accordingly.

```
sudo docker inspect Jenkins > tmp.txt
```

When you view the text file using the more command, you will see an entry as JENKINS_HOME=/var/Jenkins_home.

This is the mapping that is done within the container via the Jenkins image.

```
"JAVA_DEBIAN_VERSION=8u111-b14-2~bpo8+1",
"CA_CERTIFICATES_JAVA_VERSION=20140324",
"JENKINS_HOME=/var/jenkins_home",
"JENKINS_SLAVE_AGENT_PORT=50000",
"JINI_VERSION=0.9.0",
"JINI_SHA=fa23d1e20732501c3bb8eeeca423c89ac80ed452",
"JENKINS_VERSION=2.19.4",
"JENKINS_UC=https://updates.jenkins.io",
"COPY_REFERENCE_FILE_LOG=/var/jenkins_home/copy_reference_file.log"
],
{
  "Cmd": [
    "/bin/sh",
    "-c",
    "#(nop) COPY file:2a6a3e16202b8dddab5edef50f712c16fe8f6980f5aea8
0c8c76b5db4f903913 in /usr/local/bin/install-plugins.sh"
  ],
  "ArgsEscaped": true,
  "Image": "sha256:86cb73edfb8b3a4681961047f1ca654c81586c7d8fdeaf7904c
cbca09ae4d720",
  "Volumes": {
    "/var/jenkins_home": 0
  },
  "WorkingDir": "",
  "Entrypoint": [
    "/bin/tini",
    "--",
    "/usr/local/bin/jenkins.sh"
  ]
}
--More-- (37%)
```

Now suppose you wanted to map the volume in the container to a local volume, then you need to specify the `-v` option when launching the container. An example is shown below –

```
sudo docker run -d -v /home/demo:/var/jenkins_home -p 8080:8080 -p 50000:50000 jenkins
```

The `-v` option is used to map the volume in the container which is `/var/jenkins_home` to a location on our Docker Host which is `/home/demo`.

```
demo@ubuntudemo:~$ sudo docker run -d -v /home/demo:/var/jenkins_home -p 8080:80
80 -p 50000:50000 jenkins
```

Now if you go to the `/home/demo` location on your Docker Host after launching your container, you will see all the container files present there.

```
demo@ubuntudemo:~$ pwd
/home/demo
demo@ubuntudemo:~$ ls
config.xml
copy_reference_file.log
Dockerfile
hudson.model.UpdateCenter.xml
identity.key.enc
init.groovy.d
jenkins.install.UpgradeWizard.state
job
logs
nodeMonitors.xml
notes
plugins
secret.key
secret.key.not-so-secret
secrets
temp.txt
tmp.txt
userContent
users
war
demo@ubuntudemo:~$
```

Changing the Storage Driver for a Container

If you wanted to change to the storage driver used for a container, you can do so when launching the container. This can be done by using the –volume-driver parameter when using the docker run command. An example is given below –

```
sudo docker run -d --volume-driver=flocker  
-v /home/demo:/var/jenkins_home -p 8080:8080 -p 50000:50000 jenkins
```

The –volume-driver option is used to specify another storage driver for the container.

```
demo@ubuntudemo:~$ sudo docker run -d --volume-driver=flocker -v /home/demo:/var/jenkins_home -p 8080:8080 -p 50000:50000 jenkins  
9bffb1bfebee3fd15bc58ebade534bf18bf996d0052af7190aef5fdcf37180  
demo@ubuntudemo:~$
```

To confirm that the driver has been changed, first let's use the docker ps command to see the running containers and get the container ID. So, issue the following command first –

```
sudo docker ps
```

Then issue a docker inspect against the container and put the output in a text file using the command.

```
sudo docker inspect 9bffb1bfebee > temp.txt
```

```
demo@ubuntudemo:~$ sudo docker ps  
CONTAINER ID        IMAGE               COMMAND             CREATED            NAME  
    STATUS           PORTS              NAMES  
9bffb1bfebee        jenkins            "/bin/tini -- /usr/lo"   2 minutes ago   gloomy_wing  
Up 2 minutes        0.0.0.0:8080->8080/tcp, 0.0.0.0:50000->50000/tcp  
demo@ubuntudemo:~$ sudo docker inspect 9bffb1bfebee > temp.txt_
```

If you browse through the text file and go to the line which says VolumeDriver, you will see that the driver name has been changed.

```
        "Config": {},
        "NetworkMode": "default",
        "PortBindings": [
            "50000/tcp": [
                {
                    "HostIp": "",
                    "HostPort": "50000"
                }
            ],
            "8080/tcp": [
                {
                    "HostIp": "",
                    "HostPort": "8080"
                }
            ]
        ],
        "RestartPolicy": {
            "Name": "no",
            "MaximumRetryCount": 0
        },
        "AutoRemove": false,
        "VolumeDriver": "fllocker",
        "VolumesFrom": null,
        "CapAdd": null,
        "CapDrop": null,
        "Dns": [],
        "DnsOptions": [],
        "DnsSearch": []
    }
--More-- (32%)
```

Creating a Volume

A volume can be created beforehand using the docker command. Let's learn more about this command.

Syntax

```
docker volume create --name=volumename --opt options
```

Options

- name – This is the name of the volume which needs to be created.
- opt – These are options you can provide while creating the volume.

Return Value

The command will output the name of the volume created.

Example

```
sudo docker volume create --name = demo --opt o = size = 100m
```

In the above command, we are creating a volume of size 100MB and with a name of demo.

Output

The output of the above command is shown below –

```
demo@ubuntudemo:~$ sudo docker volume create --name=demo --opt o=size=100m  
demo  
demo@ubuntudemo:~$ _
```

Listing all the Volumes

You can also list all the docker volumes on a docker host. More details on this command is given below –

Syntax

```
docker volume ls
```

Options

None

Return Value

The command will output all the volumes on the docker host.

Example

```
sudo docker volume ls
```

Output

The output of the above command is shown below –

```
demo@ubuntudemo:~$ sudo docker volume ls  
DRIVER    VOLUME NAME  
local     6329aedc9cb821481d4a6c05619839294af86cfac3494a44b7ace23b1bc8  
local     e457e437c2496560355bb02e056d4443ec7e70dd6ceeece12044b1cf4d40b  
a037  
local     3405fca247666c62a05ec15988534c0d385444bc7d5475457bf108a10eb2  
f334  
local     3cf320ee8bd98f550c25aff2803b300815da575bcc0e5a319e18316618e1  
f959  
local     8a32b991086de55f3869ae1bc7057f14dbc29c3aba70db6726a416670747  
d74c  
local     9c7e3f37b4f5483c0550f6122b2e8f053d025b6174aecf14e0a12d96081e  
c450  
local     demo  
local     e94311df64b7ad609f851c5c66d0ec04b680c83539cc2721d32697f048fb  
fd0f  
local     myvolume  
demo@ubuntudemo:~$
```

Docker - Networking

Docker takes care of the networking aspects so that the containers can communicate with other containers and also with the Docker Host. If you do an ifconfig on the Docker Host, you will see the Docker Ethernet adapter. This adapter is created when Docker is installed on the Docker Host.

```
demo@ubuntudemo:~$ sudo ifconfig
docker0  Link encap:Ethernet HWaddr 02:42:b4:a4:43:59
          inet addr:172.17.0.1 Bcast:0.0.0.0 Mask:255.255.0.0
              inet6 addr: fe80::42:b4ff:fea4:4359/64 Scope:Link
                  UP BROADCAST MULTICAST MTU:1500 Metric:1
                  RX packets:55 errors:0 dropped:0 overruns:0 frame:0
                  TX packets:28 errors:0 dropped:0 overruns:0 carrier:0
                  collisions:0 txqueuelen:0
                  RX bytes:3448 (3.4 KB) TX bytes:2576 (2.5 KB)

eth0      Link encap:Ethernet HWaddr 08:00:27:f5:15:76
          inet addr:192.168.137.200 Bcast:192.168.137.255 Mask:255.255.255.0
              inet6 addr: fe80::a00:27ff:fe5f:1576/64 Scope:Link
                  UP BROADCAST RUNNING MULTICAST MTU:1500 Metric:1
                  RX packets:199 errors:0 dropped:0 overruns:0 frame:0
                  TX packets:70 errors:0 dropped:0 overruns:0 carrier:0
                  collisions:0 txqueuelen:1000
                  RX bytes:13734 (13.7 KB) TX bytes:5238 (5.2 KB)

lo        Link encap:Local Loopback
          inet addr:127.0.0.1 Mask:255.0.0.0
              inet6 addr: ::1/128 Scope:Host
                  UP LOOPBACK RUNNING MTU:65536 Metric:1
                  RX packets:40 errors:0 dropped:0 overruns:0 frame:0
                  TX packets:40 errors:0 dropped:0 overruns:0 carrier:0
                  collisions:0 txqueuelen:0
                  RX bytes:3184 (3.1 KB) TX bytes:3184 (3.1 KB)
```

This is a bridge between the Docker Host and the Linux Host. Now let's look at some commands associated with networking in Docker.

Listing All Docker Networks

This command can be used to list all the networks associated with Docker on the host.

Syntax

```
docker network ls
```

Options

None

Return Value

The command will output all the networks on the Docker Host.

Example

```
sudo docker network ls
```

Output

The output of the above command is shown below

```
dcno@ubuntudemo:~$ sudo docker network ls
NETWORK ID      NAME        DRIVER      SCOPE
f07aad6ccadf   bridge      bridge      local
faae6bf679ea   host        host        local
54a2d37e7e00   none       null       local
dcno@ubuntudemo:~$
```

Inspecting a Docker network

If you want to see more details on the network associated with Docker, you can use the Docker network inspect command.

Syntax

```
docker network inspect networkname
```

Options

- **networkname** – This is the name of the network you need to inspect.

Return Value

The command will output all the details about the network.

Example

```
sudo docker network inspect bridge
```

Output

The output of the above command is shown below –

```
"Name": "bridge",
"Id": "f07aad6ccadf388082ccf9ad37db43f78adec85fb96ae0b2e9e8390c6d674242",
"Scope": "local",
"Driver": "bridge",
"EnableIPv6": false,
"IPAM": {
    "Driver": "default",
    "Options": null,
    "Config": [
        {
            "Subnet": "172.17.0.0/16",
            "Gateway": "172.17.0.1"
        }
    ]
},
"Internal": false,
"Containers": {},
"Options": {
    "com.docker.network.bridge.default_bridge": "true",
    "com.docker.network.bridge.enable_icc": "true",
    "com.docker.network.bridge.enable_ip_masquerade": "true",
    "com.docker.network.bridge.host_binding_ipv4": "0.0.0.0",
    "com.docker.network.bridge.name": "docker0",
    "com.docker.network.driver.mtu": "1500"
},
"Labels": {}
}
demo@ubuntudemo:~$
```

Now let's run a container and see what happens when we inspect the network again. Let's spin up an Ubuntu container with the following command –

```
sudo docker run -it ubuntu:latest /bin/bash
```

```
demo@ubuntudemo:~$ sudo docker run -it ubuntu:latest /bin/bash
```

Now if we inspect our network name via the following command, you will now see that the container is attached to the bridge.

```
sudo docker network inspect bridge
```

```
        {
            "Subnet": "172.17.0.0/16",
            "Gateway": "172.17.0.1"
        }
    ],
    "Internal": false,
    "Containers": [
        "8e7b9a6dc121ba1c9a9fe48542db0149ee87b5ef031f518fb15751741ea0447": {
            "Name": "suspicious_blackwell",
            "EndpointID": "d30971d663e91ec2439355bb43c99613d500e35fbaae1957ef74cb650f40723",
            "MacAddress": "02:42:ac:11:00:02",
            "IPv4Address": "172.17.0.2/16",
            "IPv6Address": ""
        }
    ],
    "Options": {
        "com.docker.network.bridge.default_bridge": "true",
        "com.docker.network.bridge.enable_icc": "true",
        "com.docker.network.bridge.enable_ip_masquerade": "true",
        "com.docker.network.bridge.host_binding_ipv4": "0.0.0.0",
        "com.docker.network.bridge.name": "docker0",
        "com.docker.network.driver.mtu": "1500"
    },
    "Labels": {}
}

```

leno@ubuntudeno:~\$

Creating Your Own New Network

One can create a network in Docker before launching containers. This can be done with the following command –

Syntax

```
docker network create --driver drivername name
```

Options

- drivername – This is the name used for the network driver.
- name – This is the name given to the network.

Return Value

The command will output the long ID for the new network.

Example

```
sudo docker network create --driver bridge new_nw
```

Output

The output of the above command is shown below –

```
demo@ubuntudemo:~$ sudo docker network create --driver bridge new_nw
f01b64dc09425cc4906e20b5e17765e3248ea727068e0e2172bfc4aec42586fe
demo@ubuntudemo:~$ _
```

You can now attach the new network when launching the container. So let's spin up an Ubuntu container with the following command –

```
sudo docker run -it --network=new_nw ubuntu:latest /bin/bash
```

```
demo@ubuntudemo:~$ sudo docker run -it --network=new_nw ubuntu:latest /bin/bash
```

And now when you inspect the network via the following command, you will see the

container attached to the network.

```
sudo docker network inspect new_nw
```


```
Scope": "local",
"Driver": "bridge",
"EnableIPv6": false,
"IPAM": {
    "Driver": "default",
    "Options": {},
    "Config": [
        {
            "Subnet": "172.18.0.0/16",
            "Gateway": "172.18.0.1/16"
        }
    ]
},
"Internal": false,
"Containers": {
    "38604fc42bcb5f78d42a8f40f34fa245301b2020a84c9e602786d2103ca6b847": {
        "Name": "boring_dubinsky",
        "EndpointID": "74d6b14a6393bf3081d5d9ec012b5b76b2ead49e85a5f664c621761a9e69612",
        "MacAddress": "02:42:ac:12:00:02",
        "IPv4Address": "172.18.0.2/16",
        "IPv6Address": ""
    }
},
"Options": {},
"Labels": {}
}
leno@ubuntudemo:~$
```

Docker - Setting Node.js

Node.js is a JavaScript framework that is used for developing server-side applications. It is an open source framework that is developed to run on a variety of operating systems. Since Node.js is a popular framework for development, Docker has also ensured it has support for Node.js applications.

We will now see the various steps for getting the Docker container for Node.js up and running.

Step 1 – The first step is to pull the image from Docker Hub. When you log into Docker Hub, you will be able to search and see the image for Node.js as shown below. Just type in Node in the search box and click on the node (official) link which comes up in the search results.

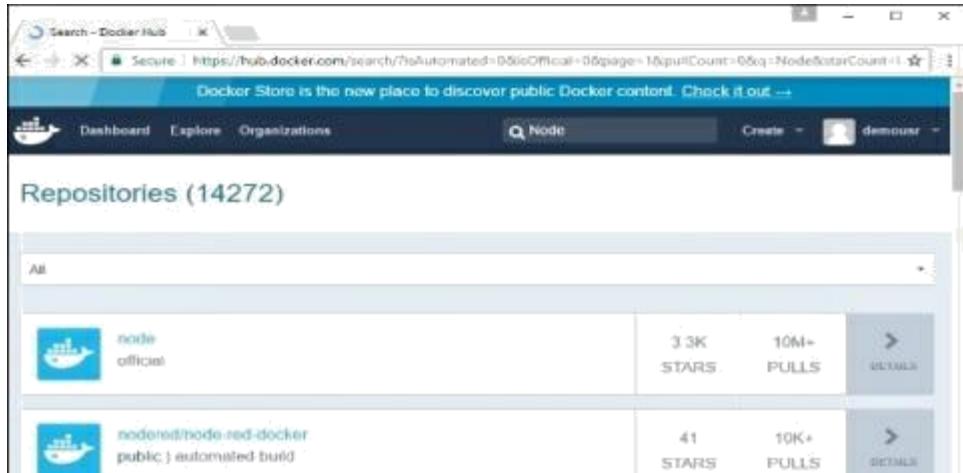

Step 2 – You will see that the Docker pull command for node in the details of the repository in Docker Hub.



Step 3 – On the Docker Host, use the Docker pull command as shown above to download the latest node image from Docker Hub.

```
demo@ubuntudemo:~$ sudo docker pull node
```

Once the pull is complete, we can then proceed with the next step.

```
demo@ubuntudemo:~$ sudo docker pull node
Using default tag: latest
latest: Pulling from library/node

75a822cd7888: Downloading 31.54 MB/39.73 MB
75a822cd7888: Pull complete
57de64c72267: Pull complete
4306be1e8943: Pull complete
871436ab7225: Pull complete
9110c26a367a: Pull complete
1f04fe713f1b: Pull complete
723bac39028e: Pull complete
Digest: sha256:08d77f1984cf79739ba7c987636cb871fd69745754200e5891a0c7ee2d9965b0
Status: Downloaded newer image for node:latest
demo@ubuntudemo:~$
```

Step 4 – On the Docker Host, let's use the vim editor and create one Node.js example file. In this file, we will add a simple command to display “HelloWorld” to the command prompt.

```
demo@ubuntudemo:~$ vim HelloWorld.js
```

In the Node.js file, let's add the following statement –

```
Console.log('Hello World');
```

This will output the “Hello World” phrase when we run it through Node.js.

```
console.log('Hello World');
```

Ensure that you save the file and then proceed to the next step.

Step 5 – To run our Node.js script using the Node Docker container, we need to execute the following statement –

```
sudo docker run -it --rm --name=HelloWorld -v "$PWD":/usr/src/app  
-w /usr/src/app node node HelloWorld.js
```

The following points need to be noted about the above command –

- The –rm option is used to remove the container after it is run.
- We are giving a name to the container called “HelloWorld”.
- We are mentioning to map the volume in the container which is /usr/src/app to our current present working directory. This is done so that the node container will pick up our HelloWorld.js script which is present in our working directory on the Docker Host.
- The –w option is used to specify the working directory used by Node.js.
- The first node option is used to specify to run the node image.
- The second node option is used to mention to run the node command in the node container.
- And finally we mention the name of our script.

We will then get the following output. And from the output, we can clearly see that the Node container ran as a container and executed the HelloWorld.js script.

```
demo@ubuntudemo:~$ sudo docker run -it --rm --name>HelloWorld -v "$PWD":/usr/s  
/app -w /usr/src/app node node HelloWorld.js  
Hello World
```


Docker - Setting MongoDB

MongoDB is a famous document-oriented database that is used by many modern-day web applications. Since MongoDB is a popular database for development, Docker has also ensured it has support for MongoDB.

We will now see the various steps for getting the Docker container for MongoDB up and running.


Step 1 – The first step is to pull the image from Docker Hub. When you log into Docker Hub, you will be able to search and see the image for Mongo as shown

below. Just type in Mongo in the search box and click on the Mongo (official) link which comes up in the search results.

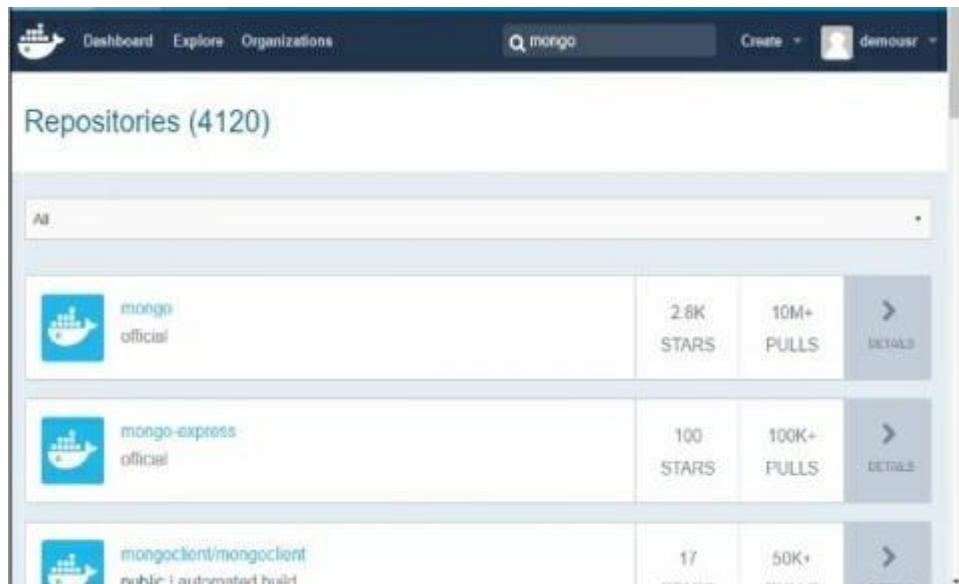

A screenshot of the Docker Hub interface. At the top, there's a search bar with the query 'mongo'. Below the search bar, the heading 'Repositories (4120)' is displayed. Underneath, there's a table listing three repositories: 'mongo' (official), 'mongo-express' (official), and 'mongoose/mongoose' (public, automated build). Each repository entry includes its icon, name, status (official/public), stars, pulls, and a 'DETAILS' button.

Step 2 – You will see that the Docker pull command for Mongo in the details of the repository in Docker Hub.

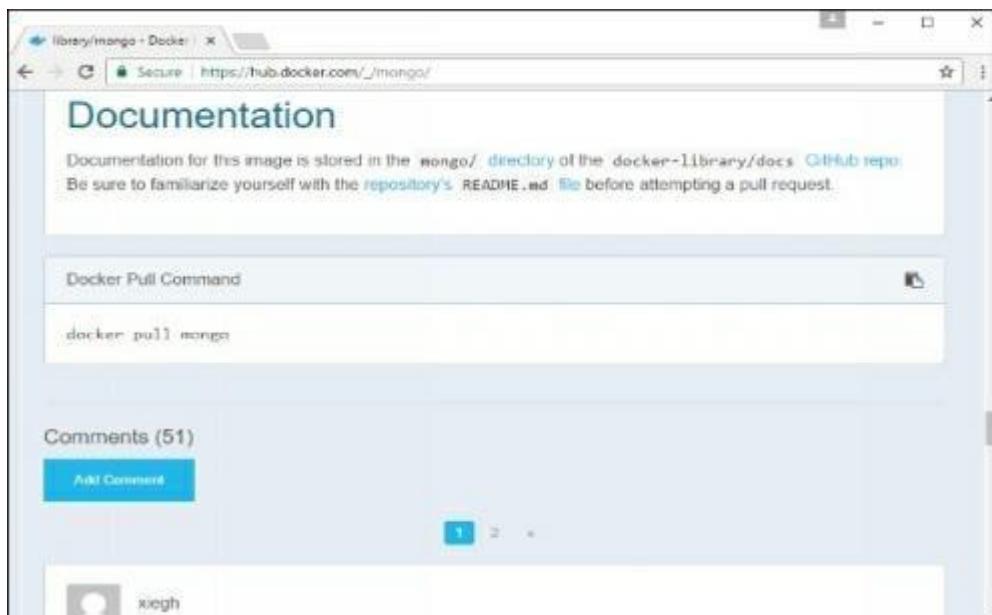

A screenshot of a web browser displaying the Docker Hub documentation for the 'mongo' image. The URL is https://hub.docker.com/_/mongo/. The page title is 'Documentation'. It contains instructions for pulling the image with the command 'docker pull mongo'. There are also sections for 'Comments (51)' and a 'Add Comment' button.

Step 3 – On the Docker Host, use the Docker pull command as shown above to download the latest Mongo image from Docker Hub.

```
[demo@ubuntudemo: $ sudo docker pull mongo
```

```
demo@ubuntudemo:~$ sudo docker pull mongo
[sudo] password for demo:
Using default tag: latest
latest: Pulling from library/mongo

75a822cd7888: Already exists
3bf369f658b6: Pull complete
7d7cb343d20e: Pull complete
73a933a908f7: Pull complete
658569c28c55: Pull complete
124a8bf940da: Pull complete
7c19551df503: Pull complete
a18347fe18d9: Pull complete
53e710c6ec29: Pull complete
Digest: sha256:23e5cdbd9bc26a6d1ae4db8252a295d6bdbba8332dec68483816d5b7bb2438d7
Status: Downloaded newer image for mongo:latest
demo@ubuntudemo:~$
```

Step 4 – Now that we have the image for Mongo, let's first run a MongoDB container which will be our instance for MongoDB. For this, we will issue the following command –

```
sudo docker run -it -d mongo
```

The following points can be noted about the above command –

- The `-it` option is used to run the container in interactive mode.
- The `-d` option is used to run the container as a daemon process.
- And finally we are creating a container from the Mongo image.

You can then issue the `docker ps` command to see the running containers –

```
demo@ubuntudemo:~$ sudo docker run -it -d mongo
ec086eec7416e368614de631b8356fcf68eec978b01b620251cb55d8b7ec7189
demo@ubuntudemo:~$ sudo docker ps
CONTAINER ID        IMAGE               COMMAND             CREATED            STATUS              NAMES
           STATUS        PORTS
ec086eec7416        mongo              "/entrypoint.sh mongo"   3 seconds ago   Up 2 seconds      tender_poitras
demo@ubuntudemo:~$
```

Take a note of the following points –

- The name of the container is `tender_poitras`. This name will be different since the name of the containers keep on changing when you spin up a container. But just make a note of the container which you have launched.
- Next, also notice the port number it is running on. It is listening on the TCP port of 27017.

Step 5 – Now let's spin up another container which will act as our client which will be used to connect to the MongoDB database. Let's issue the following command for this –

```
sudo docker run -it --link=tender_poitras:mongo mongo /bin/bash
```

The following points can be noted about the above command –

- The –it option is used to run the container in interactive mode.
- We are now linking our new container to the already launched MongoDB server container. Here, you need to mention the name of the already launched container.
- We are then specifying that we want to launch the Mongo container as our client and then run the bin/bash shell in our new container.

```
demo@ubuntudemo:~$ sudo docker run -it --link=tender_poitras:mongo mongo /bin/sh
root@83b6ac60e866:/#
```

You will now be in the new container.

Step 6 – Run the env command in the new container to see the details of how to connect to the MongoDB server container.

```
demo@ubuntudemo:~$ env
Server has startup warnings:
2017-01-07T15:26:23.769+0000 I STORAGE  [initandlisten]
2017-01-07T15:26:23.769+0000 I STORAGE  [initandlisten] ** WARNING: Using the XFS filesystem is strongly recommended with the WiredTiger storage engine
2017-01-07T15:26:23.769+0000 I STORAGE  [initandlisten] **             See http://dochub.mongodb.org/core/prodnotes-filesystem
2017-01-07T15:26:23.873+0000 I CONTROL  [initandlisten]
2017-01-07T15:26:23.874+0000 I CONTROL  [initandlisten] ** WARNING: Access control is not enabled for the database.
2017-01-07T15:26:23.874+0000 I CONTROL  [initandlisten] **             Read and write access to data and configuration is unrestricted.
2017-01-07T15:26:23.874+0000 I CONTROL  [initandlisten]
2017-01-07T15:26:23.874+0000 I CONTROL  [initandlisten]
2017-01-07T15:26:23.875+0000 I CONTROL  [initandlisten] ** WARNING: /sys/kernel/mm/transparent_hugepage/enabled is 'always'.
2017-01-07T15:26:23.875+0000 I CONTROL  [initandlisten] **             We suggest setting it to 'never'
2017-01-07T15:26:23.875+0000 I CONTROL  [initandlisten]
2017-01-07T15:26:23.875+0000 I CONTROL  [initandlisten] ** WARNING: /sys/kernel/mm/transparent_hugepage/defrag is 'always'.
2017-01-07T15:26:23.875+0000 I CONTROL  [initandlisten] **             We suggest setting it to 'never'
2017-01-07T15:26:23.875+0000 I CONTROL  [initandlisten]
```


Step 7 – Now it's time to connect to the MongoDB server from the client container. We can do this via the following command –

```
mongo 172.17.0.2:27017
```

The following points need to be noted about the above command

- The mongo command is the client mongo command that is used to connect to a MongoDB database.
- The IP and port number is what you get when you use the env command.

Once you run the command, you will then be connected to the MongoDB database.

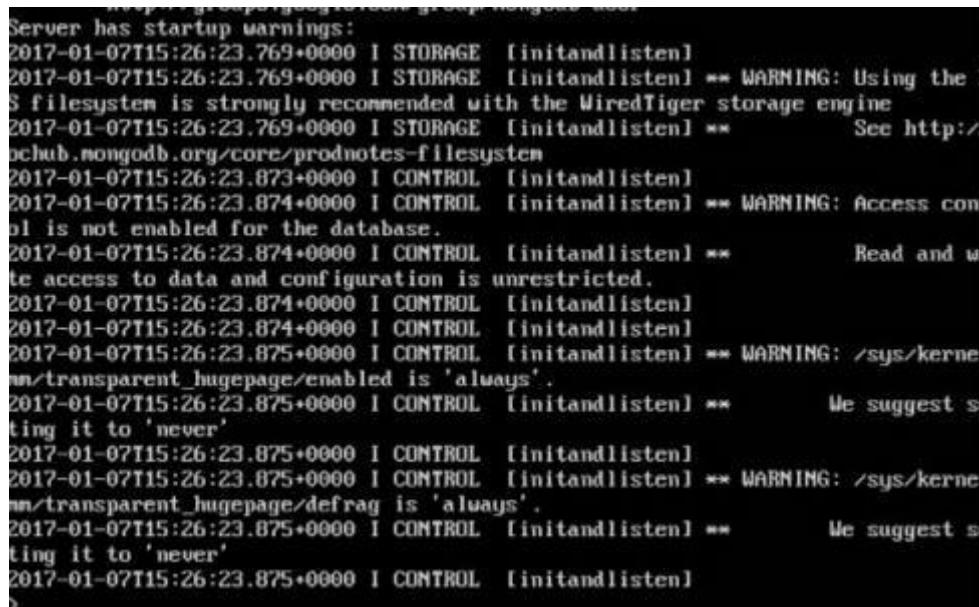

```
Server has startup warnings:
2017-01-07T15:26:23.769+0000 I STORAGE [initandlisten]
2017-01-07T15:26:23.769+0000 I STORAGE [initandlisten] ** WARNING: Using the
SS filesystem is strongly recommended with the WiredTiger storage engine
2017-01-07T15:26:23.769+0000 I STORAGE [initandlisten] ** See http://
dochub.mongodb.org/core/prodnotes-filesystem
2017-01-07T15:26:23.873+0000 I CONTROL [initandlisten]
2017-01-07T15:26:23.874+0000 I CONTROL [initandlisten] ** WARNING: Access com
pl is not enabled for the database.
2017-01-07T15:26:23.874+0000 I CONTROL [initandlisten] ** Read and w
rite access to data and configuration is unrestricted.
2017-01-07T15:26:23.874+0000 I CONTROL [initandlisten]
2017-01-07T15:26:23.874+0000 I CONTROL [initandlisten]
2017-01-07T15:26:23.875+0000 I CONTROL [initandlisten] ** WARNING: /sys/kerne
mm/transparent_hugepage/enabled is 'always'.
2017-01-07T15:26:23.875+0000 I CONTROL [initandlisten] ** We suggest se
ting it to 'never'
2017-01-07T15:26:23.875+0000 I CONTROL [initandlisten]
2017-01-07T15:26:23.875+0000 I CONTROL [initandlisten] ** WARNING: /sys/kerne
mm/transparent_hugepage/defrag is 'always'.
2017-01-07T15:26:23.875+0000 I CONTROL [initandlisten] ** We suggest se
ting it to 'never'
2017-01-07T15:26:23.875+0000 I CONTROL [initandlisten]
```

You can then run any MongoDB command in the command prompt. In our example, we are running the following command –

```
use demo
```

This command is a MongoDB command which is used to switch to a database name demo. If the database is not available, it will be created.

```
2017-01-07T15:26:23.769+0000 I STORAGE [initandlisten] ** WARNING: Using the ZFS filesystem is strongly recommended with the WiredTiger storage engine
2017-01-07T15:26:23.769+0000 I STORAGE [initandlisten] ** See http://dochub.mongodb.org/core/prodnotes-filesystem
2017-01-07T15:26:23.873+0000 I CONTROL [initandlisten]
2017-01-07T15:26:23.874+0000 I CONTROL [initandlisten] ** WARNING: Access control is not enabled for the database.
2017-01-07T15:26:23.874+0000 I CONTROL [initandlisten] ** Read and write access to data and configuration is unrestricted.
2017-01-07T15:26:23.874+0000 I CONTROL [initandlisten]
2017-01-07T15:26:23.874+0000 I CONTROL [initandlisten]
2017-01-07T15:26:23.875+0000 I CONTROL [initandlisten] ** WARNING: /sys/kernel/mm/transparent_hugepage/enabled is 'always'.
2017-01-07T15:26:23.875+0000 I CONTROL [initandlisten] ** We suggest setting it to 'never'
2017-01-07T15:26:23.875+0000 I CONTROL [initandlisten]
2017-01-07T15:26:23.875+0000 I CONTROL [initandlisten] ** WARNING: /sys/kernel/mm/transparent_hugepage/defrag is 'always'.
2017-01-07T15:26:23.875+0000 I CONTROL [initandlisten] ** We suggest setting it to 'never'
2017-01-07T15:26:23.875+0000 I CONTROL [initandlisten]
> use demo
switched to db demo
>
```


Now you have successfully created a client and server MongoDB container.

Docker - Setting NGINX


NGINX is a popular lightweight web application that is used for developing server-side applications. It is an open-source web server that is developed to run on a variety of operating systems. Since nginx is a popular web server for development, Docker has ensured that it has support for nginx.

We will now see the various steps for getting the Docker container for nginx up and running.

Step 1 – The first step is to pull the image from Docker Hub. When you log into Docker Hub, you will be able to search and see the image for nginx as shown below. Just type in nginx in the search box and click on the nginx(official) link which comes up in the search results.

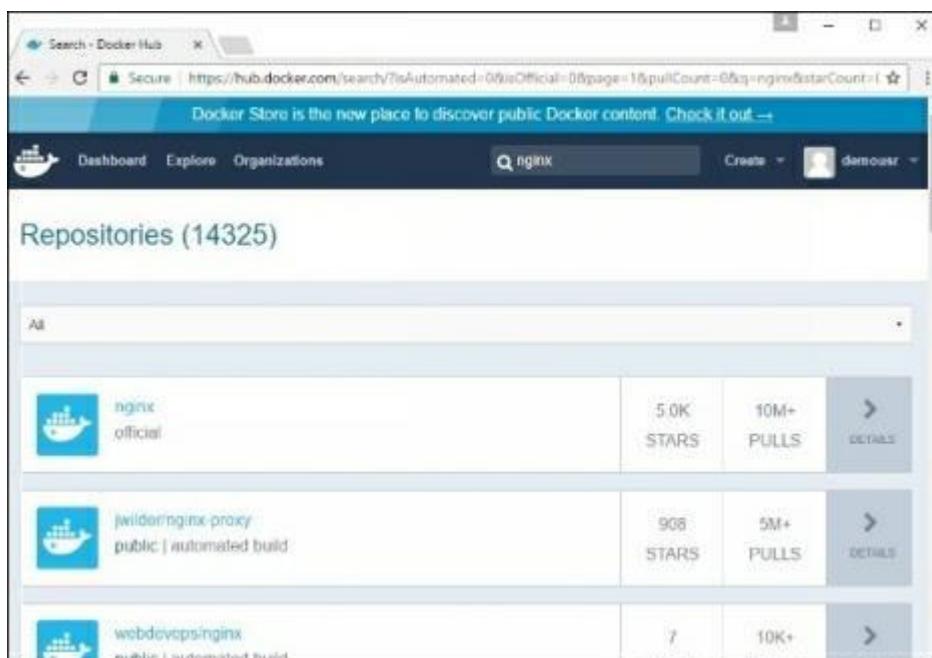

Step 2 – You will see that the Docker pull command for nginx in the details of the repository in Docker Hub.

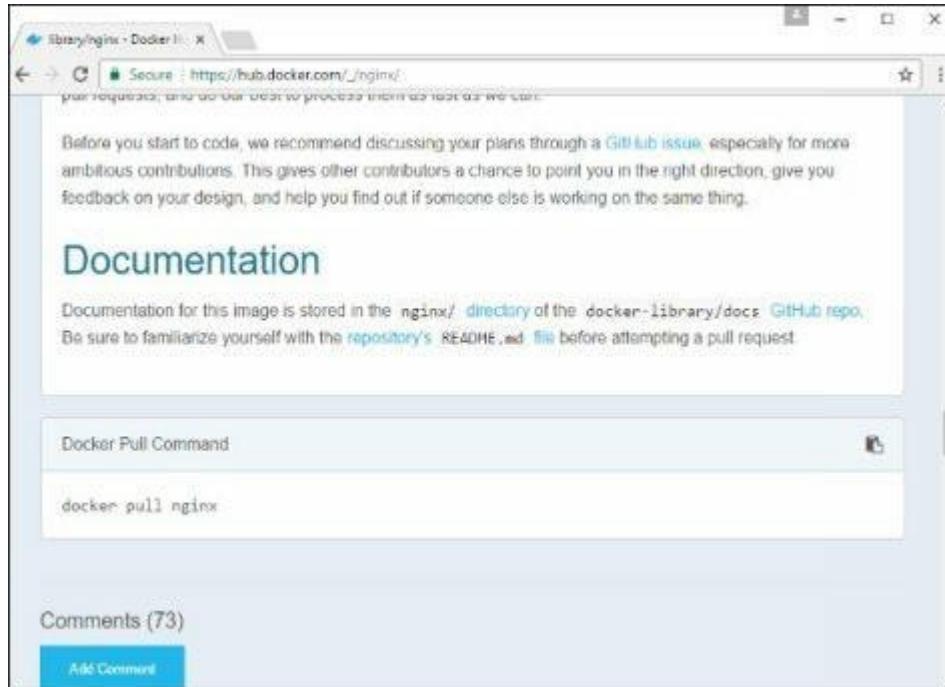

Step 3 – On the Docker Host, use the Docker pull command as shown above to download the latest nginx image from Docker Hub.

```
demo@ubuntudemo:~$ sudo docker pull nginx
Using default tag: latest
latest: Pulling from library/nginx
75a822cd7888: Already exists
9acfb9dc4a57: Pull complete
946e44ee6057: Pull complete
Digest: sha256:fab482910aae9630c93bd24fc6fcecb9f9f792c24a8974f5e46d8ad625ac235
Status: Downloaded newer image for nginx:latest
demo@ubuntudemo:~$
```

Step 4 – Now let's run the nginx container via the following command.

```
sudo docker run -p 8080:80 -d nginx
```

We are exposing the port on the nginx server which is port 80 to the port 8080 on the Docker Host.

```
demo@ubuntudemo:~$ sudo docker run -p 8080:80 -d nginx
[sudo] password for demo:
605d088b4d044f40b558fd321df2b40cadfc5d0c59a947bddffffdc0c5151e4f
demo@ubuntudemo:~$
```

Once you run the command, you will get the following output if you browse to the URL <http://dockerhost:8080>. This shows that the nginx container is up and running.



Step 5 – Let's look at another example where we can host a simple web page in our nginx container. In our example, we will create a simple HelloWorld.html file and host it in our nginx container.

Let's first create an HTML file called HelloWorld.html

```
deno@ubuntudemo:~$ sudo vim HelloWorld.html
```

Let's add a simple line of Hello World in the HTML file.

```
Hello World
```

Let's then run the following Docker command.

```
sudo docker run -p 8080:80 -v  
"$PWD":/usr/share/nginx/html:ro -d nginx
```

The following points need to be noted about the above command –

- We are exposing the port on the nginx server which is port 80 to the port 8080 on the Docker Host.
- Next, we are attaching the volume on the container which is /usr/share/nginx/html to our present working directory. This is where our HelloWorld.html file is stored.

```
deno@ubuntudemo:~$ sudo docker run -p 8080:80 -v "$PWD":/usr/share/nginx/html:  
-d nginx  
bee9ef3fb04f2f3a219fc60123989351c63d4074a32a765340491f28ad3dbc44  
deno@ubuntudemo:~$  
deno@ubuntudemo:~$ sudo docker ps  
CONTAINER ID        IMAGE               COMMAND                  CREATED             NAMES  
STATUS              PORTS              NAMES  
bee9ef3fb04f        nginx              "nginx -g 'daemon off'"   About a minute ago      agitated_leavitt  
ago                Up 50 seconds          443/tcp, 0.0.0.0:8080->80/tcp  
cc086eecd7416       mongo              "/entrypoint.sh mongo"  About an hour ago    tender_poitras  
go                 Up About an hour         27017/tcp  
deno@ubuntudemo:~$
```

Now if we browse to the URL `http://dockerhost:8080/HelloWorld.html` we will get the following output as expected –



Docker - Toolbox

In the introductory chapters, we have seen the installation of Docker toolbox on Windows. The Docker toolbox is developed so that Docker containers can be run on Windows and MacOS. The site for toolbox on Windows is <https://docs.docker.com/docker-for-windows/>

A screenshot of a web browser displaying the 'Get started with Docker for Windows' guide. The URL in the address bar is 'https://docs.docker.com/docker-for-windows/'. The page features a blue header with the Docker logo. On the left, there's a sidebar with links for Docker ID, Docker Engine, Docker for Mac, Docker for Windows, Getting Started, Logs and Troubleshooting, FAQs, and Example Applications. The main content area has a large title 'Get started with Docker for Windows' with a subtext 'Estimated reading time: 27 minutes'. It includes a 'Welcome to Docker for Windows!' section and a detailed description of what Docker is and why it's good for Windows. At the bottom, there's a note for users who already have Docker installed, pointing them to Step 3 and the 'Getting Started with Docker' tutorial.

For Windows, you need to have Windows 10 or Windows Server 2016 with Hyper-V enabled.


The toolbox consists of the following components –

- Docker Engine – This is used as the base engine or Docker daemon that is used to run Docker containers.
- Docker Machine – for running Docker machine commands.
- Docker Compose for running Docker compose commands.
- Kinematic – This is the Docker GUI built for Windows and Mac OS.
- Oracle virtualbox

Let's now discuss the different types of activities that are possible with Docker toolbox.

Running in Powershell

With Docker toolbox on Windows 10, you can now run Docker commands off powershell. If you open powershell on Windows and type in the command of Docker version, you will get all the required details about the Docker version installed.

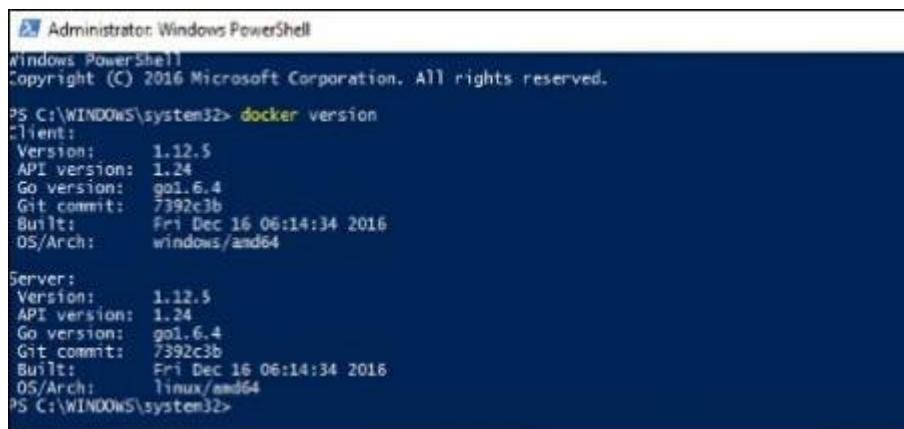

```
Administrator: Windows PowerShell
Windows PowerShell
Copyright (C) 2016 Microsoft Corporation. All rights reserved.

PS C:\WINDOWS\system32> docker version
client:
  Version: 1.12.5
  API version: 1.24
  Go version: go1.6.4
  Git commit: 7392c3b
  Built: Fri Dec 16 06:14:34 2016
  OS/Arch: windows/amd64

Server:
  Version: 1.12.5
  API version: 1.24
  Go version: go1.6.4
  Git commit: 7392c3b
  Built: Fri Dec 16 06:14:34 2016
  OS/Arch: linux/amd64
PS C:\WINDOWS\system32>
```

Pulling Images and Running Containers

You can also now pull Images from Docker Hub and run containers in powershell as you would do in Linux. The following example will show in brief the downloading of the Ubuntu image and running of the container off the image.

The first step is to use the Docker pull command to pull the Ubuntu image from Docker Hub.

```
Administrator: Windows PowerShell
PS C:\WINDOWS\system32> docker pull ubuntu
Using default tag: latest
latest: Pulling from library/ubuntu
b3e1c725a85f: Pull complete
4daad8bdde31: Pull complete
63fe8c0068a8: Pull complete
4a70713c436f: Pull complete
bd842a2105a8: Pull complete
Digest: sha256:7a64bc9c8843b0a8c8b8a7e4715b7615e4e1b0d8ca3c7e7a76ec8250899c397a
Status: Downloaded newer image for ubuntu:latest
PS C:\WINDOWS\system32>
```

The next step is to run the Docker image using the following run command –


```
docker run -it ubuntu /bin/bash
```

You will notice that the command is the same as it was in Linux.

```
root@67a51e497413:/#
PS C:\WINDOWS\system32> docker pull ubuntu
Using default tag: latest
latest: Pulling from library/ubuntu
b3e1c725a85f: Pull complete
4daad8bdde31: Pull complete
63fe8c0068a8: Pull complete
4a70713c436f: Pull complete
bd842a2105a8: Pull complete
Digest: sha256:7a64bc9c8843b0a8c8b8a7e4715b7615e4e1b0d8ca3c7e7a76ec8250899c397a
Status: Downloaded newer image for ubuntu:latest
PS C:\WINDOWS\system32> docker run -it ubuntu /bin/bash
root@67a51e497413:/#
```


Kitematic

This is the GUI equivalent of Docker on Windows. To open this GUI, go to the taskbar and on the Docker icon, right-click and choose to open Kitematic.

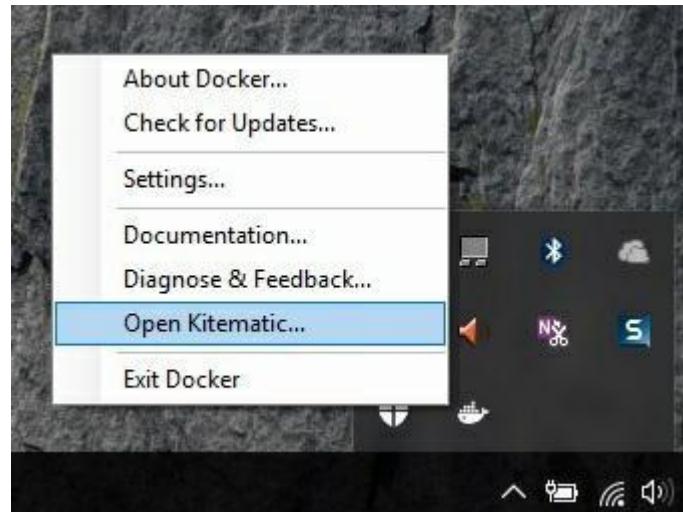


It will prompt you to download Kitematic GUI. Once downloaded, just unzip the contents. There will be a file called Kitematic.exe. Double-click this exe file to open the GUI interface.

You will then be requested to log into Docker Hub, enter through the GUI. Just enter the required username and password and then click the Login button.

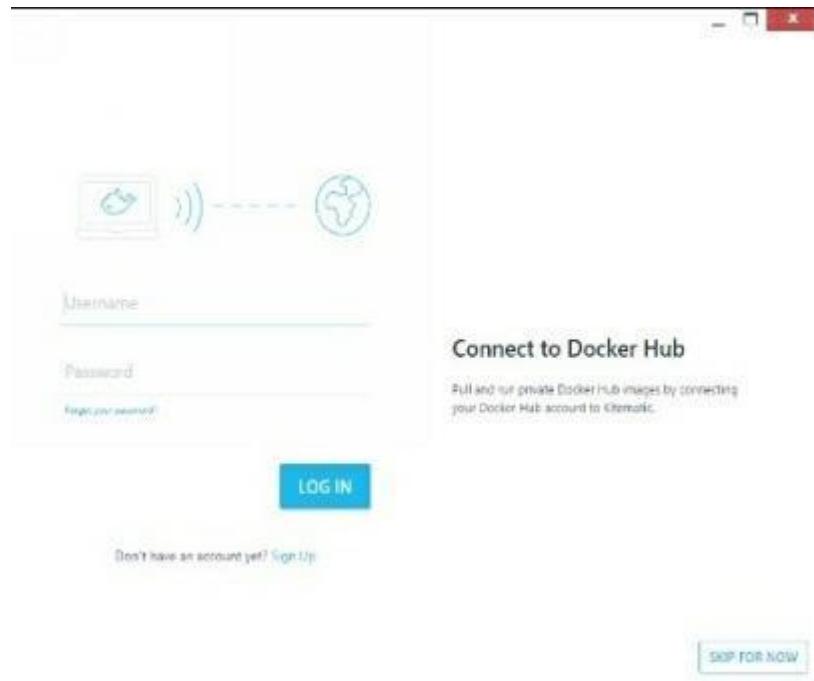

Once logged in, you will be able to see all the images downloaded on the system on the left-hand side of the interface.

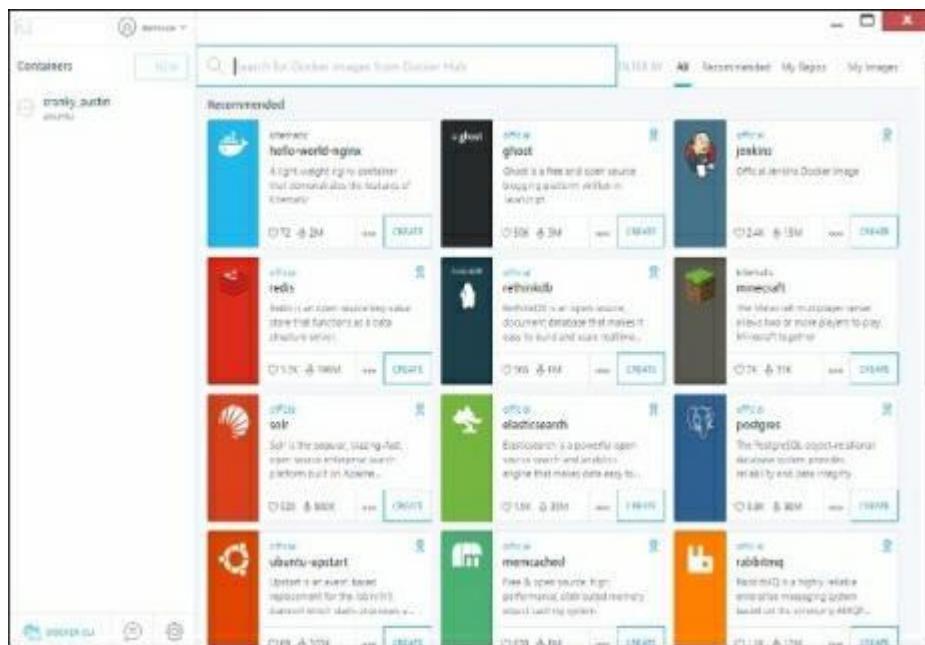


On the right-hand side, you will find all the images available on Docker Hub. Let's take an example to understand how to download the Node image from Docker Hub using Kitematic.


Step 1 – Enter the keyword of node in the search criteria.



Step 2 – Click the create button on official Node image. You will then see the image being downloaded.

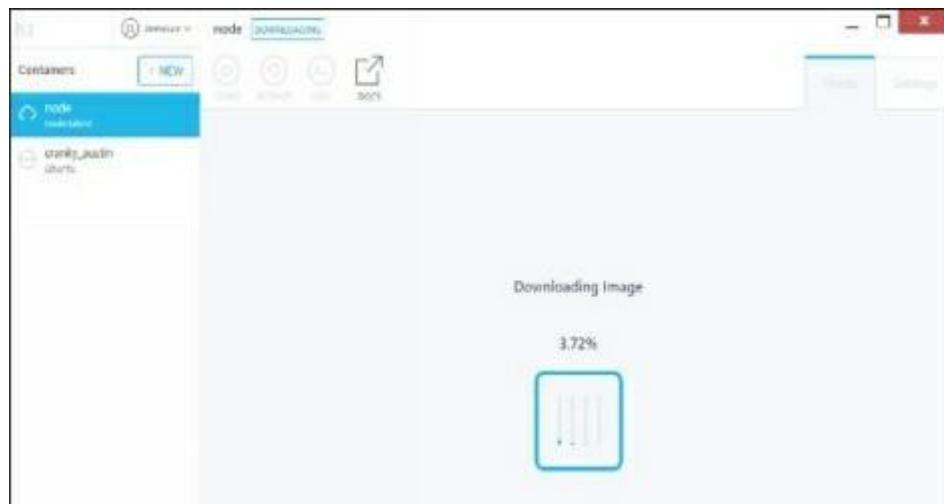


Once the image has been downloaded, it will then start running the Node container.

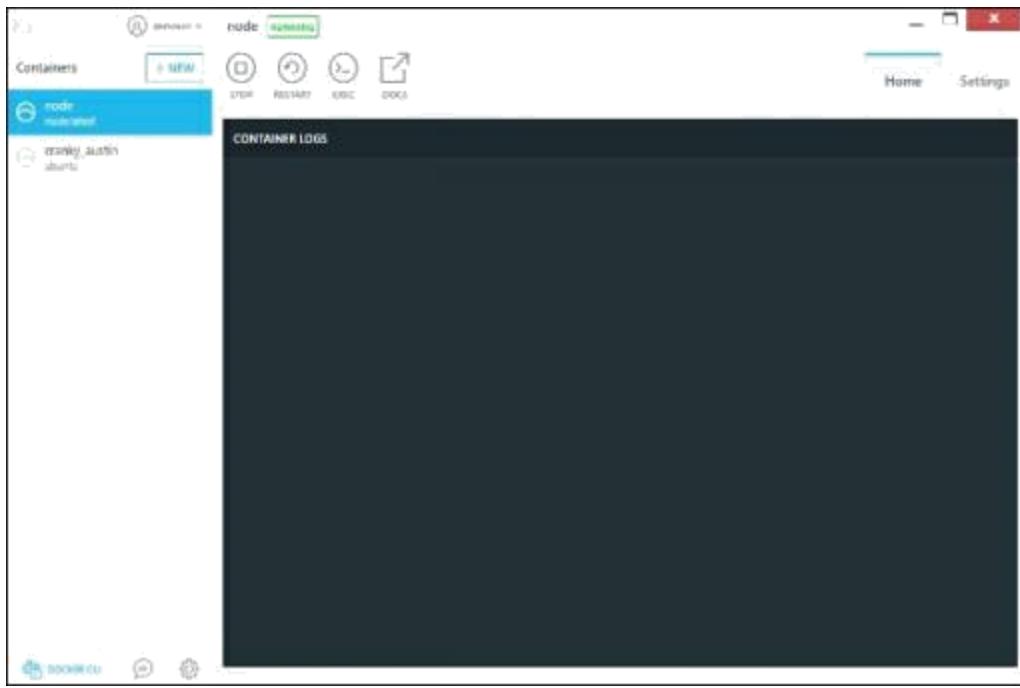

Step 3 – If you go to the settings tab, you can drill-down to further settings options, as shown below.


- General settings – In this tab, you can name the container, change the path settings, and delete the container.

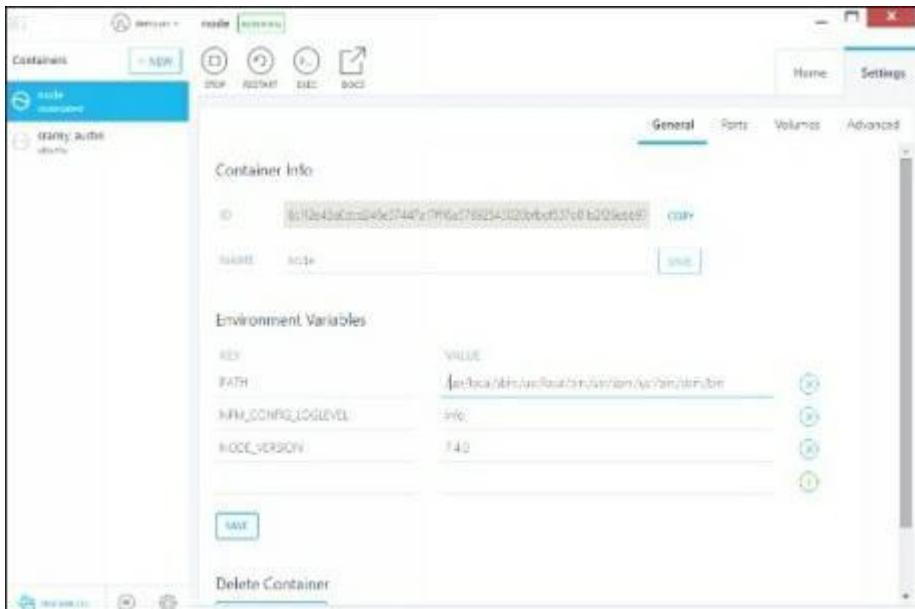


- Ports – Here you can see the different port mappings. If you want, you can create your own port mappings.



- Volumes – Here you can see the different volume mappings.

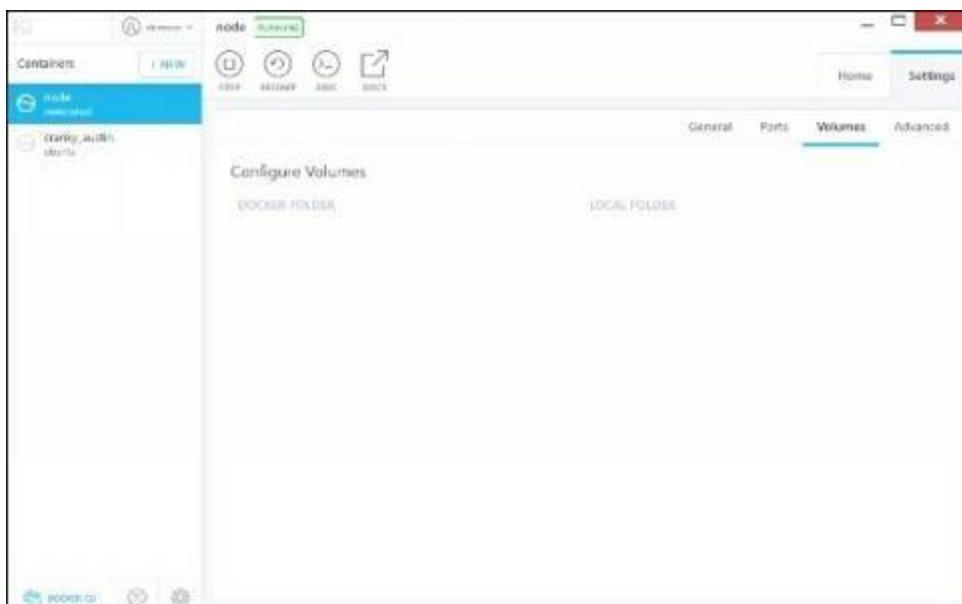

- Advanced – It contains the advanced settings for the container.

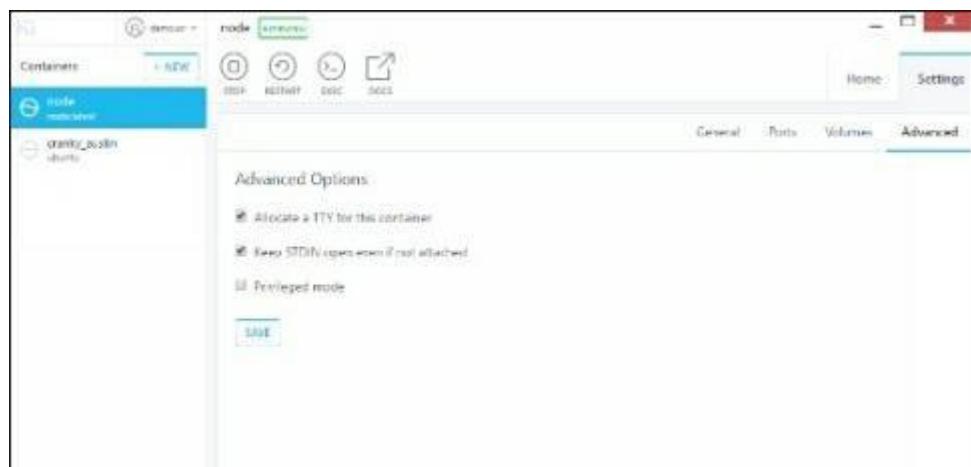

Docker - Setting ASP.Net

ASP.Net is the standard web development framework that is provided by Microsoft for developing server-side applications. Since ASP.Net has been around for quite a long time for development, Docker has ensured that it has support for ASP.Net.


In this chapter, we will see the various steps for getting the Docker container for ASP.Net up and running.

Prerequisites

The following steps need to be carried out first for running ASP.Net.

Step 1 – Since this can only run on Windows systems, you first need to ensure that you have either Windows 10 or Window Server 2016.


Step 2 – Next, ensure that Hyper-V is and Containers are installed on the Windows system. To install Hyper-V and Containers, you can go to Turn Windows Features ON or OFF. Then ensure the Hyper-V option and Containers is checked and click the OK button.

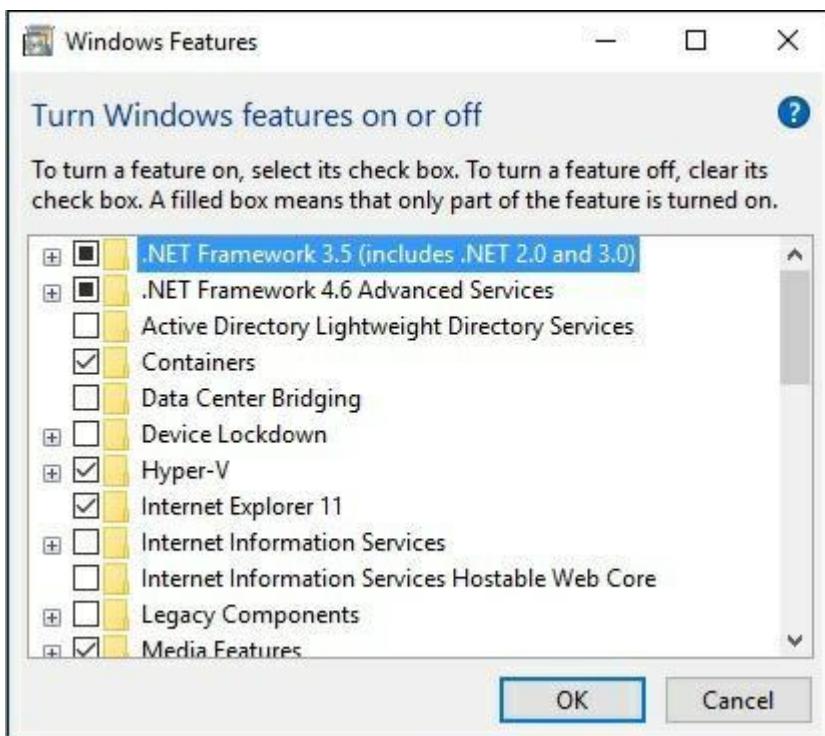

The system might require a restart after this operation.

Step 3 – Next, you need to use the following Powershell command to install the 1.13.0rc4 version of Docker. The following command will download this and store it in the temp location.

```
Invoke-WebRequest "https://test.docker.com/builds/Windows/x86_64/docker-1.13.0-rc4.zip" -OutFile "$env:TEMP\docker-1.13.0-rc4.zip" –UseBasicParsing
```

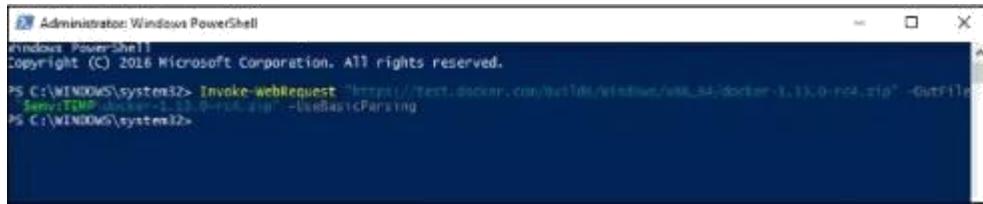

```
Administrator: Windows PowerShell
Copyright (C) 2016 Microsoft Corporation. All rights reserved.

PS C:\WINDOWS\system32> Invoke-WebRequest "https://test.docker.com/testfile/windows/100_44/docker-1.13.0-rc4.zip" -OutFile $env:TEMP\docker-1.13.0-rc4.zip
PS C:\WINDOWS\system32>
```

Step 4 – Next, you need to expand the archive using the following powershell command.

```
Expand-Archive -Path "$env:TEMP\docker-1.13.0-rc4.zip" -DestinationPath $env:ProgramFiles
```



```
Administrator: Windows PowerShell
Copyright (C) 2016 Microsoft Corporation. All rights reserved.

PS C:\WINDOWS\system32> Invoke-WebRequest "https://test.docker.com/testfile/windows/100_44/docker-1.13.0-rc4.zip" -OutFile $env:TEMP\docker-1.13.0-rc4.zip
PS C:\WINDOWS\system32> Expand-Archive -Path "$env:TEMP\docker-1.13.0-rc4.zip" -DestinationPath $env:ProgramFiles
PS C:\WINDOWS\system32>
```

Step 5 – Next, you need to add the Docker Files to the environment variable using the following powershell command.

```
$env:path += ";$env:ProgramFiles\docker"
```


Step 6 – Next, you need to register the Docker Daemon Service using the following powershell command.

```
dockerd --register-service
```

Step 7 – Finally, you can start the docker daemon using the following command.

```
Start-Service Docker
```

Use the docker version command in powershell to verify that the docker daemon is working

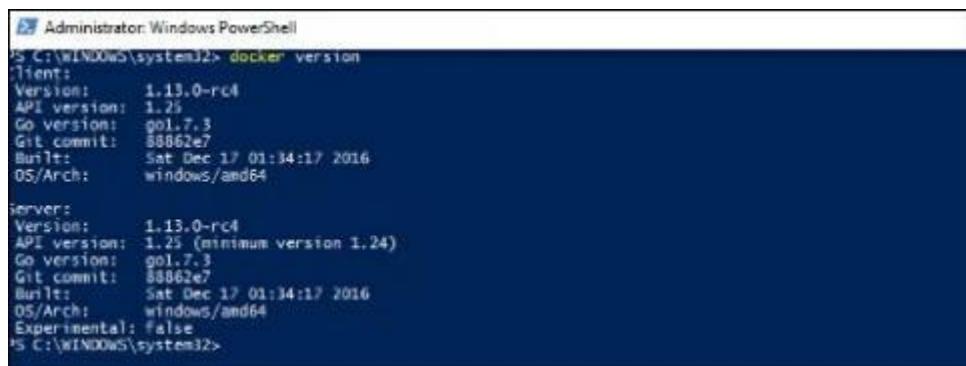


```
Administrator: Windows PowerShell
PS C:\WINDOWS\system32> docker version
Client:
  Version: 1.13.0-rc4
  API version: 1.25
  Go version: go1.7.3
  Git commit: 88862e7
  Built: Sat Dec 17 01:34:17 2016
  OS/Arch: windows/amd64

Server:
  Version: 1.13.0-rc4
  API version: 1.25 (minimum version: 1.24)
  Go version: go1.7.3
  Git commit: 88862e7
  Built: Sat Dec 17 01:34:17 2016
  OS/Arch: windows/amd64
  Experimental: false
PS C:\WINDOWS\system32>
```


Installing the ASP.Net Container

Let's see how to install the ASP.Net container.

Step 1 – The first step is to pull the image from Docker Hub. When you log into Docker Hub, you will be able to search and see the image for Microsoft/aspnet as shown below. Just type in asp in the search box and click on the Microsoft/aspnet link which comes up in the search results.

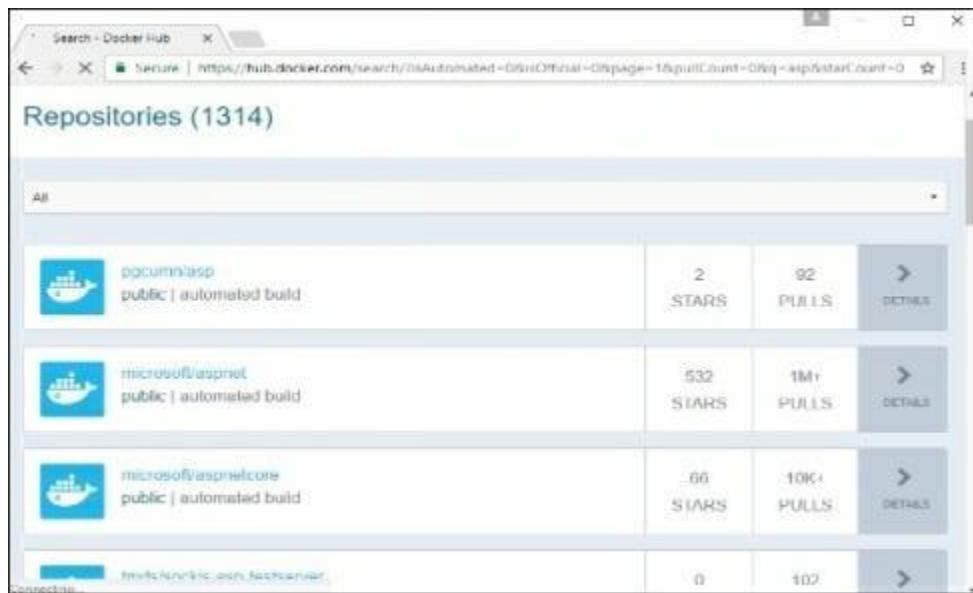

Step 2 – You will see that the Docker pull command for ASP.Net in the details of the repository in Docker Hub.

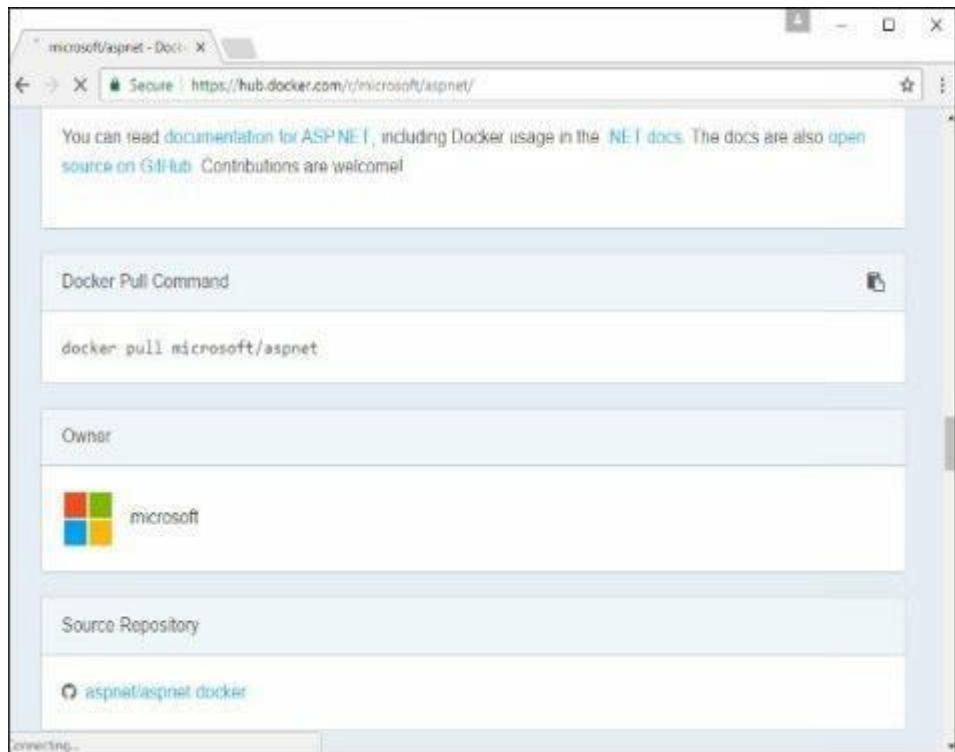

Step 3 – Go to Docker Host and run the Docker pull command for the microsoft/aspnet image. Note that the image is pretty large, somewhere close to 4.2 GB.

```
Administrator: Windows PowerShell
PS C:\WIN00WS\system32> docker pull microsoft/aspnet
Using default tag: latest
latest: Pulling from microsoft/aspnet
3889bb8d808b: Pull complete
0fee5d718c7a: Pull complete
c0931dd15237: Pull complete
61784b745c20: Pull complete
d05122f129ca: Pull complete
c31417523ee9: Pull complete
Digest: sha256:48e6b45a43bc58e71da3d20d73839c29cc1c7ce87ed06ad257c4150e5286ade3
Status: Downloaded newer image for microsoft/aspnet:latest
PS C:\WIN00WS\system32>
```

Step 4 – Now go to the following location <https://github.com/Microsoft/aspnet-docker> and download the entire Git repository.

Step 5 – Create a folder called App in your C drive. Then copy the contents from the 4.6.2/sample folder to your C drive. Go the Docker File in the sample directory and issue the following command –

```
docker build -t aspnet-site-new --build-arg site_root=/
```

The following points need to be noted about the above command –

- It builds a new image called **aspnet-site-new** from the Docker File.
- The root path is set to the localpath folder.

```
Administrator: Windows PowerShell
-a---- 11/3/2016 11:54 AM    72 Dockerfile

PS C:\App> cd 4.6.2
PS C:\App\4.6.2> dir

Directory: C:\App\4.6.2

Mode                LastWriteTime         Length Name
----                -----          -----   Name
d----           1/15/2017  8:52 AM            0 sample
-a----          11/3/2016  11:54 AM        216 Dockerfile

PS C:\App\4.6.2> cd sample
PS C:\App\4.6.2\sample> dir

Directory: C:\App\4.6.2\sample

Mode                LastWriteTime         Length Name
----                -----          -----   Name
-a----          11/3/2016  11:54 AM        72 Dockerfile


PS C:\App\4.6.2\sample> docker build -t aspnet-site-new --build-arg site_root=/
.
Sending build context to Docker daemon 2.048 kB
Step 1/3 : FROM microsoft/aspnet
--> 08897a1b16a
Step 2/3 : ARG site_root=
--> Using cache
--> 4c89ch1bef2d
Step 3/3 : ADD ${site_root} /inetpub/wwwroot
--> d1ce3a0ca1bc
Removing intermediate container 8652c844e52a
Successfully built d1ce3a0ca1bc
PS C:\App\4.6.2\sample>
```

Step 6 – Now it's time to run the container. It can be done using the following command –

```
docker run -d -p 8000:80 --name my-running-site-new aspnet-site-new
```

```
Administrator: Windows PowerShell
PS C:\App\4.6.2\sample> docker run -d -p 8000:80 --name my-running-site-new aspnet-site-new
31cfe55892ba5059330ae3084532cc3cb8a31a64b69d9478a899c33f1c2ec629
PS C:\App\4.6.2\sample>
```

Step 7 – You will now have IIS running in the Docker container. To find the IP Address of the Docker container, you can issue the Docker inspect command as shown below.

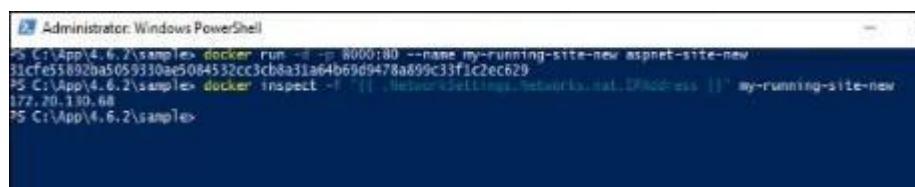

```
C:\App\4.6.2\sample> docker run -d -p 8000:80 --name my-running-site-new aspnet-site-new
31cfe55892ba5059330ae5084532cc3cb8a31a64b69d9478a899c33f1c2ec629
PS C:\App\4.6.2\sample> docker inspect -f {{.NetworkSettings.Networks.default.IPAddress}} my-running-site-new
172.20.130.68
PS C:\App\4.6.2\sample>
```

Docker - Cloud

The Docker Cloud is a service provided by Docker in which you can carry out the following operations –

- Nodes – You can connect the Docker Cloud to your existing cloud providers such as Azure and AWS to spin up containers on these environments.
- Cloud Repository – Provides a place where you can store your own repositories.
- Continuous Integration – Connect with Github and build a continuous integration pipeline.
- Application Deployment – Deploy and scale infrastructure and containers.
- Continuous Deployment – Can automate deployments.

Getting started

You can go to the following link to getting started with Docker Cloud –

<https://cloud.docker.com/>



Once logged in, you will be provided with the following basic interface –



Connecting to the Cloud Provider

The first step is to connect to an existing cloud provider. The following steps will show you how to connect with an Amazon Cloud provider.

Step 1 – The first step is to ensure that you have the right AWS keys. This can be taken from the aws console. Log into your aws account using the following link – <https://aws.amazon.com/console/>



Step 2 – Once logged in, go to the Security Credentials section. Make a note of the access keys which will be used from Docker Hub.

	Created	Deleted	Access Key ID	Last Used	Last Used Region	Status	Actions
Identity providers	Jan 7th 2017		AKAJMK4PHESJUMBY7Q	N/A	N/A	Active	Make Inactive Delete
Account settings	Dec 13th 2016		AKAJRGTVMUETSKJOGKA	N/A	N/A	Active	Make Inactive Delete
Credential report	Dec 12th 2016	Jan 7th 2017	AKAIAIRAKBUZ7VQFPAKX	2016-12-12 03:34 PST	us-west-2	ec2	Deleted
Encryption keys	Jul 27th 2016	Dec 13th 2016	AKAIAIR3TRFGT07BPMF3A	N/A	N/A	Deleted	

[Create New Access Key](#)

Important Change - Managing Your AWS Secret Access Keys
As described in a previous announcement, you cannot retrieve the existing secret access keys for your AWS root account, though you can still create a new root access key at any time. As a best practice, we recommend creating an IAM user that has access keys rather than relying on root access keys.

Step 3 – Next, you need to create a policy in aws that will allow Docker to view EC2 instances. Go to the profiles section in aws. Click the Create Policy button.

Policy Name	Attached Entities	Creation Time	Edited Time
AmazonS3FullAccess	1	2015-02-06 10:40 PST	2015-02-06 10:40...
CloudwatchDemo	1	2016-12-13 08:43 PST	2016-12-13 08:43...
AdministratorAccess	0	2015-02-06 10:39 PST	2015-02-06 10:39...
AmazonAPIGateway	0	2015-07-09 10:34 PST	2015-07-09 10:34...
AmazonAPIGateway...	0	2015-07-09 10:36 PST	2015-07-09 10:36...
AmazonAPIGateway...	0	2015-11-11 15:41 PST	2015-11-11 15:41...
AmazonAppStreamF...	0	2015-02-06 10:40 PST	2015-02-06 10:40...
AmazonAppStreamR...	0	2015-02-06 10:40 PST	2016-12-07 13:00...
AmazonAppStreamS...	0	2016-11-18 20:17 PST	2016-11-18 20:17...
AmazonAthenaFullA...	0	2016-11-30 08:46 PST	2016-11-30 08:46...
AmazonCloudWatchD...	0	2016-03-24 10:22 PST	2016-03-24 10:22...


Step 4 – Click on ‘Create Your Own Policy’ and give the policy name as dockercloudpolicy and the policy definition as shown below.

```
{
  "Version": "2012-10-17",
  "Statement": [ {
    "Action": [
      "ec2:*",
      "iam:CreateAccessKey"
    ],
    "Effect": "Allow",
    "Resource": "*"
  }
]
```

```

    "iam:ListInstanceProfiles"
],
{
  "Effect": "Allow",
  "Resource": "*"
}
}

```

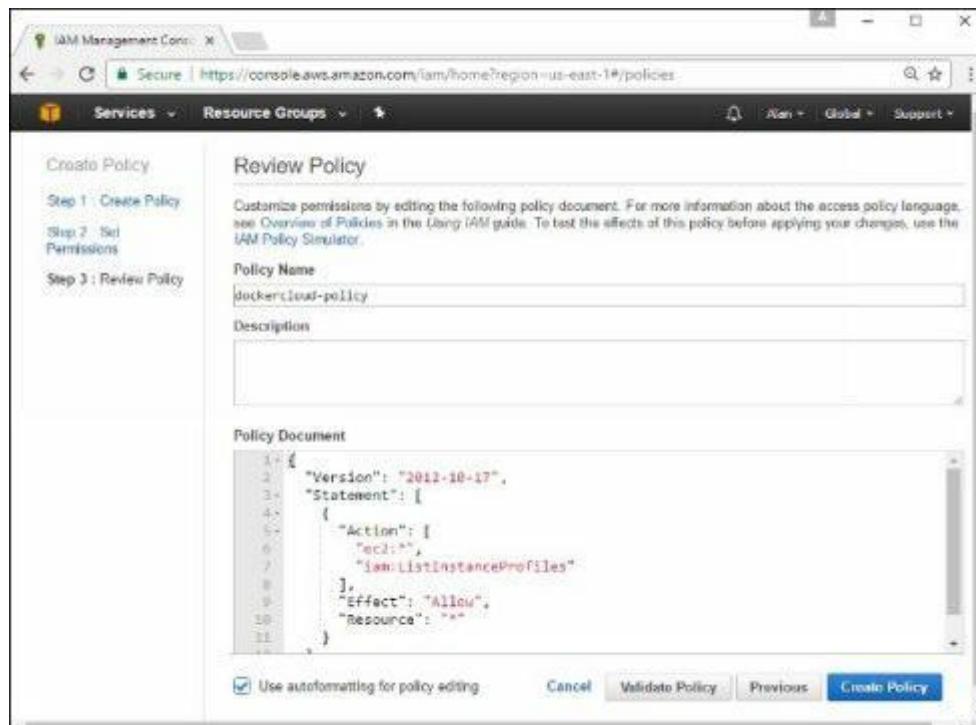


Next, click the Create Policy button


Step 5 – Next, you need to create a role which will be used by Docker to spin up nodes on AWS. For this, go to the Roles section in AWS and click the Create New Role option.



Step 6 – Give the name for the role as dockercloud-role.

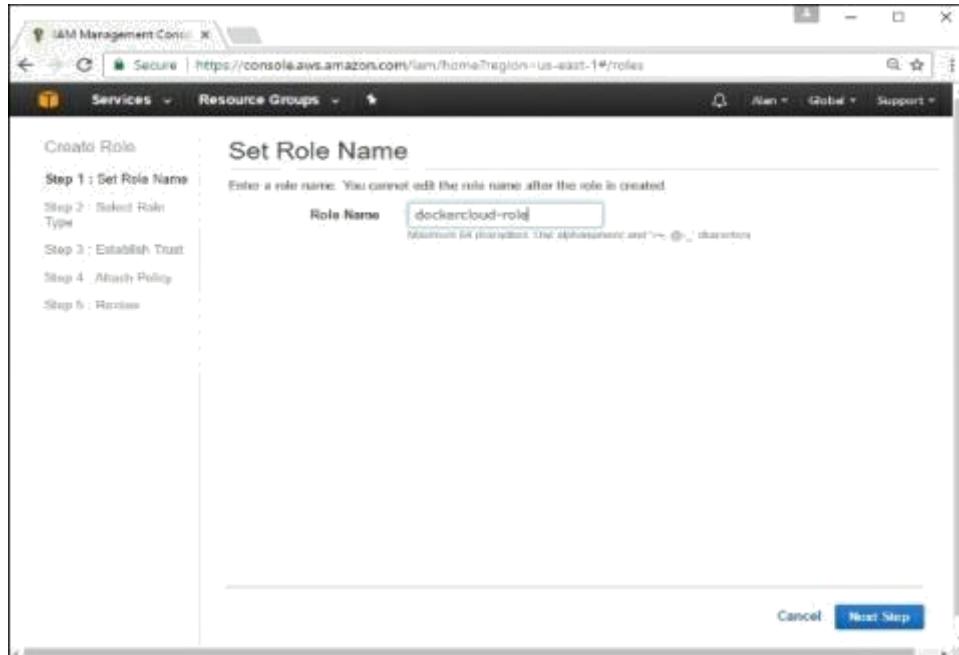

Step 7 – On the next screen, go to ‘Role for Cross Account Access’ and select “Provide access between your account and a 3rd party AWS account”.

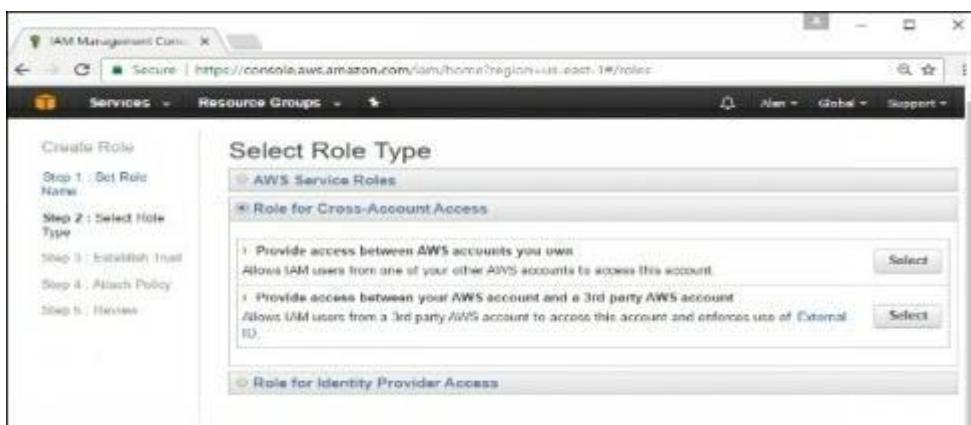


Step 8 – On the next screen, enter the following details –

- In the Account ID field, enter the ID for the Docker Cloud service: 689684103426.
- In the External ID field, enter your Docker Cloud username.



Step 9 – Then, click the Next Step button and on the next screen, attach the policy which was created in the earlier step.

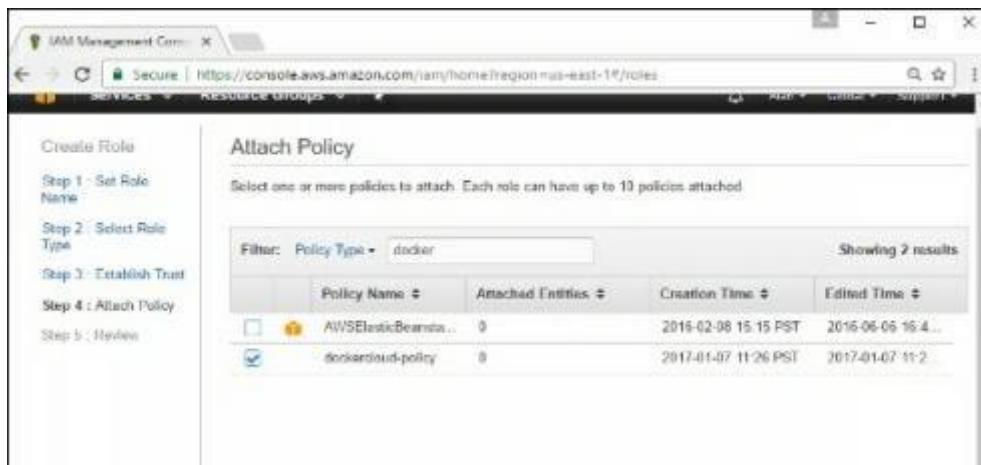

Step 10 – Finally, on the last screen when the role is created, make sure to copy the arn role which is created.

arn:aws:iam::085363624145:role/dockercloud-role



Step 11 – Now go back to Docker Cloud, select Cloud Providers, and click the plug symbol next to Amazon Web Services.

The screenshot shows the Docker Cloud Cloud Settings page. On the left, there's a sidebar with icons for General, Cloud providers, Source providers, Notifications, Default Privacy, Billing, Plan, and Quotas. The 'Cloud providers' item is selected and highlighted in blue. The main content area has a header 'Cloud providers' with a sub-header 'Amazon Web Services'. Below this, there's a table with five rows:

Provider	Action	Status
Amazon Web Services	Add new credentials	<input checked="" type="checkbox"/> Free Trial
Digital Ocean	Add new credentials	<input type="checkbox"/> \$20 Credit
Microsoft Azure	Add new credentials	<input checked="" type="checkbox"/> Free trial
SoftLayer	Add new credentials	<input checked="" type="checkbox"/> Free trial

Enter the arn role and click the Save button.

This screenshot shows a modal dialog box titled 'Add AWS Credentials'. It contains a text input field with the value 'arn:aws:iam::065363624145:role/dockercloud-role'. Below the input field are two buttons: 'Cancel' on the left and 'Save' on the right.

Once saved, the integration with AWS would be complete.


This screenshot shows the Docker Cloud Cloud Settings page again. The 'Cloud providers' section now includes an additional row for AWS:

Provider	Action	Status
Amazon Web Services	arn:aws:iam::065363624145:role/dockercloud-role	<input checked="" type="checkbox"/> Free Trial
Digital Ocean	Add new credentials	<input type="checkbox"/> \$20 Credit
Microsoft Azure	Add new credentials	<input checked="" type="checkbox"/> Free trial
SoftLayer	Add new credentials	<input checked="" type="checkbox"/> Free trial


Setting Up Nodes

Once the integration with AWS is complete, the next step is to setup a node. Go to the Nodes section in Docker Cloud. Note that the setting up of nodes will automatically setup a node cluster first.


Step 1 – Go to the Nodes section in Docker Cloud.

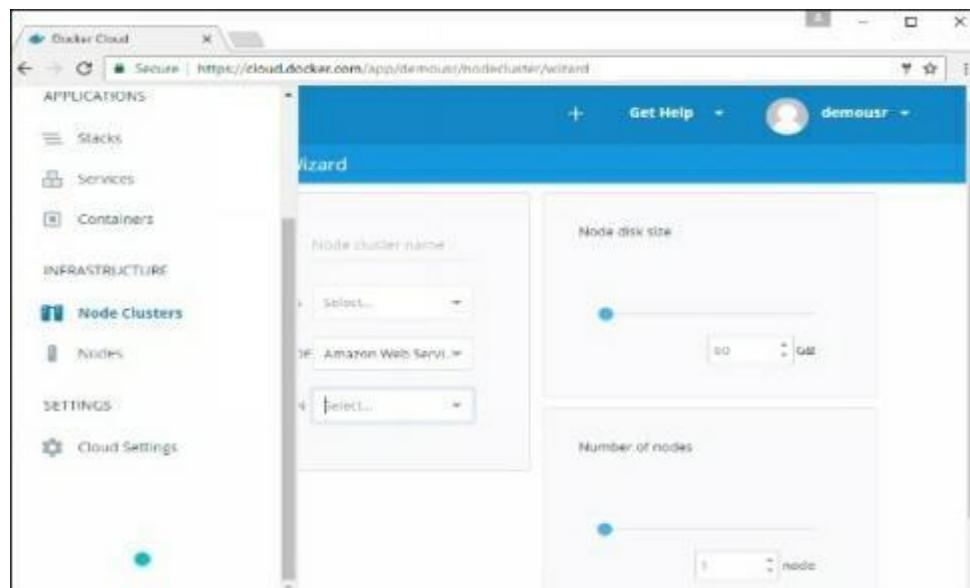

Step 2 – Next, you can give the details of the nodes which will be setup in AWS.

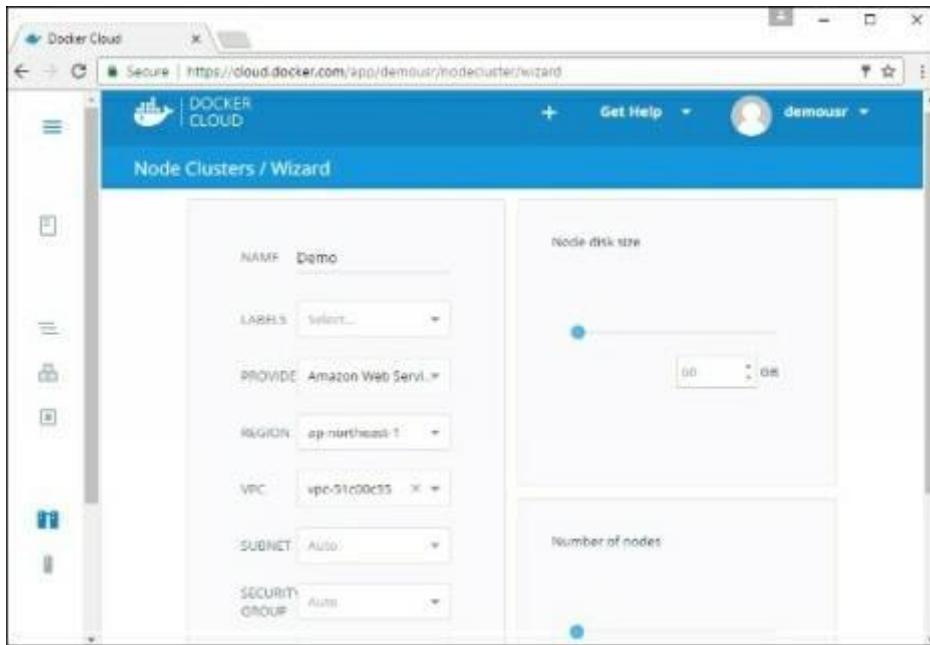


You can then click the Launch Node cluster which will be present at the bottom of the screen. Once the node is deployed, you will get the notification in the Node Cluster screen.

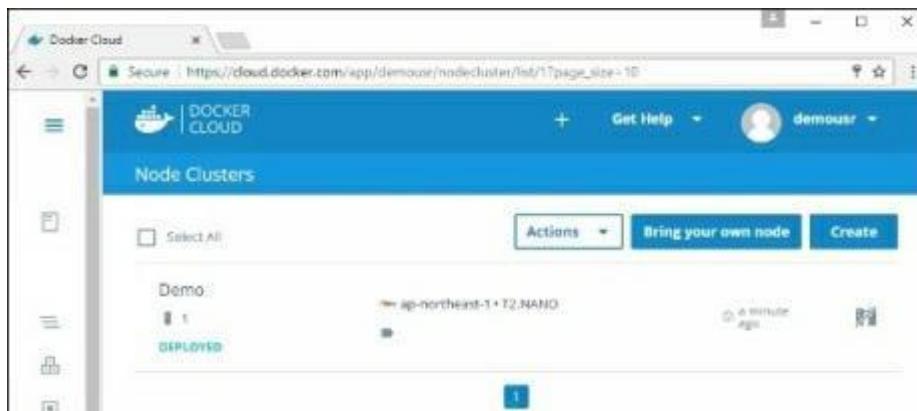


Deploying A Service

The next step after deploying a node is to deploy a service. To do this, we need to perform the following steps.


Step 1 – Go to the Services Section in Docker Cloud. Click the Createbutton

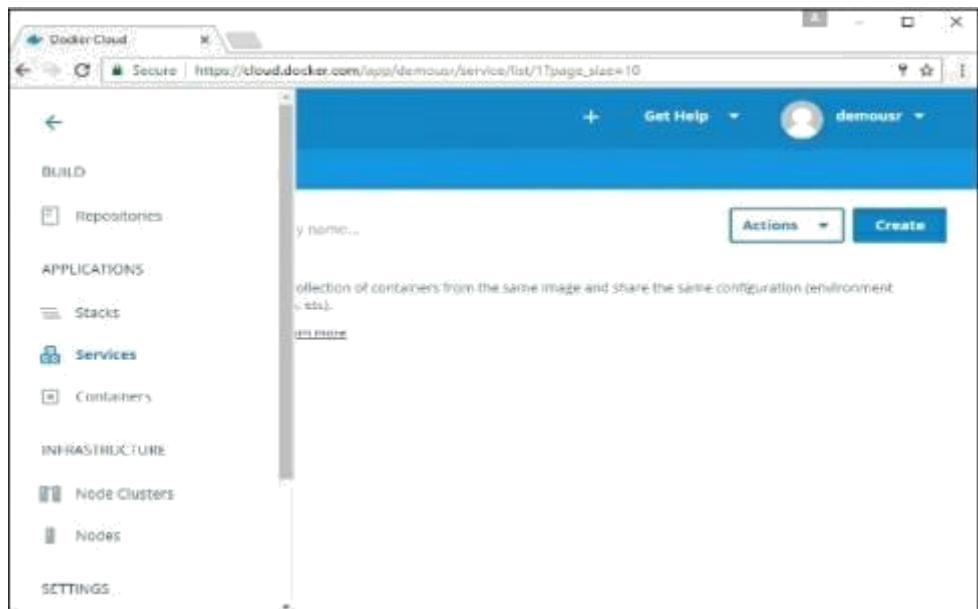


Step 2 – Choose the Service which is required. In our case, let's choose mongo.

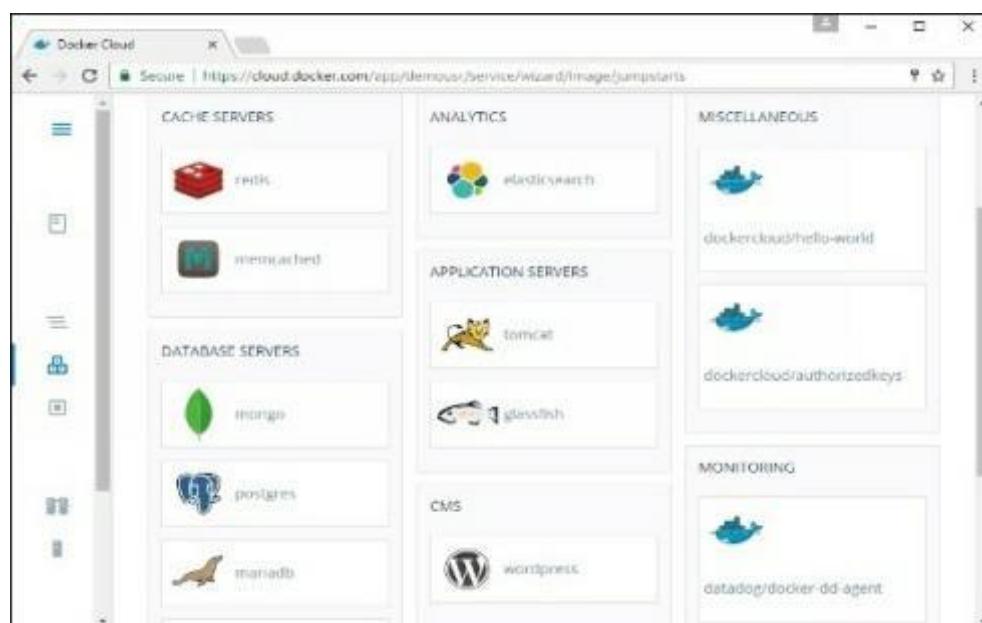

Step 3 – On the next screen, choose the Create & Deploy option. This will start deploying the Mongo container on your node cluster.

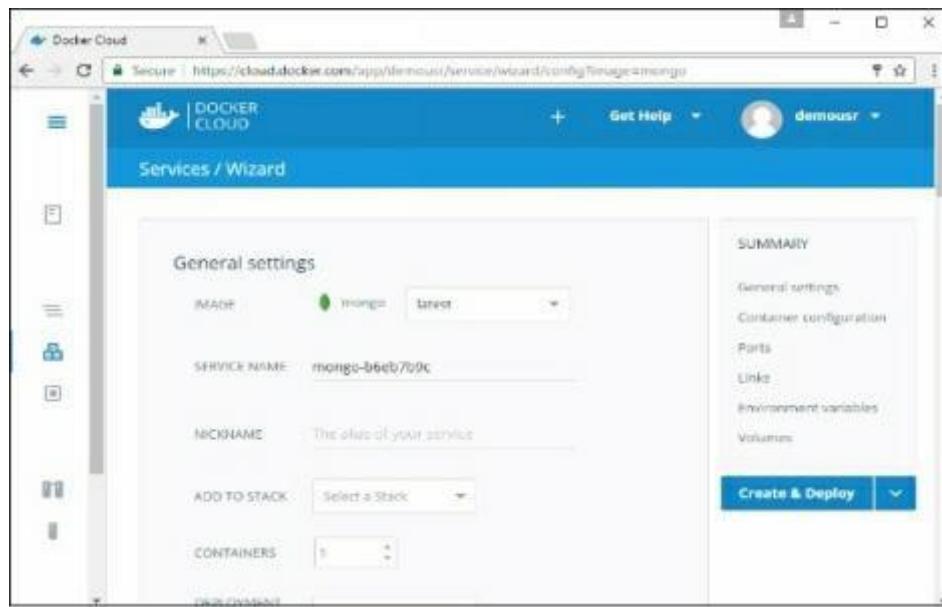

Once deployed, you will be able to see the container in a running state.

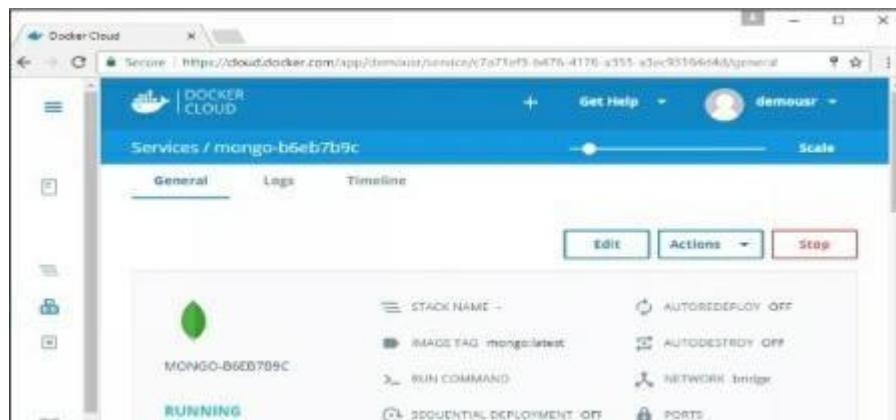

Docker - Logging

Docker has logging mechanisms in place which can be used to debug issues as and when they occur. There is logging at the daemon level and at the container level. Let's look at the different levels of logging.

Daemon Logging

At the daemon logging level, there are four levels of logging available –

- Debug – It details all the possible information handled by the daemon process.
- Info – It details all the errors + Information handled by the daemon process.
- Errors – It details all the errors handled by the daemon process.
- Fatal – It only details all the fatal errors handled by the daemon process.

Go through the following steps to learn how to enable logging.

Step 1 – First, we need to stop the docker daemon process, if it is already running. It can be done using the following command –

```
sudo service docker stop
```

```
demo@ubuntudemo:~$ sudo service docker stop
```

Step 2 – Now we need to start the docker daemon process. But this time, we need to append the **-l** parameter to specify the logging option. So let's issue the following command when starting the docker daemon process.

```
sudo dockerd -l debug &
```

The following points need to be noted about the above command –

- dockerd is the executable for the docker daemon process.
- The **-l** option is used to specify the logging level. In our case, we are putting this as debug
- **&** is used to come back to the command prompt after the logging has been enabled.

```
demo@ubuntudemo:~$ sudo dockerd -l debug &
```

Once you start the Docker process with logging, you will also now see the Debug Logs being sent to the console.

```
DEBU[0001] Registering POST, /build
DEBU[0001] Registering POST, /swarm/init
DEBU[0001] Registering POST, /swarm/join
DEBU[0001] Registering POST, /swarm/leave
DEBU[0001] Registering GET, /swarm
DEBU[0001] Registering POST, /swarm/update
DEBU[0001] Registering GET, /services
DEBU[0001] Registering GET, /services/{id:.*}
DEBU[0001] Registering POST, /services/create
DEBU[0001] Registering POST, /services/{id:.*}/update
DEBU[0001] Registering DELETE, /services/{id:.*}
DEBU[0001] Registering GET, /nodes
DEBU[0001] Registering GET, /nodes/{id:.*}
DEBU[0001] Registering DELETE, /nodes/{id:.*}
DEBU[0001] Registering POST, /nodes/{id:.*}/update
DEBU[0001] Registering GET, /tasks
DEBU[0001] Registering GET, /tasks/{id:.*}
DEBU[0001] Registering GET, /networks
DEBU[0001] Registering GET, /networks/{id:.*}
DEBU[0001] Registering POST, /networks/create
DEBU[0001] Registering POST, /networks/{id:.*}/connect
DEBU[0001] Registering POST, /networks/{id:.*}/disconnect
DEBU[0001] Registering DELETE, /networks/{id:.*}
[INFO] [0001] API listen on /var/run/docker.sock
DEBU[0003] libcontainerd: containerd connection state change: READY
```

Now, if you execute any Docker command such as docker images, the Debug information will also be sent to the console.

```
demo@ubuntudemo:~$ sudo docker images
DEBU[0009] Calling GET /v1.24/images/json
REPOSITORY          TAG      IMAGE ID      CREATED
SIZE
node               latest   7c4d899628d5    3 days ago
660.4 MB
nginx              latest   01f818af747d    11 days ago
181.6 MB
mongo              latest   a3bfbb96cf65e   2 weeks ago
402 MB
web                latest   f5792fc30aaa   2 weeks ago
267.9 MB
firstweb           latest   0e52e236368a   2 weeks ago
267.6 MB
ubuntu              latest   104bec311bcd   3 weeks ago
129 MB
jenkins             latest   ff6f0851ef57   5 weeks ago
714.1 MB
demo@ubuntudemo:~$ _
```

Container Logging

Logging is also available at the container level. So in our example, let's spin up an Ubuntu container first. We can do it by using the following command.

```
sudo docker run -it ubuntu /bin/bash
```

```
demo@ubuntudemo:~$ sudo docker run -it ubuntu /bin/bash
root@6bfbb1271fcdd:/# demo@ubuntudemo:~$
```

Now, we can use the docker log command to see the logs of the container.

Syntax

```
Docker logs containerID
```

Parameters

- containerID – This is the ID of the container for which you need to see the logs.

Example

On our Docker Host, let's issue the following command. Before that, you can issue some commands whilst in the container.

```
sudo docker logs 6bfb1271fcdd
```

Output

```
demo@ubuntudemo:~$ sudo docker logs 6bfb1271fcdd
root@6bfb1271fcdd:~#
root@6bfb1271fcdd:~# ifconfig
bash: ifconfig: command not found
root@6bfb1271fcdd:~# ls
bin dev home lib64 opt proc run sbin tmp var
boot etc lib media opt root sbin sys var
demo@ubuntudemo:~$
```

From the output, you can see that the commands executed in the container are shown in the logs.

Docker - Compose

Docker Compose is used to run multiple containers as a single service. For example, suppose you had an application which required NGNIX and MySQL, you could create one file which would start both the containers as a service without the need to start each one separately.

In this chapter, we will see how to get started with Docker Compose. Then, we will look at how to get a simple service with MySQL and NGNIX up and running using Docker Compose.

Docker Compose – Installation


The following steps need to be followed to get Docker Compose up and running.

Step 1 – Download the necessary files from github using the following command –

```
curl -L "https://github.com/docker/compose/releases/download/1.10.0-rc2/dockercompose  
-$(uname -s)-$(uname -m)" -o /home/demo/docker-compose
```

The above command will download the latest version of Docker Compose which at the time of writing this article is 1.10.0-rc2. It will then store it in the directory /home/demo/.

```
[deno@ubuntudemo:~]$ curl -L "https://github.com/docker/compose/releases/download/  
1.10.0-rc2/docker-compose-$(uname -s)-$(uname -m)" -o /home/deno/docker-compose
```



Step 2 – Next, we need to provide execute privileges to the downloaded Docker Compose file, using the following command –

```
chmod +x /home/demo/docker-compose
```

```
demo@ubuntudemo:~$ curl -L "https://github.com/docker/compose/releases/download/1.10.0-rc2/docker-compose-$(uname -s)-$(uname -m)" -o /home/demo/docker-compose
% Total    % Received % Xferd  Average Speed   Time   Time     Current
          Dload  Upload Total   Spent   Left  Speed
100  600    0  600    0      0  403      0 --:--:--  0:00:01 --:--:--  403
100 7929k  100 7929k    0      0  215k      0  0:00:36  0:00:36 --:--:--  213k
demo@ubuntudemo:~$ chmod +x /home/demo/docker-compose
```

We can then use the following command to see the compose version.

Syntax

```
docker-compose version
```

Parameters

- **version** – This is used to specify that we want the details of the version of Docker Compose.

Output

The version details of Docker Compose will be displayed.

Example

The following example shows how to get the docker-compose version.

```
sudo ./docker-compose -version
```

Output


You will then get the following output –

```
demo@ubuntudemo:~$ curl -L "https://github.com/docker/compose/releases/download/1.10.0-rc2/docker-compose-$(uname -s)-$(uname -m)" -o /home/demo/docker-compose
% Total    % Received % Xferd  Average Speed   Time   Time     Current
          Dload  Upload Total   Spent   Left  Speed
100  600    0  600    0      0  403      0 --:--:--  0:00:01 --:--:--  403
100 7929k  100 7929k    0      0  215k      0  0:00:36  0:00:36 --:--:--  213k
demo@ubuntudemo:~$ chmod +x /home/demo/docker-compose
demo@ubuntudemo:~$ sudo ./docker-compose version
docker-compose version 1.10.0-rc2, build fb241d0
docker-py version: 2.0.1
CPython version: 2.7.9
OpenSSL version: OpenSSL 1.0.2t  3 May 2016
demo@ubuntudemo:~$
```

Creating Your First Docker-Compose File

Now let's go ahead and create our first Docker Compose file. All Docker Compose files are YAML files. You can create one using the vim editor. So execute the following command to create the compose file –

```
sudo vim docker-compose.yml
```

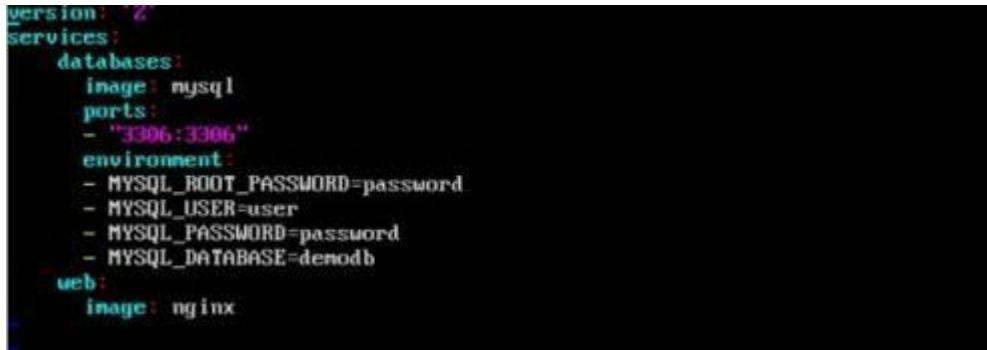

```
version: '2'
services:
  databases:
    image: mysql
    ports:
      - "3306:3306"
    environment:
      - MYSQL_ROOT_PASSWORD=password
      - MYSQL_USER=user
      - MYSQL_PASSWORD=password
      - MYSQL_DATABASE=denodb
  web:
    image: nginx
```

Let's take a close look at the various details of this file –

- The database and web keyword are used to define two separate services. One will be running our mysql database and the other will be our nginx web server.
- The image keyword is used to specify the image from dockerhub for our mysql and nginx containers
- For the database, we are using the ports keyword to mention the ports that need to be exposed for mysql.
- And then, we also specify the environment variables for mysql which are required to run mysql.

Now let's run our Docker Compose file using the following command –

```
sudo ./docker-compose up
```

This command will take the docker-compose.yml file in your local directory and start building the containers.

```
demo@ubuntudemo:~$ sudo ./docker-compose up
```

Once executed, all the images will start downloading and the containers will start automatically.

```

databases_1  | 2017-01-13T09:47:56.6455582 0 [Note] InnoDB: Buffer pool(s) loaded at startup.
databases_1  | 2017-01-13T09:47:56.6845962 0 [Note] Server socket created on ':'.
databases_1  | 2017-01-13T09:47:56.6845962 0 [Note] InnoDB: Buffer pool(s) loaded at startup.
databases_1  | 2017-01-13T09:47:56.6845792 0 [Warning] 'user' entry 'root@localhost' ignored in --skip-name-resolve mode.
databases_1  | 2017-01-13T09:47:56.6847302 0 [Warning] 'user' entry 'mysql.sys@localhost' ignored in --skip-name-resolve mode.
databases_1  | 2017-01-13T09:47:56.6848092 0 [Warning] 'db' entry 'sys mysql.sys@localhost' ignored in --skip-name-resolve mode.
databases_1  | 2017-01-13T09:47:56.6848492 0 [Warning] 'proxies_priv' entry 'root@localhost' ignored in --skip-name-resolve mode.
databases_1  | 2017-01-13T09:47:56.6883682 0 [Warning] 'tables_priv' entry 'sys config mysql.sys@localhost' ignored in --skip-name-resolve mode.
databases_1  | 2017-01-13T09:47:56.7038522 0 [Note] Event Scheduler: Loaded 0 events
databases_1  | 2017-01-13T09:47:56.7041102 0 [Note] Executing 'SELECT * FROM INFORMATION_SCHEMA.TABLES;' to get a list of tables using the deprecated partitioning engine. You may use the startup option '--disable-partition-engine-check' to skip this check.
databases_1  | 2017-01-13T09:47:56.7042492 0 [Note] Beginning of list of non-natively partitioned tables
databases_1  | 2017-01-13T09:47:56.7290272 0 [Note] End of list of non-native partitioned tables
databases_1  | 2017-01-13T09:47:56.7292332 0 [Note] mysqld: ready for connections.
databases_1  | Version: '5.7.17'  socket: '/var/run/mysqld/mysqld.sock'  port: 3306  MySQL Community Server (GPL)

```

And when you do a docker ps, you can see that the containers are indeed up and running.

```


#localhost ignored in --skip-name-resolve mode.
databases_1  | 2017-01-13T09:47:56.6848492 0 [Warning] 'proxies_priv' entry 'root@localhost' ignored in --skip-name-resolve mode.
databases_1  | 2017-01-13T09:47:56.6883682 0 [Warning] 'tables_priv' entry 'sys config mysql.sys@localhost' ignored in --skip-name-resolve mode.
databases_1  | 2017-01-13T09:47:56.7038522 0 [Note] Event Scheduler: Loaded 0 events
databases_1  | 2017-01-13T09:47:56.7041102 0 [Note] Executing 'SELECT * FROM INFORMATION_SCHEMA.TABLES;' to get a list of tables using the deprecated partitioning engine. You may use the startup option '--disable-partition-engine-check' to skip this check.
databases_1  | 2017-01-13T09:47:56.7042492 0 [Note] Beginning of list of non-natively partitioned tables
databases_1  | 2017-01-13T09:47:56.7290272 0 [Note] End of list of non-native partitioned tables
databases_1  | 2017-01-13T09:47:56.7292332 0 [Note] mysqld: ready for connections.
databases_1  | Version: '5.7.17'  socket: '/var/run/mysqld/mysqld.sock'  port: 3306  MySQL Community Server (GPL)
^Z
[5]+  Stopped                  sudo ./docker-compose up
demo@ubuntudemo:~$ sudo docker ps
CONTAINER ID        IMAGE               COMMAND             CREATED            STATUS              NAMES
           43501a8bf6c4        mysql              "docker-entrypoint.sh"   57 minutes ago    Up About a minute   0.0.0.0:3306->3306/tcp   demo_databases_1
           b45c8a2a1b4f        nginx              "nginx -g 'daemon off'"  About an hour ago   Up About a minute   80/tcp, 443/tcp      demo_web_1
demo@ubuntudemo:~$
```

Docker - Continuous Integration


Docker has integrations with many Continuous Integrations tools, which also includes the popular CI tool known as Jenkins. Within Jenkins, you have plugins available which can be used to work with containers. So let's quickly look at a Docker plugin available for the Jenkins tool.

Let's go step by step and see what's available in Jenkins for Docker containers.


Step 1 – Go to your Jenkins dashboard and click Manage Jenkins.

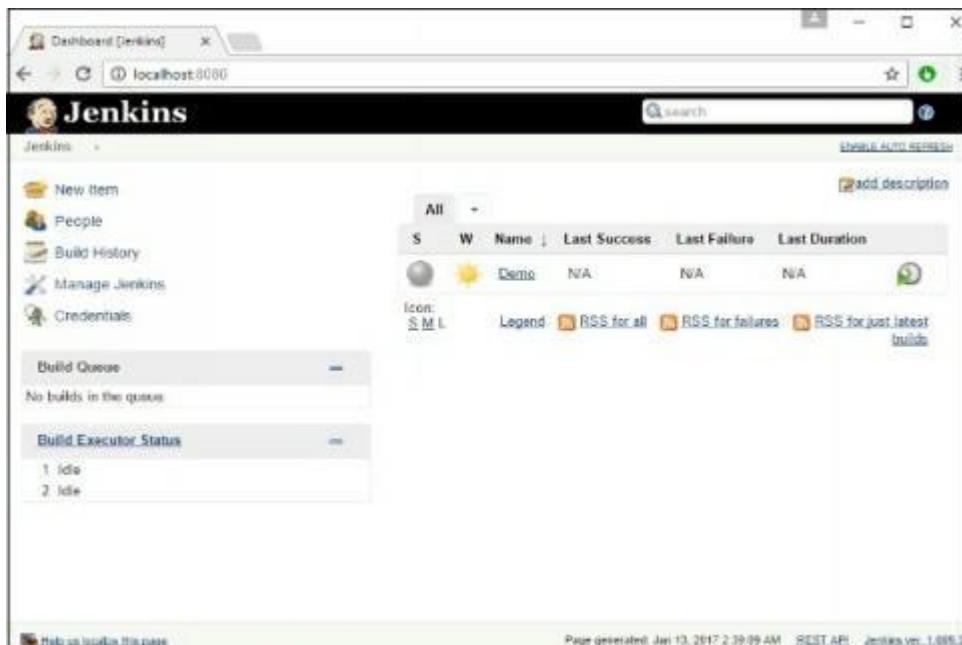

Step 2 – Go to Manage Plugins.

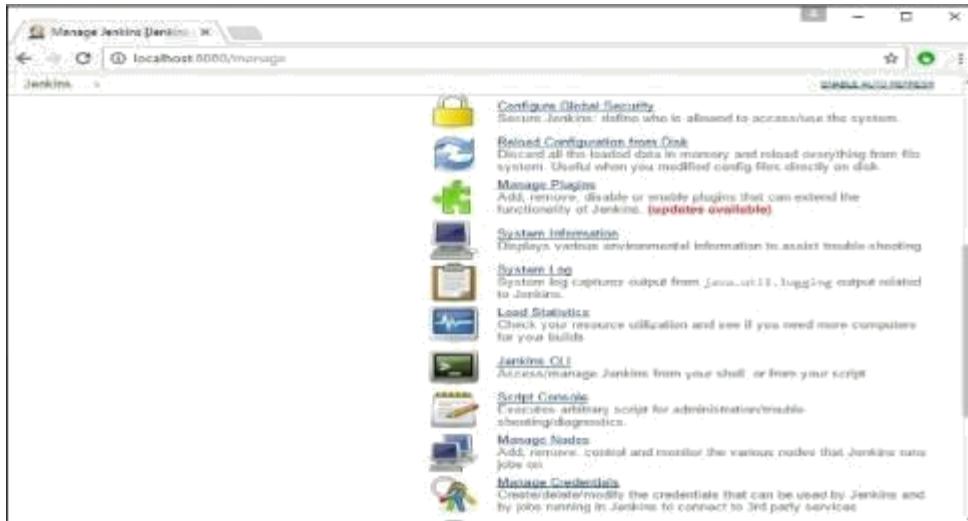


Step 3 – Search for Docker plugins. Choose the Docker plugin and click the Install without restart button.

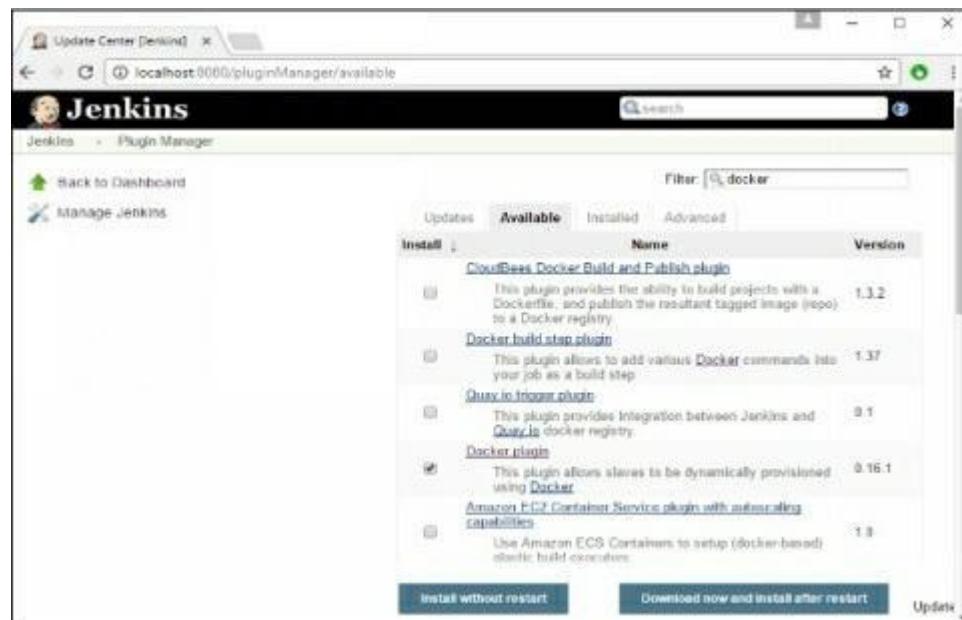


Step 4 – Once the installation is completed, go to your job in the Jenkins dashboard. In our example, we have a job called Demo.



Step 5 – In the job, when you go to the Build step, you can now see the option to start and stop containers.

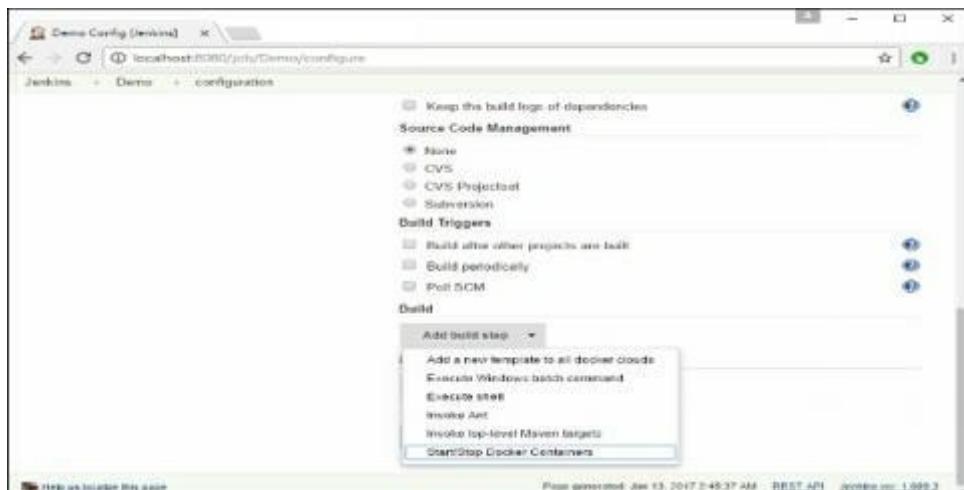

Step 6 – As a simple example, you can choose the further option to stop containers when the build is completed. Then, click the Save button.

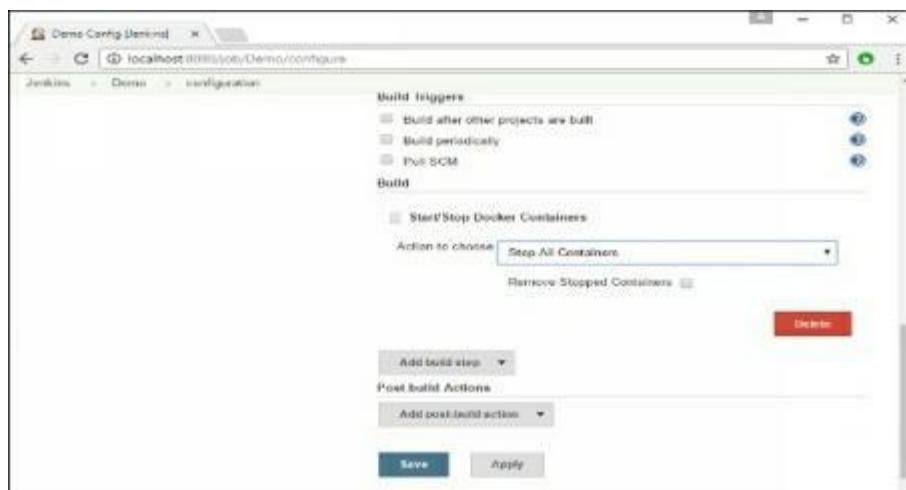

Now, just run your job in Jenkins. In the Console output, you will now be able to see that the command to Stop All containers has run.




Docker - Kubernetes Architecture

Kubernetes is an orchestration framework for Docker containers which helps expose containers as services to the outside world. For example, you can have two services

- One service would contain nginx and mongoDB, and another service would contain nginx and redis. Each service can have an IP or service point which can be connected by other applications. Kubernetes is then used to manage these services.

The following diagram shows in a simplistic format how Kubernetes works from an architecture point of view.

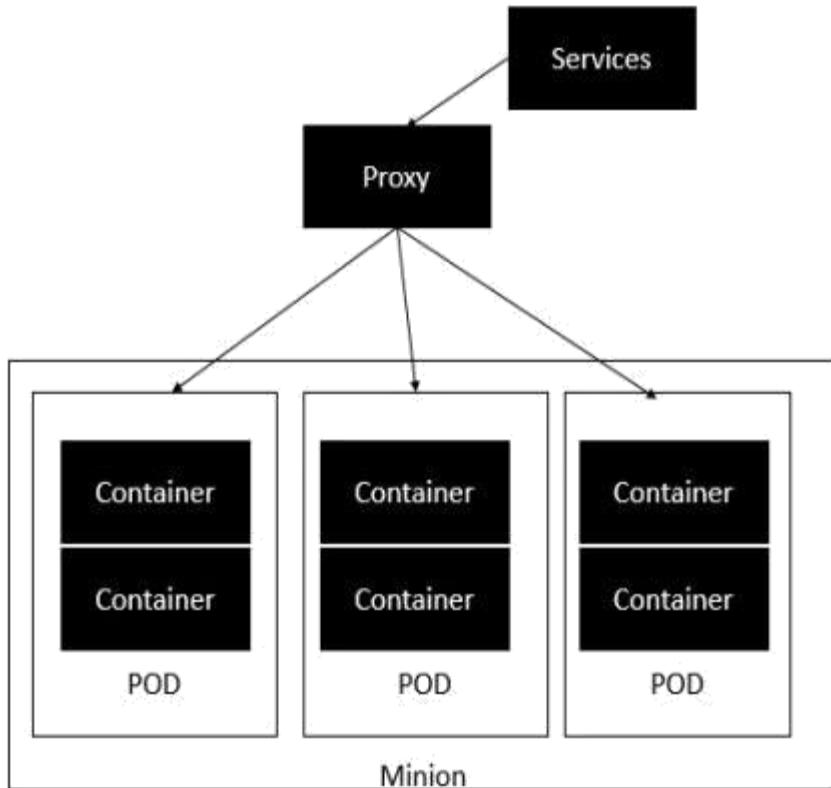

The minion is the node on which all the services run. You can have many minions running at one point in time. Each minion will host one or more POD. Each POD is like hosting a service. Each POD then contains the Docker containers. Each POD can host a different set of Docker containers. The proxy is then used to control the exposing of these services to the outside world.

Kubernetes has several components in its architecture. The role of each component is explained below −

- etcd – This component is a highly available key-value store that is used for storing shared configuration and service discovery. Here the various applications will be able to connect to the services via the discovery service.
- Flannel – This is a backend network which is required for the containers.
- kube-apiserver – This is an API which can be used to orchestrate the Docker containers.
- kube-controller-manager – This is used to control the Kubernetes services.
- kube-scheduler – This is used to schedule the containers on hosts.
- Kubelet – This is used to control the launching of containers via manifest files.
- kube-proxy – This is used to provide network proxy services to the outside world.

Docker - Working of Kubernetes

In this chapter, we will see how to install Kubernetes via kubeadm. This is a tool which helps in the installation of Kubernetes. Let's go step by step and learn how to install Kubernetes.

Step 1 – Ensure that the Ubuntu server version you are working on is 16.04.

Step 2 – Ensure that you generate a ssh key which can be used for sshlogin. You can do this using the following command.

```
ssh-keygen
```

This will generate a key in your home folder as shown below.

```
master@master:~$ ssh-keygen
Generating public/private rsa key pair.
Enter file in which to save the key (/home/master/.ssh/id_rsa):
Created directory '/home/master/.ssh'.
Enter passphrase (empty for no passphrase):
Enter same passphrase again:
Your identification has been saved in /home/master/.ssh/id_rsa.
Your public key has been saved in /home/master/.ssh/id_rsa.pub.
The key fingerprint is:
SHA256:a30Av0xfNvityajIjstZBt1keq90hrp7qUSjqSo5w81 master@master
The key's randomart image is:
+---[RSA 2048]---+
|          . |
|          . |
|          . |
|          o |
|   S*oo o |
|   .oBo...+ |
|   o.Boxo.=. |
|   .*. ooB++oo |
|   .E...o...BB.ooo. |
+---[SHA256]---+
master@master:~$
```

Step 3 – Next, depending on the version of Ubuntu you have, you will need to add the relevant site to the docker.list for the apt package manager, so that it will be able to detect the Kubernetes packages from the kubernetes site and download them accordingly.

We can do it using the following commands.

```
curl -s https://packages.cloud.google.com/apt/doc/apt-key.gpg | apt-key add -
echo "deb http://apt.kubernetes.io/ kubernetes-xenial main" | sudo tee /etc/apt/sources.list.d/docker.list
```

Step 4 – We then issue an apt-get update to ensure all packages are downloaded on the Ubuntu server.

```
Get:25 http://us.archive.ubuntu.com/ubuntu xenial/universe amd64 Packages [7,532 kB]
Get:26 http://us.archive.ubuntu.com/ubuntu xenial/universe i386 Packages [7,512 kB]
Get:27 http://us.archive.ubuntu.com/ubuntu xenial/universe Translation-en [4,354 kB]
Get:28 http://us.archive.ubuntu.com/ubuntu xenial/multiverse amd64 Packages [114 kB]
Get:29 http://us.archive.ubuntu.com/ubuntu xenial/multiverse i386 Packages [116 kB]
Get:30 http://us.archive.ubuntu.com/ubuntu xenial/multiverse Translation-en [106 kB]
Get:31 http://us.archive.ubuntu.com/ubuntu xenial-updates/main amd64 Packages [452 kB]
Get:32 http://us.archive.ubuntu.com/ubuntu xenial-updates/main i386 Packages [444 kB]
Get:33 http://us.archive.ubuntu.com/ubuntu xenial-updates/main Translation-en [170 kB]
Get:34 http://us.archive.ubuntu.com/ubuntu xenial-updates/restricted amd64 Packages [6,576 kB]
Get:35 http://us.archive.ubuntu.com/ubuntu xenial-updates/restricted i386 Packages [6,528 kB]
Get:36 http://us.archive.ubuntu.com/ubuntu xenial-updates/restricted Translation-en [2,016 kB]
Get:37 http://us.archive.ubuntu.com/ubuntu xenial-updates/universe amd64 Packages [378 kB]
Get:38 http://us.archive.ubuntu.com/ubuntu xenial-updates/universe i386 Packages [373 kB]
Get:39 http://us.archive.ubuntu.com/ubuntu xenial-updates/universe Translation-en [140 kB]
Get:40 http://us.archive.ubuntu.com/ubuntu xenial-updates/multiverse amd64 Packages [7,364 kB]
Get:41 http://us.archive.ubuntu.com/ubuntu xenial-updates/multiverse i386 Packages [6,180 kB]
Get:42 http://us.archive.ubuntu.com/ubuntu xenial-updates/multiverse Translation-en [3,060 kB]
Get:43 http://us.archive.ubuntu.com/ubuntu xenial-backports/main amd64 Packages [4,494 kB]
Get:44 http://us.archive.ubuntu.com/ubuntu xenial-backports/main i386 Packages [4,494 kB]
Get:45 http://us.archive.ubuntu.com/ubuntu xenial-backports/main Translation-en [3,124 kB]
Get:46 http://us.archive.ubuntu.com/ubuntu xenial-backports/universe amd64 Packages [2,412 kB]
Get:47 http://us.archive.ubuntu.com/ubuntu xenial-backports/universe i386 Packages [2,412 kB]
Get:48 http://us.archive.ubuntu.com/ubuntu xenial-backports/universe Translation-en [1,216 kB]
Fetched 26.0 MB in 57s (455 kB/s)
Reading package lists... Done
root@slave:~#
```

Step 5 – Install the Docker package as detailed in the earlier chapters.

Step 6 – Now it's time to install kubernetes by installing the following packages –

```
apt-get install -y kubelet kubeadm kubectl kubernetes-cni
```

```
root@slave:~# apt-get install -y kubelet kubeadm kubectl kubernetes-cni
[...]
Preparing to unpack .../kubernetes-cni_0.3.0.1-07a8a2-00_amd64.deb ...
Unpacking kubernetes-cni (0.3.0.1-07a8a2-00) ...
Selecting previously unselected package socat.
Preparing to unpack .../socat_1.7.3.1-1_amd64.deb ...
Unpacking socat (1.7.3.1-1) ...
Selecting previously unselected package kubelet.
Preparing to unpack .../kubelet_1.5.1-00_amd64.deb ...
Unpacking kubelet (1.5.1-00) ...
Selecting previously unselected package kubectl.
Preparing to unpack .../kubectl_1.5.1-00_amd64.deb ...
Unpacking kubectl (1.5.1-00) ...
Selecting previously unselected package kubeadm.
Preparing to unpack .../kubeadm_1.6.0-alpha.0-2074-a092d8c0f95f52-00_amd64.deb ...
Unpacking kubeadm (1.6.0-alpha.0-2074-a092d8c0f95f52-00) ...
Processing triggers for systemd (229-4ubuntu7) ...
Processing triggers for ureadahead (0.100.0-19) ...
Processing triggers for man-db (2.7.5-1) ...
Setting up ctables (2.0.10.4-3.4ubuntu1) ...
update-re.d: warning: start and stop actions are no longer supported; falling back to defaults
Setting up kubernetes-cni (0.3.0.1-07a8a2-00) ...
Setting up socat (1.7.3.1-1) ...
Setting up kubelet (1.5.1-00) ...
Setting up kubectl (1.5.1-00) ...
Setting up kubeadm (1.6.0-alpha.0-2074-a092d8c0f95f52-00) ...
Processing triggers for systemd (229-4ubuntu7) ...
Processing triggers for ureadahead (0.100.0-19) ...
root@slave:~#
```

Step 7 – Once all kubernetes packages are downloaded, it's time to start the kubernetes controller using the following command –

```
kubeadm init
```

```
[kubeconfig] Wrote kubeconfig file to disk: /etc/kubernetes/admin.conf
[apiclient] Created API client, waiting for the control plane to become ready
[apiclient] All control plane components are healthy after 113.293014 seconds
[apiclient] Waiting for at least one node to register and become ready
[apiclient] First node is ready after 6.502638 seconds
[apiclient] Creating a test deployment
[apiclient] Test deployment succeeded
[token-discovery] Created the kube-discovery deployment, waiting for it to become ready
[token-discovery] kube-discovery is ready after 55.593574 seconds
[addons] Created essential addon: kube-proxy
[addons] Created essential addon: kube-dns

Your Kubernetes master has initialized successfully!

You should now deploy a pod network to the cluster.
Run "kubectl apply -f [podnetwork.yaml]" with one of the options listed at:
  http://kubernetes.io/docs/admin/addons/

You can now join any number of machines by running the following on each node:
kubeadm join --token=101573.c17ba345fc84fb71 192.168.1.105
root@slave:~ # _
```

Once done, you will get a successful message that the master is up and running and nodes can now join the cluster.

Table of Contents

Docker Tutorial	3
Audience	4
Prerequisites	5
Table of Contents	6
Docker - Overview	8
Installing Docker on Linux	10
Docker - Installation	28
Docker - Hub	39
Docker - Images	44
Docker - Containers	54
Docker - Working with Containers	58
Docker - Architecture	69
Docker - Container and Hosts	72
Docker - Configuring	74
Docker - Containers and Shells	75
Docker - File	80
Docker - Building Files	83
Docker - Public Repositories	85
Docker - Managing Ports	93
Docker - Private Registries	99
Docker - Building a Web Server Docker File	104
Docker - Instruction Commands	107
Docker - Container Linking	115
Docker - Storage	118
Docker - Networking	124
Docker - Setting Node.js	131
Docker - Setting MongoDB	134
Docker - Setting NGINX	140
Docker - Toolbox	144
Docker - Setting ASP.Net	151

Docker - Cloud	158
Docker - Logging	170
Docker - Compose	174
Docker - Continuous Integration	178
Docker - Kubernetes Architecture	181
Docker - Working of Kubernetes	183