ManageOrders API Guide

ShopWorks
313 10th Street
West Palm Beach, FL 33401
Ph: 800-526-6702
Fx: 877-491-5860

Introduction

ManageOrders is a web-based application that is used to present OnSite data to your customers and/or sales force.

The main "use case" for ManageOrders is that your Customers can look-up Orders and related information including payment and line item details. In addition, your Customers can pay online using ManageOrders via credit card or electronic check (ACH).

The data used to populate ManageOrders can be accessed from our PULL API.

ManageOrders can also take Order and related information and send to the OnSite system using our PUSH API.

The purpose of the rest of this document is to explain how both the PULL and PUSH API can be used.

Preparation

You must do a few steps before you use the ManageOrders PULL or PUSH API.

Step 1 – You Must Be Using ManageOrders

ManageOrders is a separate hosted service from OnSite and you must have this up and running before you can use the ManageOrders API.

We do offer a free 30-day demo for ManageOrders so if you would like to try it please email us below and we will get you set up:

sales@shopworx.com

Step 2 – The API Must Be Enabled By Us

Utilizing the API for ManageOrders is NOT a separate fee. However, for security purposes we only enable the API for our customers who request it. If you are using ManageOrders and want the API enabled, please email us below:

support@shopworx.com

Step 3 – Enter Credentials Into OnSite

The ShopWorks support team will email to you the API credentials. These must then be entered into your OnSite system.

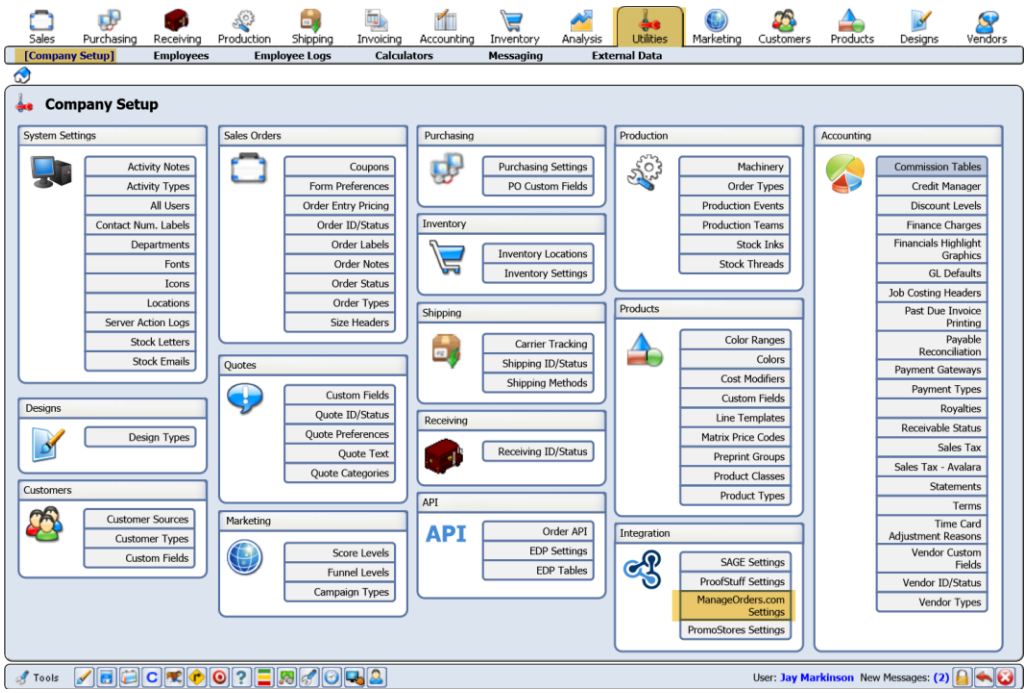

- Navigate to Utilities > Company Setup > ManageOrders.com Settings as shown above.

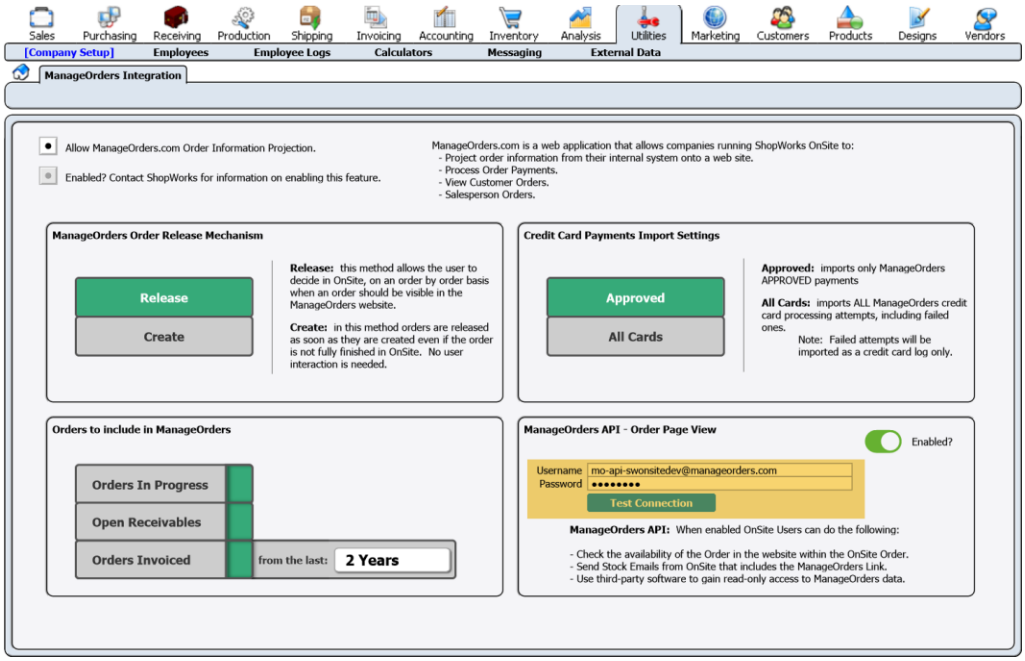

- Enter the credentials as shown above. These will be provided to you by ShopWorks technical support.
- Press the “Test Connection” button to test.

NOTE: If you receive an error message contact our support department to rectify the problem.

support@shopworx.com

ManageOrders PULL API

ManageOrders PULL API – What Can You Do With It?

Listed below is the information that you can get from the ManageOrders PULL API. Technical details for how to do this are explained later in this document.

1. Retrieve a List of Orders by date range.
2. Retrieve a specific Order.
3. Retrieve a specific Order using an External Order ID.
4. Retrieve a list of Line Items for a specific Order.
5. Retrieve a list of Payments by date range.
6. Retrieve a list of Payments for a specific Order.
7. Retrieve a list of Package Tracking Records by date range.
8. Retrieve a list of Package Tracking Records for a specific Order.

NOTE: The ManageOrders PULL API is designed to pull information from ManageOrders ONLY. See separate documentation for PUSH functionality.

ManageOrders PULL API Flowchart

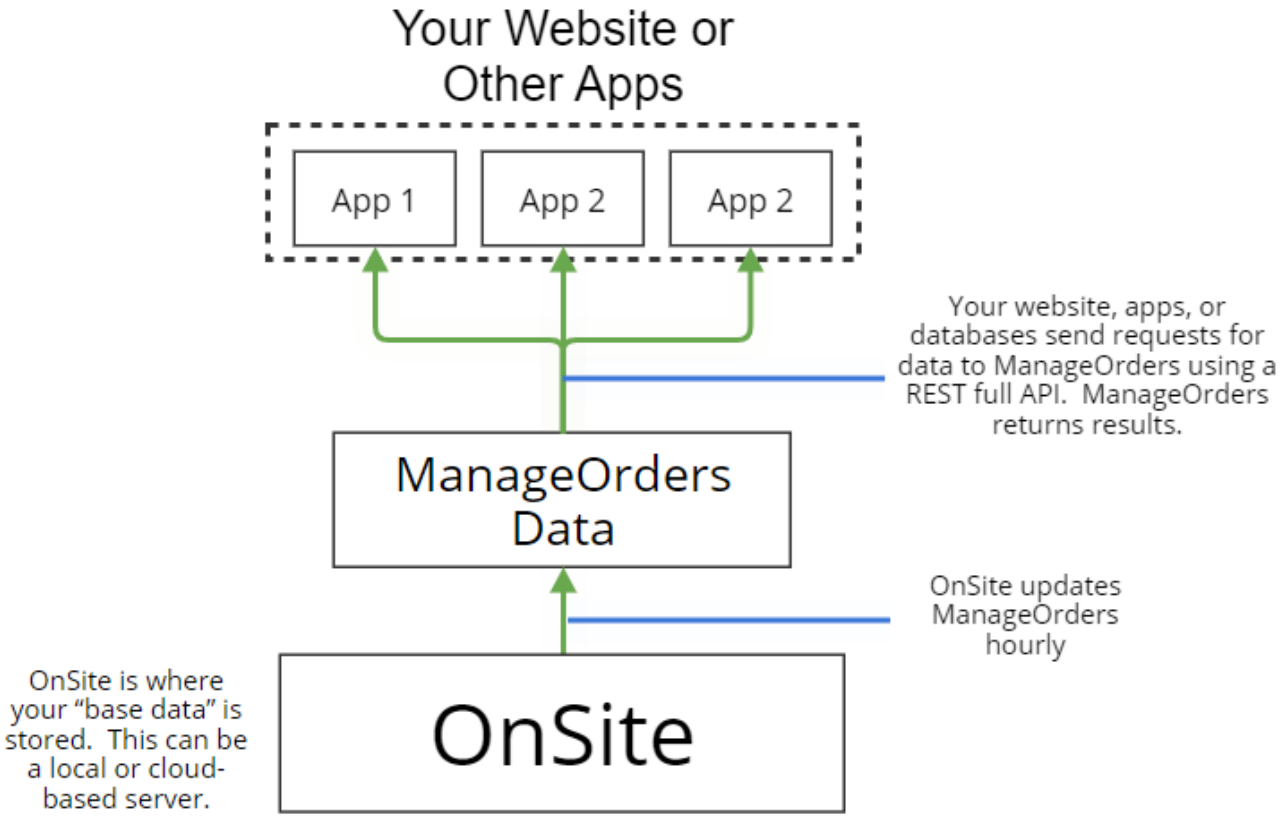

Access Your Data Through the API

The ManageOrders PULL API gives authenticated users read-only access to ManageOrders data through a REST full API. Listed below are the allowed API calls.

Authentication

POST	/manageorders/signin	Sign-In User

Orders

GET	/manageorders/orders	Retrieves a list of Orders for a date range.
GET	/manageorders/orders/{order_no}	Retrieves a specific Order.
GET	/manageorders/getorderno/{ext_order_id}	Retrieves the Order Number that matches the provided External Order ID.

Line Items

GET	/manageorders/lineitems/{order_no}	Retrieves a list of Line Items for a specific Order.

Payments

GET	/manageorders/payments	Retrieves a list of Web and OnSite Payments for a date range.
GET	/manageorders/payments/{order_no}	Retrieves a list of Payments for a specific Order.

Tracking

GET	/manageorders/tracking	Retrieves a list of Tracking Numbers for a date range.
GET	/manageorders/tracking/{order_no}	Retrieves a list of Tracking Numbers for a specific Order.

Inventory Levels

GET	/manageorders/inventorylevels	Retrieves a list of Inventory Levels.

Full Developer Documentation

For a full list of the ManageOrders API Endpoints and its capabilities follow this URL:

https://app.swaggerhub.com/apis-docs/ShopWorks/ManageOrdersAPI/1.0.0

Dates and Ranges Explained

- The following API Endpoints have additional functionality regarding Dates and Date Ranges:
    - /manageorders/orders
    - /manageorders/payments
    - /manageorders/tracking
- The **"Date"** fields in these endpoints come in pairs. For example:
    - date_Invoiced_start
    - date_Invoiced_end
- If you ONLY provide one of the dates in the pair, the API assumes both the Start and End Date are the same. For example:
    - Providing ONLY the Start Date of "2019-02-17" will return results for February 17th, 2019, ONLY. The API assumes the End Date is also "2019-02-17".
- If you provide BOTH Start and End date, the API will return results that fall within the Date Range. For example:
    - Providing the Start Date of "2019-01-01" and End Date of 2019-12-31" will return all the results for the year 2019.
- If you provide Dates for TWO or more different Pairs, the API queries the database taking into account all the parameters. For example:
    - Providing the Invoiced Start Date of "2019-01-01" and Invoiced End Date of 2019-12-31" plus a Shipped Start Date of "2019-01-01" and Shipped End Date of "2019-06-30" will return all the results with an Invoiced Date in 2019 that were Shipped in the first half of 2019.

ManageOrders PUSH API

ManageOrders PUSH API – What Can You Do With It?

Listed below is the information that you can send to the ManageOrders PUSH API. Technical details for how to do this are explained later in this document.

1. Upload a single Order.

    a. Upload Line Items for the Order.
    b. Upload a Customer for the Order.
    c. Upload Designs with thumbnails for the Order.
    d. Upload Shipping Addresses for the Order.
    e. Have OnSite create a Production Spec and Shipping Spec for you.
    f. Upload Payments for the Order.
    g. Upload Notes for the Order.
    h. Upload Attachments for the Order.

2. Retrieve Orders uploaded by date/time range.

> **NOTE**: This function will ONLY pull order and related information that was **previously pushed through the PUSH API**. To get other Order information you will need to use the ManageOrders PULL API which is covered earlier in this document.

3. Automatically import the uploaded Orders into ShopWorks OnSite.

> **NOTE**: The ManageOrders PUSH API is designed to upload information to the ManageOrders API Server. This data will then be downloaded into ShopWorks OnSite. Depending on your OnSite settings, these Orders will then become available on ManageOrders.

ManageOrders PUSH API Flowchart

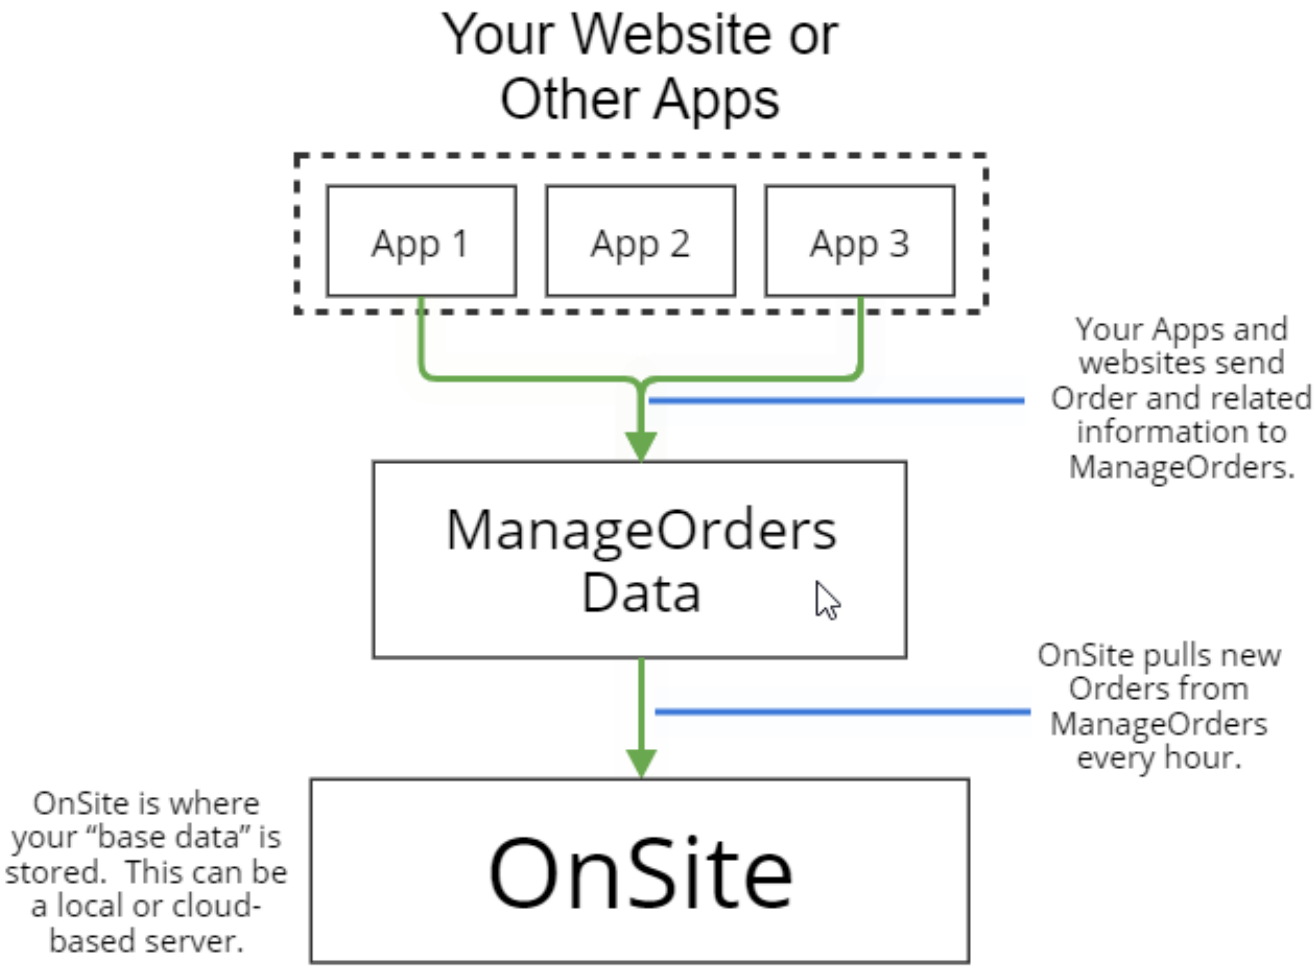

Access Your Data Through the API

The ManageOrders PUSH API gives authenticated users access to ManageOrders API Server data through a RESTful API. Listed below are the allowed API calls.

Authentication

POST	/signin	Sign-In User

Orders

GET	/order-pull	Download Orders that meet a specific timeframe.
POST	/order-push	Upload a single Order to the database.

NOTE: The order-pull function will ONLY pull order and related information **that was previously pushed through the PUSH API**.

Use case: If you just PUSHED an Order to the API and you want to verify that the information is there.

To get <u>other</u> Order information you will need to use the ManageOrders PULL API which is covered earlier in this document and is a separate API.

Full Developer Documentation

The ManageOrders PUSH API is a REST API. It uses JSON to store and transmit data. For a full list of the ManageOrders PUSH API Endpoints and its capabilities follow this URL:

https://app.swaggerhub.com/apis-docs/ShopWorks/OnSiteExternalAPI/1.0.0

Order Properties

NOTE: Fields with a red asterisk * next to them indicates a Required Field.

```
{
  "ContactEmail" : "string",
  "ContactNameFirst" : "string",
  "ContactNameLast" : "string",
  "ContactPhone" : "string",
  "DiscountPartDescription" : "string",
  "DiscountPartNumber" : "string",
  "ExtCustomerID" : "string",
  "ExtCustomerPref" : "string",
  "ExtOrderID" : "string",
  "ExtSource" : "string",
  "OnHold" : "number",
  "CustomerPurchaseOrder" : "string",
  "CustomerServiceRep" : "string",
  "TaxPartDescription" : "string",
  "TaxPartNumber" : "string",
  "TaxTotal" : "number",
  "Terms" : "string",
  "TotalDiscounts" : "number",
  "cur_Shipping" : "number",
  "date_OrderDropDead" : "date",
  "date_OrderPlaced" : "date",
  "date_OrderRequestedToShip" : "date",
  "id_CompanyLocation" : "number",
  "id_SalesStatus" : "number",
  "id_ReceivingStatus" : "number",
  "id_ShippingStatus" : "number",
  "id_Customer" :  "number",
  "id_EmpCreatedBy" : "number",
  "id_OrderType" : "number",
  "Customer" :
```

The above shows Order information associated with a specific order. Some of the Order properties are not required and may be left out. Below are the properties:

- **APISource:** This field can be any alpha-numeric value. This value can be used to filter what orders are pulled when making an API call to grab orders from ManageOrder Pull API. This setting can be found in OnSite within the ManageOrders Orders API Integration Settings.

- * **ExtOrderID:** ID of the order from the external source.

- * **ExtSource:** Used to describe the source of the Order.

- **id_Customer:** The ID of the Customer in OnSite to link this Order to. If the "Create Customer" setting is "Off" and **ExtCustomerID** is not provided or is blank, then this value must match an existing Customer in OnSite. If left blank, the system will use the default value from the ManageOrders Orders API Integration Settings in OnSite. **ExtCustomerID** will take precedence over **id_Customer** when determining which customer in OnSite to use for an order.

- **id_CompanyLocation:** Id of the location that this order is assigned. If no value is provided, then OnSite will use the id_CompanyLocation assigned in the API's auxiliary settings.

- **id_EmpCreatedBy:** The ID of the Employee who created the order. This value must match an existing Employee ID in OnSite. If left blank, the system will use the default value from the ManageOrders Orders API Integration Settings in OnSite.

- **id_OrderType:** This is the id of the OrderType from your OnSite system. This value must match an existing OrderType in OnSite. If left blank, the system will use the default value from the ManageOrders Orders API Integration Settings in OnSite.

- **ExtCustomerID:** The External ID of the Customer. This can be any alphanumeric value. If this value matches an existing OnSite customer's ExtCustomerID, then that customer is used for the order. If the Setting to "Create Customer" is enabled and no customer matches this value, a new customer will be created. This ID will take precedence over **id_Customer** when used to reference an existing OnSite customer.

- **ExtCustomerPref:** This can be any alphanumeric value. This value will be appended to the ExtCustomerID when a new customer is created. This value should be unique across all API's.

This will help prevent one API's customer from being used with another API.

- **date_OrderPlaced:** The date that the order was placed on the external source.
- **date_OrderRequestedToShip:** The date the Order must be shipped.
- **date_OrderDropDead:** The date the Order must be handed over to the Customer.
- **ContactEmail:** The Email Address for the Order Contact.
- **ContactNameFirst:** The First Name for the Order Contact.
- **ContactNameLast:** The Last Name for the Order Contact.
- **ContactPhone:** The Phone Number for the Order contact.
- **CustomerPurchaseOrder:** The Customer Purchase Order.
- **CustomerServiceRep:** The Salesperson associated with the Order.
- **id_SalesStatus:** This should be the ID of the sales status that you want to pass. This ID can be found in Settings > Order ID/Status. (Available Only in OnSite 12)
- **id_ReceivingStatus:** This should be the ID of the receiving status that you want to pass. This ID can be found in Settings > Receiving ID/Status. (Available Only in OnSite 12)
- **id_ShippingStatus:** This should be the ID of the shipping status that you want to pass. This ID can be found in Settings > Shipping ID/Status. (Available Only in OnSite 12)
- **OnHold:** Whether the Order will be OnHold or not after processing.
    - "1" = OnHold.
    - "0" or blank = Not OnHold
- **Terms:** Payment Terms for the Order. This value must match an existing value in OnSite Settings.
- **DiscountPartNumber:** Part Number to be used for a Discount Line Item if a value greater than zero is present on the "TotalDiscounts" field. If left blank, the system will use the default value

from the ManageOrders Orders API Integration Settings in OnSite.

- **DiscountPartDescription:** Part Number to be used for a Discount Line Item if a value greater than zero is present on the "TotalDiscounts" field. If left blank, the system will use the default value from the ManageOrders Orders API Integration Settings in OnSite.

- **TaxTotal:** The Sales Tax Total for the Order. If not empty, Sales Tax will be applied to the Order as a single Line Item using the system default value from the ManageOrders Orders API Integration Settings in OnSite.

- **cur_Shipping:** Total Shipping amount for the Order.

- **TotalDiscounts:** Total Discount amount for the order. If it is not empty, a Discount will be applied to the Order as a single Line Item.

Customer Properties

```
"Customer" :
{
  "CompanyName" : "string",
  "CustomerSource" : "string",
  "CustomerType" : "string",
  "InvoiceNotes" : "string",
  "MainEmail" : "string",
  "SalesGroup" : "string",
  "TaxExempt" : "number",
  "TaxExemptNumber" : "string",
  "WebSite" : "string",
  "CustomerReminderInvoiceNotes" : "string",
  "CustomDateField01" : "date",
  "CustomDateField02" : "string",
  "CustomDateField03" : "string",
  "CustomDateField04" : "string",
  "CustomField01" : "string",
  "CustomField02" : "string",
  "CustomField03" : "string",
  "CustomField04" : "string",
  "CustomField05" : "string",
  "CustomField06" : "string",
  "BillingAddress01" : "string",
  "BillingAddress02" : "string",
  "BillingCity" : "string",
  "BillingCompany" : "string",
  "BillingCountry" : "string",
  "BillingState" : "string",
  "BillingZip" : "string",
},
```

The Customer Object contains customer details. Only one customer is allowed. This block is only used if the “Create Customer” setting is on and **ExtCustomerID** is not empty within the Orders properties.

- **BillingCompany:** The Company of the person associated with the Shipping Address.
- **BillingAddress01:** The street address of the Billing Address
- **BillingAddress02:** An additional field for the Billing Address.
- **BillingCity:** The city, town, or village of the Billing Address.
- **BillingState:** The state or province of the Billing Address.
- **BillingZip:** Postal code of the Billing Address.
- **BillingCountry:** Country of the Billing Address.
- * **CompanyName:** Name of the company for this customer.
- **CustomDateField01 - CustomDateField04:** A custom date field. Use only dates in these fields.
- **CustomField01 - CustomField06:** Custom fields that can contain any text.
- **CustomerReminderInvoiceNotes:** These notes will populate a pop-up window when an order for this customer is invoiced.
- **CustomerSource:** The source that this customer originated from, trade show, website…etc.
- **CustomerType:** What type of customer this is. For Example, school, large business, small business…etc.
- **InvoiceNotes:** These notes will print on invoices for this customer.
- **MainEmail:** This customer's main email address.
- **SalesGroup:** The sales group for this customer.
- **TaxExempt:** Sets the customer to Tax Exempt.
    - "1" = Tax Exempt.
    - "0" or blank = Not Tax Exempt.

- **TaxExemptNumber:** For tax exempt customers only.

- **Website –** The customers main website URL.

Design Properties

```
"Designs" :
[
  {
    "DesignName" : "string",
    "ExtDesignID" : "string",
    "id_Design" : "number",
    "id_DesignType" : "number",
    "id_Artist" : "number",
    "ForProductColor" : "string",
    "ThreadBreak" : "string",
    "VendorDesignID" : "string",
    "CustomField01" : "string",
    "CustomField02" : "string",
    "CustomField03" : "string",
    "CustomField04" : "string",
    "CustomField05" : "string",
    "Locations" :
    […
    ]
  }
],
```

The Designs object contains Design information for an Order. This object is an array and can contain multiple Designs, Locations, and Location Details.

- **CustomField01 – CustomField05 :** Design specific custom values.

- **DesignName :** Name of the design.

- **ExtDesignID :** Unique string generated by an external application. **Required if no id_Design value is provided**. If this value already exists in OnSite than a new design will not be created and instead, the existing OnSite design, design locations, and location details will be used. If a value

also exists in id_Design, then that will take precedence over ExtDesignID when determining whether a new design is created. If this value appears in a line item objects **ExtDesignIDBlock** key, that line item will be assigned to this design in a production spec**.**

- **VendorDesignID :** Unique string generated by an external application.

- **id_Artist :** Must match an existing user's ID in OnSite. If left blank, the system will use the default value from the ManageOrders Orders API Integration Settings in OnSite.

- **id_Customer :** This ID should match an existing customer ID in OnSite.

- **id_Design :** Used to reference an existing design in OnSite. If used, must match a design record in OnSite. This value will take precedence over the ExtDesignID value when determining whether a new design is created or an existing design is used. If this value matches an OnSite design record, then all other JSON values supplied for this design object are ignored. If this value appears in a line item objects **DesignIDBlock** key, that line item will be assigned to this design in a production spec**.**

- **id_DesignType :** ID of the DesignType from your OnSite system. This value must match an existing DesignType in OnSite. If left blank, the system will use the default value from the ManageOrders Orders API Integration Settings in OnSite.

Design Locations Properties

```
"Locations" :
[
  {
    "Location" : "string",
    "TotalColors" : "string",
    "TotalFlashes" : "string",
    "TotalStitches" : "string",
    "DesignCode" : "string",
    "CustomField01" : "string",
    "CustomField02" : "string",
    "CustomField03" : "string",
    "CustomField04" : "string",
    "CustomField05" : "string",
    "ImageURL" : "string",
    "Notes" : "string",
    "LocationDetails" :
    [ ...
    ]
  }
]
```

The Locations object is an array and can contain multiple Locations per Design. If no locations are provided for a design object, then default locations are created based off the DesignType settings.

- **CustomField01 - CustomField05 :** Location specific custom values.

- **DesignCode :** Secondary Design ID for each location. Used for reference only.

- **ImageURL :** The URL for the thumbnail of a location. If a URL exist OnSite will attempt to download and add the image to the location. Images can be no larger than 2MB. Any image larger than this will not be added to the location. We recommend using .jpg's or .png file types.

- **Location :** Description of the location for embellishment.

- **Notes :** Notes specific to this location.

- **TotalColors :** Total number of colors used for print calculators. Screen Printing only.

- **FlashesTotal :** Total number of flashes used for print calculators. Screen Printing only.

- **StitchesTotal :** Total number of stitches used for embroidery calculators. Embroidery only.

Design Location Detail Properties

```
"LocationDetails" :
[
  {
    "Color" : "string",
    "ParameterLabel" : "string",
    "ParameterValue" : "string",
    "Text" : "string",
    "CustomField01" : "string",
    "CustomField02" : "string",
    "CustomField03" : "string",
    "CustomField04" : "string",
    "CustomField05" : "string",
  }
]
```

The locations detail object is an array and can contain multiple locations details per location. If no locations details are provided for a location object, then default locations details are created based off the DesignType settings.

ThreadBreak : Description of location detail for embellishment. Typically used for embroidery design types to describe what areas get what thread colors.

Color : Description of color for the location detail.

CustomField01 - CustomField05 : Location detail specific custom values.

ParameterLabel : Usually used in digital type designs. This is the for the parameter.

ParameterValue : Usually used in digital type designs. The value of the parameter. A link will be created when an E-Mail, file location, or URL is used as the parameter value.

Text : Used only for text design types. This is the only location detail value that can be used for text design types.

Line Item Properties

```
      "PartNumber" : "string",
      "DisplayAsPartNumber" : "string",
      "Color" : "string",
      "Description" : "string",
      "DisplayAsDescription":"string",
      "Size" : "string",
      "Qty" : "number",
      "Price" : "number",
      "id_ProductClass" : "number",
      "CustomField01": "string",
      "CustomField02": "string",
      "CustomField03": "string",
      "CustomField04": "string",
      "CustomField05": "string",
      "NameFirst": "string",
      "NameLast": "string",
      "LineItemNotes": "string",
      "ExtDesignIDBlock" : "string",
      "ExtShipID" : "string"
```

The LinesOE Object contains the Order Line Items. This object is an array and can contains multiple Line Items.

- **PartNumber:** The Part Number of the Line Item.

- **Description:** The Description of the Line Item.

- **DisplayAsPartNumber:** This is the part number that you want to be displayed to customers on their invoice. This value is only displayed within the invoicing tab of an order.

- **DisplayAsDescription:** This is the part description that you want to be displayed to customers on their invoice. This value is only displayed within the invoicing tab of an order.

- **Color:** The Color of the Line Item.

- **Size:** The size of the Line Item. The values used should match an entry in the translation table in for the ManageOrders API Integration.

- **Qty:** The Line-Item Quantity.

- **ExtShipID:** This value is used to assign line items to a shipping address. (**Shipping Spec.**) Each line can only belong to a ShippingAddress. The rules for using this key are below:
    - If this key is not included in the line item, that line item will not be assigned to any address.
    - If this key is present but the value is left empty, shipping for this line item will be turned off.
    - If this key is present, has a value, and that value matches the **ExtShipID** in one of the address objects, OnSite will create a shipping spec and assign this line item to the corresponding ShippingAddress.

- **DesignIDBlock:** This block is used to assign line items to specific designs. (**Production Spec.**) This block should only contain Design IDs from OnSite and must be present in the designs object. Multiple values are allowed and are separated by a comma. Should be a string. The rules for using this key are below:
    - If this key is not present in the line items object, that line item will be assigned to all designs referenced in the designs block.
    - If this key is present but is empty, the line item will not be assigned to any design and "Apply Designs" behavior will be turned off on this line item.
    - If this key is present , has a value, and that value matches a referenced design in the designs object, OnSite will assign this line to all of that design's locations.

- **ExtDesignIDBlock:** This block is used to assign line items to specific designs. (**Production Spec.**) This block should only contain **ExtDesignID**s and must be present in the designs object. Multiple values are allowed and are separated by a comma. Should be a string. The rules for using this key are below:
    - If this key is not present in the line item object, that line item will be assigned to all designs in the order.
    - If this key is present but is empty, the line item will not be assigned to any design and "Apply Designs" behavior will be turned off on this line item.
    - If this key is present , has a value, and that value matches a referenced design in the designs object, OnSite will assign this line to all of that design's locations.

- **CustomField01 – CustomField05:** Line Item specific custom values.
- **NameFirst:** First Name of the player or person.
- **NameLast:** Last Name of the player or person.
- **LineItemNotes:** Invoice Line Item specific notes.
- **WorkOrderNotes:** Work Order Line Item specific notes.
- **Price:** Price of Line Item.
- **id_ProductClass:** This ID should match an existing Product Class in OnSite. If left blank, the system will use the default value from the ManageOrders Orders API Integration Settings in OnSite.

Notes Properties

```
"Notes" :
[
  {
    "Note" : "string",
    "Type" : "string"
  }
],
```

The Notes object contains Order/Customer related notes. This object is an array and can contain multiple Notes.

- **Note:** This is the actual Note.
- * **Type:** This is the Type of Note. Here are the valid Note Types:

  Below are the different types:

  - **Notes On Order**
  - **Notes To Art**
  - **Notes To Purchasing**
  - **Notes To Subcontract**
  - **Notes To Production**
  - **Notes To Receiving**
  - **Notes To Shipping**
  - **Notes To Accounting**
  - **Notes On Customer** (Only valid during new customer creation)

Payment Properties

```
"Payments" :
[
  {
    "Amount" : "number",
    "AccountNumber" : "number",
    "date_Payment" : "date",
    "AuthCode" : "string",
    "CreditCardCompany" : "string",
    "Gateway" : "string",
    "ResponseCode" : "string",
    "ResponseReasonCode" : "string",
    "ResponseReasonText" : "string",
    "Status" : "string"

  }
],
```

The Payments object contains Order Payments. This object is an array and can contain multiple Payments.

* • **Date_Payment:** Date the payment was made.***
- **AccountNumber:** Account Number for the Payment.
* • **Amount:** Total amount of the Payment.***
- **AuthCode:** A code generated by the bank that authorizes the Payment.
- **CreditCardCompany:** Name of the issuing bank or credit card.
- **Gateway:** Name of the Gateway the Payment was processed through.
- **ResponseCode:** An alphanumeric code that tells a merchant whether the transaction was approved.

- **ResponseReasonCode:** Represents a more specific reason for the transaction status.

- **ResponseReasonText:** Describes the transaction status.

- **Status:** Status of the payment. Only “success” status will be created as actual Payments for the Order when processed.

ShippingAddresses Properties

```
"ShippingAddresses" :
[
  {

    "ShipCompany" : "string",
    "ShipMethod" : "string",
    "ShipAddress01" : "string",
    "ShipAddress02" : "string",
    "ShipCity" : "string",
    "ShipCountry" : "string",
    "ShipState" : "string",
    "ShipZip" : "string",
    "ExtShipID" : "string",
  }
],
```

The ShippingAddresses object contains Address information for Order. This object is an array and can contain multiple Shipping Addresses.

- **ShipCompany:** The Company of the person associated with the Shipping Address.
- **ShipMethod:** The Shipping Method used to ship to this address.
- **ShippingAddress01:** The street address of the Shipping Address
- **ShippingAddress02:** An additional field for the Street Address.
- **ShipCity:** The city, town, or village of the Shipping Address.
- **ShipState:** The state or province of the Shipping Address.
- **ShipZip:** Postal code of the Shipping Address.
- **ShipCountry:** Country of the Shipping Address.

- **ExtShipID:** This can contain any alpha numeric characters. If this value matches a **ExtShipID** value in any line item object, a shipping spec will be created and that line item will be assigned to this address.

Attachment Properties

```
"Attachments" :
[
  {
    "MediaName" : "string",
    "MediaURL" : "string",
    "Link" : "number",
    "LinkNote" : "string",
    "LinkURL" : "string"

  }
]
```

The Attachments object is an array and can include multiple attachments for a single order. Attachments can either be a link to an attachment or MediaURL in which OnSite will attempt to download and attach the media to the order.

MediaURL : The link to the media that is to be downloaded. This will take precedence over **LinkURL.** Attachments should be no larger 2MB.

MediaName : The name of the downloaded media item.

LinkURL : The URL of the media item. OnSite does not attempt to download link items, however, OnSite will store the URL so users can copy/paste the URL into a browser.

LinkNote : The name or a brief description of the media item.

Link : This must be set to “1” if a value exists in **LinkURL**.

ManageOrders Tracking PUSH API

ManageOrders Tracking API – What Can You Do With It?

Below is the information you can send to the ManageOrders Tracking API. You must use this API to authenticate. Once authenticated, use the id_token as your Authorization Header for this request.

- Send Tracking information to ManageOrder API.

Authentication - https://app.swaggerhub.com/apis-docs/ShopWorks/ManageOrdersAPI/1.0.0#/Authentication/sign-in.



NOTE: You will need to be on version 12 of OnSite to use this functionality. If you are using our native ShipStation Integration, please see the following document for OnSite setup.

https://www.shopworkshelp.com/index.php?solution_id=1584

URL - https://manageordersapi.com/onsite/track-push

Tracking Properties

```
{
    "APISource": "string",
    "ExtOrderID": "string",
    "Tracking":
    {
        "Name":"string",
        "Address01": "string",
        "Address02": "string",
        "AddressCity": "string",
        "AddressCompany": "string",
        "AddressCountry": "string",
        "AddressState": "string",
        "AddressZip": "string",
        "Cost": "number",
        "Tracking": "string",
        "Weight": "number",
        "date_Shipped": "Date"//Format MM/DD/YYYY"
    }
}
```

- **APISource:** This field can be any alpha-numeric value. This value can filter what Tracking records are pulled when making an API call to grab Tracking from ManageOrder Tracking Pull API. This setting can be found in OnSite within the ManageOrders Tracking API Integration Settings.

- **ExtOrderID:** ID of the order from the external source.

- **Name:** Shipping Contact.

- **Address01:** The street address of the Shipping Address.

- **Address02:** An additional field for the Street Address.

- **Address City:** The city, town, or village of the Shipping Address.

- **Address State:** The state or province of the Shipping Address.

- **Address Zip:** Postal code of the Shipping Address.

- **Address Country:** Country of the Shipping Address.

- **Tracking:** Tracking Number.

- **Weight:** Weight of package.

- **Date_Shipped:** Date the package shipped. Format must be **MM/DD/YYYY**.

ManageOrders Tracking PULL API

ManageOrders PULL API – What Can You Do With It?

Below is the information you can get from the ManageOrders Tracking PULL API. You must use this API to authenticate. Once authenticated, use the id_token as your Authorization Header for this request.

Authentication - https://app.swaggerhub.com/apis-docs/ShopWorks/ManageOrdersAPI/1.0.0#/Authentication/sign-in.

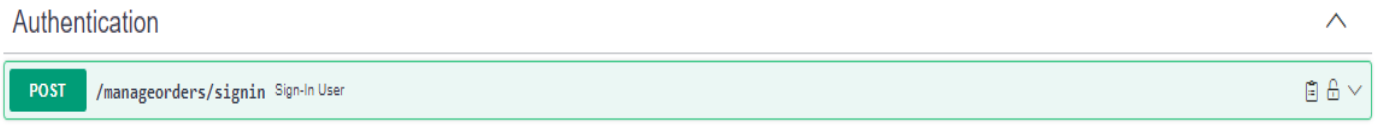

- Retrieve Tracking for a specific Date/Time.
  EXAMPLE - https://manageordersapi.com/onsite/track-pull?date_from=2024-07-09&date_to=2024-07-09&time_from=04:00:00&time_to=05:00:00

- Retrieve Tracking for a specific Date/Time and API Source
  EXAMPLE - https://manageordersapi.com/onsite/track-pull?date_from=2024-07-09&date_to=2024-07-09&time_from=04:00:00&time_to=05:00:00&api_source=shipstation