ATE accuracy across recorded contexts

288 contexts; 8 independent mechanisms; observed outcomes m = 20/50/100.

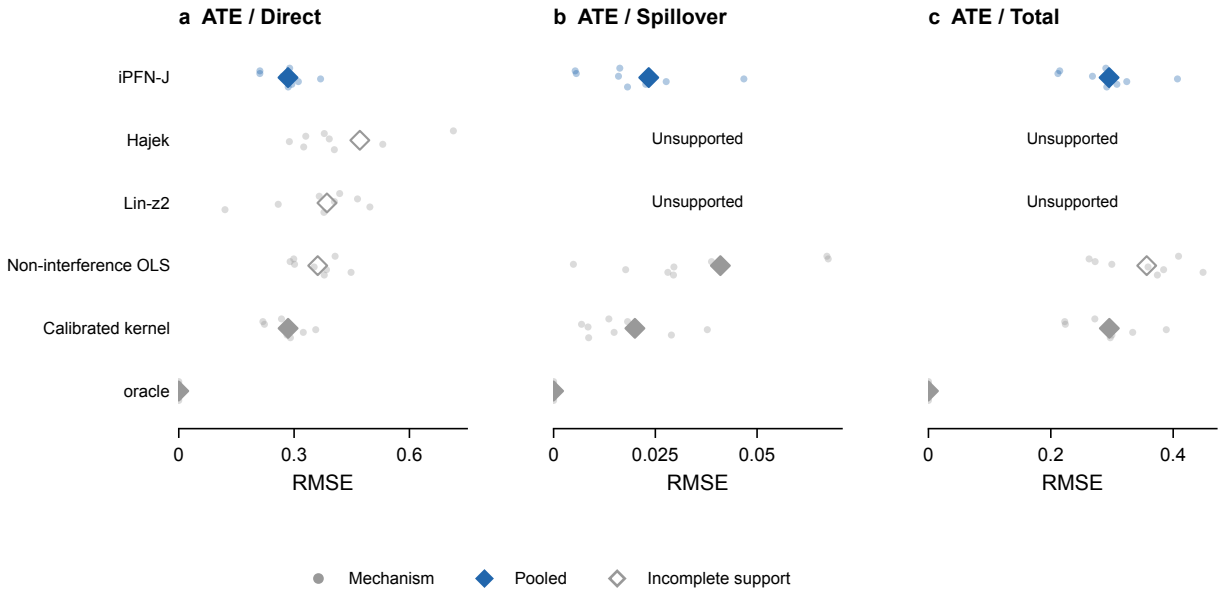

RMSE pools squared errors across recorded repeats before taking the square root.

Small points show mechanism summaries, not confidence limits. Counts and missing support are exported to CSV.