


# Collision resolution: open addressing

---

Open addressing. [Amdahl-Boehme-Rochester-Samuel, IBM 1953]

When a new key collides, find next empty slot, and put it there.

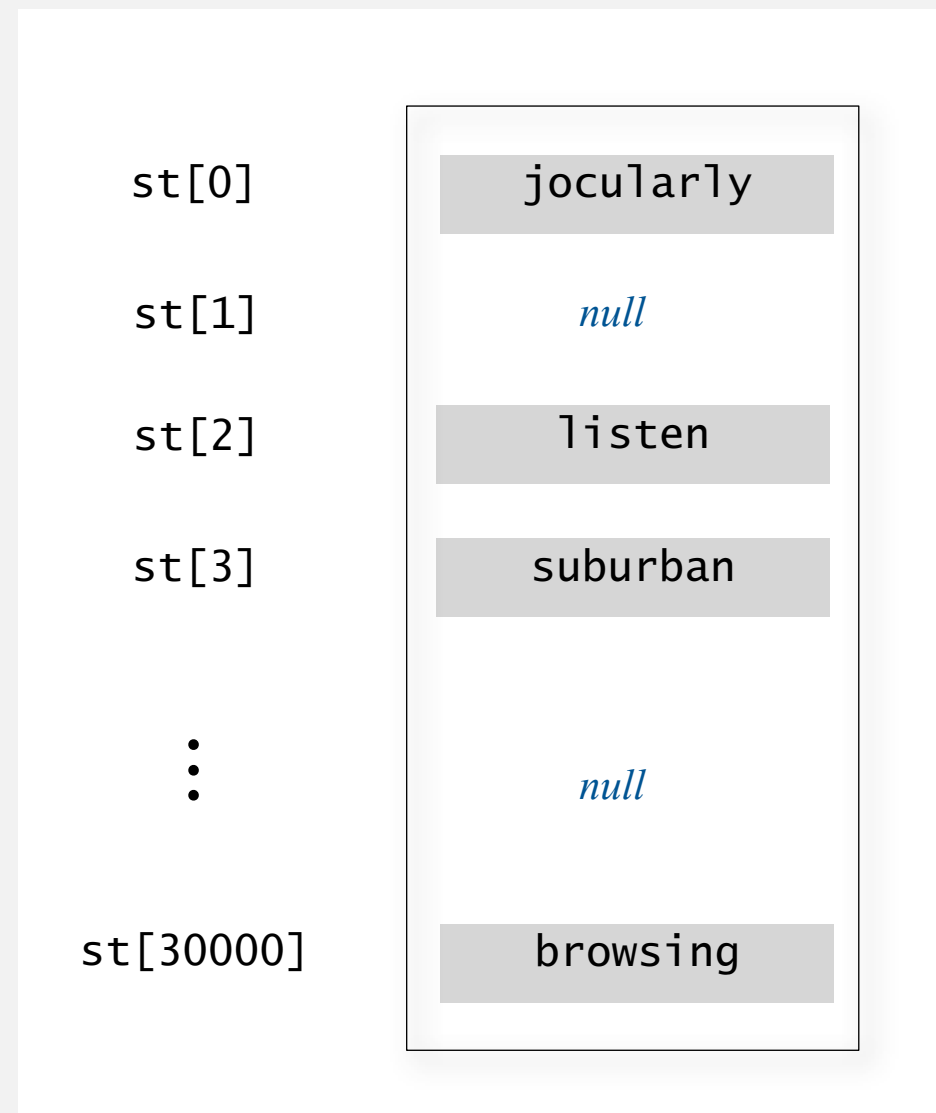

linear probing ( $M = 30001$ ,  $N = 15000$ )