

Codeforces Round #687 (Div. 2, based on Technocup 2021 Elimination Round 2)

A. Prison Break

time limit per test: 1 second
 memory limit per test: 256 megabytes
 input: standard input
 output: standard output

There is a prison that can be represented as a rectangular matrix with n rows and m columns. Therefore, there are $n \cdot m$ prison cells. There are also $n \cdot m$ prisoners, one in each prison cell. Let's denote the cell in the i -th row and the j -th column as (i, j) .

There's a secret tunnel in the cell (r, c) , that the prisoners will use to escape! However, to avoid the risk of getting caught, they will escape at night.

Before the night, every prisoner is in his own cell. When night comes, they can start moving to adjacent cells. Formally, in one second, a prisoner located in cell (i, j) can move to cells $(i - 1, j)$, $(i + 1, j)$, $(i, j - 1)$, or $(i, j + 1)$, as long as the target cell is inside the prison. They can also choose to stay in cell (i, j) .

The prisoners want to know the minimum number of seconds needed so that every prisoner can arrive to cell (r, c) if they move optimally. Note that there can be any number of prisoners in the same cell at the same time.

Input

The first line contains an integer t ($1 \leq t \leq 10^4$), the number of test cases.

Each of the next t lines contains four space-separated integers n, m, r, c ($1 \leq r \leq n \leq 10^9, 1 \leq c \leq m \leq 10^9$).

Output

Print t lines, the answers for each test case.

Example

input
3 10 10 1 1 3 5 2 4 10 2 5 1
output
18 4 6

B. Repainting Street

time limit per test: 1 second
 memory limit per test: 256 megabytes
 input: standard input
 output: standard output

There is a street with n houses in a line, numbered from 1 to n . The house i is initially painted in color c_i . The street is considered beautiful if all houses are painted in the same color. Tom, the painter, is in charge of making the street beautiful. Tom's painting capacity is defined by an integer, let's call it k .

On one day, Tom can do the following repainting process that consists of two steps:

1. He chooses two integers l and r such that $1 \leq l \leq r \leq n$ and $r - l + 1 = k$.
2. For each house i such that $l \leq i \leq r$, he can either repaint it with any color he wants, or ignore it and let it keep its current color.

Note that in the same day Tom can use different colors to repaint different houses.

Tom wants to know the minimum number of days needed to repaint the street so that it becomes beautiful.

Input

The first line of input contains a single integer t ($1 \leq t \leq 10^4$), the number of test cases. Description of test cases follows.

In the first line of a test case description there are two integers n and k ($1 \leq k \leq n \leq 10^5$).

The second line contains n space-separated integers. The i -th of these integers represents c_i ($1 \leq c_i \leq 100$), the color which house i is initially painted in.

It is guaranteed that the sum of n over all test cases does not exceed 10^5 .

Output

Print t lines, each with one integer: the minimum number of days Tom needs to make the street beautiful for each test case.

Example

input
3 10 2 1 1 2 2 1 1 2 2 2 1 7 1 1 2 3 4 5 6 7 10 3 1 3 3 3 3 1 2 1 3 3
output
3 6 2

Note

In the first test case Tom should paint houses 1 and 2 in the first day in color 2, houses 5 and 6 in the second day in color 2, and the last house in color 2 on the third day.

In the second test case Tom can, for example, spend 6 days to paint houses 1, 2, 4, 5, 6, 7 in color 3.

In the third test case Tom can paint the first house in the first day and houses 6, 7, and 8 in the second day in color 3.

C. Bouncing Ball

time limit per test: 1 second
memory limit per test: 256 megabytes
input: standard input
output: standard output

You're creating a game level for some mobile game. The level should contain some number of cells aligned in a row from left to right and numbered with consecutive integers starting from 1, and in each cell you can either put a platform or leave it empty.

In order to pass a level, a player must throw a ball from the left so that it first lands on a platform in the cell p , then bounces off it, then bounces off a platform in the cell $(p + k)$, then a platform in the cell $(p + 2k)$, and so on every k -th platform until it goes farther than the last cell. If any of these cells has no platform, you can't pass the level with these p and k .

You already have some level pattern $a_1, a_2, a_3, \dots, a_n$, where $a_i = 0$ means there is no platform in the cell i , and $a_i = 1$ means there is one. You want to modify it so that the level can be passed with given p and k . In x seconds you can add a platform in some empty cell. In y seconds you can remove the first cell completely, reducing the number of cells by one, and renumbering the other cells keeping their order. You can't do any other operation. You **can not** reduce the number of cells to less than p .

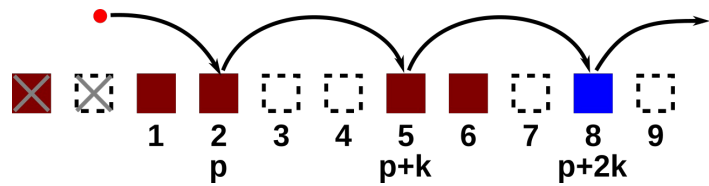


Illustration for the third example test case. Crosses mark deleted cells. Blue platform is the newly added.

What is the minimum number of seconds you need to make this level passable with given p and k ?

Input

The first line contains the number of test cases t ($1 \leq t \leq 100$). Description of test cases follows.

The first line of each test case contains three integers n , p , and k ($1 \leq p \leq n \leq 10^5$, $1 \leq k \leq n$) — the number of cells you have, the first cell that should contain a platform, and the period of ball bouncing required.

The second line of each test case contains a string $a_1a_2a_3 \dots a_n$ ($a_i = 0$ or $a_i = 1$) — the initial pattern written **without spaces**.

The last line of each test case contains two integers x and y ($1 \leq x, y \leq 10^4$) — the time required to add a platform and to remove the first cell correspondingly.

The sum of n over test cases does not exceed 10^5 .

Output

For each test case output a single integer — the minimum number of seconds you need to modify the level accordingly.

It can be shown that it is always possible to make the level passable.

Example

input
3 10 3 2

0101010101 2 2 5 4 1 00000 2 10 11 2 3 10110011000 4 3
output
2 4 10

Note

In the first test case it's best to just remove the first cell, after that all required platforms are in their places: ~~0~~**101010101**. The stroked out digit is removed, the bold ones are where platforms should be located. The time required is $y = 2$.

In the second test case it's best to add a platform to both cells 4 and 5: **00000** \rightarrow **00011**. The time required is $x \cdot 2 = 4$.

In the third test case it's best to to remove the first cell twice and then add a platform to the cell which was initially 10-th: ~~10110011000~~ \rightarrow ~~1~~**0110011010**. The time required is $y \cdot 2 + x = 10$.

D. XOR-gun

time limit per test: 2 seconds
memory limit per test: 256 megabytes
input: standard input
output: standard output

Arkady owns a **non-decreasing** array a_1, a_2, \dots, a_n . You are jealous of its beauty and want to destroy this property. You have a so-called *XOR-gun* that you can use one or more times.

In one step you can select two **consecutive** elements of the array, let's say x and y , remove them from the array and insert the integer $x \oplus y$ on their place, where \oplus denotes the [bitwise XOR operation](#). Note that the length of the array decreases by one after the operation. You can't perform this operation when the length of the array reaches one.

For example, if the array is $[2, 5, 6, 8]$, you can select 5 and 6 and replace them with $5 \oplus 6 = 3$. The array becomes $[2, 3, 8]$.

You want the array no longer be non-decreasing. What is the minimum number of steps needed? If the array stays non-decreasing no matter what you do, print -1 .

Input

The first line contains a single integer n ($2 \leq n \leq 10^5$) — the initial length of the array.

The second line contains n integers a_1, a_2, \dots, a_n ($1 \leq a_i \leq 10^9$) — the elements of the array. It is guaranteed that $a_i \leq a_{i+1}$ for all $1 \leq i < n$.

Output

Print a single integer — the minimum number of steps needed. If there is no solution, print -1 .

Examples

input
4 2 5 6 8
output
1
input
3 1 2 3
output
-1
input
5 1 2 4 6 20
output
2

Note

In the first example you can select 2 and 5 and the array becomes $[7, 6, 8]$.

In the second example you can only obtain arrays $[1, 1]$, $[3, 3]$ and $[0]$ which are all non-decreasing.

In the third example you can select 1 and 2 and the array becomes [3, 4, 6, 20]. Then you can, for example, select 3 and 4 and the array becomes [7, 6, 20], which is no longer non-decreasing.

E. New Game Plus!

time limit per test: 2 seconds
memory limit per test: 256 megabytes
input: standard input
output: standard output

Wabbit is playing a game with n bosses numbered from 1 to n . The bosses can be fought in any order. Each boss needs to be defeated **exactly once**. There is a parameter called **boss bonus** which is initially 0.

When the i -th boss is defeated, the current **boss bonus** is added to Wabbit's score, and then the value of the **boss bonus** increases by the point increment c_i . Note that c_i can be negative, which means that other bosses now give fewer points.

However, Wabbit has found a glitch in the game. At any point in time, he can reset the playthrough and start a New Game Plus playthrough. This will set the current **boss bonus** to 0, while all defeated bosses remain defeated. The current score is also saved and does **not** reset to zero after this operation. This glitch can be used **at most** k times. He can reset after defeating any number of bosses (including before or after defeating all of them), and he also can reset the game several times in a row without defeating any boss.

Help Wabbit determine the maximum score he can obtain if he has to defeat **all** n bosses.

Input

The first line of input contains two spaced integers n and k ($1 \leq n \leq 5 \cdot 10^5$, $0 \leq k \leq 5 \cdot 10^5$), representing the number of bosses and the number of resets allowed.

The next line of input contains n spaced integers c_1, c_2, \dots, c_n ($-10^6 \leq c_i \leq 10^6$), the point increments of the n bosses.

Output

Output a single integer, the maximum score Wabbit can obtain by defeating all n bosses (this value may be negative).

Examples

input
3 0 1 1 1
output
3
input
5 1 -1 -2 -3 -4 5
output
11
input
13 2 3 1 4 1 5 -9 -2 -6 -5 -3 -5 -8 -9
output
71

Note

In the first test case, no resets are allowed. An optimal sequence of fights would be

- Fight the first boss (+0). Boss bonus becomes equal to 1.
- Fight the second boss (+1). Boss bonus becomes equal to 2.
- Fight the third boss (+2). Boss bonus becomes equal to 3.

Thus the answer for the first test case is $0 + 1 + 2 = 3$.

In the second test case, it can be shown that one possible optimal sequence of fights is

- Fight the fifth boss (+0). Boss bonus becomes equal to 5.
- Fight the first boss (+5). Boss bonus becomes equal to 4.
- Fight the second boss (+4). Boss bonus becomes equal to 2.
- Fight the third boss (+2). Boss bonus becomes equal to -1.
- Reset. Boss bonus becomes equal to 0.
- Fight the fourth boss (+0). Boss bonus becomes equal to -4.

Hence the answer for the second test case is $0 + 5 + 4 + 2 + 0 = 11$.

