

Technocup 2019 - Elimination Round 4

A. Right-Left Cipher

time limit per test: 1 second
 memory limit per test: 256 megabytes
 input: standard input
 output: standard output

Polycarp loves ciphers. He has invented his own cipher called Right-Left.

Right-Left cipher is used for strings. To encrypt the string $s = s_1 s_2 \dots s_n$ Polycarp uses the following algorithm:

- he writes down s_1 ,
- he appends the current word with s_2 (i.e. writes down s_2 to the right of the current result),
- he prepends the current word with s_3 (i.e. writes down s_3 to the left of the current result),
- he appends the current word with s_4 (i.e. writes down s_4 to the right of the current result),
- he prepends the current word with s_5 (i.e. writes down s_5 to the left of the current result),
- and so on for each position until the end of s .

For example, if $s = \text{"techno"}$ the process is: $\text{"t"} \rightarrow \text{"te"} \rightarrow \text{"cte"} \rightarrow \text{"cteh"} \rightarrow \text{"ncteh"} \rightarrow \text{"ncteho"}$. So the encrypted $s = \text{"techno"}$ is "ncteho" .

Given string t — the result of encryption of some string s . Your task is to decrypt it, i.e. find the string s .

Input

The only line of the input contains t — the result of encryption of some string s . It contains only lowercase Latin letters. The length of t is between 1 and 50, inclusive.

Output

Print such string s that after encryption it equals t .

Examples

input
ncteho
output
techno
input
erfdcoeocs
output
codeforces
input
z
output
z

B. Div Times Mod

time limit per test: 1 second
 memory limit per test: 256 megabytes
 input: standard input
 output: standard output

Vasya likes to solve equations. Today he wants to solve $(x \operatorname{div} k) \cdot (x \operatorname{mod} k) = n$, where div and mod stand for integer division and modulo operations (refer to the Notes below for exact definition). In this equation, k and n are positive integer parameters, and x is a positive integer unknown. If there are several solutions, Vasya wants to find the smallest possible x . Can you help him?

Input

The first line contains two integers n and k ($1 \leq n \leq 10^6$, $2 \leq k \leq 1000$).

Output

Print a single integer x — the smallest positive integer solution to $(x \operatorname{div} k) \cdot (x \operatorname{mod} k) = n$. It is guaranteed that this equation has at least one positive integer solution.

Examples

input
6 3
output
11

input
1 2
output
3

input
4 6
output
10

Note

The result of integer division $a \operatorname{div} b$ is equal to the largest integer c such that $b \cdot c \leq a$. a modulo b (shortened $a \operatorname{mod} b$) is the only integer c such that $0 \leq c < b$, and $a - c$ is divisible by b .


In the first sample, $11 \operatorname{div} 3 = 3$ and $11 \operatorname{mod} 3 = 2$. Since $3 \cdot 2 = 6$, then $x = 11$ is a solution to $(x \operatorname{div} 3) \cdot (x \operatorname{mod} 3) = 6$. One can see that 19 is the only other positive integer solution, hence 11 is the smallest one.

C. Connect Three

time limit per test: 1 second
memory limit per test: 256 megabytes
input: standard input
output: standard output

The Squareland national forest is divided into equal 1×1 square plots aligned with north-south and east-west directions. Each plot can be uniquely described by integer Cartesian coordinates (x, y) of its south-west corner.

Three friends, Alice, Bob, and Charlie are going to buy three distinct plots of land A, B, C in the forest. Initially, all plots in the forest (including the plots A, B, C) are covered by trees. The friends want to visit each other, so they want to clean some of the plots from trees. After cleaning, one should be able to reach any of the plots A, B, C from any other one of those by moving through adjacent cleared plots. Two plots are adjacent if they share a side.



For example, $A = (0, 0)$, $B = (1, 1)$, $C = (2, 2)$. The minimal number of plots to be cleared is 5. One of the ways to do it is shown with the gray color. Of course, the friends don't want to strain too much. Help them find out the smallest number of plots they need to clean from trees.

Input

The first line contains two integers x_A and y_A — coordinates of the plot A ($0 \leq x_A, y_A \leq 1000$). The following two lines describe coordinates (x_B, y_B) and (x_C, y_C) of plots B and C respectively in the same format ($0 \leq x_B, y_B, x_C, y_C \leq 1000$). It is guaranteed that all three plots are distinct.

Output

On the first line print a single integer k — the smallest number of plots needed to be cleaned from trees. The following k lines should contain coordinates of all plots needed to be cleaned. All k plots should be distinct. You can output the plots in any order.

If there are multiple solutions, print any of them.

Examples

input
0 0 1 1 2 2
output
5 0 0

1 0
1 1
1 2
2 2

input

0 0
2 0
1 1


output

4
0 0
1 0
1 1
2 0

Note

The first example is shown on the picture in the legend.

The second example is illustrated with the following image:



D. Minimum Diameter Tree

time limit per test: 1 second
memory limit per test: 256 megabytes
input: standard input
output: standard output

You are given a tree (an undirected connected graph without cycles) and an integer s .

Vanya wants to put weights on all edges of the tree so that all weights are non-negative real numbers and their sum is s . At the same time, he wants to make the diameter of the tree as small as possible.

Let's define the diameter of a weighed tree as the maximum sum of the weights of the edges lying on the path between two some vertices of the tree. In other words, the diameter of a weighed tree is the length of the longest simple path in the tree, where length of a path is equal to the sum of weights over all edges in the path.

Find the minimum possible diameter that Vanya can get.

Input

The first line contains two integer numbers n and s ($2 \leq n \leq 10^5$, $1 \leq s \leq 10^9$) — the number of vertices in the tree and the sum of edge weights.

Each of the following $n - 1$ lines contains two space-separated integer numbers a_i and b_i ($1 \leq a_i, b_i \leq n$, $a_i \neq b_i$) — the indexes of vertices connected by an edge. The edges are undirected.

It is guaranteed that the given edges form a tree.

Output

Print the minimum diameter of the tree that Vanya can get by placing some non-negative real weights on its edges with the sum equal to s .

Your answer will be considered correct if its absolute or relative error does not exceed 10^{-6} .

Formally, let your answer be a , and the jury's answer be b . Your answer is considered correct if $\frac{|a-b|}{\max(1,b)} \leq 10^{-6}$.

Examples

input

4 3
1 2
1 3
1 4


output

2.0000000000000000

input
6 1 2 1 2 3 2 5 5 4 5 6
output
0.5000000000000000


input
5 5 1 2 2 3 3 4 3 5
output
3.3333333333333333

Note
In the first example it is necessary to put weights like this:

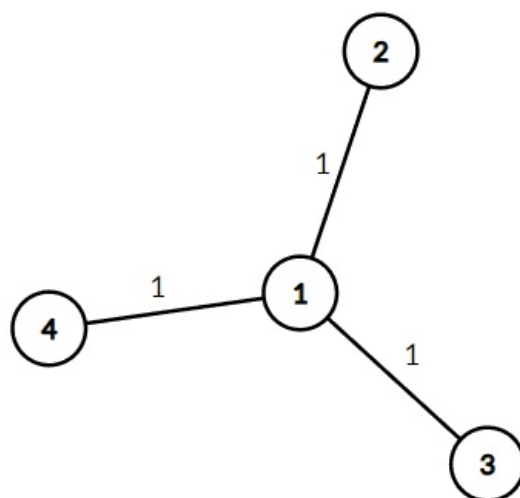

It is easy to see that the diameter of this tree is 2. It can be proved that it is the minimum possible diameter.

In the second example it is necessary to put weights like this:

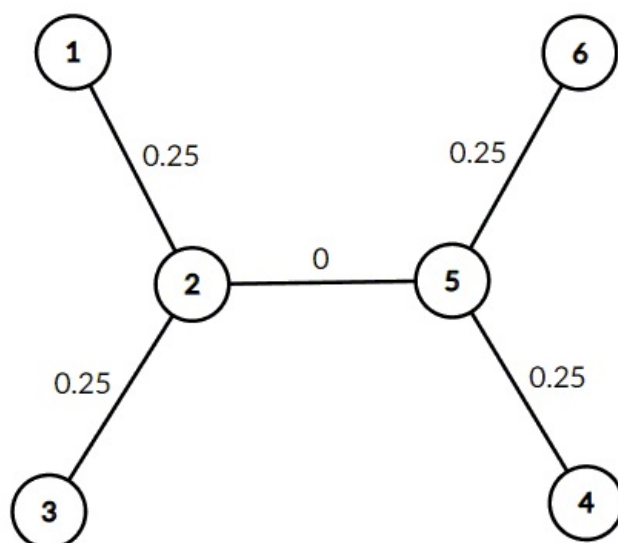

E. Vasya and Templates

time limit per test: 5 seconds
memory limit per test: 256 megabytes
input: standard input
output: standard output

Vasya owns three strings s , a and b , each of them consists only of first k Latin letters.

Let a template be such a string of length k that each of the first k Latin letters appears in it exactly once (thus there are $k!$ distinct templates). Application of template p to the string s is the replacement of each character in string s with p_i , i is the index of this letter in the alphabet. For example, applying template "bdca" to a string "aabccd" yields string "bbdcca".

Vasya wants to know if there exists such a template which yields a string lexicographically greater than or equal to string a and lexicographically less than or equal to string b after applying it to s .

If there exist multiple suitable templates, print any of them.

String a is lexicographically less than string b if there is some i ($1 \leq i \leq n$) that $a_i < b_i$ and for any j ($1 \leq j < i$) $a_j = b_j$.

You are required to answer t testcases **independently**.

Input

The first line contains a single integer t ($1 \leq t \leq 10^6$) — the number of testcases.

In **hacks** you can only use $t = 1$.

Each of the next t lines contains the description of the testcase in the following form:

The first line of the testcase contains a single integer k ($1 \leq k \leq 26$) — the length of the template.

The second line of the testcase contains the string s ($1 \leq |s| \leq 10^6$).

The third line of the testcase contains the string a .

The fourth line of the testcase contains the string b .

Strings s , a and b have the same length ($|s| = |a| = |b|$) and consist only of the first k Latin letters, all letters are lowercase.

It is guaranteed that string a is lexicographically less than or equal to string b .

It is also guaranteed that the total length of strings over all testcase won't exceed $3 \cdot 10^6$.

Output

Print the answers to all testcases in the following form:

If there exists no suitable template then print "NO" in the first line.

Otherwise print "YES" in the first line and the template itself in the second line (k lowercase letters, each of the first k Latin letters should appear exactly once).

If there exist multiple suitable templates, print any of them.

Example

input
2 4 bbcb aada aada 3 abc bbb bbb
output
YES badc NO

F. Rock-Paper-Scissors Champion

time limit per test: 2 seconds
memory limit per test: 256 megabytes
input: standard input
output: standard output

n players are going to play a rock-paper-scissors tournament. As you probably know, in a one-on-one match of rock-paper-scissors, two players choose their shapes independently. The outcome is then determined depending on the chosen shapes: "paper" beats "rock", "rock" beats "scissors", "scissors" beat "paper", and two equal shapes result in a draw.

At the start of the tournament all players will stand in a row, with their numbers increasing from 1 for the leftmost player, to n for the rightmost player. Each player has a pre-chosen shape that they will use in every game throughout the tournament. Here's how the tournament is conducted:

- If there is only one player left, he is declared the champion.
- Otherwise, two adjacent players in the row are chosen arbitrarily, and they play the next match. The losing player is eliminated

from the tournament and leaves his place in the row (with his former neighbours becoming adjacent). If the game is a draw, the losing player is determined by a coin toss.

The organizers are informed about all players' favoured shapes. They wish to find out the total number of players who have a chance of becoming the tournament champion (that is, there is a suitable way to choose the order of the games and manipulate the coin tosses). However, some players are still optimizing their strategy, and can inform the organizers about their new shapes. Can you find the number of possible champions after each such request?

Input

The first line contains two integers n and q — the number of players and requests respectively ($1 \leq n \leq 2 \cdot 10^5, 0 \leq q \leq 2 \cdot 10^5$).

The second line contains a string of n characters. The i -th of these characters is "R", "P", or "S" if the player i was going to play "rock", "paper", or "scissors" before all requests respectively.

The following q lines describe the requests. The j -th of these lines contain an integer p_j and a character c_j meaning that the player p_j is going to use the shape described by the character c_j from this moment ($1 \leq p_j \leq n$).

Output

Print $q + 1$ integers r_0, \dots, r_q , where r_k is the number of possible champions after processing k requests.

Example

input
3 5 RPS 1 S 2 R 3 P 1 P 2 P
output
2 2 1 2 2 3

G. Beautiful Matrix

time limit per test: 4 seconds
memory limit per test: 256 megabytes
input: standard input
output: standard output

Petya collects *beautiful* matrix.

A matrix of size $n \times n$ is *beautiful* if:

- All elements of the matrix are integers between 1 and n ;
- For every row of the matrix, all elements of this row are different;
- For every pair of vertically adjacent elements, these elements are different.

Today Petya bought a *beautiful* matrix a of size $n \times n$, and now he wants to determine its rarity.

The rarity of the matrix is its index in the list of *beautiful* matrices of size $n \times n$, sorted in lexicographical order. Matrix comparison is done row by row. (The index of lexicographically smallest matrix is **zero**).

Since the number of *beautiful* matrices may be huge, Petya wants you to calculate the rarity of the matrix a modulo 998 244 353.

Input

The first line contains one integer n ($1 \leq n \leq 2000$) — the number of rows and columns in a .

Each of the next n lines contains n integers $a_{i,j}$ ($1 \leq a_{i,j} \leq n$) — the elements of a .

It is guaranteed that a is a *beautiful* matrix.

Output

Print one integer — the rarity of matrix a , taken modulo 998 244 353.

Examples

input
2 2 1 1 2
output
1

input
3 1 2 3 2 3 1 3 1 2
output
1

input
3 1 2 3 3 1 2 2 3 1
output
3

Note

There are only 2 *beautiful* matrices of size 2×2 :

1 2	2 1
2 1	1 2

There are the first 5 *beautiful* matrices of size 3×3 in lexicographical order:

1 2 3	1 2 3	1 2 3	1 2 3	1 3 2
2 3 1	2 3 1	3 1 2	3 1 2	2 1 3
1 2 3	3 1 2	1 2 3	2 3 1	1 3 2