



Mata Kuliah : Pemrograman Web Lanjut (PWL)
Program Studi : D4 – Sistem Informasi Bisnis
Semester : 5

Kelas : SIB
NIM : 2241760138
Nama : Ervan Dwi Ardian
Jobsheet Ke- : UTS

Laporan UTS

Kode Dart

Langkah	Jawaban/Deskripsi
1	main.dart



	<pre>main.dart / ... 1 import 'package:flutter/material.dart'; 2 import 'landing_page.dart'; 3 import 'login_page.dart'; 4 import 'home_page.dart'; 5 import 'about_page.dart'; 6 import 'profile_page.dart'; 7 8 Run Debug Profile 9 void main() { 10 runApp(MyApp()); 11 } 12 13 class MyApp extends StatelessWidget { Constructors 14 @override 15 Widget build(BuildContext context) { 16 return MaterialApp(17 title: 'Simple App', 18 theme: ThemeData(19 primarySwatch: Colors.blue, 20), // ThemeData 21 home: LandingPage(), 22 routes: { 23 '/login': (context) => LoginPage(), 24 '/home': (context) => HomePage(), 25 '/about': (context) => AboutPage(), 26 '/profile': (context) => ProfilePage(), 27 }, 28); // MaterialApp 29 } 30 }</pre>
2	Landing_page.dart



	<pre>import 'package:flutter/material.dart'; class LandingPage extends StatelessWidget { Constructors for public widgets should have a named 'key' parameter.ðTry adding a named parameter to the constructor. @override Widget build(BuildContext context) { return Scaffold(body: Container(decoration: BoxDecoration(gradient: LinearGradient(colors: [Colors.greenAccent, Colors.teal], begin: Alignment.topLeft, end: Alignment.bottomRight,), // LinearGradient), // BoxDecoration child: Center(child: Column(mainAxisAlignment: MainAxisAlignment.center, children: [Text('Selamat Datang Diaplikasi\ñErwan Dwi Ardian\ñ2241760138', textAlign: TextAlign.center, style: TextStyle(color: Colors.white, fontSize: 24, fontWeight: FontWeight.bold,), // TextStyle), // Text SizedBox(height: 20), ElevatedButton(onPressed: () { Navigator.pushNamed(context, '/login'); }, child: Text('Login'),), // ElevatedButton], // Column), // Center), // Container), // Scaffold); } }</pre>
3	Login_page.dart



```
import 'package:flutter/material.dart';

class LoginPage extends StatefulWidget {
  @override
  _LoginPageState createState() => _LoginPageState();
}

class _LoginPageState extends State<LoginPage> {
  final _usernameController = TextEditingController();
  final _passwordController = TextEditingController();
  String _errorMessage = '';

  void _login() {
    if (_usernameController.text == 'Ervan' && _passwordController.text == 'ervan123') {
      Navigator.pushReplacementNamed(context, '/home', arguments: _usernameController.text);
    } else {
      setState(() {
        _errorMessage = 'Invalid username or password';
      });
    }
  }

  @override
  Widget build(BuildContext context) {
    return Scaffold(
      appBar: AppBar(
        title: Text('Laman Login'),
      ), // AppBar
      body: Container(
        decoration: BoxDecoration(
          gradient: LinearGradient(
            colors: [Colors.greenAccent, Colors.teal],
            begin: Alignment.topLeft,
            end: Alignment.bottomRight,
          ), // LinearGradient
        ), // BoxDecoration
        child: Center(
          child: Padding(
            padding: EdgeInsets.all(16.0),
            child: Column(
              mainAxisAlignment: MainAxisAlignment.center,
              children: [
                Text(
                  'Login',
                  style: TextStyle(
                    fontSize: 30,
                    color: Colors.white,
                    fontWeight: FontWeight.bold,

```



	<pre>), // TextStyle), // Text SizedBox(height: 20), // Use 'const' with the constr TextField(controller: _usernameController, decoration: InputDecoration(// Use 'const' with th labelText: 'Username', filled: true, fillColor: Colors.white,), // InputDecoration), // TextField SizedBox(height: 10), // Use 'const' with the constr TextField(controller: _passwordController, decoration: InputDecoration(// Use 'const' with th labelText: 'Password', filled: true, fillColor: Colors.white,), // InputDecoration obscureText: true,), // TextField SizedBox(height: 20), // Use 'const' with the constr ElevatedButton(onPressed: _login, child: Text('Login'), // Use 'const' with the const), // ElevatedButton if (_errorMessage.isNotEmpty) Text(_errorMessage, style: TextStyle(color: Colors.red), // Use 'c), // Text],), // Column), // Padding), // Center), // Container); // Scaffold } }</pre>
4	Home_page.dart



	<pre>import 'package:flutter/material.dart'; class HomePage extends StatelessWidget { Constructors for public widgets should h @override Widget build(BuildContext context) { final username = ModalRoute.of(context)?.settings.arguments as String; return Scaffold(appBar: AppBar(title: Text('Home Page'), Use 'const' with the constructor to improve per), // AppBar body: Container(decoration: BoxDecoration(Use 'const' with the constructor to improve pe gradient: LinearGradient(Use 'const' with the constructor to improve p colors: [Colors.greenAccent, Colors.teal], Use 'const' literals a begin: Alignment.topLeft, end: Alignment.bottomRight,), // LinearGradient), // BoxDecoration child: Center(child: Column(mainAxisAlignment: MainAxisAlignment.center, children: [ElevatedButton(onPressed: () { Navigator.pushNamed(context, '/profile', arguments: username); }, child: Text('Profil'), Use 'const' with the constructor to improv), // ElevatedButton ElevatedButton(onPressed: () { Navigator.pushNamed(context, '/about'); }, child: Text('About'), Use 'const' with the constructor to improve), // ElevatedButton],), // Column), // Center), // Container); // Scaffold } }</pre>
5	About_page.dart



	<pre>about_page.dart > AboutPage > build import 'package:flutter/material.dart'; class AboutPage extends StatelessWidget { Constructors for public widgets should have a named 'key' parameter @override Widget build(BuildContext context) { return Scaffold(appBar: AppBar(title: Text('About Page'),), // AppBar body: Container(decoration: BoxDecoration(gradient: LinearGradient(colors: [Colors.greenAccent, Colors.teal], begin: Alignment.topLeft, end: Alignment.bottomRight,), // LinearGradient), // BoxDecoration child: Center(child: Padding(padding: EdgeInsets.all(16.0), child: Text('Aplikasi Sederhana oleh\nErwan Dwi Ardian\n2241760138\nUntuk Penilaian UTS Pemrograman Mobile', textAlign: TextAlign.center, style: TextStyle(fontSize: 20, color: Colors.white,), // TextStyle), // Text), // Padding), // Center), // Container); // Scaffold } }</pre>
6	Profile_page.dart



	<pre>import 'package:flutter/material.dart'; class ProfilePage extends StatelessWidget { Constructors for public widget @override Widget build(BuildContext context) { final username = ModalRoute.of(context)?.settings.arguments as String; return Scaffold(appBar: AppBar(title: Text('Laman Profil'), Use 'const' with the constructor to i), // AppBar body: Container(decoration: BoxDecoration(Use 'const' with the constructor to imp gradient: LinearGradient(Use 'const' with the constructor to im colors: [Colors.greenAccent, Colors.teal], Use 'const' lit begin: Alignment.topLeft, end: Alignment.bottomRight,), // LinearGradient), // BoxDecoration child: Center(child: Column(mainAxisAlignment: MainAxisAlignment.center, children: [Icon(Use 'const' with the constructor to improve performanc Icons.account_circle, size: 100, color: Colors.white,), // Icon SizedBox(height: 20), Use 'const' with the constructor to im Text('Username: \$username', style: TextStyle(Use 'const' with the constructor to impr fontSize: 24, color: Colors.white,), // TextStyle), // Text],), // Column), // Center), // Container); // Scaffold } }</pre>
7	Fungsi file 1. login_page.dart Fungsi: Halaman LoginPage berfungsi sebagai halaman awal di mana pengguna memasukkan username dan password. Aplikasi memvalidasi input dan, jika benar,




	pengguna akan diarahkan ke halaman utama (HomePage). Jika salah, pesan error akan ditampilkan.
	2. home_page.dart Fungsi: Halaman HomePage adalah halaman utama yang dilihat pengguna setelah berhasil login. Di halaman ini, terdapat dua tombol untuk navigasi ke halaman profil (ProfilePage) dan halaman tentang (AboutPage).
	3. profile_page.dart Fungsi: Halaman ProfilePage menampilkan informasi tentang pengguna, terutama username yang diinput dari LoginPage. Di sini, username ditampilkan secara dinamis berdasarkan argumen yang diterima dari HomePage.
	4. about_page.dart Fungsi: Halaman AboutPage menampilkan informasi tentang aplikasi. Ini adalah halaman statis yang hanya berfungsi sebagai deskripsi aplikasi.
	5. main.dart Fungsi: File utama aplikasi yang bertanggung jawab untuk mendefinisikan rute dan mengatur navigasi antar halaman. Di sini, rute untuk LoginPage, HomePage, ProfilePage, dan AboutPage didefinisikan.

Output

Langkah	Jawaban/Deskripsi
1	Landing_page.dart

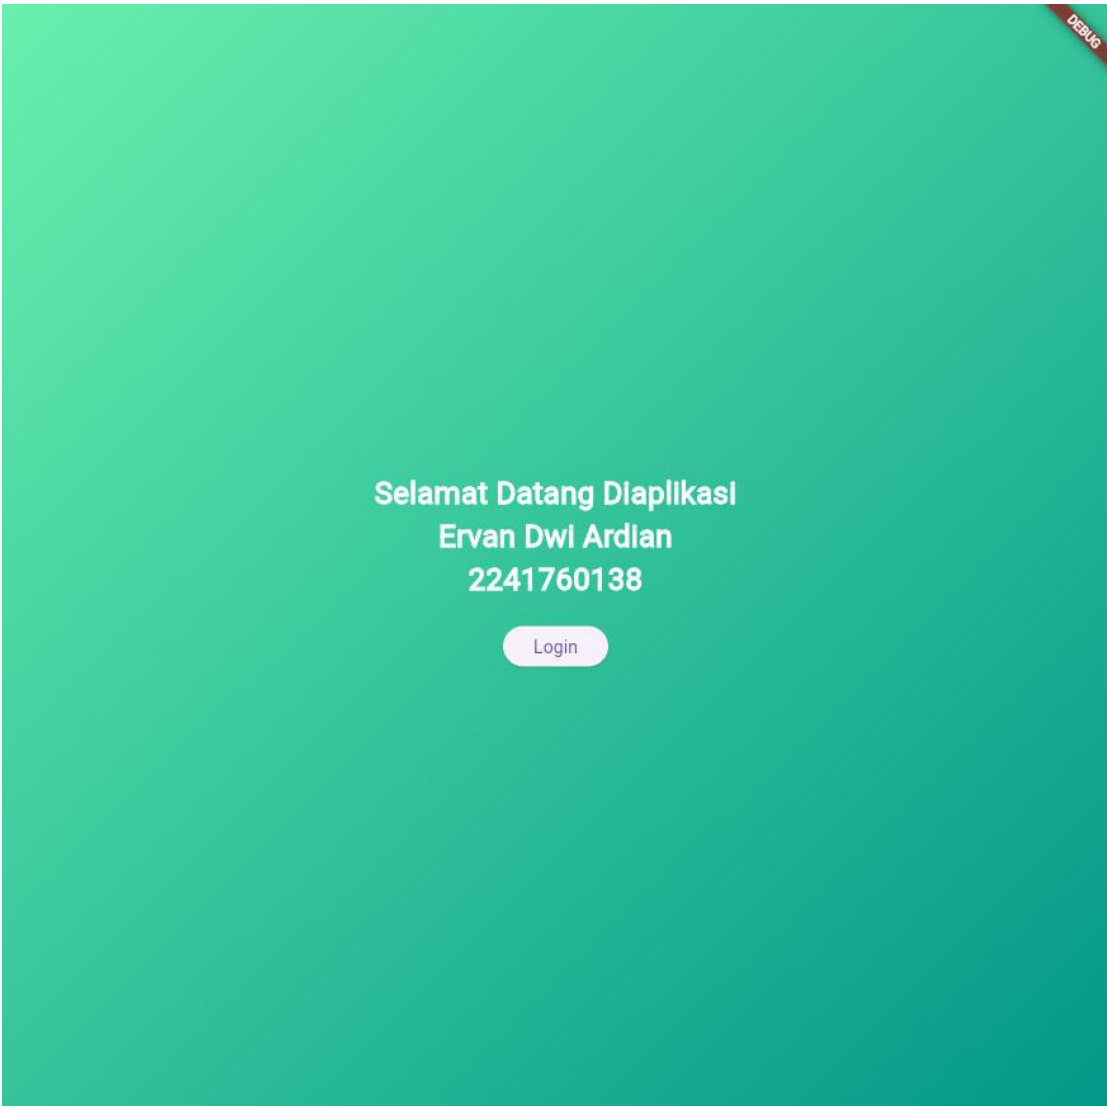


	
2	Login_page.dart




	← Laman Login DEBUG Login Username Password Login
3	Jika gagal

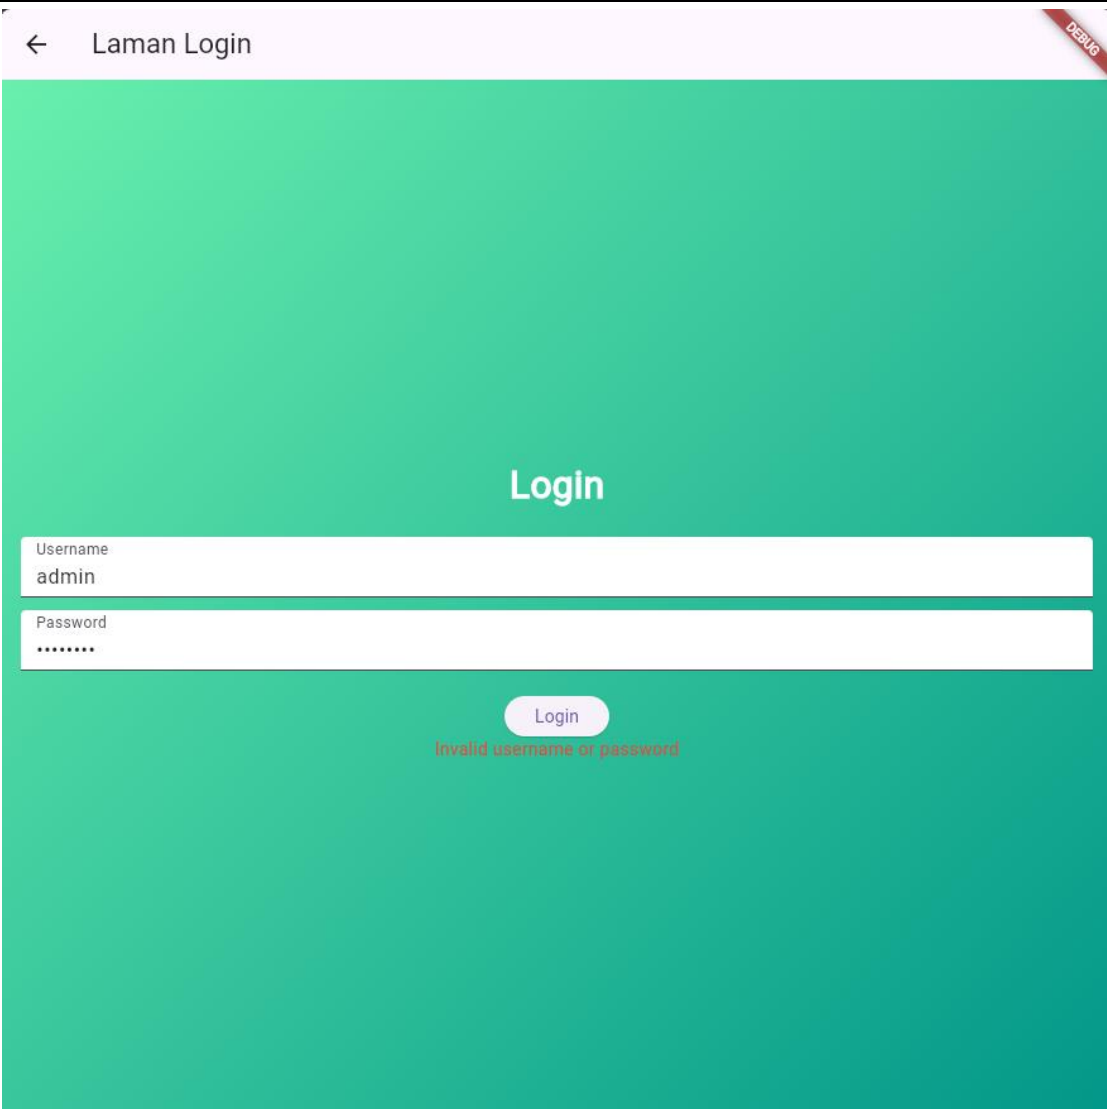


	
4	Home_page.dart

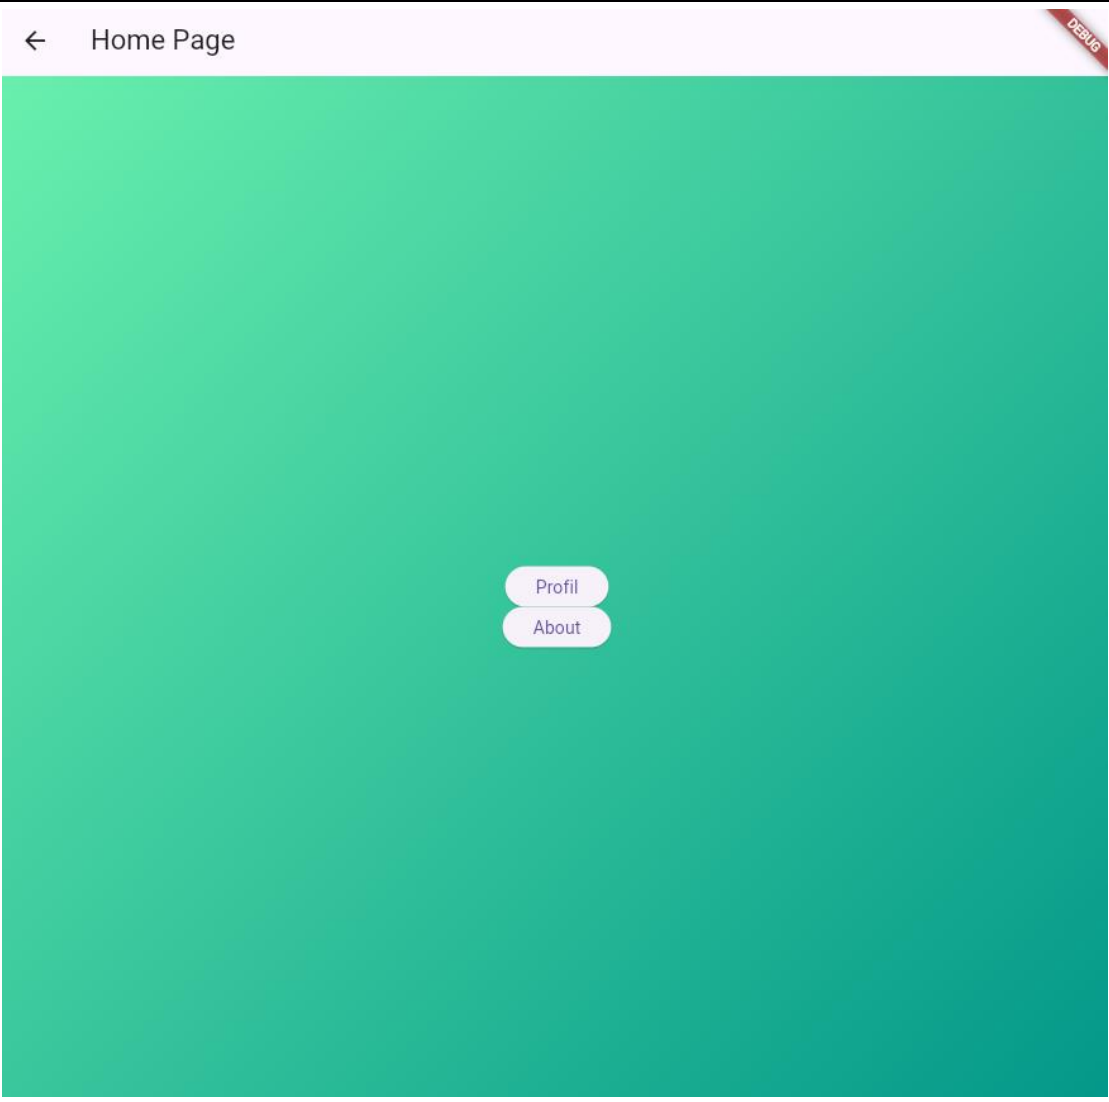

	
5	Profile_page.dart

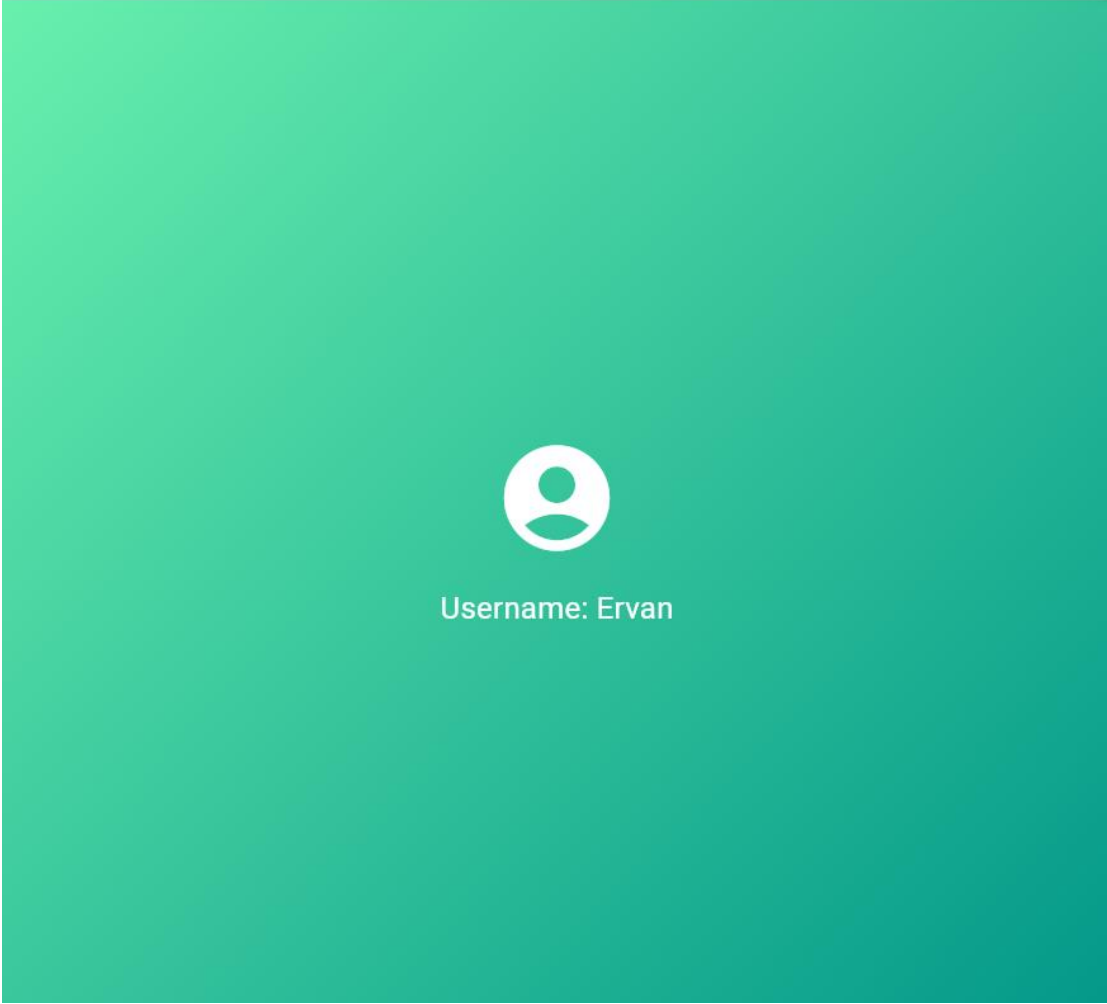

	← Laman Profil 
6	About_page.dart



	← About Page DEBUG Aplikasi Sederhana oleh Ervan Dwi Ardian 2241760138 Untuk Penilaian UTS Pemrograman Mobile
	Link github Mobile/UTS Mobile/flutter_application_uts at main · ErvanArdian/Mobile