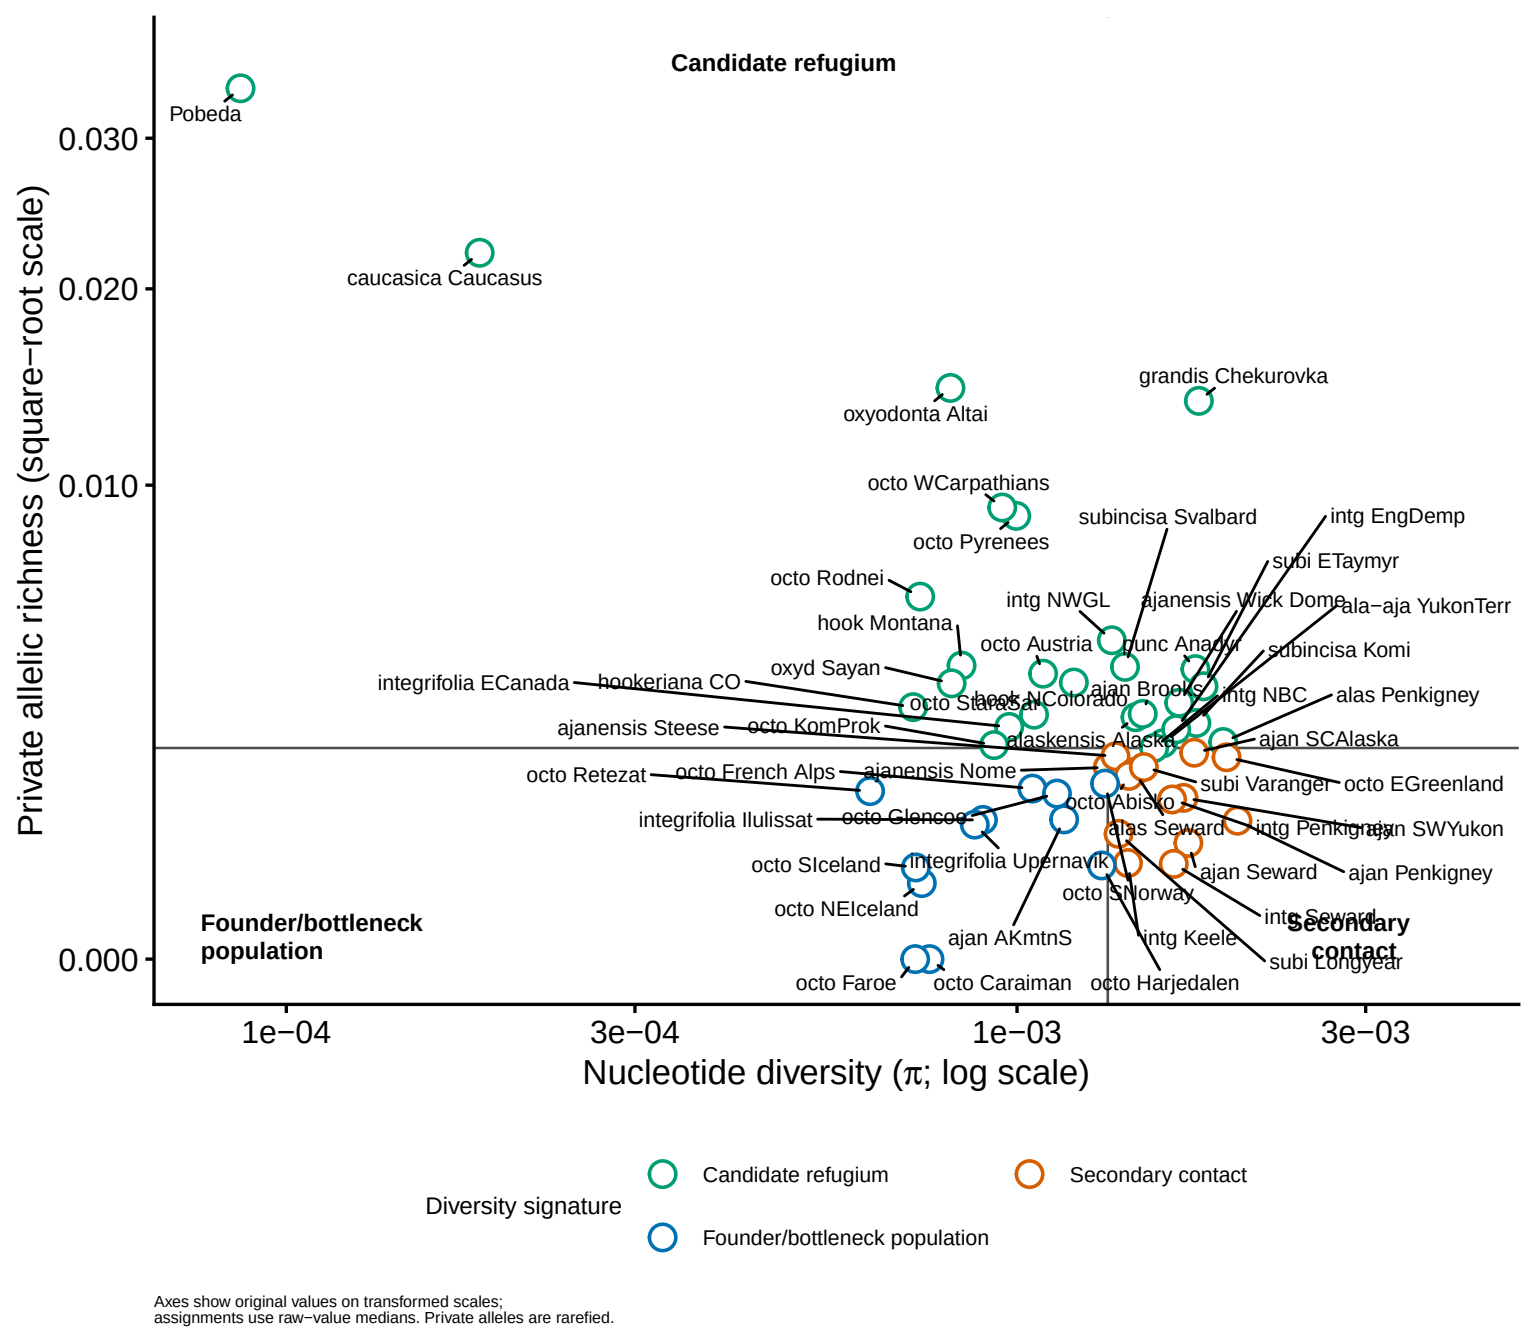

Axes show original values on transformed scales;
assignments use raw−value medians. Private alleles are rarefied.