


=====

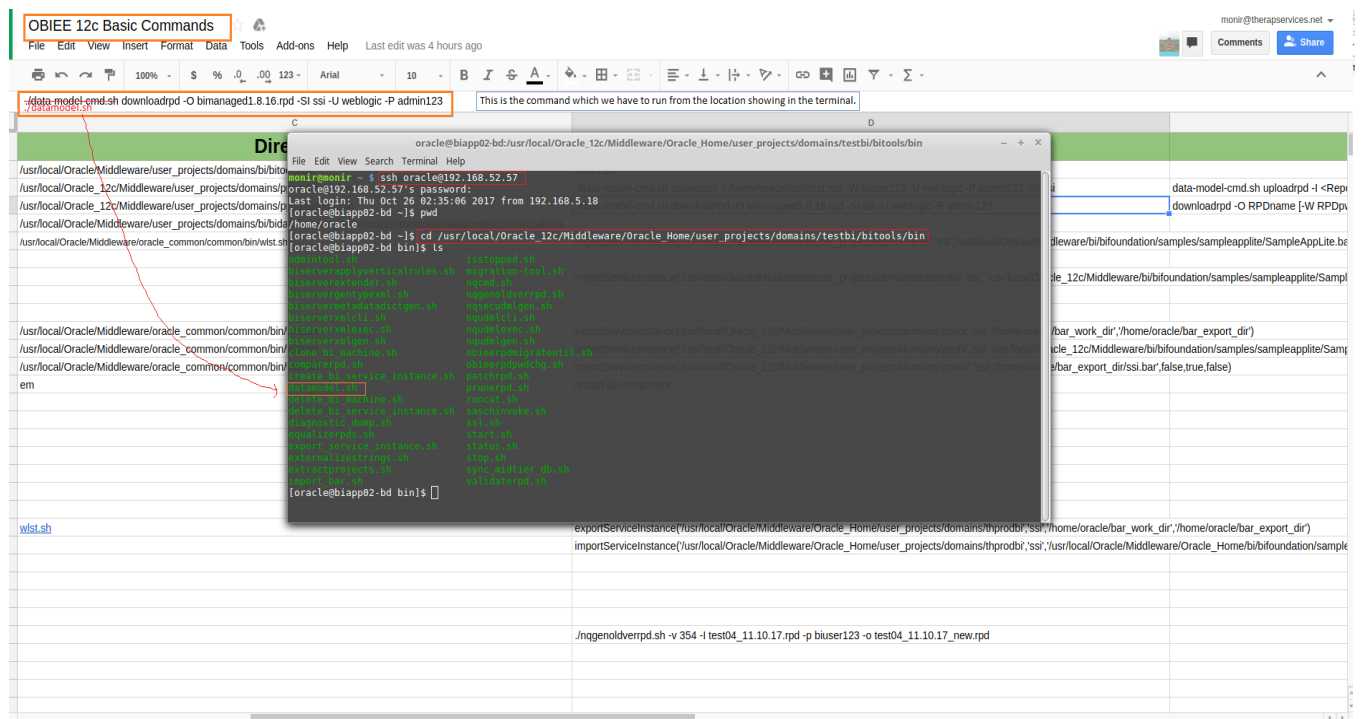

2. Moving **rpdp** file from **Server Machine** to **My machine (Local)** :


scp

```
oracle@192.168.52.57:/usr/local/Oracle_12c/Middleware/Oracle_Home/user_projects/domains/testbi/bitools/bin/rpdname.rpd .
```

NB: There is . at the end of the command.

prompt for p/w: *****

-- This `scp` commands will move the rpd file from server's specified location to my Home (commands should be given from my PC)

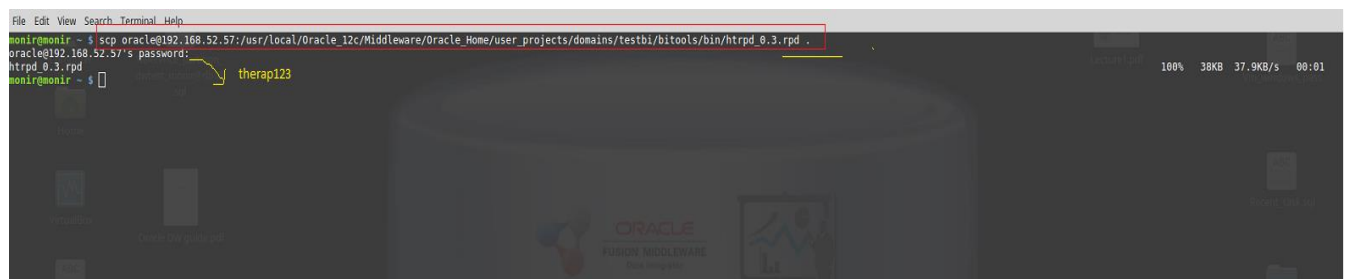

3. Moving **rpdp** file from **My machine (Local)** to **Server Machine** :

-- Go to the location of the rpd file in my machine to upload in remote server.

```
scp rpdname.rpd oracle@192.168.52.57:/home/oracle/rpd
```

prompt for p/w: *****

Here, **/home/oracle/rpd** is the location in remote server where the rpd file will be copied from my pc.

```
punamepunam ~ - $ pwd
/home/punam
punamepunam ~ - $ cd Desktop
punamepunam ~/Desktop $ scp merged_12.12.17.rpd oracle@192.168.52.57:/home/oracle/rpd
oracle@192.168.52.57's password:
merged_12.12.17.rpd
punamepunam ~/Desktop $ ssh oracle@192.168.52.57
oracle@192.168.52.57's password:
Last login: Tue Dec 12 22:37:07 2017 from 192.168.5.16
[oracle@biapp02-bd ~]$ pwd
/home/oracle
[oracle@biapp02-bd ~]$ ls
12cInstallation_response_file_biapp02  biapp03_26.10.17.rpd  oracle12.2.1.0.0_linux  oradwmg_oracle  punam@192.168.5.16  start_stop.txt  upload_rpd  vertical_testing
12cInstallation_response_file_biapp03  htrpd_0.1.rpd        oracle12.2.1.0.0_linux  orainventory    rpd                TEST            userCreation
[oracle@biapp02-bd ~]$ cd rpd
[oracle@biapp02-bd rpd]$ ls
biapp03_26.10.17.rpd  biapp_14.6.17.rpd  biapp23.7.17_dwadmin1.rpd  biapp23.7.17.rpd  htrpd_0.1.rpd  merged_12.12.17.rpd  test04_31_05_17.rpd
[oracle@biapp02-bd rpd]$
```

4. Uploading offline **rpd** to BI server (In Server Machine) :

ssh oracle@192.168.52.57 # ssh to server machine (192.168.52.57)

prompt for p/w : *****

cd /usr/local/Oracle_12c/Middleware/Oracle_Home/user_projects/domains/testbi/bitools/bin

./datamodel.sh **uploadrpd -I /home/oracle/rpd/rpdname.rpd -W biuser123 -U weblogic -P admin123 -SI ssi**

Here, **biuser123** is the pass which was given while downloading the rpd file from BI server.

```
moniremonir ~ - $ ssh oracle@192.168.52.57
oracle@192.168.52.57's password: therap123
Last login: Thu Nov 2 06:12:54 2017 from 192.168.5.16
[oracle@biapp02-bd ~]$ pwd
/home/oracle
[oracle@biapp02-bd ~]$ ls
12cInstallation_response_file_biapp02  biapp03_26.10.17.rpd  oracle12.2.1.0.0_linux  oradwmg_oracle  punam@192.168.5.16  start_stop.txt  upload_rpd  vertical_testing
12cInstallation_response_file_biapp03  htrpd_0.1.rpd        oracle12.2.1.0.0_linux  orainventory    rpd                TEST            userCreation
[oracle@biapp02-bd ~]$ cd rpd
[oracle@biapp02-bd rpd]$ ls
biapp03_26.10.17.rpd  biapp_14.6.17.rpd  biapp23.7.17_dwadmin1.rpd  biapp23.7.17.rpd  htrpd_0.1.rpd  test04_31_05_17.rpd
[oracle@biapp02-bd rpd]$ cd /usr/local/Oracle_12c/Middleware/Oracle_Home/user_projects/domains/testbi/bitools/bin
[oracle@biapp02-bd bin]$ ls
biuservermcli.sh  create-bi-service-instance.sh  equalizerpd.sh  import-bi-  nqscudbngen.sh  oboverpdpdchg.sh  ssl.sh  validatepd.sh
biuservermclsh  datamodel.sh  expert-service-instance.sh  isstopped.sh  nqdelall.sh  oboverpdpdchg.sh  start.sh
biuservermclsh  delete-bi-machine.sh  externalizerpd.sh  migration-tool.sh  nqdelall.sh  oboverpdpdchg.sh  status.sh
biuservermclsh  delete-bi-service-instance.sh  externalizerpd.sh  nqdelall.sh  oboverpdpdchg.sh  stop.sh
biuservermclsh  delete-bi-service-instance.sh  externalizerpd.sh  nqdelall.sh  oboverpdpdchg.sh  sync_nddier_db.sh
[oracle@biapp02-bd bin]$ ./datamodel.sh uploadrpd -I /home/oracle/rpd/htrpd_0.1.rpd -W biuser123 -U weblogic -P admin123 -SI ssi
Location of rpd file
We have to run this command in the below location -- /usr/local/Oracle_12c/Middleware/Oracle_Home/user_projects/domains/testbi/bitools/bin
```