Mid Term Exam

Question 1:

HTML:

```
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <link rel="stylesheet" href="style1.css">
    <link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-
awesome/7.3.1/css/all.css">
    <title>Login page</title>
</head>
<body>
    <input type="checkbox" name="" id="close">
    <div class="parent">
        <div class="top">
            <div class="left">
                <img src="https://picsum.photos/200/300" alt="" width="150px"
height="100px">
                <button>Login</button>
            </div>
            <div class="right">
                <label for="close">
                    <i class="fa-solid fa-xmark"></i>
                </label>
                <img src="https://picsum.photos/200/300" alt="" width="150px"
height="100px">
                <button>Sign up</button>
            </div>
        </div>
        <div class="bottom"><h1>I want to leave this page</h1></div>
    </div>
</body>
</html>
```

CSS:

```
body{
    height: 100vh;
```

```
    display: flex;
    justify-content: center;
    align-items: center;
}
.parent{
    display: flex;
    width: 800px;
    height: 400px;
    flex-direction: column;
    border: 2px solid black;
    border-radius: 20px;
}
.top{
    display: flex;
    height: 300px;
    width: 100%;
    justify-content: center;
    align-items: center;
}
.bottom{
    display: flex;
    height: 100px;
    width: 100%;
    justify-content: center;
    align-items: center;
}
.left{
    display: flex;
    gap: 50px;
    width: 400px;
    height: 100%;
    flex-direction: column;
    justify-content: center;
    align-items: center;
    border-right: 2px solid black;
}
.right{
    gap: 50px;
    display: flex;
    width: 400px;
    height: 100%;
    flex-direction: column;
    align-items: center;
}
img{
```

```
    border-radius: 50%;
}
button{
    width: 250px;
    height: 30px;
    border-radius: 5px;
    transition: all 1s ease;
    cursor: pointer;
}
button:hover{
    background-color: black;
    color: white;
}
i{
    margin-left: 350px;
    cursor: pointer;
    box-sizing: border-box;
}
#close{
    display: none;
}
body:has(#close:checked) .parent{
    display: none;
}
body:has(#close:checked) #close{
    display: block;
}
```

Question 2:

HTML:

```
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <link rel="stylesheet" href="style.css">
    <title>Side menu</title>
</head>
<body>
    <div class="parent">
        <div class="top">
            <p>Muhammad</p>
```

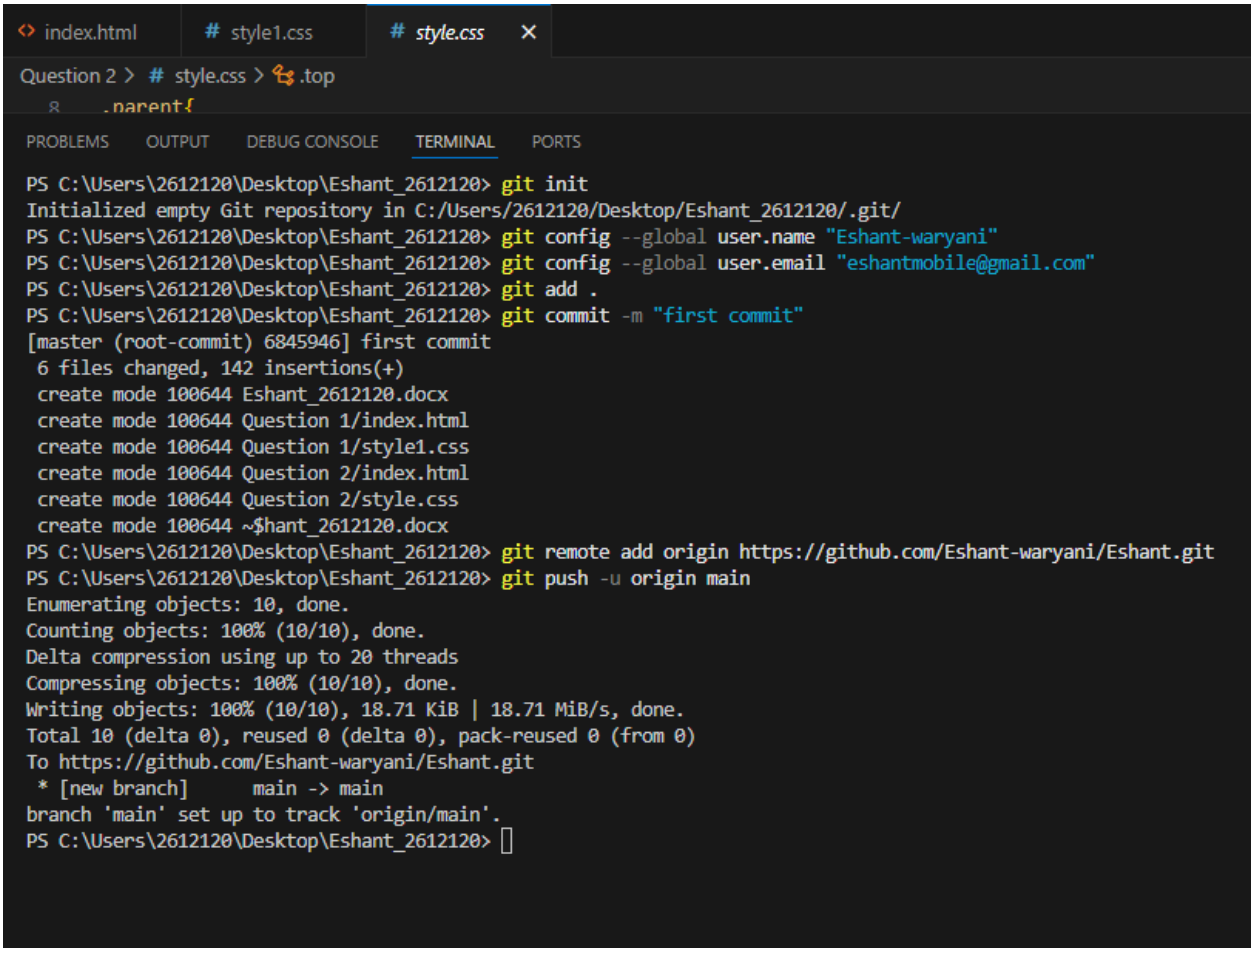
```
            <p>Hi</p>
        </div>
        <ul>
            <li>Item1</li>
            <li>Item2</li>
            <li>Item3</li>
            <li>Item4</li>
        </ul>
    </div>
</body>
</html>
```

CSS:

```
body{
    height: 100vh;
    border: 2px solid black;
    border-radius: 20px;
    overflow: hidden;
    display: flex;
}
.parent{
    width: 200px;
    height: 100%;
    border-right: 2px solid black;
}
.top{
    justify-content: space-between;
    display: flex;
}
```

GIT URL: https://github.com/Eshant-waryani/Eshant.git

GIT SS:


index.html
style1.css
style.css
Question 2 > style.css > .top
.parent{
PROBLEMS
OUTPUT
DEBUG CONSOLE
TERMINAL
PORTS
PS C:\Users\2612120\Desktop\Eshant_2612120> git init
Initialized empty Git repository in C:/Users/2612120/Desktop/Eshant_2612120/.git/
PS C:\Users\2612120\Desktop\Eshant_2612120> git config --global user.name "Eshant-waryani"
PS C:\Users\2612120\Desktop\Eshant_2612120> git config --global user.email "eshantmobile@gmail.com"
PS C:\Users\2612120\Desktop\Eshant_2612120> git add .
PS C:\Users\2612120\Desktop\Eshant_2612120> git commit -m "first commit"
[master (root-commit) 6845946] first commit
6 files changed, 142 insertions(+)
create mode 100644 Eshant_2612120.docx
create mode 100644 Question 1/index.html
create mode 100644 Question 1/style1.css
create mode 100644 Question 2/index.html
create mode 100644 Question 2/style.css
create mode 100644 ~$hant_2612120.docx
PS C:\Users\2612120\Desktop\Eshant_2612120> git remote add origin https://github.com/Eshant-waryani/Eshant.git
PS C:\Users\2612120\Desktop\Eshant_2612120> git push -u origin main
Enumerating objects: 10, done.
Counting objects: 100% (10/10), done.
Delta compression using up to 20 threads
Compressing objects: 100% (10/10), done.
Writing objects: 100% (10/10), 18.71 KiB | 18.71 MiB/s, done.
Total 10 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/Eshant-waryani/Eshant.git
* [new branch] main -> main
branch 'main' set up to track 'origin/main'.
PS C:\Users\2612120\Desktop\Eshant_2612120>