


# Documentation Version 4

## Introduction:

DCML (DOTWconnect Markup Language) is an XML based interface providing the access to information and ability manage reservations for the global product range of Destinations of the world. DCML is able to access Destinations of the World's proprietary reservation system DOTWconnect with over 25,000 negotiated rate properties and standard rates at over 10,000 properties. DCML standardizes the requests and responses to the different sources in order to provide a coherent product with a single communication interface.

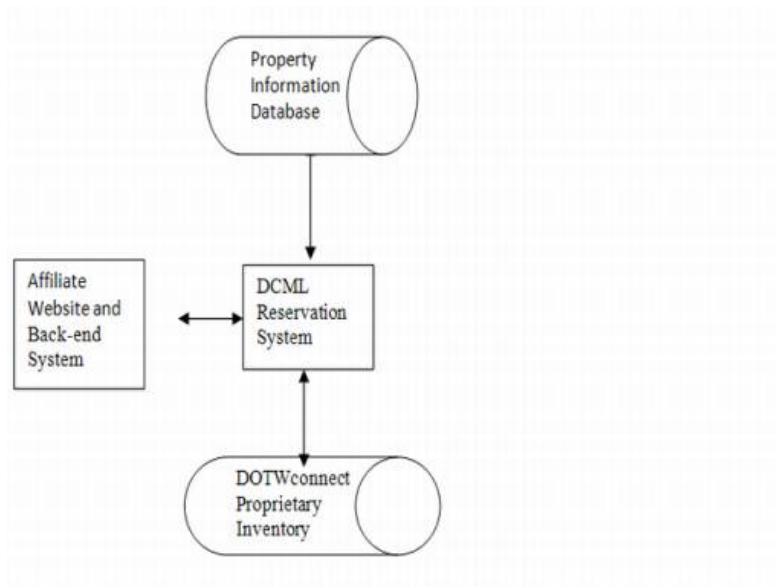

## Connection properties:

The communication with the DCML system is performed through http/https connections. For the production system and for the development system SSL is not supported in order to increase the speed. The following table enlists the properties of the request that must be employed:

Request Header/Property	Value	Description
Host (production)	us.dotwconnect.com	All connections can be made via a http or https protocols.
Host (development)	xmldev.dotwconnect.com	All connections can be made via a http or https protocols.
Request URL	/gatewayV4.dotw	The requested URL.
Request Method	POST	The requested method.
Content-Type	text/xml	The content type.
Connection	close	This value specifies that the connection is not to be a keep-alive connection.
Compression	Gzip	Gzip compression must be enabled for communicating with DOTW servers.

## General guidelines:

## Travel Agent reservation database:

Any Travel Agent using the DCML system is required to maintain a database of reservation details, both booked and cancelled. It is also recommended that an email should be sent to the user upon booking or cancellation with the appropriate information. The data maintained in the database for bookings must at least include the information necessary for cancelling that booking. It is highly recommended, however, that the stored data include all information of interest or value to the customer regarding their booking (rate change information, cancel policy, etc.).

## Request/Response DOTWconnect:

It is recommended that at least all booking and cancellation transactions sent through the DCML system should be logged and maintained by the travel agent for at least 6 months.

## Go-Live Process:

In order to start testing, please notify our sales department via e-mail at [xmlsupport@dotw.com](mailto:xmlsupport@dotw.com). Please note that all transactions through the DCML Test system are simply test transactions. No reservations or charges will result from a transaction made through our test environment. Please be advised that not all our properties are available in the test environment and also the rates and/or products may be not updated. Unfortunately, we have no way of determining which properties will be available in the test environment, thus attempts may need to be made at many properties until an available property is discovered. The system functionality between the Test and Live system is exactly the same except for the fact that Bookings processed in the Test environment are not sent to the Suppliers. When you have completed your development, please contact our Sales Department for the activation of the access to the Live server.

## Development Phase

Once you receive your user id, password and company code you can start the development of your application/framework. The whole process of communication consists of simple xml messages exchange (request - answer/response) between your application/framework and DOTWconnect system. Each request needs to be posted (through POST method) using http or https protocols to [xmldev.dotwconnect.com/request.dotw](http://xmldev.dotwconnect.com/request.dotw) and it receives a response irrespectively the request is successfully processed or not informing about the success of the operation. For details regarding requests and answers formats and details please consult the dedicated area of each request.

For further assistance in development process do not hesitate to contact our support team

## Changes in Version 4

We kindly invite you to review the V4 key features presented below.

Version 4 of our XML Booking Engine is a simplified version of the current V3, built by removing from the searchhotels response optional elements and attributes, in order to obtain a reduced and simplified response.

Key benefits provided by Version 4 of our Booking Engine:

- Considerably reduced response size which will have a positive impact on the processing time on customer's side.
- In Version 4 we will provide in the searchhotels response all the available rooms, with the cheapest price per each rateBasis/meal plan. This will improve the searchhotels API, which will quickly return all the available properties along with the available roomTypes for the given search criteria

### Major changes on Version 4.

- One of the major changes on Version 4 is that in the searchhotels response we don't provide information about cancellation policy, or the allocationDetails token, which has to be used in the next steps of the booking flow. Due to this, it is mandatory for all our customers to implement the simple getRooms method, in order to obtain all the available rates for each roomType along with the cancellation policies and allocationDetails token. The allocationDetails string needs to be used in the confirmation step, in order to successfully finalize the reservation.
- In Version 4, in order to have a more simplified booking process flow, the rate/s blocking step is not mandatory anymore. This process can still be implemented by those customers who are interested to be able to block the selected rate/s for a certain period of time. DOTW will block the selected rate/s for 15 minutes before releasing the allocation.

In the current version 4 of DOTW webserivces, same as on previous Version, our system supports two possible booking flows:

- searchhotels -> getRooms (without blocking) -> confirmbooking
- searchhotels -> getRooms (without blocking)-> savebooking -> bookItinerary

The advantage of the second booking flow, is that it gives to our customers the possibility to consume APRs (Advance Purchased Rates) which come with the advantage of high discounts for our customer.

Also using the second booking flow, the DOTW customers have the possibility to save an itinerary (using savebooking API), which can be confirmed at a later stage (using bookItinerary API).

# DCML Request Structure

## Introduction:

This document details the XML structure of each of the supported request types. Please note that the DOTWconnect XML booking engine (dubbed DCML) is the gateway to the DOTW reservation sources. One of these sources is our proprietary inventory system, and more systems may be added in the future. The DCML system was designed to be a standard interface to each of these sources and each attempt was made in order to bring coherency to these disparate sources.

## Request Format:

The basic format of each request is detailed below. The XML document root element for all the requests passed to DOTWconnect Web Services server is the customer element. For all the requests you make please remember that you need to pass the authentication data you received when signing up with DOTWconnect. **For security reasons you need to pass your password encrypted with MD5 algorithm. Please note that throughout this document when we refer to password it implies that the password is encrypted using MD5 algorithm.** In addition to the authentication data you will also need to pass an element, source which will always have the value 1 and an element, product with a specific value identifying the product the request is made for. The specific details for the request will be passed inside the request element. This element must have an attribute named command and its value will state exactly which command you are trying to run on DOTWconnect server. More information about these specific details will be presented for each request in separate sections. Please note, each element and attribute in the DCML system is case dependent. For requests, they must appear exactly as they are detailed below. For responses, the elements and attributes will appear precisely as you see them in the Response Format area. Improperly cased element and attribute names and in some cases, the attribute values will not be recognized.

```

01. <customer>
02.   <username>username</username>
03.   <password>md5(password)</password>
04.   <id>company code</id>
05.   <source>1</source>
06.   <product>product</product>
07.   <request command="command">request details</request>
08. </customer>

```

Item	Type	Parent	Description	Required
<b>customer</b>	Element	None	Root element of all requests.	Yes.
<b>username</b>	Element	customer	Customer username	Yes.
<b>password</b>	Element	customer	Customer password <b>encrypted using md5 algorithm.</b>	Yes.
<b>id</b>	Element	customer	Customer company code.	Yes.
<b>source</b>	Element	customer	The value should be 1.	Yes.
<b>product</b>	Element	customer	Indicates what product the request is made for: <ul style="list-style-type: none"> <li>hotel</li> <li>transfer</li> </ul>	Yes.
<b>request</b>	Element	customer	Contains specific data for each request.	Yes.
@command	Attribute	request	Value detailing the type of request being passed.	Yes.

## Response Format:

For each request your application makes to the DOTWconnect server you will get a response in XML format with a root element **result**. The most important element you will find in the response is the **successful** element with two possible values: TRUE or FALSE. These values indicate whether your request was successfully processed by the DOTWconnect server or not. The following general response is for an unsuccessful process. For a successful process, DOTWconnect will return TRUE for the **successful**

element and the corresponding elements for that specific request. In the coming sections you will see the Successful general response for each request.

```

01. <result command=" " date="" ip="">
02.   <request>
03.     <error>
04.       <class></class>
05.       <code>error code</code>
06.       <details></details>
07.       <extraDetails></extraDetails>
08.       <postXml></postXml>
09.     </error>
10.     <successful>FALSE</successful>
11.   </request>
12. </result>

```

### 1.Minimum Stay Rules

In DOTW system hotels are able to define a minimumStay rule at room level, or even rate level.

We highlight this information in the XML response by the below two elements:

<b>minStay</b>	Element	rateBasis	If the hotel has requested a minimum stay for this room type and rate basis then this element will be returned and its value will be the minimum stay required in days. If no minimum stay applies this element will be returned with no value (empty tag).
<b>dateApplyMinStay</b>	Element	rateBasis	If there is a minimum stay condition this element will specify the starting date when the minium stay condition applies. If no minimum stay applies this element will be returned with no value (empty tag).

Our requirement is that customer's application somehow inform the user about the fact that the stay period has modified for the selected roomType and rateBasis.

Please note that we can manage this from our side and if you want we can filter out the rates for which a minimum stay policy, higher than the initial number of nights requested for booking, applies.

Please let us know if we should apply this filter from our side or you will manage it from yours.

### 2.Passenger Nationality and Country of Residence


Since most products are now with specific source markets and nationality, Nationality and Residence check is mandatory for all customers now and it has to be made from the beginning of the booking.

We have two dedicated elements to be used in order to pass this information to DOTW server:

- passengerNationality & passengerCuountryOfResidence. For any further questions you can consult our online documentation, or contact the Integration support team at [xmlsupport@dotw.com](mailto:xmlsupport@dotw.com)

## Hotels Communication Structure:

This section provides you with details of all methods for communication with DOTWconnect server to process your Hotel Reservations. The section has the following methods and each method is explained in detail with their corresponding request and response formats.

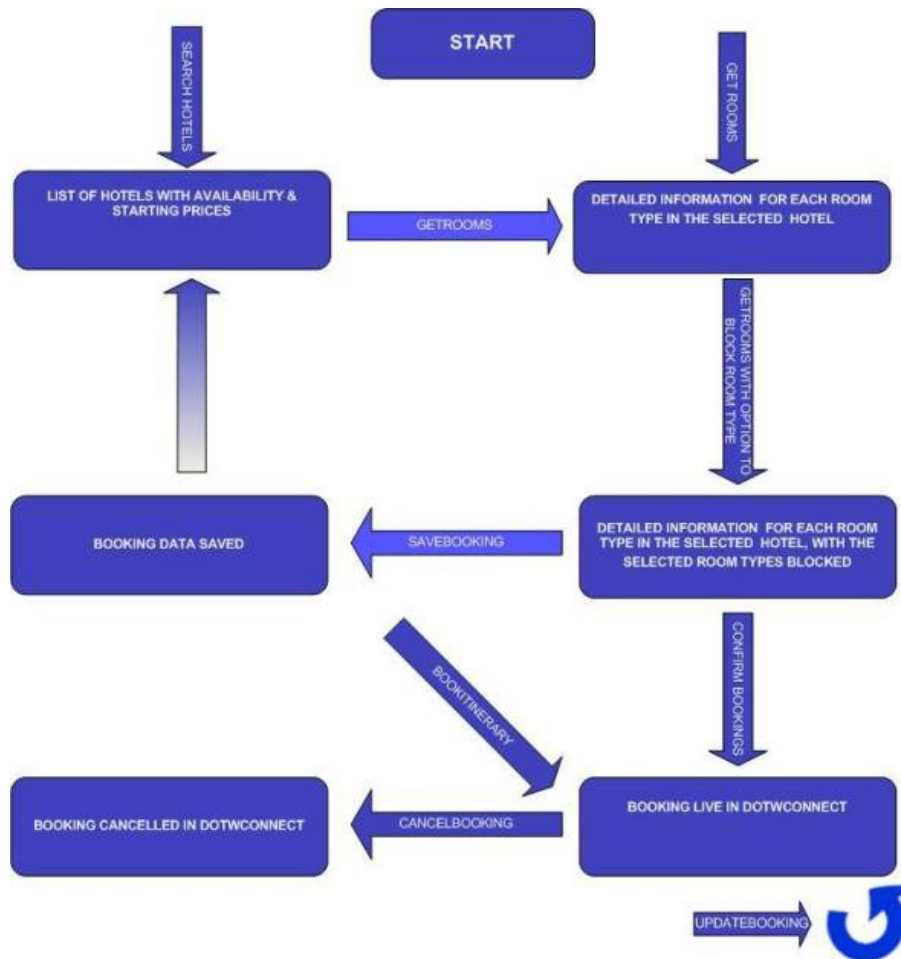

DOTWconnect server has the following XML requests commands for hotels:

- searchhotels
- getrooms
- savebooking
- confirmbooking
- getbookingdetails
- updatebooking
- cancelbooking
- bookitinerary
- deleteitinerary
- searchbookings

## General Request

Based on the search criteria provided in the XML request, this method returns the hotel details which include: starting price per Hotel and availability based on date range, city and passenger room occupancy. In addition to the Authentication data the elements required to be passed for this method are defined in the following table. This method also allows the possibility to filter the response data based on specific criteria. The request is composed of two separate sections which are **bookingDetails** and **return**. The **bookingDetails** element data contains the travel dates, detailed room occupancy and the preferred internal DOTW currency code which will determine in what currency the prices will be returned. The **return** parameter contains details about filtering and room information that the DOTWconnect system returns for each hotel in the response list (if the element getRooms is set to value true).

**Please be aware that in V4 the response will return only the cheapest rate per meal type for each hotel and it will contain less details about the rates.** All the details per rate are still available in the getrooms response.

**FYI** Currently we provide Serviced Apartments and hotels using the same method: searchHotels. You can identify the Serviced Apartments in our XML responses by checking the rating, which in case of apartments will have the value 48055. If you want to filter the results and retrieve only serviced apartments in the response, you can filter the rates using the filter: rating - filters the hotels based on the classification (star rating) (fieldTest: equals, in).

```

01. <customer>
02.   <username>username</username>
03.   <password>md5(password)</password>

```

```

04.    <id>company_code</id>
05.    <source>1</source>
06.    <product>hotel</product>
07.    <request command="searchhotels">
08.        <bookingDetails>
09.            <fromDate>dotw date format</fromDate>
10.            <toDate>dotw date format</toDate>
11.            <currency>currency internal code</currency>
12.            <commision>
13.                <rooms no="">
14.                    <room runno="">
15.                        <adultsCode>adults</adultsCode>
16.                        <children no="">
17.                            <child runno="">child age</child>
18.                        </children>
19.                        <rateBasis>room rate basis</rateBasis>
20.                        <passengerNationality></passengerNationality>
21.                        <passengerCountryOfResidence></passengerCountryOfResidence>
22.                    </room>
23.                </rooms>
24.            </commision>
25.        </bookingDetails>
26.        <return>
27.            <filters xmlns:a="http://us.dotwconnect.com/xsd/atomicCondition" xmlns:c="http://us.dotwconnect.com/xsd/comp1
exCondition">
28.                <city>
29.                    <country>
30.                        <noPrice>true</noPrice>
31.                        <rateTypes>
32.                            <rateType></rateType>
33.                        </rateTypes>
34.                        <c:condition>
35.                            <a:condition>
36.                                <fieldName>fieldName</fieldName>
37.                                <fieldTest>fieldTest</fieldTest>
38.                                <fieldValues>
39.                                    <fieldValue>fieldValue</fieldValue>
40.                                </fieldValues>
41.                            </a:condition>
42.                            <operator>operator</operator>
43.                            <a:condition>
44.                                <fieldName>fieldName</fieldName>
45.                                <fieldTest>fieldTest</fieldTest>
46.                                <fieldValues>
47.                                    <fieldValue>fieldValue</fieldValue>
48.                                </fieldValues>
49.                            </a:condition>
50.                        </c:condition>
51.                    </country>
52.                </city>
53.            </filters>
54.            <resultsPerPage>
55.                <page></page>
56.            </resultsPerPage>
57.        </return>
58.    </request>
59. </customer>

```

Item	Type	Parent	Description	Required
<b>bookingDetails</b>	Element	request	Contains travel dates, detailed room occupancy and the currency code in which the prices are returned.	Yes.
<b>commision</b>	Element	bookingDetails	Credit card customer can specify the commision in percentage	No.
<b>fromDate</b>	Element	bookingDetails	Arrival date in DotW date format (YYYY-MM-DD) or Unix timestamp	Yes.
<b>toDate</b>	Element	bookingDetails	Departure date in DotW date format (YYYY-MM-DD) or Unix timestamp	Yes.
<b>currency</b>	Element	bookingDetails	Internal code of the currency in which the customer will see the prices.	Yes.
<b>rooms</b>	Element	bookingDetails	Contains a room element for each room the customer wishes to book.	Yes.
<b>@no</b>	Attribute	rooms	Specifies the total number of rooms.	Yes.
<b>room</b>	Element	rooms	Encapsulates details about one room.	Yes.

@runno	Attribute	room	Specifies for which room number out of total passed rooms the search specifications are applicable. Please note that the running serial number starts from 0.	Yes.
adultsCode	Element	room	Number of adults in the room; The possible codes are: <ul style="list-style-type: none"> <li>• 1</li> <li>• 2</li> <li>• 3</li> <li>• 4</li> </ul>	Yes.
children	Element	room	Specifies the details about the accompanying children in the room.	Yes.
@no	Attribute	children	Specifies the total number of children in the room. If the search does not include any children then the value should be 0.	Yes.
child	Element	children	Specifies the child age.	Yes, if children@no > 0.
@runno	Attribute	child	Specifies for which child the age is applicable.	Yes, if parent present.
rateBasis	Element	room	Specifies the internal code for the rate basis you would like for this room (eg. Room Only, Half Board). Please note that rate basis - All Rates (1) can be used only if a hotel category or hotel name is specified.	Yes.
passengerNationality	Element	room	Specifies passenger nationality and it is mandatory to be sent in the request. This is DOTW country internal code that can be obtained using the getallcountries request.	Yes.
passengerCountryOfResidence	Element	room	Specifies passenger country of residence and it is mandatory to be sent in the request.. This is DOTW country internal code that can be obtained using the getallcountries request.	Yes.
return	Element	request	Contains details about filtering and hotel information that needs to be returned for each hotel in the response list.	Yes.
filters	Element	return	Groups filtering criteria.	Yes.
city	Element	filters	For filtering by city you have to specify the city internal code. You can receive city internal codes using <b>getservicingities</b> request. This filter is available only when you do not apply a country filter.	No.
country	Element	filters	For filtering by country you have to specify the country internal code. You can receive country internal codes using <b>getservicingountries</b> request. This filter is available only when you do not apply a city filter.	No.

<b>noPrice</b>	Element	filters	This option can be made use of if you would like the hotel details not to contain any price related information. Fixed value: <b>true</b> ; This is an optional element and by including this as part of your request, system will not calculate and return the starting price. If your site does not require to show any prices, you may use this filter which will improve the performance of your search. Default ( <b>false</b> ) will return for each hotel the starting price for one roomtype for one day.	No.
<b>c:condition</b>	Element	return	This element encapsulates advanced filtering techniques. It can contain as many <b>c:condition</b> (complex condition) elements and <b>a:condition</b> (atomic condition) elements as it may be necessary along with the operators you want to be applied for those conditions.	No.
<b>a:condition</b>	Element	c:condition	Groups details for a specific elementary condition. Each filter is made up by 3 elements	Yes, if parent present.
<b>fieldName</b>	Element	a:condition	<p>The field you want to evaluate. Possible values are:</p> <ul style="list-style-type: none"> <li>• <b>hotelId</b> - filters the hotels by their internal codes(fieldTest: equals, in, notin)</li> <li>• <b>price</b> - filters the hotels by price (fieldTest: equals, in, between)</li> <li>• <b>preferred</b> - filters the hotels by the preferred status (fieldTest: equals, in)</li> <li>• <b>onRequest</b> - filters the hotels based on the availability of rooms (fieldTest: equals, in)</li> <li>• <b>rating</b> - filters the hotels based on the classification (star rating) (fieldTest: equals, in)</li> <li>• <b>luxury</b> - filters the hotels based on the luxury classification (fieldTest: equals, in)</li> <li>• <b>location</b> - filters the hotels based on the location (fieldTest: regex)</li> <li>• <b>locationId</b> - filters the hotels based on the location internal codes (fieldTest: equals, in)</li> <li>• <b>amenitie</b> - filters the hotels based on the amenities (fieldTest: equals, in)</li> <li>• <b>leisure</b> - filters the hotels based on the leisure amenities (fieldTest: equals, in)</li> <li>• <b>business</b> - filters the hotels based on the business amenities (fieldTest: equals, in)</li> <li>• <b>hotelPreference</b> - filters the hotels based on the hotel preferences (fieldTest: equals, in)</li> <li>• <b>chain</b> - filters the hotels based on the hotel chain (fieldTest: equals, in)</li> <li>• <b>attraction</b> - filters the hotels based on the hotel nearby attractions (fieldTest: regex)</li> <li>• <b>hotelName</b> - filters the hotels based on the hotel name (fieldTest: regex)</li> <li>• <b>builtYear</b> - filters the hotels based on the hotel built year (fieldTest: equals, in, between)</li> </ul>	Yes, if parent present.



			<ul style="list-style-type: none"> <li>• <b>renovationYear</b> - filters the hotels based on the hotel built year (fieldTest: equals, in, between)</li> <li>• <b>floors</b> - filters the hotels based on the hotel number of floors (fieldTest: equals, in, between)</li> <li>• <b>noOfRooms</b> - filters the hotels based on the hotel number of rooms (fieldTest: equals, in, between)</li> <li>• <b>fireSafety</b> - filters the hotels based on the hotel fire safety compliance (fieldTest: equals, in)</li> <li>• <b>lastUpdate</b> - filters the hotels based on the last update of their profile (fieldTest: between)</li> </ul> <p>You can also use the following to filter the rooms that will be returned for each hotel:</p> <ul style="list-style-type: none"> <li>• <b>roomOnRequest</b> - filters rooms based on availability (fieldTest: equals, in)</li> <li>• <b>roomPrice</b> - filters rooms based on room price (fieldTest: equals, between)</li> <li>• <b>suite</b> - filters rooms based on the suite status of the room (fieldTest: equals)</li> <li>• <b>roomAmentie</b> - filters rooms based on the roomAmenties (fieldTest: equals, in)</li> <li>• <b>roomId</b> - filters rooms based on the room internal code (fieldTest: equals, in)</li> <li>• <b>roomRateBasis</b> - filters rooms based on the rate basis internal code (fieldTest: equals, in)</li> <li>• <b>roomName</b> - filters rooms based on the room name (fieldTest: regex, equals)</li> </ul>	
<b>fieldTest</b>	Element	a:condition	<p>The test you want to make on the field. Possible values:</p> <ul style="list-style-type: none"> <li>• <b>equals</b> - if you want the field to be evaluated to be equal to all the test values;</li> <li>• <b>in</b> - if you want the test field to be evaluated to be equal to at least one of the test values.</li> <li>• <b>notin</b> - if you want the test field to be evaluated to be different than all of the test values.</li> <li>• <b>between</b> - if you want the test field to be evaluated to be compared to the two test values (one would be the inferior limit, one - the superior limit). If you want the field to be evaluated to be greater than a certain value that just pass that value. If you want your test field to be lower than a certain value that you have to pass to values (one should be 0 - the inferior limit and the other the actual value you want to compare to).</li> <li>• <b>regex</b> - if you want the test field to be evaluated to match a PERL Regular Expression provided as a test value.</li> <li>• <b>like</b> - if you want the results to contain the text in the test field.</li> </ul>	Yes, if parent present.

fieldValues	Element	a:condition	Groups the test value(s) you want the test field to be evaluated against.	Yes, if parent present.
fieldValue	Element	testValues	<p>The test value you want the test field to be evaluated against. Use the following testing values for the fields:</p> <ul style="list-style-type: none"> <li>• <b>price</b> - any float value</li> <li>• <b>preferred</b> - 1(true) or 0(false)</li> <li>• <b>onRequest</b> - 1(true) or 0(false)</li> <li>• <b>rating</b> - Hotel classification codes from DOTWconnect system should be passed here. You can receive the rating codes using <b>gethotelclassificationids</b> request.</li> <li>• <b>luxury</b> - 1(true) or 0(false)</li> <li>• <b>location</b> - PERL Regular Expression</li> <li>• <b>locationId</b> - Location internal code from DOTWConnect system should be passed here. You can receive the location codes using <b>getlocationids</b> request.</li> <li>• <b>amenitie</b> - Amenitie codes from DOTWConnect system should be passed here. You can receive the amenitie codes using <b>getamenitiesids</b> request.</li> <li>• <b>leisure</b> - Leisure codes from DOTWconnect system should be passed here. You can receive the leisure codes using <b>getleisureids</b> request.</li> <li>• <b>business</b> - Business amenitie codes from DOTWconnect system should be passed here. You can receive the business amenities codes using <b>getbusinessids</b> request.</li> <li>• <b>hotelPreference</b> - Hotel preferences codes from DOTWconnect system should be passed here. You can receive the hotel preferences codes using <b>getpreferencesids</b> request.</li> <li>• <b>chain</b> - Hotel chain codes from DOTWconnect system should be passed here. You can receive the hotel chain codes using <b>getchainids</b> request.</li> <li>• <b>attraction</b> - PERL Regular Expression</li> <li>• <b>hotelName</b> - PERL Regular Expression</li> <li>• <b>builtYear</b> - integer &gt; 1800</li> <li>• <b>renovationYear</b> - integer &gt; 1800</li> <li>• <b>floors</b> - integer &lt; 200</li> <li>• <b>noOfRooms</b> - integer &lt; 6000</li> <li>• <b>fireSafety</b> - 1(true) or 0(false)</li> <li>• <b>lastUpdate</b> - date in YYYY-MM-DD HH:MM:SS format.</li> </ul> <p>You can also use the following to filter the rooms that will be returned for each hotel:</p> <ul style="list-style-type: none"> <li>• <b>roomOnRequest</b> - 1(true) or 0(false)</li> <li>• <b>roomPrice</b> - any float value</li> <li>• <b>suite</b> - 1(true) or 0(false)</li> <li>• <b>roomAmenitie</b> - Amenitie codes from DOTWconnect system should be passed here. You can receive the amenitie codes using <b>getamenitiesids</b> request</li> <li>• <b>roomId</b> - internal code</li> </ul>	Yes, if parent present.

			<ul style="list-style-type: none"> <li>• <b>roomRateBasis</b> - rate basis codes from DOTWconnect system should be passed here. You can receive the rate basis codes using getratebasis request.</li> <li>• <b>roomName</b> - PERL Regular Expression</li> </ul>	
<b>operator</b>	Element	c:condition	Specifies the logical operator that will be applied for the conditions. Possible values: <ul style="list-style-type: none"> <li>• AND</li> <li>• OR</li> </ul>	Yes.
<b>resultsPerPage</b>	Element	return	Indicates how many hotels you would like the DOTWconnect system to return. If you don't include this element in your request the complete list of hotels that match your search criteria.	No.
<b>page</b>	Element	return	The combination of <b>resultsPerPage</b> and <b>page</b> indicates the DOTWconnect system to return hotels within a specific range from the total number of hotels according to the specified filter criteria. eg: if you have specified the <b>resultsPerPage</b> as 10 and you want to receive the set of hotels in 3rd page, the value for <b>page</b> element must be specified as 2. Please note the numbering starts from 0.	Yes, if <b>resultsPerPage</b> is present.

## searchhotels.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns:a="http://us.dotwconnect.com/xsd/atomicCondition" xmlns:c="http://us.dotwconnect.com/xsd/complexCondition">
02.   <xs:include schemaLocation="loginDetails.xsd"></xs:include>
03.   <xs:include schemaLocation="bookingDetails.xsd"></xs:include>
04.   <xs:include schemaLocation="general.xsd"></xs:include>
05.   <xs:import namespace="http://us.dotwconnect.com/xsd/atomicCondition" schemaLocation="atomicCondition.xsd">
06.     </xs:import>
07.   <xs:import namespace="http://us.dotwconnect.com/xsd/complexCondition" schemaLocation="complexCondition.xsd">
08.     </xs:import>
09.     <!-- ##### -->
10.     <xs:element name="customer">
11.       <xs:complexType>
12.         <xs:sequence>
13.           <xs:group ref="loginDetailsGroup"></xs:group>
14.           <xs:element name="product" type="xs:string" fixed="hotel"></xs:element>
15.           <xs:element name="language" type="xs:string" minOccurs="0"></xs:element>
16.           <xs:element name="request" type="requestType"></xs:element>
17.         </xs:sequence>
18.       </xs:complexType>
19.     </xs:element>
20.     <!-- ##### -->
21.     <xs:complexType name="requestType">
22.       <xs:sequence>
23.         <xs:element name="bookingDetails" type="bookingDetailsType"></xs:element>
24.         <xs:element name="return" type="returnType"></xs:element>
25.       </xs:sequence>
26.       <xs:attribute name="command" type="xs:string" use="required" fixed="searchhotels"></xs:attribute>
27.       <xs:attribute name="debug" type="xs:integer" use="optional"></xs:attribute>
28.       <xs:attribute name="defaultnamespace" type="xs:string" use="optional" fixed="true"></xs:attribute>
29.       <xs:attribute name="nocache" type="xs:integer" use="optional"></xs:attribute>
30.     </xs:complexType>
31.     <!-- ##### -->
32.     <xs:complexType name="returnType">
33.       <xs:sequence>
34.         <xs:element name="filters" type="filtersType"></xs:element>
35.         <xs:group ref="resultsPerPageGroup" minOccurs="0"></xs:group>
36.       </xs:sequence>
37.     </xs:complexType>
38.     <!-- ##### -->
39.     <xs:complexType name="filtersType">
40.       <xs:sequence>
41.         <xs:group ref="cityOrCountryFilter" minOccurs="0"></xs:group>
42.         <xs:element name="noPrice" type="TrueOrFalse" minOccurs="0"></xs:element>
43.         <xs:element name="rateTypes" type="rateTypesType" minOccurs="0"></xs:element>

```

```

42.         <xs:element ref="c:condition" minOccurs="0"/></xs:element>
43.     </xs:sequence>
44. </xs:complexType>
45. <!-- ##### -->
46. <xs:group name="groupOfCity">
47.     <xs:sequence>
48.         <xs:element name="city" type="xs:positiveInteger"/></xs:element>
49.         <xs:element name="nearbyCities" type="TrueOrFalse" minOccurs="0"/></xs:element>
50.     </xs:sequence>
51. </xs:group>
52. <!-- ##### -->
53. <xs:group name="cityOrCountryFilter">
54.     <xs:choice>
55.         <xs:group ref="groupOfCity"/></xs:group>
56.         <xs:element name="country" type="xs:integer"/></xs:element>
57.     </xs:choice>
58. </xs:group>
59. <!-- ##### -->
60. <xs:group name="resultsPerPageGroup">
61.     <xs:sequence>
62.         <xs:element name="resultsPerPage" type="xs:nonNegativeInteger" minOccurs="0"/></xs:element>
63.         <xs:element name="page" type="xs:nonNegativeInteger" minOccurs="0"/></xs:element>
64.     </xs:sequence>
65. </xs:group>
66. <!-- ##### -->
67. <xs:simpleType name="yesOrNo">
68.     <xs:restriction base="xs:string">
69.         <xs:pattern value="yes|no"/></xs:pattern>
70.     </xs:restriction>
71. </xs:simpleType>
72. </xs:schema>

```

### complexCondition.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns="http://us.dotwconnect.com/xsd/complexCondition" xmlns:a="ht
tp://us.dotwconnect.com/xsd/atomicCondition" targetNamespace="http://us.dotwconnect.com/xsd/complexCondition">
02.     <xs:import namespace="http://us.dotwconnect.com/xsd/atomicCondition" schemaLocation="atomicCondition.xsd">
</xs:import>
03.     <xs:element name="condition">
04.         <xs:complexType>
05.             <xs:sequence>
06.                 <xs:choice>
07.                     <xs:group ref="complexis"/></xs:group>
08.                     <xs:group ref="a:atomics"/></xs:group>
09.                 </xs:choice>
10.             </xs:sequence>
11.         </xs:complexType>
12.     </xs:element>
13.     <xs:group name="complexis">
14.         <xs:sequence>
15.             <xs:element ref="condition"/></xs:element>
16.             <xs:sequence minOccurs="0" maxOccurs="unbounded">
17.                 <xs:element name="operator" type="operatorType"/></xs:element>
18.                 <xs:element ref="condition"/></xs:element>
19.             </xs:sequence>
20.         </xs:sequence>
21.     </xs:group>
22. <!-- ##### -->
23.     <xs:simpleType name="operatorType">
24.         <xs:restriction base="xs:string">
25.             <xs:pattern value="AND|OR"/></xs:pattern>
26.         </xs:restriction>
27.     </xs:simpleType>
28. </xs:schema>

```

### atomicCondition.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns="http://us.dotwconnect.com/xsd/atomicCondition" targetNamesp
ace="http://us.dotwconnect.com/xsd/atomicCondition">
02.     <xs:element name="condition">
03.         <xs:complexType>
04.             <xs:sequence>
05.                 <xs:element name="fieldName" type="fieldNameType"/></xs:element>
06.                 <xs:element name="fieldTest" type="fieldTestType"/></xs:element>
07.                 <xs:element name="fieldValues" type="fieldValuesType"/></xs:element>
08.             </xs:sequence>
09.         </xs:complexType>
10.     </xs:element>
11. <!-- ##### -->
12.     <xs:simpleType name="fieldNameType">
13.         <xs:restriction base="xs:string">
14.             <xs:enumeration value="hotelId"/></xs:enumeration>
15.             <xs:enumeration value="price"/></xs:enumeration>
16.             <xs:enumeration value="preferred"/></xs:enumeration>
17.             <xs:enumeration value="onRequest"/></xs:enumeration>
18.             <xs:enumeration value="rating"/></xs:enumeration>
19.             <xs:enumeration value="luxury"/></xs:enumeration>
20.             <xs:enumeration value="topDeals"/></xs:enumeration>
21.             <xs:enumeration value="specialDeals"/></xs:enumeration>
22.             <xs:enumeration value="location"/></xs:enumeration>
23.             <xs:enumeration value="locationId"/></xs:enumeration>
24.             <xs:enumeration value="amenitie"/></xs:enumeration>

```

```

25.         <xs:enumeration value="leisure"></xs:enumeration>
26.         <xs:enumeration value="business"></xs:enumeration>
27.         <xs:enumeration value="hotelPreference"></xs:enumeration>
28.         <xs:enumeration value="chain"></xs:enumeration>
29.         <xs:enumeration value="attraction"></xs:enumeration>
30.         <xs:enumeration value="hotelName"></xs:enumeration>
31.         <xs:enumeration value="builtYear"></xs:enumeration>
32.         <xs:enumeration value="renovationYear"></xs:enumeration>
33.         <xs:enumeration value="floors"></xs:enumeration>
34.         <xs:enumeration value="noOfRooms"></xs:enumeration>
35.         <xs:enumeration value="fireSafety"></xs:enumeration>
36.         <xs:enumeration value="roomOnRequest"></xs:enumeration>
37.         <xs:enumeration value="lastUpdated"></xs:enumeration>
38.         <xs:enumeration value="roomPrice"></xs:enumeration>
39.         <xs:enumeration value="suite"></xs:enumeration>
40.         <xs:enumeration value="roomAmentie"></xs:enumeration>
41.         <xs:enumeration value="roomId"></xs:enumeration>
42.         <xs:enumeration value="roomRateBasis"></xs:enumeration>
43.         <xs:enumeration value="roomName"></xs:enumeration>
44.     </xs:restriction>
45. </xs:simpleType>
46. <!-- ##### -->
47. <xs:simpleType name="fieldTestType">
48.     <xs:restriction base="xs:string">
49.         <xs:enumeration value="equals"></xs:enumeration>
50.         <xs:enumeration value="in"></xs:enumeration>
51.         <xs:enumeration value="notin"></xs:enumeration>
52.         <xs:enumeration value="between"></xs:enumeration>
53.         <xs:enumeration value="regex"></xs:enumeration>
54.         <xs:enumeration value="like"></xs:enumeration>
55.     </xs:restriction>
56. </xs:simpleType>
57. <!-- ##### -->
58. <xs:complexType name="fieldValuesType">
59.     <xs:sequence>
60.         <xs:element name="fieldValue" type="xs:string" maxOccurs="unbounded"></xs:element>
61.     </xs:sequence>
62. </xs:complexType>
63. <!-- ##### -->
64. <xs:simpleType name="fieldValueType">
65.     <xs:restriction base="xs:string">
66.         <xs:pattern value="[0-9]{1,5}|true|false"></xs:pattern>
67.     </xs:restriction>
68. </xs:simpleType>
69. <!-- ##### -->
70. <xs:group name="atomics">
71.     <xs:sequence>
72.         <xs:element ref="condition"></xs:element>
73.         <xs:sequence minOccurs="0" maxOccurs="unbounded">
74.             <xs:element name="operator" type="xs:string"></xs:element>
75.             <xs:element ref="condition"></xs:element>
76.         </xs:sequence>
77.     </xs:sequence>
78. </xs:group>
79. <!-- ##### -->
80. <xs:simpleType name="roomFieldNameType">
81.     <xs:restriction base="xs:string">
82.         <xs:enumeration value="roomPrice"></xs:enumeration>
83.         <xs:enumeration value="roomId"></xs:enumeration>
84.         <xs:enumeration value="roomRateBasis"></xs:enumeration>
85.         <xs:enumeration value="roomName"></xs:enumeration>
86.     </xs:restriction>
87. </xs:simpleType>
88. </xs:schema>

```

## loginDetails.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.     <xs:group name="loginDetailsGroup">
03.         <xs:sequence>
04.             <xs:element name="username" type="xs:string"></xs:element>
05.             <xs:element name="password" type="passwordType"></xs:element>
06.             <xs:element name="id" type="xs:nonNegativeInteger"></xs:element>
07.             <xs:element name="source" type="sourceType"></xs:element>
08.         </xs:sequence>
09.     </xs:group>
10.     <!-- ##### -->
11.     <xs:simpleType name="passwordType">
12.         <xs:restriction base="xs:string">
13.             <xs:length value="32"></xs:length>
14.         </xs:restriction>
15.     </xs:simpleType>
16.     <!-- ##### -->
17.     <xs:simpleType name="sourceType">
18.         <xs:restriction base="xs:string">
19.             <xs:enumeration value="0"></xs:enumeration>
20.             <xs:enumeration value="1"></xs:enumeration>
21.             <xs:enumeration value="2"></xs:enumeration>
22.             <xs:enumeration value="5"></xs:enumeration>
23.         </xs:restriction>
24.     </xs:simpleType>
25. </xs:schema>

```

## bookingDetails.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns:a="http://us.dotwconnect.com/xsd/atomicCondition_rooms" xmlns:
s:c="http://us.dotwconnect.com/xsd/complexCondition_rooms">
02.   <xs:import namespace="http://us.dotwconnect.com/xsd/atomicCondition_rooms" schemaLocation="atomicCondition_rooms.xsd"
></xs:import>
03.   <xs:import namespace="http://us.dotwconnect.com/xsd/complexCondition_rooms" schemaLocation="complexCondition_rooms.xs
d"></xs:import>
04.   <xs:complexType name="bookingDetailsType">
05.     <xs:sequence>
06.       <xs:group ref="bookingDetailsDefaultGroup"></xs:group>
07.       <xs:element name="rooms" type="roomsType"></xs:element>
08.     </xs:sequence>
09.   </xs:complexType>
10.   <!-- ##### -->
11.   <xs:group name="bookingDetailsDefaultGroup">
12.     <xs:sequence>
13.       <xs:element name="fromDate" type="dotwDateType"></xs:element>
14.       <xs:element name="toDate" type="dotwDateType"></xs:element>
15.       <xs:element name="currency" type="xs:nonNegativeInteger"></xs:element>
16.       <xs:element name="commission" type="xs:nonNegativeInteger" minOccurs="0"></xs:element>
17.     </xs:sequence>
18.   </xs:group>
19.   <!-- ##### -->
20.   <xs:simpleType name="dotwDateType">
21.     <xs:restriction base="xs:string">
22.       <xs:pattern value="[0-9]{10,11}|2[0-9]{3,3}-(0[1-9]|[1][0-2])-(0[1-9]|[1-2][0-9]|3[0-1])"></xs:pattern>
23.     </xs:restriction>
24.   </xs:simpleType>
25.   <!-- ##### -->
26.   <xs:complexType name="roomsType">
27.     <xs:sequence>
28.       <xs:element name="room" type="roomType" maxOccurs="5"></xs:element>
29.     </xs:sequence>
30.     <xs:attribute name="no" type="xs:nonNegativeInteger"></xs:attribute>
31.   </xs:complexType>
32.   <!-- ##### -->
33.   <xs:complexType name="roomType">
34.     <xs:sequence>
35.       <xs:group ref="roomOccupancy"></xs:group>
36.       <xs:element name="rateBasis" type="xs:integer"></xs:element>
37.       <xs:element name="passengerNationality" type="xs:integer" minOccurs="0"></xs:element>
38.       <xs:element name="passengerCountryOfResidence" type="xs:integer" minOccurs="0"></xs:element>
39.     </xs:sequence>
40.     <xs:attribute name="runno" type="xs:nonNegativeInteger"></xs:attribute>
41.   </xs:complexType>
42.   <!-- ##### -->
43.   <xs:group name="roomOccupancy">
44.     <xs:sequence>
45.       <xs:element name="adultsCode" type="adultsCodeType"></xs:element>
46.       <xs:element name="children" type="childrenType"></xs:element>
47.     </xs:sequence>
48.   </xs:group>
49.   <!-- ##### -->
50.   <xs:simpleType name="adultsCodeType">
51.     <xs:restriction base="xs:string">
52.       <xs:enumeration value="1"></xs:enumeration>
53.       <xs:enumeration value="2"></xs:enumeration>
54.       <xs:enumeration value="3"></xs:enumeration>
55.       <xs:enumeration value="4"></xs:enumeration>
56.       <xs:enumeration value="5"></xs:enumeration>
57.       <xs:enumeration value="6"></xs:enumeration>
58.       <xs:enumeration value="7"></xs:enumeration>
59.       <xs:enumeration value="8"></xs:enumeration>
60.       <xs:enumeration value="9"></xs:enumeration>
61.       <xs:enumeration value="10"></xs:enumeration>
62.     </xs:restriction>
63.   </xs:simpleType>
64.   <!-- ##### -->
65.   <xs:attribute name="no">
66.     <xs:simpleType>
67.       <xs:restriction base="xs:integer">
68.         <xs:minInclusive value="0"></xs:minInclusive>
69.         <xs:maxInclusive value="4"></xs:maxInclusive>
70.       </xs:restriction>
71.     </xs:simpleType>
72.   </xs:attribute>
73.   <!-- ##### -->
74.   <xs:complexType name="childrenType">
75.     <xs:sequence>
76.       <xs:element minOccurs="0" maxOccurs="4" name="child" type="childType"></xs:element>
77.     </xs:sequence>
78.     <xs:attribute name="no" type="xs:integer" use="required"></xs:attribute>
79.   </xs:complexType>
80.   <!-- ##### -->
81.   <xs:complexType name="childType">
82.     <xs:simpleContent>
83.       <xs:extension base="childAge">
84.         <xs:attribute name="runno" type="xs:integer" use="required"></xs:attribute>
85.       </xs:extension>
86.     </xs:simpleContent>
87.   </xs:complexType>
88.   <!-- ##### -->
89.   <xs:simpleType name="childAge">
90.     <xs:restriction base="xs:integer">
91.       <xs:minInclusive value="0"></xs:minInclusive>
92.       <xs:maxInclusive value="21"></xs:maxInclusive>
93.     </xs:restriction>

```

```

94.     </xs:simpleType>
95.     <!-- ##### -->
96.     <xs:complexType name="rateTypesType">
97.         <xs:sequence>
98.             <xs:element name="rateType" minOccurs="1" maxOccurs="3">
99.                 <xs:simpleType>
100.                     <xs:restriction base="xs:integer">
101.                         <xs:enumeration value="1"></xs:enumeration>
102.                         <xs:enumeration value="2"></xs:enumeration>
103.                         <xs:enumeration value="3"></xs:enumeration>
104.                     </xs:restriction>
105.                 </xs:simpleType>
106.             </xs:element>
107.         </xs:sequence>
108.     </xs:complexType>
109. </xs:schema>

```

#### general.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.     <xs:simpleType name="TrueOrFalse">
03.         <xs:restriction base="xs:string">
04.             <xs:pattern value="true|false"></xs:pattern>
05.         </xs:restriction>
06.     </xs:simpleType>
07.     <xs:simpleType name="productType">
08.         <xs:restriction base="xs:string">
09.             <xs:pattern value="hotel|apartment|transfer"></xs:pattern>
10.         </xs:restriction>
11.     </xs:simpleType>
12. </xs:schema>

```

## General Response

After you initiate the searchhotels command, our system will process the request and it will look for availability in accordance with the provided search criteria. It will calculate the cheapest price per each meal type, if not otherwise requested (in case of static data download, when you restrict the return of this element by including the **noprice** element with value **true**) and it will return a list of hotels along with all their room types that match your search criteria with a minimum of details.

The general format of the response is shown below:

## General Response

After you initiate the searchhotels command, our system will process the request and it will look for availability in accordance with the provided search criteria. It will calculate the cheapest price per each meal type, if not otherwise requested (in case of static data download, when you restrict the return of this element by including the **noprice** element with value **true**) and it will return a list of hotels along with all their room types that match your search criteria with a minimum of details.

The general format of the response is shown below:

```

01. <result command="searchhotels" date="" ip="">
02.     <hotels>
03.         <hotel hotelid="">
04.             <rooms>
05.                 <room adults="" children="" childrenages="" extrabeds="">
06.                     <roomtype roomtypecode="">
07.                         <name></name>
08.                         <ratebases>
09.                             <ratebasis id="">
10.                                 <ratetype currencyid="" nonrefundable="" notes=""></ratetype>
11.                                 <total>Total Price in Rate Currency</total>
12.                                 <totalminimumselling>MSP in Rate Currency</totalminimumselling>
13.                                 <totalinrequestedcurrency>Total in requested currency</totalinrequestedcurrency>
14.                                 <totalminimumsellinginrequestedcurrency>MSP in requested
currency</totalminimumsellinginrequestedcurrency>
15.                             </ratebasis>
16.                         </ratebases>
17.                     </roomtype>
18.                 </room>
19.             </rooms>
20.         </hotel>
21.     </hotels>
22.     <successful>TRUE</successful>
23. </result>

```

```

01. <result command="searchhotels" date="" ip="">
02.     <hotels>
03.         <hotel hotelid="">
04.             <rooms>
05.                 <room adults="" children="" childrenages="" extrabeds="">

```

```

06.         <roomtype roomtypecode="">
07.             <name></name>
08.             <ratebases>
09.                 <ratebasis id="">
10.                     <ratetype currencyid="" nonrefundable="" notes=""></ratetype>
11.                     <cancellationrules>
12.                         <rule>
13.                             <fromdate></fromdate>
14.                             <todate></todate>
15.                             <amendrestricted></amendrestricted>
16.                             <cancelrestricted></cancelrestricted>
17.                             <noshowpolicy></noshowpolicy>
18.                             <amendcharge></amendcharge>
19.                             <cancelcharge></cancelcharge>
20.                             <charge>Cancellation Charge</charge>
21.                         </rule>
22.                     </cancellationrules>
23.                     <total>Total Price in Rate Currency</total>
24.                     <totalminimumselling>MSP in Rate Currency</totalminimumselling>
25.                     <totalinrequestedcurrency>Total in requested currency</totalinrequestedcurrency>
26.                     <totalminimumsellinginrequestedcurrency>MSP in requested
currency</totalminimumsellinginrequestedcurrency>
27.                 </ratebasis>
28.             </ratebases>
29.         </roomtype>
30.     </room>
31. </rooms>
32. </hotel>
33. </hotels>
34. <successful>TRUE</successful>
35. </result>

```

Item	Type	Parent	Description
<b>result</b>	Element	root	The root element.
@date	Attribute	result	The date and time when the result was provided in unix timestamp.
@command	Attribute	result	The request command which returned this result.
@ip	Attribute	result	The Ipv4 address the request was made from.
@elapsedTime	Attribute	result	The time required to process the request and return the response
@tID	Attribute	result	The unique transaction Id that has been attributed to the response
<b>hotels</b>	Element	return	The hotel response list. Contains a <b>hotel</b> element for each hotel returned by DOTWconnect system.
<b>hotel</b>	Element	hotels	Contains information about one hotel.
@hotelid	Attribute	hotel	Contains the hotel internal code.
<b>rooms</b>	Element	hotel	Contains a room element for each room a customer wishes to book.
<b>room</b>	Element	rooms	Encapsulates details about room types for the specified room occupancy.
@adults	Attribute	room	Number of adults from the request or 2t for a twin room.
@children	Attribute	room	Number of children from the request.
@childrenages	Attribute	room	Child ages separated by comma. Added only if children.
@extrabeds	Attribute	room	Number of extra beds.
<b>roomType</b>	Element	room	Encapsulates information about a room type.
@roomtypecode	Attribute	roomType	Internal code for the room type.
<b>name</b>	Element	roomType	The room type name.



<b>rateBases</b>	Element	roomType	Groups details about room type by rate basis.
<b>rateBasis</b>	Attribute	rateBases	Details about room type with this rate basis.
@id	Attribute	rateBasis	Internal code for rate basis.
<b>rateType</b>	Element	rateBasis	<p>Specifies the rate type. Possible values:</p> <ul style="list-style-type: none"> <li>• 1 - DOTW rate type</li> <li>• 2 - DYNAMIC DIRECT rate type</li> <li>• 3 - DYNAMIC 3rd PARTY rate type</li> </ul> <p>Please note that the blocking process guarantees the allotment (holds inventory) only for DOTW rate types. For the DYNAMIC rates, only the price is checked and guaranteed. Sending the blocking request is however mandatory for both rate types.</p>
@currencyid	Attribute	rateType	<p>Internal code of the currency in which the prices for this rate are provided.</p> <p><b>ONLY For Non Refundable Advance Purchase Rates, this can be a different currency than the one requested.</b> To see the prices in the requested currency you should look for the price elements which clearly specify <i>InRequestedCurrency</i> (totalInRequestedCurrency, totalMinimumSellingInRequestedCurrency, priceInRequestedCurrency, priceMinimumSellingInRequestedCurrency)</p>
@nonrefundable	Attribute	rateType	<p>If present, indicates that the rate is Non Refundable Advance Purchase.</p> <p>Possible values:</p> <ul style="list-style-type: none"> <li>• yes</li> </ul> <p>To be able to book this rate it is mandatory for your application to use the savebooking and bookitinerary booking flow.</p>
@notes	Attribute	rateType	If present, contains a free flow text with additional notes about the rate, mainly
<b>total</b>	Element	rateBasis	This element contains the total price for the room type and rate basis in two formats one without any formatting and the other one properly formatted. The price will be for the whole stay for this room type in the currency specified in the request.
<b>totalMinimumSelling</b>	Element	rateBasis	<b>This element returns the minimum selling price the customer should adhere to while distributing the product</b> (B2C platform). XML customers must display the MSP as the price that is sold to their customers. The MSP cannot be undercut and this is a mandatory requirement from all the hotel chains working on direct connectivity.
<b>totalInRequestedCurrency</b>	Element	rateBasis	This element is present only for Non Refundable Advance Rates and when the rateType/@currencyid is different from the requested currency. This element contains the total price for the room type and rate basis in two formats one without any formatting and the other one properly formatted. The price will be for the whole stay for this room type in the currency specified in the request.

<b>totalMinimumSellingInRequestedCurrency</b>	Element	rateBasis	This element is presented only for Non Refundable Advance Purchase rates and when the rateType/@currencyid is different from the requested currency. <b>This element returns the minimum selling price the customer should adhere to while distributing the product</b> (B2C platform). XML customers must display the MSP as the price that is sold to their customers. The MSP cannot be undercut and this is a mandatory requirement from all the hotel chains working on direct connectivity.
---	---------	-----------	---

Item	Type	Parent	Description
<b>result</b>	Element	root	The root element.
@date	Attribute	result	The date and time when the result was provided in unix timestamp.
@command	Attribute	result	The request command which returned this result.
@ip	Attribute	result	The Ipv4 address the request was made from.
@elapsedTime	Attribute	result	The time required to process the request and return the response
@tID	Attribute	result	The unique transaction Id that has been attributed to the response
<b>hotels</b>	Element	return	The hotel response list. Contains a <b>hotel</b> element for each hotel returned by DOTWconnect system.
<b>hotel</b>	Element	hotels	Contains information about one hotel.
@hotelid	Attribute	hotel	Contains the hotel internal code.
<b>rooms</b>	Element	hotel	Contains a room element for each room a customer wishes to book.
<b>room</b>	Element	rooms	Encapsulates details about room types for the specified room occupancy.
@adults	Attribute	room	Number of adults from the request or 2t for a twin room.
@children	Attribute	room	Number of children from the request.
@childrenages	Attribute	room	Child ages separated by comma. Added only if children.
@extrabeds	Attribute	room	Number of extra beds.
<b>roomType</b>	Element	room	Encapsulates information about a room type.
@roomtypecode	Attribute	roomType	Internal code for the room type.
<b>name</b>	Element	roomType	The room type name.
<b>rateBases</b>	Element	roomType	Groups details about room type by rate basis.
<b>rateBasis</b>	Attribute	rateBases	Details about room type with this rate basis.
@id	Attribute	rateBasis	Internal code for rate basis.

<b>rateType</b>	Element	rateBasis	<p>Specifies the rate type. Possible values:</p> <ul style="list-style-type: none"> <li>• 1 - DOTW rate type</li> <li>• 2 - DYNAMIC DIRECT rate type</li> <li>• 3 - DYNAMIC 3rd PARTY rate type</li> </ul> <p>Please note that the blocking process guarantees the allotment (holds inventory) only for DOTW rate types. For the DYNAMIC rates, only the price is checked and guaranteed. Sending the blocking request is however mandatory for both rate types.</p>
@currencyid	Attribute	rateType	<p>Internal code of the currency in which the prices for this rate are provided.</p> <p><b>ONLY For Non Refundable Advance Purchase Rates, this can be a different currency than the one requested.</b> To see the prices in the requested currency you should look for the price elements which clearly specify <i>InRequestedCurrency</i> (totalInRequestedCurrency, totalMinimumSellingInRequestedCurrency, priceInRequestedCurrency, priceMinimumSellingInRequestedCurrency)</p>
@nonrefundable	Attribute	rateType	<p>If present, indicates that the rate is Non Refundable Advance Purchase.</p> <p>Possible values:</p> <ul style="list-style-type: none"> <li>• yes</li> </ul> <p>To be able to book this rate it is mandatory for your application to use the savebooking and bookitinerary booking flow.</p>
@notes	Attribute	rateType	<p>If present, contains a free flow text with additional notes about the rate, mainly</p>
<b>cancellationRules</b>	Element	rateBasis	<p>Encapsulates details about the cancellation policy applicable for this room type and rate basis.</p>
<b>rule</b>	Element	cancellationRules	<p>Contains details about a specific cancellation policy.</p>
<b>fromDate</b>	Element	rule	<p>Starting date of the rule. From this day forward until toDate (if present), the specified charge will be applied for any cancellations or amendments. If this element is not present then the charge will be applied from the current date until toDate. Date format is: YYYY-MM-DD HH:MM:SS</p>
<b>toDate</b>	Element	rule	<p>Ending date of the rule. The specified charge will be applied for any cancellations or amendments until this date. If this element is not present then the charge from fromDate onwards. Date format is: YYYY-MM-DD HH:MM:SS</p>
<b>amendRestricted</b>	Element	rule	<p>If present, this element indicates that a future amendment (using the updatebooking method) done in the time period defined by this rule, will not be possible. Fixed value:</p> <p>TRUE</p>

cancelRestricted	Element	rule	<p>If present, this element indicates that a future cancel (using the cancelbooking or deleteitinerary methods) done in the time period defined by this rule, will not be possible. Fixed value:</p> <p>TRUE</p>
noShowPolicy	Element	rule	<p>If present, this element indicates that the presented charge is a no show charge. In this case the elements fromDate, toDate, amendingPossible will be absent. Fixed value:</p> <p>TRUE</p>
amendCharge	Element	rule	<p>Amendment charge that will be applied if booking is amended in the period defined by this rule.</p>
cancelCharge	Element	rule	<p>Cancellation charge that will be applied if booking is canceled in the period defined by this rule.</p>
charge	Element	rule	<p>Charge that will be applied if booking is a no show.</p>
total	Element	rateBasis	<p>This element contains the total price for the room type and rate basis in two formats one without any formatting and the other one properly formatted. The price will be for the whole stay for this room type in the currency specified in the request.</p>
totalMinimumSelling	Element	rateBasis	<p><b>This element returns the minimum selling price the customer should adhere to while distributing the product</b> (B2C platform). XML customers must display the MSP as the price that is sold to their customers. The MSP cannot be undercut and this is a mandatory requirement from all the hotel chains working on direct connectivity.</p>
totalInRequestedCurrency	Element	rateBasis	<p>This element is present only for Non Refundable Advance Rates and when the rateType/@currencyid is different from the requested currency. This element contains the total price for the room type and rate basis in two formats one without any formatting and the other one properly formatted. The price will be for the whole stay for this room type in the currency specified in the request.</p>
totalMinimumSellingInRequestedCurrency	Element	rateBasis	<p>This element is presented only for Non Refundable Advance Purchase rates and when the rateType/@currencyid is different from the requested currency. <b>This element returns the minimum selling price the customer should adhere to while distributing the product</b> (B2C platform). XML customers must display the MSP as the price that is sold to their customers. The MSP cannot be undercut and this is a mandatory requirement from all the hotel chains working on direct connectivity.</p>

## searchhotels\_response.xsd

## searchhotels\_response.xsd

```
01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="result" type="resultType"></xs:element>
03.   <xs:complexType name="resultType">
04.     <xs:sequence>
05.       <xs:element name="hotels" type="hotelsType" minOccurs="1" maxOccurs="1"></xs:element>
06.       <xs:element name="successful" type="trueOrFalse" minOccurs="1" maxOccurs="1"></xs:element>
07.     </xs:sequence>
08.     <xs:attribute name="command" type="xs:string" use="required" fixed="searchhotels"></xs:attribute>
09.     <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
10.     <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
11.     <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
12.     <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
13.     <xs:attribute name="elapsedTime" type="xs:decimal" use="required"></xs:attribute>
14.   </xs:complexType>
15.   <xs:simpleType name="trueOrFalse">
16.     <xs:restriction base="xs:string">
17.       <xs:pattern value="true|false|TRUE|FALSE"></xs:pattern>
18.     </xs:restriction>
19.   </xs:simpleType>
20.   <xs:simpleType name="oneOrZero">
21.     <xs:restriction base="xs:integer">
22.       <xs:pattern value="1|0"></xs:pattern>
23.     </xs:restriction>
24.   </xs:simpleType>
25.   <xs:simpleType name="dotwIP">
26.     <xs:restriction base="xs:string">
27.       <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[ 1][0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0)"></xs:pattern>
28.     </xs:restriction>
29.   </xs:simpleType>
30.   <xs:simpleType name="dotwDateType">
31.     <xs:restriction base="xs:string">
32.       <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}(\s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})?|[0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2}(\s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})?|[0-9]{4,4}T[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2}(\s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})?"></xs:pattern>
33.     </xs:restriction>
34.   </xs:simpleType>
35.   <xs:simpleType name="versionType">
36.     <xs:restriction base="xs:string">
37.       <xs:pattern value="[1-9]{1}([0-9])?*"></xs:pattern>
38.     </xs:restriction>
39.   </xs:simpleType>
40.   <xs:simpleType name="rateTypeRestriction">
41.     <xs:restriction base="xs:string">
42.       <xs:enumeration value="1"></xs:enumeration>
43.       <xs:enumeration value="2"></xs:enumeration>
44.       <xs:enumeration value="3"></xs:enumeration>
45.       <xs:enumeration value="4"></xs:enumeration>
46.     </xs:restriction>
47.   </xs:simpleType>
48.   <xs:complexType name="rateType">
49.     <xs:simpleContent>
50.       <xs:extension base="rateTypeRestriction">
51.         <xs:attribute name="currencyid" type="xs:nonNegativeInteger" use="required"></xs:attribute>
52.         <xs:attribute name="nonrefundable" type="xs:string" fixed="yes" use="optional"></xs:attribute>
53.         <xs:attribute name="notes" type="xs:string" use="optional"></xs:attribute>
54.       </xs:extension>
55.     </xs:simpleContent>
56.   </xs:complexType>
57.   <xs:simpleType name="adultsCodeType">
58.     <xs:restriction base="xs:string">
59.       <xs:enumeration value="1"></xs:enumeration>
60.       <xs:enumeration value="2"></xs:enumeration>
61.       <xs:enumeration value="3"></xs:enumeration>
62.       <xs:enumeration value="4"></xs:enumeration>
63.       <xs:enumeration value="5"></xs:enumeration>
64.       <xs:enumeration value="6"></xs:enumeration>
65.       <xs:enumeration value="7"></xs:enumeration>
66.       <xs:enumeration value="8"></xs:enumeration>
67.       <xs:enumeration value="9"></xs:enumeration>
68.       <xs:enumeration value="10"></xs:enumeration>
69.       <xs:enumeration value="11"></xs:enumeration>
70.       <xs:enumeration value="12"></xs:enumeration>
71.       <xs:enumeration value="13"></xs:enumeration>
72.       <xs:enumeration value="14"></xs:enumeration>
73.       <xs:enumeration value="15"></xs:enumeration>
74.       <xs:enumeration value="16"></xs:enumeration>
75.       <xs:enumeration value="17"></xs:enumeration>
76.       <xs:enumeration value="18"></xs:enumeration>
77.       <xs:enumeration value="19"></xs:enumeration>
78.       <xs:enumeration value="20"></xs:enumeration>
79.     </xs:restriction>
80.   </xs:simpleType>
81.   <xs:simpleType name="empty">
82.     <xs:restriction base="xs:string">
83.       <xs:maxLength value="0"></xs:maxLength>
84.     </xs:restriction>
85.   </xs:simpleType>
86.   <xs:complexType name="hotelsType">
87.     <xs:sequence>
88.       <xs:element name="hotel" type="hotelType" minOccurs="0" maxOccurs="unbounded"></xs:element>
```

```

89.         </xs:sequence>
90.     </xs:complexType>
91. <xs:complexType name="hotelType">
92.     <xs:all>
93.         <xs:element name="rooms" type="roomsType" minOccurs="0" maxOccurs="1"/></xs:element>
94.     </xs:all>
95.     <xs:attribute name="hotelid" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
96. </xs:complexType>
97. <xs:complexType name="roomsType">
98.     <xs:sequence>
99.         <xs:element name="room" type="roomType" minOccurs="1" maxOccurs="unbounded"/></xs:element>
100.     </xs:sequence>
101. </xs:complexType>
102. <xs:complexType name="roomType">
103.     <xs:sequence>
104.         <xs:element name="roomType" type="roomTypeType" minOccurs="1" maxOccurs="unbounded"/></xs:element>
105.     </xs:sequence>
106.     <xs:attribute name="adults" type="adultsCodeType" use="required"/></xs:attribute>
107.     <xs:attribute name="children" type="xs:unsignedInt" use="required"/></xs:attribute>
108.     <xs:attribute name="childrenages" type="xs:string"/></xs:attribute>
109.     <xs:attribute name="extrabeds" type="oneOrZero" use="required"/></xs:attribute>
110. </xs:complexType>
111. <xs:complexType name="roomTypeType">
112.     <xs:all>
113.         <xs:element name="name" type="xs:string" minOccurs="0" maxOccurs="1"/></xs:element>
114.         <xs:element name="rateBases" type="rateBasesType" minOccurs="1" maxOccurs="1"/></xs:element>
115.     </xs:all>
116.     <xs:attribute name="roomtypecode" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
117. </xs:complexType>
118. <xs:complexType name="rateBasesType">
119.     <xs:sequence>
120.         <xs:element name="rateBasis" type="rateBasisType" minOccurs="1" maxOccurs="unbounded"/></xs:element>
121.     </xs:sequence>
122. </xs:complexType>
123. <xs:complexType name="rateBasisType">
124.     <xs:all>
125.         <xs:element name="rateType" type="rateTypeType"/></xs:element>
126.         <xs:element name="total" type="xs:string" minOccurs="1" maxOccurs="1"/></xs:element>
127.         <xs:element name="totalMinimumSelling" type="xs:string" minOccurs="0"/></xs:element>
128.         <xs:element name="totalInRequestedCurrency" type="xs:string" minOccurs="0"/></xs:element>
129.         <xs:element name="totalMinimumSellingInRequestedCurrency" type="xs:string" minOccurs="0"/></xs:element>
130.     </xs:all>
131.     <xs:attribute name="id" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
132. </xs:complexType>
133. </xs:schema>

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.     <xs:element name="result" type="resultType"/></xs:element>
03.     <xs:complexType name="resultType">
04.         <xs:sequence>
05.             <xs:element name="hotels" type="hotelsType" minOccurs="1" maxOccurs="1"/></xs:element>
06.             <xs:element name="successful" type="trueOrFalse" minOccurs="1" maxOccurs="1"/></xs:element>
07.         </xs:sequence>
08.         <xs:attribute name="command" type="xs:string" use="required" fixed="searchhotels"/></xs:attribute>
09.         <xs:attribute name="tID" type="xs:integer" use="required"/></xs:attribute>
10.         <xs:attribute name="ip" type="dotwIP" use="required"/></xs:attribute>
11.         <xs:attribute name="date" type="dotwDateType" use="required"/></xs:attribute>
12.         <xs:attribute name="version" type="versionType" use="required"/></xs:attribute>
13.         <xs:attribute name="elapsedTime" type="xs:decimal" use="required"/></xs:attribute>
14.     </xs:complexType>
15.     <xs:simpleType name="trueOrFalse">
16.         <xs:restriction base="xs:string">
17.             <xs:pattern value="true|false|TRUE|FALSE"/></xs:pattern>
18.         </xs:restriction>
19.     </xs:simpleType>
20.     <xs:simpleType name="oneOrZero">
21.         <xs:restriction base="xs:integer">
22.             <xs:pattern value="1|0"/></xs:pattern>
23.         </xs:restriction>
24.     </xs:simpleType>
25.     <xs:simpleType name="dotwIP">
26.         <xs:restriction base="xs:string">
27.             <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[ 1][0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0)" />
28.         </xs:restriction>
29.     </xs:simpleType>
30.     <xs:simpleType name="dotwDateType">
31.         <xs:restriction base="xs:string">
32.             <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}(\s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*| [0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2}(\s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*" /></xs:pattern>
33.         </xs:restriction>
34.     </xs:simpleType>
35.     <xs:simpleType name="versionType">
36.         <xs:restriction base="xs:string">
37.             <xs:pattern value="[1-9]{1}([0-9])*.([0-9])*" /></xs:pattern>
38.         </xs:restriction>
39.     </xs:simpleType>
40.     <xs:simpleType name="rateTypeRestriction">
41.         <xs:restriction base="xs:string">
42.             <xs:enumeration value="1"/></xs:enumeration>
43.             <xs:enumeration value="2"/></xs:enumeration>
44.             <xs:enumeration value="3"/></xs:enumeration>
45.             <xs:enumeration value="4"/></xs:enumeration>
46.         </xs:restriction>

```

```

47. </xs:simpleType>
48. <xs:complexType name="rateTypeType">
49.   <xs:simpleContent>
50.     <xs:extension base="rateTypeRestriction">
51.       <xs:attribute name="currencyid" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
52.       <xs:attribute name="nonrefundable" type="xs:string" fixed="yes" use="optional"/></xs:attribute>
53.       <xs:attribute name="notes" type="xs:string" use="optional"/></xs:attribute>
54.     </xs:extension>
55.   </xs:simpleContent>
56. </xs:complexType>
57. <xs:simpleType name="adultsCodeType">
58.   <xs:restriction base="xs:string">
59.     <xs:enumeration value="1"/></xs:enumeration>
60.     <xs:enumeration value="2"/></xs:enumeration>
61.     <xs:enumeration value="3"/></xs:enumeration>
62.     <xs:enumeration value="4"/></xs:enumeration>
63.     <xs:enumeration value="5"/></xs:enumeration>
64.     <xs:enumeration value="6"/></xs:enumeration>
65.     <xs:enumeration value="7"/></xs:enumeration>
66.     <xs:enumeration value="8"/></xs:enumeration>
67.     <xs:enumeration value="9"/></xs:enumeration>
68.     <xs:enumeration value="10"/></xs:enumeration>
69.     <xs:enumeration value="11"/></xs:enumeration>
70.     <xs:enumeration value="12"/></xs:enumeration>
71.     <xs:enumeration value="13"/></xs:enumeration>
72.     <xs:enumeration value="14"/></xs:enumeration>
73.     <xs:enumeration value="15"/></xs:enumeration>
74.     <xs:enumeration value="16"/></xs:enumeration>
75.     <xs:enumeration value="17"/></xs:enumeration>
76.     <xs:enumeration value="18"/></xs:enumeration>
77.     <xs:enumeration value="19"/></xs:enumeration>
78.     <xs:enumeration value="20"/></xs:enumeration>
79.   </xs:restriction>
80. </xs:simpleType>
81. <xs:simpleType name="empty">
82.   <xs:restriction base="xs:string">
83.     <xs:maxLength value="0"/></xs:maxLength>
84.   </xs:restriction>
85. </xs:simpleType>
86. <xs:complexType name="hotelsType">
87.   <xs:sequence>
88.     <xs:element name="hotel" type="hotelType" minOccurs="0" maxOccurs="unbounded"/></xs:element>
89.   </xs:sequence>
90. </xs:complexType>
91. <xs:complexType name="hotelType">
92.   <xs:all>
93.     <xs:element name="rooms" type="roomsType" minOccurs="0" maxOccurs="1"/></xs:element>
94.   </xs:all>
95.   <xs:attribute name="hotelid" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
96. </xs:complexType>
97. <xs:complexType name="roomsType">
98.   <xs:sequence>
99.     <xs:element name="room" type="roomType" minOccurs="1" maxOccurs="unbounded"/></xs:element>
100.   </xs:sequence>
101. </xs:complexType>
102. <xs:complexType name="roomType">
103.   <xs:sequence>
104.     <xs:element name="roomType" type="roomTypeType" minOccurs="1" maxOccurs="unbounded"/></xs:element>
105.   </xs:sequence>
106.   <xs:attribute name="adults" type="adultsCodeType" use="required"/></xs:attribute>
107.   <xs:attribute name="children" type="xs:unsignedInt" use="required"/></xs:attribute>
108.   <xs:attribute name="childrenages" type="xs:string"/></xs:attribute>
109.   <xs:attribute name="extrabeds" type="oneOrZero" use="required"/></xs:attribute>
110. </xs:complexType>
111. <xs:complexType name="roomTypeType">
112.   <xs:all>
113.     <xs:element name="name" type="xs:string" minOccurs="0" maxOccurs="1"/></xs:element>
114.     <xs:element name="rateBases" type="rateBasesType" minOccurs="1" maxOccurs="1"/></xs:element>
115.   </xs:all>
116.   <xs:attribute name="roomtypecode" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
117. </xs:complexType>
118. <xs:complexType name="rateBasesType">
119.   <xs:sequence>
120.     <xs:element name="rateBasis" type="rateBasisType" minOccurs="1" maxOccurs="unbounded"/></xs:element>
121.   </xs:sequence>
122. </xs:complexType>
123. <xs:complexType name="rateBasisType">
124.   <xs:all>
125.     <xs:element name="rateType" type="rateTypeType"/></xs:element>
126.     <xs:element name="cancellationRules" type="cancellationRulesType" minOccurs="1" maxOccurs="1"/></xs:element>
127.   </xs:all>
128.   <xs:element name="total" type="xs:string" minOccurs="1" maxOccurs="1"/></xs:element>
129.   <xs:element name="totalMinimumSelling" type="xs:string" minOccurs="0"/></xs:element>
130.   <xs:element name="totalInRequestedCurrency" type="xs:string" minOccurs="0"/></xs:element>
131.   <xs:element name="totalMinimumSellingInRequestedCurrency" type="xs:string" minOccurs="0"/></xs:element>
132.   <xs:attribute name="id" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
133. </xs:complexType>
134. <xs:complexType name="cancellationRulesType">
135.   <xs:sequence>
136.     <xs:element name="rule" type="ruleType" minOccurs="0" maxOccurs="unbounded"/></xs:element>
137.   </xs:sequence>
138. </xs:complexType>
139. <xs:complexType name="ruleType">
140.   <xs:sequence>
141.     <xs:element name="fromDate" type="dotwDateType" minOccurs="0" maxOccurs="1"/></xs:element>
142.     <xs:element name="toDate" type="dotwDateType" minOccurs="0" maxOccurs="1"/></xs:element>

```

```

143.         <xs:element name="noShowPolicy" type="trueOrFalse" minOccurs="0"/></xs:element>
144.         <xs:element name="amendCharge" type="xs:string" minOccurs="0"/></xs:element>
145.         <xs:element name="cancelCharge" type="xs:string" minOccurs="0"/></xs:element>
146.         <xs:element name="charge" type="xs:string" minOccurs="0"/></xs:element>
147.         <xs:element name="amendRestricted" type="trueOrFalse" minOccurs="0"/></xs:element>
148.         <xs:element name="cancelRestricted" type="trueOrFalse" minOccurs="0"/></xs:element>
149.     </xs:sequence>
150. </xs:complexType>
151. </xs:schema>

```

## New search hotels structure by hotel id's

Please take into consideration the fact the we are dealing with a dynamic environment (we, ourselves, also depend on our suppliers) and therefore it's normal that results might slightly fluctuate from one hit to the other and especially between our XML feed and our DOTW user interface (because on our website we have a higher standard cut off time set for our suppliers than the standard 5 seconds cut off we have set via XML and this might generate differences in results).

Please note that we can provide a solution that offers our customers better and faster search results: it is a new searchhotels request structure, targeted on hotel IDs. This new searchhotels method is not a mandatory requirement from DOTW's side, therefore we can't force our customers to implement it during the certification process, but we strongly recommend it's implementation.

**For improved performance and lower response rates the shopping method can be updated to the new searchhotels structure by hotelId.**

To get all the available hotels in a city the request has to be sent per hotelId's, but no more than 50 hotelId's can be sent per request. Also, be careful to pass only hotelId's from the same city in one request.

Basically, grouping a maximum of 50 hotels per request, will result in a quicker DOTW response than when you are sending a request by city. This approach also allows you to target preferred hotels in a certain city or region. In cases when the area you are interested in has a higher number of hotels, your application should send multiple searchhotels requests.

So, for example, if you want to target all approximately 380 hotels available in Dubai, your application should send 7 searchhotels requests, each one containing a list of a maximum 50 hotelIds.

We understand that our customers might consider the new searchhotels by hotelId approach a bit different from other XML providers but I'll try to explain why we decided this new structure, targeted on product Ids, is better than the standard search by city.

Please note that via XML we have a cut off of 5 seconds for our suppliers, this means that when our customers send a request by city, which is a time consuming method, our suppliers might fail to respond during those 5 seconds therefore we might not be able to return all available properties for the search criteria so this way there's a high risk of them receiving fewer products in our response.

On the other hand, implementing the new targeted search is less time consuming therefore we can guarantee that more and faster results will be passed in our availability response. **It's also very important for our customers to be aware that hitting our server with multiple simultaneous targeted search requests instead of one time with a request by city is more efficient and doesn't affect our system in any negative way.**

Below you can find how the new searchhotels request should be sent to our server:

```

01. <customer>
02.   <username></username>
03.   <password></password>
04.   <id></id>
05.   <source>1 </source>
06.   <product>hotel</product>
07.   <request command="searchhotels">
08.     <bookingdetails>
09.       <fromdate></fromdate>
10.       <todate></todate>
11.       <currency></currency>
12.       <rooms no="1">
13.         <room runno="0">
14.           <adultscore></adultscore>
15.           <children no="0"></children>
16.           <ratebasis></ratebasis>
17.           <passengernationality></passengernationality>
18.           <passengercountryofresidence></passengercountryofresidence>
19.         </room>
20.       </rooms>
21.     </bookingdetails>
22.     <return>
23.       <filters xmlns:a="http://us.dotwconnect.com/xsd/atomicCondition" xmlns:c="http://us.dotwconnect.com/xsd/compl
exCondition">
24.         <c:condition>
25.           <a:condition>
26.             <fieldname>hotelId</fieldname>
27.             <fieldtest>in</fieldtest>
28.             <fieldvalues>

```



```
29.         <fieldvalue>maximum 50 hotel ids per request</fieldvalue>
30.         <fieldvalue></fieldvalue>
31.         <fieldvalue></fieldvalue>
32.         <fieldvalue></fieldvalue>
33.         <fieldvalue></fieldvalue>
34.     </fieldvalues>
35. </a:condition>
36. </c:condition>
37. </filters>
38. </return>
39. </request>
40. </customer>
```

# Scenario H1

Customer searching for a hotel with the following parameters

# Scenario H1

Customer searching for a hotel with the following parameters

City:	Dubai
Checkin Date:	01 January 2016
Checkout Date:	02 January 2016
Hotel Classification:	Luxury 5*
Number of Rooms:	1 Double Room, Best Available Rate Basis
	1 Double Room with 1 Child aged 6, Best Available Rate Basis
PAX Nationality:	Romanian
PAX Country Of Residence:	Italy
Price Range:	Between 150 and 300 USD
Search for Hotels in Nearby cities:	No

City:	Dubai
Checkin Date:	01 January 2016
Checkout Date:	02 January 2016
Hotel Classification:	Luxury 5*
Number of Rooms:	1 Double Room, Best Available Rate Basis
	1 Double Room with 1 Child aged 6, Best Available Rate Basis
PAX Nationality:	Romanian
PAX Country Of Residence:	Italy
Price Range:	Between 150 and 300 USD
Search for Hotels in Nearby cities:	No

The following will be the request and response XMLs that will be passed and received from DOTWconnect system.

## Request XML format

The following will be the request and response XMLs that will be passed and received from DOTWconnect system.

## Request XML format

```
01. <customer>
02.   <username></username>
03.   <password></password>
04.   <id></id>
05.   <source>1</source>
06.   <product>hotel</product>
07.   <request command="searchhotels">
```

```

08.      <bookingDetails>
09.          <fromDate>1557007200</fromDate>
10.          <toDate>1557093600</toDate>
11.          <currency>520</currency>
12.          <rooms no="2">
13.              <room runno="0">
14.                  <adultsCode>2</adultsCode>
15.                  <children no="0"></children>
16.                  <rateBasis>-1</rateBasis>
17.                  <passengerNationality>81</passengerNationality>
18.                  <passengerCountryOfResidence>72</passengerCountryOfResidence>
19.              </room>
20.              <room runno="1">
21.                  <adultsCode>2</adultsCode>
22.                  <children no="1">
23.                      <child runno="0">6</child>
24.                  </children>
25.                  <rateBasis>-1</rateBasis>
26.                  <passengerNationality>81</passengerNationality>
27.                  <passengerCountryOfResidence>72</passengerCountryOfResidence>
28.              </room>
29.          </rooms>
30.      </bookingDetails>
31.      <return>
32.          <filters xmlns:a="http://us.dotwconnect.com/xsd/atomicCondition" xmlns:c="http://us.dotwconnect.com/xsd/compl
exCondition">
33.              <city>364</city>
34.              <nearbyCities>>false</nearbyCities>
35.              <c:condition>
36.                  <a:condition>
37.                      <fieldName>rating</fieldName>
38.                      <fieldTest>equals</fieldTest>
39.                      <fieldValues>
40.                          <fieldValue>563</fieldValue>
41.                      </fieldValues>
42.                  </a:condition>
43.                  <operator>AND</operator>
44.                  <a:condition>
45.                      <fieldName>price</fieldName>
46.                      <fieldTest>between</fieldTest>
47.                      <fieldValues>
48.                          <fieldValue>150</fieldValue>
49.                          <fieldValue>300</fieldValue>
50.                      </fieldValues>
51.                  </a:condition>
52.              </c:condition>
53.          </filters>
54.      </return>
55.  </request>
56. </customer>

```

```

01. <customer>
02.   <username></username>
03.   <password></password>
04.   <id></id>
05.   <source>1</source>
06.   <product>hotel</product>
07.   <request command="searchhotels">
08.       <bookingDetails>
09.           <fromDate>1557007200</fromDate>
10.           <toDate>1557093600</toDate>
11.           <currency>520</currency>
12.           <rooms no="2">
13.               <room runno="0">
14.                   <adultsCode>2</adultsCode>
15.                   <children no="0"></children>
16.                   <rateBasis>-1</rateBasis>
17.                   <passengerNationality>81</passengerNationality>
18.                   <passengerCountryOfResidence>72</passengerCountryOfResidence>
19.               </room>
20.               <room runno="1">
21.                   <adultsCode>2</adultsCode>
22.                   <children no="1">
23.                       <child runno="0">6</child>
24.                   </children>
25.                   <rateBasis>-1</rateBasis>
26.                   <passengerNationality>81</passengerNationality>
27.                   <passengerCountryOfResidence>72</passengerCountryOfResidence>
28.               </room>
29.           </rooms>
30.       </bookingDetails>
31.       <return>
32.           <filters xmlns:a="http://us.dotwconnect.com/xsd/atomicCondition" xmlns:c="http://us.dotwconnect.com/xsd/compl
exCondition">
33.               <city>364</city>
34.               <nearbyCities>>false</nearbyCities>
35.               <c:condition>
36.                   <a:condition>
37.                       <fieldName>rating</fieldName>
38.                       <fieldTest>equals</fieldTest>
39.                       <fieldValues>
40.                           <fieldValue>563</fieldValue>
41.                       </fieldValues>
42.                   </a:condition>
43.                   <operator>AND</operator>

```

```

44.         <a:condition>
45.             <fieldName>price</fieldName>
46.             <fieldTest>between</fieldTest>
47.             <fieldValues>
48.                 <fieldValue>150</fieldValue>
49.                 <fieldValue>300</fieldValue>
50.             </fieldValues>
51.         </a:condition>
52.     </c:condition>
53. </filters>
54. </return>
55. </request>
56. </customer>

```

## Response XML Format

## Response XML Format

```

01. <result command="searchhotels" date="2015-02-
24 13:29:02" elapsedtime="2.4466769695282" ip="127.0.0.1" tid="1424784539000003" version="2.0">
02.     <hotels>
03.         <hotel id="30844">
04.             <rooms>
05.                 <room adults="2" children="0" extrabeds="0">
06.                     <roomtype roomtypecode="6945328">
07.                         <name>KING ROOM 1</name>
08.                         <ratebases>
09.                             <ratebasis id="0">
10.                                 <ratetype currencyid="520">2</ratetype>
11.                                 <cancellationrules>
12.                                     <rule>
13.                                         <todate>2015-12-29 22:00:00</todate>
14.                                         <amendcharge>0</amendcharge>
15.                                         <cancelcharge>0</cancelcharge>
16.                                     </rule>
17.                                     <rule>
18.                                         <fromdate>2015-12-29 22:00:01</fromdate>
19.                                         <todate>2015-12-31 02:00:00</todate>
20.                                         <amendcharge>174.718</amendcharge>
21.                                         <cancelcharge>174.718</cancelcharge>
22.                                     </rule>
23.                                     <rule>
24.                                         <fromdate>2015-12-31 02:00:01</fromdate>
25.                                         <amendrestricted>true</amendrestricted>
26.                                         <cancelrestricted>true</cancelrestricted>
27.                                     </rule>
28.                                 </cancellationrules>
29.                                 <total>174.718</total>
30.                                 <totalminimumselling>197</totalminimumselling>
31.                             </ratebasis>
32.                         </ratebases>
33.                     </roomtype>
34.                     <roomtype roomtypecode="6945338">
35.                         <name>TWIN ROOM 2</name>
36.                         <ratebases>
37.                             <ratebasis id="0">
38.                                 <ratetype currencyid="520">2</ratetype>
39.                                 <cancellationrules>
40.                                     <rule>
41.                                         <todate>2015-12-29 22:00:00</todate>
42.                                         <amendcharge>0</amendcharge>
43.                                         <cancelcharge>0</cancelcharge>
44.                                     </rule>
45.                                     <rule>
46.                                         <fromdate>2015-12-29 22:00:01</fromdate>
47.                                         <todate>2015-12-31 02:00:00</todate>
48.                                         <amendcharge>174.718</amendcharge>
49.                                         <cancelcharge>174.718</cancelcharge>
50.                                     </rule>
51.                                     <rule>
52.                                         <fromdate>2015-12-31 02:00:01</fromdate>
53.                                         <amendrestricted>true</amendrestricted>
54.                                         <cancelrestricted>true</cancelrestricted>
55.                                     </rule>
56.                                 </cancellationrules>
57.                                 <total>174.718</total>
58.                                 <totalminimumselling>197</totalminimumselling>
59.                             </ratebasis>
60.                         </ratebases>
61.                     </roomtype>
62.                 </room>
63.                 <room adults="2" children="1" childrenages="6" extrabeds="0">
64.                     <roomtype roomtypecode="6945328" runno="0">
65.                         <name>KING ROOM 1</name>
66.                         <ratebases>
67.                             <ratebasis id="0">
68.                                 <ratetype currencyid="520">2</ratetype>
69.                                 <cancellationrules>
70.                                     <rule>
71.                                         <todate>2015-12-29 22:00:00</todate>
72.                                         <amendcharge>0</amendcharge>
73.                                         <cancelcharge>0</cancelcharge>
74.                                     </rule>
75.                                     <rule>
76.                                         <fromdate>2015-12-29 22:00:01</fromdate>

```

```
77.         <todate>2015-12-31 02:00:00</todate>
78.         <amendcharge>174.718</amendcharge>
79.         <cancelcharge>174.718</cancelcharge>
80.     </rule>
81.     <rule>
82.         <fromdate>2015-12-31 02:00:01</fromdate>
83.         <amendrestricted>true</amendrestricted>
84.         <cancelrestricted>true</cancelrestricted>
85.     </rule>
86. </cancellationrules>
87. <total>174.718</total>
88. <totalminimumselling>197</totalminimumselling>
89. </ratebasis>
90. </ratebases>
91. </roomtype>
92. <roomtype roomtypecode="6945338" runno="1">
93.     <name>TWIN ROOM 2</name>
94.     <ratebases>
95.         <ratebasis id="0">
96.             <ratetype currencyid="520">2</ratetype>
97.             <cancellationrules>
98.                 <rule>
99.                     <todate>2015-12-29 22:00:00</todate>
100.                    <amendcharge>0</amendcharge>
101.                    <cancelcharge>0</cancelcharge>
102.                </rule>
103.                <rule>
104.                    <fromdate>2015-12-29 22:00:01</fromdate>
105.                    <todate>2015-12-31 02:00:00</todate>
106.                    <amendcharge>174.718</amendcharge>
107.                    <cancelcharge>174.718</cancelcharge>
108.                </rule>
109.                <rule>
110.                    <fromdate>2015-12-31 02:00:01</fromdate>
111.                    <amendrestricted>true</amendrestricted>
112.                    <cancelrestricted>true</cancelrestricted>
113.                </rule>
114.            </cancellationrules>
115.            <total>174.718</total>
116.            <totalminimumselling>197</totalminimumselling>
117.        </ratebasis>
118.    </ratebases>
119. </roomtype>
120. </room>
121. </rooms>
122. </hotel>
123. </hotels>
124. <successful>TRUE</successful>
125. </result>
```

```
01. <result command="searchhotels" date="2015-02-
24 13:29:02" elapsedtime="2.4466769695282" ip="127.0.0.1" tid="1424784539000003" version="2.0">
02.     <hotels>
03.         <hotel id="30844">
04.             <rooms>
05.                 <room adults="2" children="0" extrabeds="0">
06.                     <roomtype roomtypecode="6945328">
07.                         <name>KING ROOM 1</name>
08.                         <ratebases>
09.                             <ratebasis id="0">
10.                                 <ratetype currencyid="520">2</ratetype>
11.                                 <total>174.718</total>
12.                                 <totalminimumselling>197</totalminimumselling>
13.                             </ratebasis>
14.                         </ratebases>
15.                     </roomtype>
16.                     <roomtype roomtypecode="6945338">
17.                         <name>TWIN ROOM 2</name>
18.                         <ratebases>
19.                             <ratebasis id="0">
20.                                 <ratetype currencyid="520">2</ratetype>
21.                                 <total>174.718</total>
22.                                 <totalminimumselling>197</totalminimumselling>
23.                             </ratebasis>
24.                         </ratebases>
25.                     </roomtype>
26.                 </room>
27.                 <room adults="2" children="1" childrenages="6" extrabeds="0">
28.                     <roomtype roomtypecode="6945328" runno="0">
29.                         <name>KING ROOM 1</name>
30.                         <ratebases>
31.                             <ratebasis id="0">
32.                                 <ratetype currencyid="520">2</ratetype>
33.                                 <total>174.718</total>
34.                                 <totalminimumselling>197</totalminimumselling>
35.                             </ratebasis>
36.                         </ratebases>
37.                     </roomtype>
38.                     <roomtype roomtypecode="6945338" runno="1">
39.                         <name>TWIN ROOM 2</name>
40.                         <ratebases>
41.                             <ratebasis id="0">
42.                                 <ratetype currencyid="520">2</ratetype>
43.                                 <total>174.718</total>
44.                                 <totalminimumselling>197</totalminimumselling>
```

```

45.         </ratebasis>
46.     </ratebases>
47. </roomtype>
48. </room>
49. </rooms>
50. </hotel>
51. </hotels>
52. <successful>TRUE</successful>
53. </result>

```

# Get Rooms

## General Request

This request is used to get a list of all roomtypes with rates, availability details for each roomtype for a selected hotel. Each response of this request also returns an encrypted string that can be passed in subsequent requests **in order to block the desired roomtypes in the system** until the booking process has been completed. DOTWconnect system will hold the specified roomtypes for no more than 15 minutes till the booking process is completed.

This method offers also the functionality of controlling what exactly is returned based on the request, by making use of the **return** element. Please read below for more details.

```

01. <customer>
02.   <username>username</username>
03.   <password>md5(password)</password>
04.   <id>company code</id>
05.   <source>1</source>
06.   <product>hotel</product>
07.   <request command="getrooms">
08.     <bookingDetails>
09.       <fromDate></fromDate>
10.       <toDate></toDate>
11.       <currency></currency>
12.       <rooms no="">
13.         <room runno="">
14.           <adultsCode></adultsCode>
15.           <children no="">
16.             <child runno=""></child>
17.           </children>
18.           <rateBasis></rateBasis>
19.           <passengerNationality></passengerNationality>
20.           <passengerCountryOfResidence></passengerCountryOfResidence>
21.           <roomTypeSelected>
22.             <selectedRateBasis></selectedRateBasis>
23.             <allocationDetails></allocationDetails>
24.           </roomTypeSelected>
25.         </room>
26.       </rooms>
27.       <productId></productId>
28.       <roomModified></roomModified>
29.     </bookingDetails>
30.   </request>
31. </customer>

```

Item	Type	Parent	Description	Required
<b>bookingDetails</b>	Element	request	Contains travel dates, detailed room occupancy, currency code in which the prices are returned and also the internal code for the hotel you want to receive rates and allocation details.	Yes.
<b>fromDate</b>	Element	bookingDetails	Arrival date in DotW date format (YYYY-MM-DD) or Unix timestamp	Yes.
<b>toDate</b>	Element	bookingDetails	Departure date in DotW date format (YYYY-MM-DD) or Unix timestamp	Yes.
<b>currency</b>	Element	bookingDetails	Internal code of the currency in which the customer will see the prices.	Yes.
<b>rooms</b>	Element	bookingDetails	Contains a room element for each room the customer wishes to book.	Yes.
<b>@no</b>	Attribute	rooms	Specifies the total number of rooms.	Yes.

<b>room</b>	Element	rooms	Encapsulates details about one room.	Yes.
@runno	Attribute	room	Specifies for which room number out of total passed rooms the search specifications are applicable. Please note that the running serial number starts from 0.	Yes.
<b>adultsCode</b>	Element	room	Number of adults in the room; The possible codes are: <ul style="list-style-type: none"> <li>• 1</li> <li>• 2</li> <li>• 3</li> <li>• 4</li> </ul>	Yes.
<b>children</b>	Element	room	Specifies the details about the accompanying children in the room.	Yes.
@no	Attribute	children	Specifies the total number of children in the room. If the search does not include any child then the value should be 0.	Yes.
<b>child</b>	Element	children	Specifies a child age.	No.
@runno	Attribute	child	Specifies for which child the age is applicable.	Yes, if <b>children@no</b> >0.
<b>rateBasis</b>	Element	room	Specifies what rate basis you would like for this room (eg. Room Only, Half Board)	Yes.
<b>passengerNationality</b>	Element	room	Specifies passenger nationality and it is mandatory to be sent in the request. This is DOTW country internal code that can be obtained using the getallcountries request.	Yes.
<b>passengerCountryOfResidence</b>	Element	room	Specifies passenger country of residence and it is mandatory to be sent in the request.. This is DOTW country internal code that can be obtained using the getallcountries request.	Yes.
<b>roomTypeSelected</b>	Element	room	Contains information about a room type the customer wishes to block.	No.
<b>code</b>	Element	roomTypeSelected	Internal code for the roomtype the customer wishes to block.	Yes, if parent present.
<b>selectedRateBasis</b>	Element	roomTypeSelected	Internal code for the rate basis the customer wishes to block.	Yes, if parent present.
<b>allocationDetails</b>	Element	roomTypeSelected	An encrypted string containing information about the room type that was received in a previous response.	Yes, if parent present.
<b>productId</b>	Element	bookingDetails	Internal code of the hotel you wish to receive rates and allocation details for.	Yes.
<b>roomModified</b>	Element	bookingDetails	Indicates for what room out of total rooms you want to block the room type for. Populated with the room runno of the room you want to block.	No, used only when blocking step is sequential, for one room at a time

## getrooms.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns:a="http://us.dotwconnect.com/xsd/atomicCondition_rooms" xmlns:
s:c="http://us.dotwconnect.com/xsd/complexCondition_rooms">
02.   <xs:include schemaLocation="loginDetails.xsd"></xs:include>
03.   <xs:include schemaLocation="bookingDetails.xsd"></xs:include>
04.   <xs:include schemaLocation="general.xsd"></xs:include>
05.   <xs:import namespace="http://us.dotwconnect.com/xsd/atomicCondition_rooms" schemaLocation="atomicCondition_rooms.xsd"
></xs:import>
06.   <xs:import namespace="http://us.dotwconnect.com/xsd/complexCondition_rooms" schemaLocation="complexCondition_rooms.xs
d"></xs:import>
07.   <!-- ##### -->
08.   <xs:element name="customer">
09.     <xs:complexType>
10.       <xs:sequence>
11.         <xs:group ref="loginDetailsGroup"></xs:group>
12.         <xs:element name="product" type="xs:string" fixed="hotel"></xs:element>
13.         <xs:element name="request" type="requestType"></xs:element>
14.       </xs:sequence>
15.     </xs:complexType>
16.   </xs:element>
17.   <!-- ##### -->
18.   <xs:complexType name="requestType">
19.     <xs:sequence>
20.       <xs:element name="bookingDetails" type="getRoomsBookingDetailsType"></xs:element>
21.       <xs:element name="return" type="getRoomsReturnTypes" minOccurs="0"></xs:element>
22.     </xs:sequence>
23.     <xs:attribute name="command" type="xs:string" use="required" fixed="getrooms"></xs:attribute>
24.     <xs:attribute name="debug" type="xs:integer"></xs:attribute>
25.     <xs:attribute name="defaultnamespace" type="xs:string" use="optional" fixed="true"></xs:attribute>
26.   </xs:complexType>
27.   <!-- ##### -->
28.   <!-- ##### -->
29.   <xs:simpleType name="fieldValue">
30.     <xs:restriction base="xs:string">
31.       <xs:enumeration value="leftToSell"></xs:enumeration>
32.     </xs:restriction>
33.   </xs:simpleType>
34. </xs:schema>

```

## complexCondition\_rooms.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns="http://us.dotwconnect.com/xsd/complexCondition" xmlns:a="ht
tp://us.dotwconnect.com/xsd/atomicCondition" xmlns:notOperator="http://us.dotwconnect.com/xsd/notOperator" targetNamespac
e="http://us.dotwconnect.com/xsd/complexCondition">
02.   <xs:import namespace="http://us.dotwconnect.com/xsd/atomicCondition" schemaLocation="atomicCondition.xsd">
</xs:import>
03.   <xs:import namespace="http://us.dotwconnect.com/xsd/notOperator" schemaLocation="notOperator.xsd"></xs:import>
04.   <xs:element name="condition">
05.     <xs:complexType>
06.       <xs:sequence>
07.         <xs:element ref="notOperator:operator" minOccurs="0"></xs:element>
08.         <xs:choice>
09.           <xs:group ref="complexis"></xs:group>
10.           <xs:group ref="a:atomics"></xs:group>
11.         </xs:choice>
12.       </xs:sequence>
13.     </xs:complexType>
14.   </xs:element>
15.   <xs:group name="complexis">
16.     <xs:sequence>
17.       <xs:element ref="condition"></xs:element>
18.       <xs:sequence minOccurs="0" maxOccurs="unbounded">
19.         <xs:element name="operator" type="operatorType"></xs:element>
20.         <xs:element ref="condition"></xs:element>
21.       </xs:sequence>
22.     </xs:sequence>
23.   </xs:group>
24.   <!-- ##### -->
25.   <xs:simpleType name="operatorType">
26.     <xs:restriction base="xs:string">
27.       <xs:pattern value="AND|OR"></xs:pattern>
28.     </xs:restriction>
29.   </xs:simpleType>
30.   <!-- ##### -->
31. </xs:schema>

```

## atomicCondition\_rooms.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns="http://us.dotwconnect.com/xsd/atomicCondition" targetNamesp
ace="http://us.dotwconnect.com/xsd/atomicCondition">
02.   <xs:element name="condition">
03.     <xs:complexType>
04.       <xs:sequence>
05.         <xs:element name="fieldName" type="fieldNameType"></xs:element>
06.         <xs:element name="fieldTest" type="fieldTestType"></xs:element>
07.         <xs:element name="fieldValues" type="fieldValuesType"></xs:element>

```

```

08.         </xs:sequence>
09.     </xs:complexType>
10. </xs:element>
11. <!-- ##### -->
12. <xs:simpleType name="fieldNameType">
13.     <xs:restriction base="xs:string">
14.         <xs:enumeration value="hotelId"></xs:enumeration>
15.         <xs:enumeration value="price"></xs:enumeration>
16.         <xs:enumeration value="preferred"></xs:enumeration>
17.         <xs:enumeration value="onRequest"></xs:enumeration>
18.         <xs:enumeration value="rating"></xs:enumeration>
19.         <xs:enumeration value="luxury"></xs:enumeration>
20.         <xs:enumeration value="topDeals"></xs:enumeration>
21.         <xs:enumeration value="specialDeals"></xs:enumeration>
22.         <xs:enumeration value="location"></xs:enumeration>
23.         <xs:enumeration value="locationId"></xs:enumeration>
24.         <xs:enumeration value="amenitie"></xs:enumeration>
25.         <xs:enumeration value="leisure"></xs:enumeration>
26.         <xs:enumeration value="business"></xs:enumeration>
27.         <xs:enumeration value="hotelPreference"></xs:enumeration>
28.         <xs:enumeration value="chain"></xs:enumeration>
29.         <xs:enumeration value="attraction"></xs:enumeration>
30.         <xs:enumeration value="hotelName"></xs:enumeration>
31.         <xs:enumeration value="builtYear"></xs:enumeration>
32.         <xs:enumeration value="renovationYear"></xs:enumeration>
33.         <xs:enumeration value="floors"></xs:enumeration>
34.         <xs:enumeration value="noOfRooms"></xs:enumeration>
35.         <xs:enumeration value="fireSafety"></xs:enumeration>
36.         <xs:enumeration value="roomOnRequest"></xs:enumeration>
37.         <xs:enumeration value="lastUpdated"></xs:enumeration>
38.         <xs:enumeration value="roomPrice"></xs:enumeration>
39.         <xs:enumeration value="suite"></xs:enumeration>
40.         <xs:enumeration value="roomAmenitie"></xs:enumeration>
41.         <xs:enumeration value="roomId"></xs:enumeration>
42.         <xs:enumeration value="roomRateBasis"></xs:enumeration>
43.         <xs:enumeration value="roomName"></xs:enumeration>
44.     </xs:restriction>
45. </xs:simpleType>
46. <!-- ##### -->
47. <xs:simpleType name="fieldTestType">
48.     <xs:restriction base="xs:string">
49.         <xs:enumeration value="equals"></xs:enumeration>
50.         <xs:enumeration value="in"></xs:enumeration>
51.         <xs:enumeration value="notin"></xs:enumeration>
52.         <xs:enumeration value="between"></xs:enumeration>
53.         <xs:enumeration value="regex"></xs:enumeration>
54.         <xs:enumeration value="like"></xs:enumeration>
55.     </xs:restriction>
56. </xs:simpleType>
57. <!-- ##### -->
58. <xs:complexType name="fieldValuesType">
59.     <xs:sequence>
60.         <xs:element name="fieldValue" type="xs:string" maxOccurs="unbounded"></xs:element>
61.     </xs:sequence>
62. </xs:complexType>
63. <!-- ##### -->
64. <xs:simpleType name="fieldValueType">
65.     <xs:restriction base="xs:string">
66.         <xs:pattern value="[0-9]{1,5}|true|false"></xs:pattern>
67.     </xs:restriction>
68. </xs:simpleType>
69. <!-- ##### -->
70. <xs:group name="atoms">
71.     <xs:sequence>
72.         <xs:element ref="condition"></xs:element>
73.         <xs:sequence minOccurs="0" maxOccurs="unbounded">
74.             <xs:element name="operator" type="xs:string"></xs:element>
75.             <xs:element ref="condition"></xs:element>
76.         </xs:sequence>
77.     </xs:sequence>
78. </xs:group>
79. <!-- ##### -->
80. <xs:simpleType name="roomFieldNameType">
81.     <xs:restriction base="xs:string">
82.         <xs:enumeration value="roomOnRequest"></xs:enumeration>
83.         <xs:enumeration value="roomPrice"></xs:enumeration>
84.         <xs:enumeration value="suite"></xs:enumeration>
85.         <xs:enumeration value="roomAmenitie"></xs:enumeration>
86.         <xs:enumeration value="roomId"></xs:enumeration>
87.         <xs:enumeration value="roomRateBasis"></xs:enumeration>
88.         <xs:enumeration value="roomName"></xs:enumeration>
89.     </xs:restriction>
90. </xs:simpleType>
91. </xs:schema>

```

## General Response

V4 also allows multiple rates with the same meal plan to be returned for the same roomTypeCode. The difference between them could be the cancellation policy and/or price. This new feature allows the user to select the most suitable combination between price and flexibility.



Another new feature introduces multiple bedding and occupancy combinations that can suit variable passenger needs.

For example, a search for 2 adults + 1 children, could return multiple rates like a rate for the child sharing the bed with the adults and a second rate with an extra bed for the child.

```

01. <result command="getrooms" date="" ip="">
02.   <currencyShort></currencyShort>
03.   <hotel id="" name="">
04.     <allowBook></allowBook>
05.     <rooms count="">
06.       <room adults="" children="" childrenages="" count="" extrabed="" runno="">
07.         <roomType roomtypecode="" runno="">
08.           <name></name>
09.           <roomInfo>
10.             <maxOccupancy></maxOccupancy>
11.             <maxAdults></maxAdults>
12.             <maxExtraBed></maxExtraBed>
13.             <maxChildren></maxChildren>
14.           </roomInfo>
15.           <specials count="">
16.             <special runno="">
17.               <type></type>
18.               <specialName></specialName>
19.               <upgradeToRoomId></upgradeToRoomId>
20.               <upgradeToMealId></upgradeToMealId>
21.               <condition></condition>
22.               <description></description>
23.               <notes></notes>
24.               <stay></stay>
25.               <discount></discount>
26.               <discountedNights></discountedNights>
27.               <pay></pay>
28.             </special>
29.           </specials>
30.           <roomAmenities count="">
31.             <amenity id=""></amenity>
32.           </roomAmenities>
33.           <rateBases count="">
34.             <rateBasis description="" id="" runno="">
35.               <validForOccupancy></validForOccupancy>
36.               <adults></adults>
37.               <children></children>
38.               <childrenAges></childrenAges>
39.               <extraBed></extraBed>
40.               <extraBedOccupant></extraBedOccupant>
41.               <changedOccupancy></changedOccupancy>
42.               <status></status>
43.               <specialsApplied></specialsApplied>
44.               <special></special>
45.               <passengerNamesRequiredForBooking></passengerNamesRequiredForBooking>
46.             </rateBasis>
47.           </rateBasis>
48.           <paymentMode></paymentMode>
49.           <allowsExtraMeals></allowsExtraMeals>
50.           <allowsSpecialRequests></allowsSpecialRequests>
51.           <allowsBeddingPreferences></allowsBeddingPreferences>
52.           <allocationDetails></allocationDetails>
53.           <minStay></minStay>
54.           <dateApplyMinStay></dateApplyMinStay>
55.           <cancellationRules count="">
56.             <rule runno="">
57.               <fromDate></fromDate>
58.               <fromDateDetails></fromDateDetails>
59.               <toDate></toDate>
60.               <toDateDetails></toDateDetails>
61.               <amendRestricted></amendRestricted>
62.               <cancelRestricted></cancelRestricted>
63.               <noShowPolicy></noShowPolicy>
64.               <amendCharge>
65.                 <formatted></formatted>
66.               </amendCharge>
67.               <cancelCharge>
68.                 <formatted></formatted>
69.               </cancelCharge>
70.             </rule>
71.           </cancellationRules>
72.           <isBookable></isBookable>
73.           <onRequest></onRequest>
74.           <total> Total Price in Rate Currency <formatted></formatted>
75.         </total>
76.       </total>
77.     </total>
78.   </total>
79.   <totalMinimumSelling> MSP in Rate Currency <formatted></formatted>
80.   <totalInRequestedCurrency> Total in requested currency <formatted></formatted>
81.   <totalMinimumSellingInRequestedCurrency> MSP in requested currency <formatted></formatted>
82.   </totalMinimumSellingInRequestedCurrency>
83.   <dates count="">
84.     <date datetime="" day="" runno="" wday="">
85.     <price>Price per day <formatted></formatted>
86.   </price>

```

```

87.         <priceMinimumSelling> MSP Per Day <formatted></formatted>
88.     </priceMinimumSelling>
89.         <priceInRequestedCurrency> Price per day in requested currency <formatted>
90.     </priceInRequestedCurrency>
91.         <priceMinimumSellingInRequestedCurrency> MSP per day in requested currency
92.     </priceMinimumSellingInRequestedCurrency>
93.         <freeStay></freeStay>
94.         <dayOnRequest></dayOnRequest>
95.         <including count="">
96.             <includedSupplement runno="">
97.                 <supplementName></supplementName>
98.                 <description></description>
99.             </includedSupplement>
100.            <includedMeal runno="">
101.                <mealName></mealName>
102.                <mealType></mealType>
103.            </includedMeal>
104.            <includedAdditionalService runno="">
105.                <serviceId></serviceId>
106.                <serviceName></serviceName>
107.            </includedAdditionalService>
108.        </including>
109.    </date>
110. </dates>
111. </rateBasis>
112. </rateBases>
113. </roomType>
114. <from> Starting Price for the Room <formatted></formatted>
115. </from>
116.     <lookedForText></lookedForText>
117. </room>
118. </rooms>
119. <extraMeals>
120.     <mealDate datetime="" day="" wday="">
121.         <mealType count="" mealtypeName="" mealtypecode="">
122.             <meal applicablefor="" endage="" runno="" startage="">
123.                 <mealCode></mealCode>
124.                 <mealName></mealName>
125.                 <mealPrice>Meal Rate <formatted></formatted>
126.             </meal>
127.         </mealType>
128.     </mealDate>
129. </extraMeals>
130. </hotel>
131. <successful></successful>
132. </result>

```

Item	Type	Parent	Description
<b>result</b>	Element	root	The root element.
@command	Attribute	result	The request command which returned this result.
@date	Attribute	result	The date and time when the result was provided in unix timestamp.
@ip	Attribute	result	The IPv4 address the request was made from.
<b>currencyShort</b>	Element	result	The 3 letter code which identify the currency in which the prices are provided.
<b>hotel</b>	Element	result	Groups information about the room types and allocation details of this hotel.
@id	Attribute	hotel	Internal code for the hotel.
@name	Attribute	hotel	Hotel name.
<b>allowBook</b>	Element	hotel	Specifies if the customer is allowed to make a booking for this hotel.
<b>rooms</b>	Element	hotel	Contains a room element for each room a customer wishes to book.
@count	Attribute	rooms	Specifies the total number of rooms.
<b>room</b>	Element	rooms	Encapsulates details about room types for the specified room occupancy.

@runno	Attribute	room	Specifies for which room number out of total passed rooms the room types are provided for. Please note that the running serial number starts from 0.
@count	Attribute	room	Total number of room types for this.
@adults	Attribute	room	Number of adults from the request or 2t for a twin room.
@children	Attribute	room	Number of children from the request.
@childrenages	Attribute	room	Child ages separated by comma. Empty if no children.
@extrabeds	Attribute	room	Number of extra beds.
<b>roomType</b>	Element	room	Encapsulates information about a room type.
@runno	Attribute	roomType	Running number starting from 0.
@roomtypecode	Attribute	roomType	Internal code for the room type.
<b>name</b>	Element	roomType	The room type name.
<b>twin</b>	Element	roomType	Specify that the room has twin bedding if returned on yes;
<b>specials</b>	Element	roomType	Encapsulates a list with all the special promotion like PAY - STAY offers that are applicable for this room type in the specified period.
@count	Attribute	specials	Total number of special promotions like PAY - STAY offers.
<b>special</b>	Element	specials	Contains information about one promotion.
@runno	Attribute	special	Running number starting from 0.
<b>stay</b>	Element	special	Number of staying nights in this promotion.
<b>pay</b>	Element	special	Number of paying nights in this promotion.
<b>specialName</b>	Element	special	Special promotion name.
<b>roomAmenities</b>	Element	roomType	Contains a list with all the amenities for this room type.
@count	Attribute	roomAmenities	Total number of amenities for this room type.
<b>amenity</b>	Element	roomAmenities	Room amenity.
@id	Attribute	amenity	Internal code for room amenity.
<b>roomInfo</b>	Element	roomType	Encapsulates details about the maximum capacity of the room.
<b>maxOccupancy</b>	Element	roomType	Maximum number of guests for this room (adults children)
<b>maxAdults</b>	Element	roomInfo	Maximum number of adults that can book this room without any children.
<b>maxExtraBed</b>	Element	roomInfo	Specifies the maximum number of extra-beds that can be booked with this room type.

<b>maxChildren</b>	Element	roomInfo	Maximum number of children that can book this room.
<b>specials</b>	Element	roomType	Encapsulates a list with all the special promotion like PAY - STAY offers that are applicable for this room type in the specified period.
@count	Attribute	specials	Total number of special promotions like PAY - STAY offers.
<b>special</b>	Element	specials	Contains information about one promotion.
@runno	Attribute	special	Running number starting from 0.
<b>type</b>	Element	special	The type of promotion that is being applied
<b>specialName</b>	Element	special	Special promotion name.
<b>upgradeToRoomId</b>	Element	special	The roomTypeCode that is being upgraded to
<b>upgradeToMealId</b>	Element	special	The rateBasis code that is being upgraded to
<b>condition</b>	Element	special	Specifies if there is a special condition that has to be in act in order to qualify for the promotion
<b>description</b>	Element	special	Short description of the package
<b>notes</b>	Element	special	Additional notes regarding the promotion / package
<b>stay</b>	Element	special	Number of staying nights in this promotion.
<b>discount</b>	Element	special	Specifies the discount, in percentages, that is being applied for the discounted nights
<b>discountedNights</b>	Element	special	Number of discounted nights in the promotion
<b>pay</b>	Element	special	Number of paying nights in this promotion.
<b>rateBases</b>	Element	roomType	Groups details about room type by rate basis.
@count	Attribute	rateBases	Number of different rate bases for this room type.
<b>rateBasis</b>	Attribute	rateBases	Details about room type with this rate basis.
@runno	Attribute	rateBasis	Running serial number starting from 0.
@id	Attribute	rateBasis	Internal code for rate basis.
@attribute	Attribute	rateBasis	Rate Basis name. (eg. Room Only, Half Board)
<b>validForOccupancy</b>	Element	rateBasis	Container that encapsulates details regarding the bedding setting valid for the requested occupancy. If the room supports an extra bed the system will return a setting that will include one of the passengers in the extra bed.
<b>adults</b>	Element	rateBasis	Number of adults that will be accommodated on the standard bedding

<b>children</b>	Element	rateBasis	Number of children that will be accommodated in the room on standard bedding (excluding the extra bed)
<b>childrenAges</b>	Element	rateBasis	Ages of the children that will be accommodated in the room on standard bedding (excluding the extra bed)
<b>extraBed</b>	Element	rateBasis	Number of extra beds available for the room
<b>extraBedOccupant</b>	Element	rateBasis	<p>Specifies what the occupant of the extra bed will be in the presented occupancy. Possible values:</p> <p>adult child</p> <p>Please note that the passenger in the extra bed will not be returned in the adults or children elements returned in the rateBasis parent</p>
<b>changedOccupancy</b>	Element	rateBasis	<p>Returns details regarding the occupancy of the room in an alternative combination. The element will return 4 parameters separated by comma:</p> <p>The first parameter will indicate the number of adults that will be fitted on standard bedding;</p> <p>The second parameter will indicate the number of children that will be accommodated in the standard bedding (sharing the beds with the adults);</p> <p>The third parameter will return the ages of the children accommodated on the standard bedding; If more than one child the ages will be separated by "underscore" (_);</p> <p>The fourth parameter will indicate if there is an occupant for the extra bed. Possible values 0/1;</p>
<b>status</b>	Element	rateBasis	<p>Specifies if this room type is currently blocked by DOTWconnect server for you until you complete the booking process. Possible values:</p> <ul style="list-style-type: none"> <li>unchecked - the room type with this rate Basis is not blocked</li> <li>checked - the room type with this rate Basis is blocked</li> </ul> <p>Please note that you can not have more than one room type and rate basis blocked for each room you are attempting to book.</p>
<b>specialsApplied</b>	Element	rateBasis	Container for details regarding the specials applied for the rateBasis
<b>special</b>	Element	specialsApplied	The number of special that are applicable for this particular rateBasis
<b>passengerNamesRequiredForBooking</b>	Element	rateBasis	If present, specifies how many passenger names are required for completing the booking. If missing, one leading passenger name is sufficient for the booking, the other passengers names being optional.

<b>rateType</b>	Element	rateBasis	<p>Specifies the rate type. Possible values:</p> <ul style="list-style-type: none"> <li>• 1 - DOTW rate type</li> <li>• 2 - DYNAMIC DIRECT rate type</li> <li>• 3 - DYNAMIC 3rd PARTY rate type</li> </ul> <p>Please note that the blocking process guarantees the allotment (holds inventory) only for DOTW rate types. For the DYNAMIC rates, only the price is checked and guaranteed. Sending the blocking request is however mandatory for both rate types.</p>
@currencyid	Attribute	rateType	<p>Internal code of the currency in which the prices for this rate are provided.</p> <p><b>ONLY For Non Refundable Advance Purchase Rates, this can be a different currency than the one requested.</b> To see the prices in the requested currency you should look for the price elements which clearly specify <i>InRequestedCurrency</i> (totalInRequestedCurrency, totalMinimumSellingInRequestedCurrency, priceInRequestedCurrency, priceMinimumSellingInRequestedCurrency)</p>
@currencyshort	Attribute	rateType	<p>The 3 letter code which identifies the currency in which the rates are provided.</p>
@description	Attribute	rateType	<p>A short text description of the rate, indicating the type of rate (whether it is DOTW, Dynamic or 3rd party).</p>
@nonrefundable	Attribute	rateType	<p>If present, indicates that the rate is Non Refundable Advance Purchase.</p> <p>Possible values:</p> <ul style="list-style-type: none"> <li>• yes</li> </ul> <p>To be able to book this rate it is mandatory for your application to use the savebooking and bookitinerary booking flow.</p>
@notes	Attribute	rateType	<p>If present, contains a free flow text with additional notes about the rate, mainly</p>
<b>paymentMode</b>	Element	rateBasis	<p>When present, indicates that for this rate, a special mode of payment is required. If the value is CC this means the rate requires a credit card prepayment. Possible values:</p> <ul style="list-style-type: none"> <li>• CC - Credit Card</li> </ul> <p>To be able to book this type of rate it is mandatory for your application to use the savebooking and bookitinerary booking flow.</p>
<b>allowsExtraMeals</b>	Element	rateBasis	<p>If present, this element specifies if the parent rate basis can be booked with extra meals. Possible values:</p> <ul style="list-style-type: none"> <li>• true</li> <li>• false</li> </ul>
<b>allowsSpecialRequests</b>	Element	rateBasis	<p>If present, this element specifies if for this rate, special requests can be sent to the supplier. All of the special requests are subject to availability at check in. Possible values:</p> <ul style="list-style-type: none"> <li>• true</li> <li>• false</li> </ul>

<b>allowsBeddingPreferences</b>	Element	rateBasis	Returns if the room has the option of selecting the bedding preferences (e.g. Queen Size Bed, Double, King Size...etc)
<b>allowsSpecials</b>	Element	rateBasis	Present only when the room type has a special offer. Specifies if the room type special offer is also valid with this rate basis. Possible values: <ul style="list-style-type: none"> <li>• true</li> <li>• false</li> </ul>
<b>passengerNamesRequiredForBooking</b>	Element	rateBasis	If present, specifies how many passenger names are required for completing the booking. If missing, one leading passenger name is sufficient for the booking, the other passengers names being optional.
<b>allocationDetails</b>	Element	rateBasis	Encrypted string containing information about the room type and rate basis. This encrypted string must be passed again in a <b>getrooms</b> request if you want to block this particular room type and rate basis. Please note that you will have to pass this encrypted string again when you will make the request for booking.
<b>minStay</b>	Element	rateBasis	If the hotel has requested a minimum stay for this room type and rate basis then this element will be returned and its value will be the minimum stay required in days. If no minimum stay applies this element will be returned with no value (empty tag).
<b>dateApplyMinStay</b>	Element	rateBasis	If there is a minimum stay condition this element will specify the starting date when the minimum stay condition applies. If no minimum stay applies this element will be returned with no value (empty tag).
<b>cancellationRules</b>	Element	rateBasis	Encapsulates details about the cancellation policy applicable for this room type and rate basis.
@count	Attribute	cancellationRules	Specifies the number of cancellation policies.
<b>rule</b>	Element	cancellationRules	Contains details about a specific cancellation policy.
@runno	Attribute	rule	Running serial number starting from 0.
<b>fromDate</b>	Element	rule	Starting date of the rule. From this day forward until toDate (if present), the specified charge will be applied for any cancellations or amendments. If this element is not present then the charge will be applied from the current date until toDate. Date format is: YYYY-MM-DD HH:MM:SS
<b>fromDateDetails</b>	Element	rule	From Date in Weekday Month Day, Year HH:MM:SS format.
<b>toDate</b>	Element	rule	Ending date of the rule. The specified charge will be applied for any cancellations or amendments until this date. If this element is not present then the charge from fromDate onwards. Date format is: YYYY-MM-DD HH:MM:SS

<b>toDateDetails</b>	Element	rule	To Date in Weekday Month Day, Year HH:MM:SS format.
<b>amendRestricted</b>	Element	rule	If present, this element indicates that a future amendment (using the updatebooking method) done in the time period defined by this rule, will not be possible. Fixed value:  TRUE
<b>cancelRestricted</b>	Element	rule	If present, this element indicates that a future cancel (using the cancelbooking or deleteitinerary methods) done in the time period defined by this rule, will not be possible. Fixed value:  TRUE
<b>noShowPolicy</b>	Element	rule	If present, this element indicates that the presented charge is a no show charge. In this case the elements fromDate, fromDateDetails, toDate, toDateDetails, amendingPossible will be absent. Fixed value:  TRUE
<b>amendCharge</b>	Element	rule	Amendment charge that will be applied if booking is amended in the period defined by this rule.
<b>formatted</b>	Element	amendCharge	Amendments charge formatted as per the customer preference (decimal places, thousand separator, decimal separator).
<b>cancelCharge</b>	Element	rule	Cancellation charge that will be applied if booking is canceled in the period defined by this rule.
<b>formatted</b>	Element	cancelCharge	Cancellation charge formatted as per the customer preference (decimal places, thousand separator, decimal separator).
<b>charge</b>	Element	rule	Charge that will be applied if booking is a no show.
<b>formatted</b>	Element	charge	No Show charge formatted as per the customer preference (decimal places, thousand separator, decimal separator).
<b>withinCancellationDeadline</b>	Element	rateBasis	Specifies if the service (using this rate) is within cancellation deadline. Possible value:  yes - service is within cancellation deadline no - service is not within cancellation deadline
<b>tariffNotes</b>	Element	rateBasis	Contains Rate Notes and Hotel Tariff Notes regarding any specific policy or information from the hotel. It is mandatory to display these notes for the customer to acknowledge.



<b>isBookable</b>	Element	rateBasis	<p>Specifies if this room type and rate basis can be booked. Possible values:</p> <ul style="list-style-type: none"> <li>• yes</li> <li>• no</li> </ul> <p>DOTWconnect system will return a value no for this element if you are attempting to book a room type within cancellation deadline.</p>
<b>onRequest</b>	Element	rateBasis	<p>Specifies if this room type and rate basis is on request. Possible values:</p> <ul style="list-style-type: none"> <li>• 0 (the room type and rate basis is not on request)</li> <li>• 1 (the room type and rate basis is on request)</li> </ul>
<b>total</b>	Element	rateBasis	<p>This element contains the total price for the room type and rate basis in two formats one without any formatting and the other one properly formatted. The price will be for the whole stay for this room type in the currency specified in the request.</p>
<b>formatted</b>	Element	total	<p>This element contains the total price formatted as per the customer preference (decimal places, thousand separator, decimal separator)</p>
<b>totalMinimumSelling</b>	Element	rateBasis	<p><b>This element returns the minimum selling price the customer should adhere to while distributing the product (B2C platform).</b> XML customers must display the MSP as the price that is sold to their customers. The MSP cannot be undercut and this is a mandatory requirement from all the hotel chains working on direct connectivity.</p>
<b>formatted</b>	Element	totalMinimumSelling	<p>This element contains the total minimum selling price formatted as per the customer preference (decimal places, thousand separator, decimal separator)</p>
<b>totalInRequestedCurrency</b>	Element	rateBasis	<p>This element is present only for Non Refundable Advance Rates and when the rateType/@currencyid is different from the requested currency. This element contains the total price for the room type and rate basis in two formats one without any formatting and the other one properly formatted. The price will be for the whole stay for this room type in the currency specified in the request.</p>
<b>formatted</b>	Element	totalInRequestedCurrency	<p>This element contains the total price in the requested currency formatted as per the customer preference (decimal places, thousand separator, decimal separator)</p>

<b>totalMinimumSellingInRequestedCurrency</b>	Element	rateBasis	This element is presented only for Non Refundable Advance Purchase rates and when the rateType/@currencyid is different from the requested currency. <b>This element returns the minimum selling price the customer should adhere to while distributing the product</b> (B2C platform). XML customers must display the MSP as the price that is sold to their customers. The MSP cannot be undercut and this is a mandatory requirement from all the hotel chains working on direct connectivity.
<b>formatted</b>	Element	totalMinimumSellingInRequestedCurrency	This element contains the total minimum selling price in the requested currency formatted as per the customer preference (decimal places, thousand separator, decimal separator)
<b>dates</b>	Element	rateBasis	Encapsulates daily break down of the rates for this room type and rate Basis.
@count	Attribute	dates	Total number of days for the staying period. This may include any additional nights to be stayed for satisfying the minimum stay conditions.
<b>date</b>	Element	dates	Groups together information for one day.
@runno	Attribute	date	Running number starting from 0.
@day	Attribute	date	Day-of-the-week name Month, day-of-the-month, year.
@wday	Attribute	date	Weekday number (from 0 (Sun) - 6 (Sat)).
@datetime	Attribute	date	Date in YYYY-MM-DD HH:MM:SS format.
<b>price</b>	Element	date	This element contains the price for the day in two formats one without any formatting and the other one properly formatted.
<b>formatted</b>	Element	price	This element contains the price formatted as per the customer preference (decimal places, thousand separator, decimal separator)
<b>priceMinimumSelling</b>	Element	date	If present, this element returns the minimum selling price (for this date) the customer should adhere to while distributing the product. XML customers must display the MSP as the price that is sold to their customers. The MSP cannot be undercut and this is a mandatory requirement from all the hotel chains working on direct connectivity. This minimum selling price is returned in currency indicated in the rateType/@currencyid (the rateType/@currencyid is different from the requested only currency only if this is an Non Refundable Advance Purchase Rate)
<b>formatted</b>	Element	priceMinimumSelling	This element contains the minimum selling price (for this date) formatted as per the customer preference (decimal places, thousand separator, decimal separator)

<b>priceInRequestedCurrency</b>	Element	date	This element is present only for Non Refundable Advance Purchase Rates. This element contains the price in the requested currency for the day in two formats one without any formatting and the other one properly formatted.
<b>formatted</b>	Element	priceInRequestedCurrency	This element contains the price formatted as per the customer preference (decimal places, thousand separator, decimal separator)
<b>priceMinimumSelling InRequestedCurrency</b>	Element	date	This element is present only for Non Refundable Advance Purchase Rates and when a MSP is imposed. If present, this element returns the minimum selling price in the requested currency (for this date) the customer should adhere to while distributing the product. XML customers must display the MSP as the price that is sold to their customers. The MSP cannot be undercut and this is a mandatory requirement from all the hotel chains working on direct connectivity.
<b>formatted</b>	Element	priceMinimumSelling InRequestedCurrency	This element contains the minimum selling price (for this date) formatted as per the customer preference (decimal places, thousand separator, decimal separator)
<b>freeStay</b>	Element	date	Specifies if this day is free - part of a STAY - PAY offer. Possible values: <ul style="list-style-type: none"> <li>• yes</li> <li>• no</li> </ul>
<b>discount</b>	Element	date	Specifies the discount, in percentages, that is being applied for the discounted nights
<b>dayOnRequest</b>	Element	date	Specifies if this the room type and rate basis is on request on this day. Possible values: <ul style="list-style-type: none"> <li>• 0 - this room type and rate basis has an allotment and rate.</li> <li>• 1 - this room type and rate basis does not have allotment or rates defined.</li> </ul>
<b>including</b>	Element	date	Encapsulates a list with all supplements, meals.
@count	Attribute	including	Total number of included Supplements or Meals
<b>includedSupplement</b>	Element	including	Details about a certain supplement included in the price for this day.
@runno	Attribute	includedSupplement	Running number starting from 0.
<b>supplementName</b>	Element	includedSupplement	Supplement name.
<b>description</b>	Element	includedSupplement	A short description about supplement.
<b>includedMeal</b>	Element	including	Details about a certain meal supplement included in the price for this day.
@runno	Attribute	includedMeal	Running number starting from 0.
<b>mealName</b>	Element	includedMeal	Meal name.

<b>mealType</b>	Element	includedMeal	Meal type. Possible values: <ul style="list-style-type: none"> <li>• Breakfast</li> <li>• Lunch</li> <li>• Dinner</li> <li>• Half Board</li> <li>• Full Board</li> <li>• All Inclusive</li> </ul>
<b>freeUpgrade</b>	Element	including	If a free upgrade promotion is applicable this element will return the name of the upgraded meal type
@code	Attribute	freeUpgrade	The code of the upgraded meal type
<b>includedAdditionalService</b>	Element	including	Details about a certain additional service that is included.
<b>serviceId</b>	Element	includedAdditionalService	Internal id for this service. This needs to be passed in the confirm booking request along with any additional information required by the hotel. To get the additional information required by the hotel for this additional service, please use the <code>getadditionalserviceinfo</code> request.
<b>serviceName</b>	Element	includedAdditionalService	Service Name
<b>from</b>	Element	room	The starting price for this room. This will be the cheapest price for any room type on any day. The price will be returned in two formats one without any formatting and the other one properly formatted.
<b>formatted</b>	Element	from	Starting price formatted as per the customer preference (decimal places, thousand separator, decimal separator).
<b>leftToSell</b>	Element	rateBasis	returns the number of rooms available besides the one returned. (e.g. if returned on 0 there is no other room available besides the returned one, if returned on 1 there is only one room available besides the returned one...etc)
<b>lookedForText</b>	Element	room	A text displaying room occupancy for each room searched.
<b>extraMeals</b>	Element	hotel	Encapsulates information about extra meals provided by the hotel grouped by the date.
<b>mealDate</b>	Element	extraMeals	Contains details about extra meals provided by the hotel on a specific date grouped by meal types.
@wday	Attribute	mealDate	Weekday name (e.g. Monday).
@day	Attribute	mealDate	Month, day-of-the-month, year.
@datetime	Attribute	mealDate	Date in YYYY-MM-DD HH:MM:SS format.
<b>mealType</b>	Element	mealDate	Contains information about each meal in a certain category(type) e.g. Breakfast, Lunch.
@mealtypename	Attribute	mealType	Meal Type Name.
@mealtypecode	Attribute	mealType	Meal Type Internal Code.
@count	Attribute	mealType	Specifies the total number of meal types.

<b>meal</b>	Element	mealType	Groups together details of one specific meal
@runno	Attribute	meal	Running Number starting from 0.
@applicablefor	Attribute	meal	Specifies if this meal (and its price) is applicable for adults or children. Possible values: <ul style="list-style-type: none"> <li>• adult</li> <li>• child</li> </ul>
@startage	Attribute	meal	If <b>@applicablefor</b> is <b>child</b> this attribute will indicate from what age this meal is applicable
@endage	Attribute	meal	If <b>@applicablefor</b> is <b>child</b> this attribute will indicate upto what age this meal is applicable
<b>mealCode</b>	Element	meal	Internal Code for the Meal
<b>mealName</b>	Element	meal	Name of the Meal
<b>mealPrice</b>	Element	meal	Meal price.
<b>formatted</b>	Element	meal	This element contains the meal price formatted as per the customer preference (decimal places, thousand separator, decimal separator)
<b>successful</b>	Element	result	Specifies if the request was successful. Possible values: <ul style="list-style-type: none"> <li>• yes</li> <li>• no</li> </ul>

## getrooms\_response.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="result" type="resultType"></xs:element>
03.   <xs:complexType name="resultType">
04.     <xs:sequence>
05.       <xs:element name="currencyShort" type="currencyShortType"></xs:element>
06.       <xs:element name="hotel" type="hotelRoomsType"></xs:element>
07.       <xs:element name="successful" type="trueOrFalse"></xs:element>
08.     </xs:sequence>
09.     <xs:attribute name="command" type="xs:string" use="required" fixed="getrooms"></xs:attribute>
10.     <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
11.     <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
12.     <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
13.     <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
14.     <xs:attribute name="elapsedTime" type="xs:decimal" use="required"></xs:attribute>
15.   </xs:complexType>
16.   <xs:simpleType name="currencyShortType">
17.     <xs:restriction base="xs:string">
18.       <xs:pattern value="[A-Z]{3}"></xs:pattern>
19.     </xs:restriction>
20.   </xs:simpleType>
21.   <xs:simpleType name="trueOrFalse">
22.     <xs:restriction base="xs:string">
23.       <xs:pattern value="true|false|TRUE|FALSE"></xs:pattern>
24.     </xs:restriction>
25.   </xs:simpleType>
26.   <xs:simpleType name="oneOrZero">
27.     <xs:restriction base="xs:integer">
28.       <xs:pattern value="1|0"></xs:pattern>
29.     </xs:restriction>
30.   </xs:simpleType>
31.   <xs:simpleType name="dotwIP">
32.     <xs:restriction base="xs:string">
33.       <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9][0-9]{2}|1[0-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|0[0-9]{1}[0-9]{2}|1[0-9]{1}[0-9]{2}|1[0-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|0[0-9]{1}[0-9]{2}|1[0-9]{1}[0-9]{2}|1[0-9]{1}[0-9]{1}|[1-9]|0)"></xs:pattern>
34.     </xs:restriction>

```

```
35.     </xs:simpleType>
36.     <xs:simpleType name="dotwDateType">
37.         <xs:restriction base="xs:string">
38.             <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}(\s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*|[0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2}(\s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*"></xs:pattern>
39.         </xs:restriction>
40.     </xs:simpleType>
41.     <xs:simpleType name="versionType">
42.         <xs:restriction base="xs:string">
43.             <xs:pattern value="[1-9]{1}([0-9])*"></xs:pattern>
44.         </xs:restriction>
45.     </xs:simpleType>
46.     <xs:simpleType name="yesOrNo">
47.         <xs:restriction base="xs:string">
48.             <xs:pattern value="yes|no"></xs:pattern>
49.         </xs:restriction>
50.     </xs:simpleType>
51.     <xs:simpleType name="statusType">
52.         <xs:restriction base="xs:string">
53.             <xs:pattern value="checked|unchecked"></xs:pattern>
54.         </xs:restriction>
55.     </xs:simpleType>
56.     <xs:complexType name="servicePriceType" mixed="true">
57.         <xs:sequence>
58.             <xs:element name="formatted" type="xs:string"/>
59.         </xs:sequence>
60.     </xs:complexType>
61.     <xs:simpleType name="adultsCodeType">
62.         <xs:restriction base="xs:string">
63.             <xs:enumeration value="1"/>
64.             <xs:enumeration value="2"/>
65.             <xs:enumeration value="3"/>
66.             <xs:enumeration value="4"/>
67.             <xs:enumeration value="5"/>
68.             <xs:enumeration value="6"/>
69.             <xs:enumeration value="7"/>
70.             <xs:enumeration value="8"/>
71.             <xs:enumeration value="9"/>
72.             <xs:enumeration value="10"/>
73.         </xs:restriction>
74.     </xs:simpleType>
75.     <xs:simpleType name="maxAdultWithChildrenType">
76.         <xs:restriction base="xs:string">
77.             <xs:enumeration value="0"/>
78.             <xs:enumeration value="1"/>
79.             <xs:enumeration value="2"/>
80.             <xs:enumeration value="3"/>
81.             <xs:enumeration value="4"/>
82.             <xs:enumeration value="5"/>
83.             <xs:enumeration value="6"/>
84.             <xs:enumeration value="7"/>
85.             <xs:enumeration value="8"/>
86.             <xs:enumeration value="9"/>
87.             <xs:enumeration value="10"/>
88.         </xs:restriction>
89.     </xs:simpleType>
90.     <xs:complexType name="hotelRoomsType">
91.         <xs:all>
92.             <xs:element name="allowBook" type="yesOrNo"/>
93.             <xs:element name="rooms" type="roomsType"/>
94.             <xs:element name="extraMeals" type="extraMealsType" minOccurs="0"/>
95.         </xs:all>
96.         <xs:attribute name="id" type="xs:integer" use="required"/>
97.         <xs:attribute name="name" type="xs:string" use="required"/>
98.     </xs:complexType>
99.     <xs:complexType name="roomsType">
100.         <xs:sequence>
101.             <xs:element name="room" type="roomType" maxOccurs="unbounded"/>
102.         </xs:sequence>
103.         <xs:attribute name="count" type="xs:unsignedInt" use="required"/>
104.     </xs:complexType>
105.     <xs:complexType name="roomType">
106.         <xs:sequence>
107.             <xs:element name="roomType" type="roomTypeType" minOccurs="0" maxOccurs="unbounded"/>
108.             <xs:element name="from" type="servicePriceType" minOccurs="0" maxOccurs="1"/>
109.             <xs:element name="lookedForText" type="xs:string" minOccurs="0" maxOccurs="1"/>
110.         </xs:sequence>
111.         <xs:attribute name="runno" type="xs:unsignedInt" use="required"/>
112.         <xs:attribute name="count" type="xs:unsignedInt" use="required"/>
113.         <xs:attribute name="adults" type="adultsCodeType" use="required"/>
114.         <xs:attribute name="children" type="xs:unsignedInt" use="required"/>
115.         <xs:attribute name="childrenages" type="xs:string" use="required"/>
116.         <xs:attribute name="extrabeds" type="oneOrZero" use="required"/>
117.     </xs:complexType>
118.     <xs:complexType name="roomTypeType">
119.         <xs:all>
120.             <xs:element name="name" type="xs:string" minOccurs="0" maxOccurs="1"/>
121.             <xs:element name="twin" type="yesOrNo" minOccurs="0" maxOccurs="1"/>
122.             <xs:element name="roomInfo" type="roomInfoType" minOccurs="0" maxOccurs="1"/>
123.             <xs:element name="specials" type="specialsType" minOccurs="0" maxOccurs="1"/>
124.             <xs:element name="rateBases" type="rateBasesType" minOccurs="0" maxOccurs="1"/>
125.         </xs:all>
126.         <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"/>
127.         <xs:attribute name="roomtypecode" type="xs:nonNegativeInteger" use="required"/>
128.     </xs:complexType>
129.     <xs:simpleType name="extraBedType">
130.         <xs:restriction base="xs:integer">
```

```

131.         <xs:pattern value="1|0"></xs:pattern>
132.     </xs:restriction>
133. </xs:simpleType>
134. <xs:complexType name="roomInfoType">
135.     <xs:sequence>
136.         <xs:element name="maxOccupancy" type="adultsCodeType"></xs:element>
137.         <xs:element name="maxAdultWithChildren" type="maxAdultWithChildrenType"></xs:element>
138.         <xs:element name="minChildAge" type="xs:nonNegativeInteger"></xs:element>
139.         <xs:element name="maxChildAge" type="xs:nonNegativeInteger"></xs:element>
140.         <xs:element name="maxAdult" type="adultsCodeType"></xs:element>
141.         <xs:element name="maxExtraBed" type="extraBedType"></xs:element>
142.         <xs:element name="maxChildren" type="xs:nonNegativeInteger"></xs:element>
143.     </xs:sequence>
144. </xs:complexType>
145. <xs:complexType name="specialsType">
146.     <xs:sequence>
147.         <xs:element name="special" type="specialType" minOccurs="0" maxOccurs="unbounded"></xs:element>
148.     </xs:sequence>
149.     <xs:attribute name="count" type="xs:nonNegativeInteger" use="required"></xs:attribute>
150. </xs:complexType>
151. <xs:complexType name="specialsAppliedType">
152.     <xs:sequence>
153.         <xs:element name="special" type="xs:unsignedInt" minOccurs="0" maxOccurs="unbounded"></xs:element>
154.     </xs:sequence>
155. </xs:complexType>
156. <xs:complexType name="validForOccupancyType">
157.     <xs:sequence>
158.         <xs:element name="adults" type="adultsCodeType" minOccurs="1" maxOccurs="1"></xs:element>
159.         <xs:element name="extraBed" type="extraBedType" minOccurs="1" maxOccurs="1"></xs:element>
160.         <xs:element name="extraBedOccupant" type="applicableforType" minOccurs="1" maxOccurs="1"></xs:element>
161.     </xs:sequence>
162. </xs:complexType>
163. <xs:simpleType name="changedOccupancyType">
164.     <xs:restriction base="xs:string">
165.         <xs:pattern value="[0-9]{1,2},[0-9]{1,2},[0-9_]*,[01]+"></xs:pattern>
166.     </xs:restriction>
167. </xs:simpleType>
168. <xs:group name="promotionAnniversaryType">
169.     <xs:sequence>
170.         <xs:element name="condition" type="xs:string" minOccurs="1" maxOccurs="1"></xs:element>
171.         <xs:element name="description" type="xs:string" minOccurs="1" maxOccurs="1"></xs:element>
172.         <xs:element name="notes" type="xs:string" minOccurs="1" maxOccurs="1"></xs:element>
173.     </xs:sequence>
174. </xs:group>
175. <xs:group name="promotionFreeUpgradeType">
176.     <xs:sequence>
177.         <xs:element name="upgradeToRoomId" type="xs:nonNegativeInteger" minOccurs="1" maxOccurs="1"></xs:element>
178.         <xs:element name="description" type="xs:string" minOccurs="1" maxOccurs="1"></xs:element>
179.     </xs:sequence>
180. </xs:group>
181. <xs:group name="promotionFreeMealUpgradeType">
182.     <xs:sequence>
183.         <xs:element name="upgradeToMealId" type="xs:nonNegativeInteger" minOccurs="1" maxOccurs="1"></xs:element>
184.         <xs:element name="description" type="xs:string" minOccurs="1" maxOccurs="1"></xs:element>
185.     </xs:sequence>
186. </xs:group>
187. <xs:group name="promotionStayXpayYType">
188.     <xs:sequence>
189.         <xs:element name="stay" type="xs:nonNegativeInteger" minOccurs="1" maxOccurs="1"></xs:element>
190.         <xs:element name="pay" type="xs:nonNegativeInteger" minOccurs="1" maxOccurs="1"></xs:element>
191.     </xs:sequence>
192. </xs:group>
193. <xs:group name="promotionStayXgetDiscountType">
194.     <xs:sequence>
195.         <xs:element name="discount" type="xs:nonNegativeInteger" minOccurs="1" maxOccurs="1"></xs:element>
196.         <xs:element name="stay" type="xs:nonNegativeInteger" minOccurs="1" maxOccurs="1"></xs:element>
197.     </xs:sequence>
198. </xs:group>
199. <xs:group name="promotionDiscountSubsequentNightsType">
200.     <xs:sequence>
201.         <xs:element name="discountedNights" type="xs:nonNegativeInteger" minOccurs="1" maxOccurs="1">
202.     </xs:element>
203.         <xs:element name="stay" type="xs:nonNegativeInteger" minOccurs="1" maxOccurs="1"></xs:element>
204.         <xs:element name="discount" type="xs:nonNegativeInteger" minOccurs="1" maxOccurs="1"></xs:element>
205.     </xs:sequence>
206. </xs:group>
207. <xs:complexType name="specialType">
208.     <xs:sequence>
209.         <xs:element name="type" type="xs:string"></xs:element>
210.         <xs:element name="specialName" type="xs:string"></xs:element>
211.         <xs:group ref="promotionAnniversaryType" minOccurs="0"></xs:group>
212.         <xs:group ref="promotionFreeUpgradeType" minOccurs="0"></xs:group>
213.         <xs:group ref="promotionFreeMealUpgradeType" minOccurs="0"></xs:group>
214.         <xs:group ref="promotionStayXpayYType" minOccurs="0"></xs:group>
215.         <xs:group ref="promotionStayXgetDiscountType" minOccurs="0"></xs:group>
216.         <xs:group ref="promotionDiscountSubsequentNightsType" minOccurs="0"></xs:group>
217.     </xs:sequence>
218.     <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"></xs:attribute>
219. </xs:complexType>
220. <xs:complexType name="rateBookingCurrencyType">
221.     <xs:simpleContent>
222.         <xs:extension base="currencyShortType">
223.             <xs:attribute name="id" type="xs:nonNegativeInteger" use="required"></xs:attribute>
224.         </xs:extension>
225.     </xs:simpleContent>
226. </xs:complexType>
227. <xs:complexType name="rateBasesType">

```

```
227.     <xs:sequence>
228.         <xs:element name="rateBasis" type="rateBasisType" maxOccurs="unbounded"/></xs:element>
229.     </xs:sequence>
230.     <xs:attribute name="count" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
231. </xs:complexType>
232. <xs:complexType name="rateBasisType">
233.     <xs:all>
234.         <xs:element name="validForOccupancy" type="validForOccupancyType" minOccurs="0" maxOccurs="1">
235.             </xs:element>
236.         <xs:element name="changedOccupancy" type="changedOccupancyType" minOccurs="0" maxOccurs="1"></xs:element>
237.         <xs:element name="status" type="statusType" minOccurs="1" maxOccurs="1"/></xs:element>
238.         <xs:element name="specialsApplied" type="specialsAppliedType" minOccurs="0" maxOccurs="1"/></xs:element>
239.         <xs:element name="passengerNamesRequiredForBooking" type="xs:nonNegativeInteger" minOccurs="0">
240.             </xs:element>
241.         <xs:element name="rateType" type="rateTypeType"/></xs:element>
242.         <xs:element name="rateBookingCurrency" type="rateBookingCurrencyType" minOccurs="0" maxOccurs="1">
243.             </xs:element>
244.         <xs:element name="paymentMode" type="paymentModeType" minOccurs="0"/></xs:element>
245.         <xs:element name="allowsExtraMeals" type="trueOrFalse" minOccurs="0"/></xs:element>
246.         <xs:element name="allowsSpecialRequests" type="trueOrFalse" minOccurs="0"/></xs:element>
247.         <xs:element name="allowsSpecials" type="trueOrFalse" minOccurs="0"/></xs:element>
248.         <xs:element name="allowsBeddingPreference" type="trueOrFalse" minOccurs="0"/></xs:element>
249.         <xs:element name="allocationDetails" type="xs:string" minOccurs="1" maxOccurs="1"/></xs:element>
250.         <xs:element name="minStay" type="minStayType" minOccurs="0" maxOccurs="1"/></xs:element>
251.         <xs:element name="dateApplyMinStay" type="xs:string" minOccurs="0" maxOccurs="1"/></xs:element>
252.         <xs:element name="cancellationRules" type="cancellationRulesType" minOccurs="1" maxOccurs="1">
253.             </xs:element>
254.         <xs:element name="withinCancellationDeadline" type="yesOrNo" minOccurs="0" maxOccurs="1"/></xs:element>
255.         <xs:element name="tariffNotes" type="xs:string" minOccurs="0" maxOccurs="1"/></xs:element>
256.         <xs:element name="packageRemarks" type="xs:string" minOccurs="0" maxOccurs="1"/></xs:element>
257.         <xs:element name="isBookable" type="yesOrNo" minOccurs="1" maxOccurs="1"/></xs:element>
258.         <xs:element name="onRequest" type="oneOrZero" minOccurs="1" maxOccurs="1"/></xs:element>
259.         <xs:element name="extraBedOnRequest" type="oneOrZero" minOccurs="0" maxOccurs="1"/></xs:element>
260.         <xs:element name="total" type="servicePriceType" minOccurs="1" maxOccurs="1"/></xs:element>
261.         <xs:element name="totalMinimumSelling" type="servicePriceType" minOccurs="0"/></xs:element>
262.         <xs:element name="totalInRequestedCurrency" type="servicePriceType" minOccurs="0"/></xs:element>
263.         <xs:element name="totalMinimumSellingInRequestedCurrency" type="servicePriceType" minOccurs="0">
264.             </xs:element>
265.         <xs:element name="dates" type="datesType" minOccurs="1" maxOccurs="1"/></xs:element>
266.         <xs:element name="leftToSell" type="leftToSellType" minOccurs="0" maxOccurs="1"/></xs:element>
267.     </xs:all>
268.     <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
269.     <xs:attribute name="id" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
270.     <xs:attribute name="description" type="xs:string" use="required"/></xs:attribute>
271. </xs:complexType>
272. <xs:complexType name="rateTypeType">
273.     <xs:simpleContent>
274.         <xs:extension base="rateTypeRestriction">
275.             <xs:attribute name="currencyid" type="xs:nonNegativeInteger" use="optional"/></xs:attribute>
276.             <xs:attribute name="currencyshort" type="currencyShortType" use="optional"/></xs:attribute>
277.             <xs:attribute name="description" type="xs:string" use="optional"/></xs:attribute>
278.             <xs:attribute name="nonrefundable" type="xs:string" fixed="yes" use="optional"/></xs:attribute>
279.             <xs:attribute name="notes" type="xs:string" use="optional"/></xs:attribute>
280.         </xs:extension>
281.     </xs:simpleContent>
282. </xs:complexType>
283. <xs:simpleType name="paymentModeType">
284.     <xs:restriction base="xs:string">
285.         <xs:pattern value="CC"/></xs:pattern>
286.     </xs:restriction>
287. </xs:simpleType>
288. <xs:simpleType name="leftToSellType">
289.     <xs:restriction base="xs:string">
290.         <xs:pattern value="([0-9])*/></xs:pattern>
291.     </xs:restriction>
292. </xs:simpleType>
293. <xs:simpleType name="minStayType">
294.     <xs:union memberTypes="empty xs:nonNegativeInteger"/></xs:union>
295. </xs:simpleType>
296. <xs:simpleType name="rateTypeRestriction">
297.     <xs:restriction base="xs:string">
298.         <xs:enumeration value="1"/></xs:enumeration>
299.         <xs:enumeration value="2"/></xs:enumeration>
300.         <xs:enumeration value="3"/></xs:enumeration>
301.     </xs:restriction>
302. </xs:simpleType>
303. <xs:simpleType name="empty">
304.     <xs:restriction base="xs:string">
305.         <xs:maxLength value="0"/></xs:maxLength>
306.     </xs:restriction>
307. </xs:simpleType>
308. <xs:complexType name="cancellationRulesType">
309.     <xs:sequence>
310.         <xs:element name="rule" type="ruleType" minOccurs="0" maxOccurs="unbounded"/></xs:element>
311.     </xs:sequence>
312.     <xs:attribute name="count" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
313. </xs:complexType>
314. <xs:complexType name="ruleType">
315.     <xs:sequence>
316.         <xs:element name="fromDate" type="dotwDateType" minOccurs="0" maxOccurs="1"/></xs:element>
317.         <xs:element name="fromDateDetails" type="xs:string" minOccurs="0" maxOccurs="1"/></xs:element>
318.         <xs:element name="toDate" type="dotwDateType" minOccurs="0" maxOccurs="1"/></xs:element>
319.         <xs:element name="toDateDetails" type="xs:string" minOccurs="0" maxOccurs="1"/></xs:element>
320.         <xs:element name="amendRestricted" type="trueOrFalse" minOccurs="0"/></xs:element>
321.         <xs:element name="cancelRestricted" type="trueOrFalse" minOccurs="0"/></xs:element>
322.         <xs:element name="noShowPolicy" type="trueOrFalse" minOccurs="0"/></xs:element>
323.         <xs:element name="amendCharge" type="servicePriceType" minOccurs="0"/></xs:element>
```



```
319.         <xs:element name="cancelCharge" type="servicePriceType" minOccurs="0"/></xs:element>
320.         <xs:element name="charge" type="servicePriceType" minOccurs="0"/></xs:element>
321.     </xs:sequence>
322.     <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
323. </xs:complexType>
324. <xs:complexType name="datesType">
325.     <xs:sequence>
326.         <xs:element name="date" type="dateType" maxOccurs="unbounded"/></xs:element>
327.     </xs:sequence>
328.     <xs:attribute name="count" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
329. </xs:complexType>
330. <xs:complexType name="dateType">
331.     <xs:all>
332.         <xs:element name="price" type="servicePriceType"/></xs:element>
333.         <xs:element name="priceMinimumSelling" type="servicePriceType" minOccurs="0" maxOccurs="1"/></xs:element>
334.         <xs:element name="priceInRequestedCurrency" type="servicePriceType" minOccurs="0" maxOccurs="1"/>
335.     </xs:element>
336.     <xs:element name="priceMinimumSellingInRequestedCurrency" type="servicePriceType" minOccurs="0"
maxOccurs="1"/></xs:element>
337.     <xs:element name="freeStay" type="yesOrNo" minOccurs="0" maxOccurs="1"/></xs:element>
338.     <xs:element name="discount" type="xs:string" minOccurs="0" maxOccurs="1"/></xs:element>
339.     <xs:element name="dayOnRequest" type="oneOrZero" minOccurs="0" maxOccurs="1"/></xs:element>
340.     <xs:element name="dayExtraBedOnRequest" type="oneOrZero" minOccurs="0" maxOccurs="1"/></xs:element>
341.     <xs:element name="including" type="includingType" minOccurs="0" maxOccurs="1"/></xs:element>
342. </xs:all>
343.     <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
344.     <xs:attribute name="datetime" type="dotwDateType" use="required"/></xs:attribute>
345.     <xs:attribute name="day" type="xs:string" use="required"/></xs:attribute>
346.     <xs:attribute name="wday" type="xs:string" use="required"/></xs:attribute>
347. </xs:complexType>
348. <xs:complexType name="includingType">
349.     <xs:all>
350.         <xs:element name="includedSupplement" type="includedSupplementType" minOccurs="0"/></xs:element>
351.         <xs:element name="includedMeal" type="includedMealType" minOccurs="0"/></xs:element>
352.         <xs:element name="includedAdditionalService" type="includedAdditionalServiceType" minOccurs="0"
maxOccurs="1"/></xs:element>
353.     </xs:all>
354.     <xs:attribute name="count" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
355. </xs:complexType>
356. <xs:complexType name="includedSupplementType">
357.     <xs:sequence>
358.         <xs:element name="supplementName" type="xs:string"/></xs:element>
359.         <xs:element name="description" type="xs:string"/></xs:element>
360.     </xs:sequence>
361.     <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
362. </xs:complexType>
363. <xs:complexType name="includedAdditionalServiceType">
364.     <xs:sequence>
365.         <xs:element name="serviceId" type="xs:nonNegativeInteger"/></xs:element>
366.         <xs:element name="serviceName" type="xs:string"/></xs:element>
367.     </xs:sequence>
368.     <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
369. </xs:complexType>
370. <xs:complexType name="includedMealType">
371.     <xs:sequence>
372.         <xs:element name="mealName" type="xs:string" minOccurs="0" maxOccurs="1"/></xs:element>
373.         <xs:element name="mealType" minOccurs="0" maxOccurs="1"/></xs:element>
374.         <xs:complexType>
375.             <xs:simpleContent>
376.                 <xs:extension base="xs:string">
377.                     <xs:attribute name="code" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
378.                 </xs:extension>
379.             </xs:simpleContent>
380.         </xs:complexType>
381.     </xs:sequence>
382.     <xs:element name="freeUpgrade" minOccurs="0" maxOccurs="1"/>
383.     <xs:complexType>
384.         <xs:simpleContent>
385.             <xs:extension base="xs:string">
386.                 <xs:attribute name="code" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
387.             </xs:extension>
388.         </xs:simpleContent>
389.     </xs:complexType>
390. </xs:element>
391. </xs:sequence>
392.     <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
393. </xs:complexType>
394. <xs:complexType name="extraMealsType">
395.     <xs:sequence>
396.         <xs:element name="mealDate" type="mealDateType" minOccurs="0" maxOccurs="unbounded"/></xs:element>
397.     </xs:sequence>
398.     <xs:attribute name="count" type="xs:unsignedInt" use="required"/></xs:attribute>
399. </xs:complexType>
400. <xs:complexType name="mealDateType">
401.     <xs:sequence>
402.         <xs:element name="mealType" type="mealTypeType" maxOccurs="unbounded"/></xs:element>
403.     </xs:sequence>
404.     <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
405.     <xs:attribute name="wday" type="wdayType" use="required"/></xs:attribute>
406.     <xs:attribute name="day" type="xs:string" use="required"/></xs:attribute>
407.     <xs:attribute name="datetime" type="dotwDateType" use="required"/></xs:attribute>
408. </xs:complexType>
409. <xs:simpleType name="wdayType">
410.     <xs:restriction base="xs:integer">
411.         <xs:pattern value="[0-6]{1}"/></xs:pattern>
412.     </xs:restriction>
413. </xs:simpleType>
```

```

413. <xs:complexType name="mealType">
414.   <xs:sequence>
415.     <xs:element name="meal" type="mealComplexType" maxOccurs="unbounded"/></xs:element>
416.   </xs:sequence>
417.   <xs:attribute name="mealtypeName" type="xs:string" use="required"/></xs:attribute>
418.   <xs:attribute name="mealtypecode" type="xs:unsignedInt" use="required"/></xs:attribute>
419. </xs:complexType>
420. <xs:complexType name="mealComplexType">
421.   <xs:sequence>
422.     <xs:element name="mealCode" type="xs:unsignedInt"/></xs:element>
423.     <xs:element name="mealName" type="xs:string"/></xs:element>
424.     <xs:element name="mealPrice" type="servicePriceType"/></xs:element>
425.   </xs:sequence>
426.   <xs:attribute name="runno" type="xs:unsignedInt" use="required"/></xs:attribute>
427.   <xs:attribute name="applicablefor" type="applicableforType" use="required"/></xs:attribute>
428.   <xs:attribute name="startage" type="xs:unsignedShort"/></xs:attribute>
429.   <xs:attribute name="endage" type="xs:unsignedShort"/></xs:attribute>
430. </xs:complexType>
431. <xs:simpleType name="applicableforType">
432.   <xs:restriction base="xs:string">
433.     <xs:pattern value="adult|child"/></xs:pattern>
434.   </xs:restriction>
435. </xs:simpleType>
436. <xs:complexType name="selectedExtraMealsType">
437.   <xs:sequence>
438.     <xs:element name="mealPlanDate" type="mealPlanDateType" minOccurs="0" maxOccurs="unbounded"/></xs:element>
439.   </xs:sequence>
440. </xs:complexType>
441. <xs:complexType name="mealPlanDateType">
442.   <xs:sequence>
443.     <xs:element name="mealPlan" type="mealPlanType" maxOccurs="unbounded"/></xs:element>
444.   </xs:sequence>
445.   <xs:attribute name="mealplandatetime" type="xs:date" use="required"/></xs:attribute>
446. </xs:complexType>
447. <xs:complexType name="mealPlanType">
448.   <xs:sequence>
449.     <xs:element name="meal" type="mealType" minOccurs="0" maxOccurs="unbounded"/></xs:element>
450.   </xs:sequence>
451.   <xs:attribute name="runno" type="xs:unsignedShort" use="required"/></xs:attribute>
452.   <xs:attribute name="mealscount" type="xs:unsignedShort" use="required"/></xs:attribute>
453.   <xs:attribute name="applicablefor" type="applicableforType" use="required"/></xs:attribute>
454.   <xs:attribute name="childage" type="xs:unsignedShort" use="required"/></xs:attribute>
455.   <xs:attribute name="ispassenger" type="xs:integer" fixed="1"/></xs:attribute>
456.   <xs:attribute name="passengernumber" type="xs:unsignedShort" use="required"/></xs:attribute>
457. </xs:complexType>
458. <xs:complexType name="mealType">
459.   <xs:sequence>
460.     <xs:element name="code" type="xs:unsignedInt"/></xs:element>
461.     <xs:element name="units" type="xs:unsignedInt"/></xs:element>
462.     <xs:element name="mealTypeCode" type="xs:unsignedInt"/></xs:element>
463.     <xs:element name="mealPrice" type="servicePriceType"/></xs:element>
464.     <xs:element name="mealTypeName" type="xs:string"/></xs:element>
465.     <xs:element name="mealName" type="xs:string"/></xs:element>
466.     <xs:element name="bookedMealCode" type="xs:string"/></xs:element>
467.   </xs:sequence>
468.   <xs:attribute name="runno" type="xs:unsignedInt" use="required"/></xs:attribute>
469. </xs:complexType>
470. </xs:schema>

```

## Scenario H3

After getting the response back for Scenario H1, the Customer now want to receive the details of each room type for the hotel he intends to book.

The inputs to be provided to the system are

Checkin Date:	01 January 2016
Checkout Date:	02 January 2016
Number of Rooms:	1 Double Room, Best Available Rate Basis
	1 Double Room with 1 Child aged 6, Best Available Rate Basis
PAX Nationality:	Romanian
PAX Country Of Residence:	Italy
DOTWconnect Hotel Code:	30844 (Received in searchhotels request)

The DOTWconnect internal Hotel Code can be obtained using the method **searchhotels**.

The following will be the request and response XMLs that will be passed and received from DOTWconnect system for the above scenario.

## Request XML format

```

01. <p>
02.   <customer>
03.     <username></username>
04.     <password></password>
05.     <id></id>
06.     <source>1</source>
07.     <product>hotel</product>
08.     <request command="getrooms">
09.       <bookingDetails>
10.         <fromDate>1451606400</fromDate>
11.         <toDate>1451692800</toDate>
12.         <currency>520</currency>
13.         <rooms no="2">
14.           <room runno="0">
15.             <adultsCode>2</adultsCode>
16.             <children no="0"></children>
17.             <rateBasis>-1</rateBasis>
18.             <passengerNationality>81</passengerNationality>
19.             <passengerCountryOfResidence>72</passengerCountryOfResidence>
20.           </room>
21.           <room runno="1">
22.             <adultsCode>2</adultsCode>
23.             <children no="1">
24.               <child runno="0">6</child>
25.             </children>
26.             <rateBasis>-1</rateBasis>
27.             <passengerNationality>81</passengerNationality>
28.             <passengerCountryOfResidence>72</passengerCountryOfResidence>
29.           </room>
30.         </rooms>
31.         <productId>30844</productId>
32.       </bookingDetails>
33.     </request>
34.   </customer>
35. </p>

```

## Response XML format

```

01. <p>
02. <result command="getrooms" tID="142478453900003" ip="127.0.0.1" date="2015-02-
24 13:29:02" version="2.0" elapsedTime="2.4466769695282">
03. <currencyShort>USD</currencyShort>
04. <hotel id="30844" name="HYATT REGENCY DUBAI">
05. <allowBook>yes</allowBook>
06. <rooms count="2">
07. <room runno="0" count="2" adults="2" children="0" childrenages="" extrabeds="0">
08. <roomType runno="0" roomtypecode="6945328">
09. <roomAmenities count="0"></roomAmenities>
10. <name>KING ROOM 1</name>
11. <twin>no</twin>
12. <roomInfo>
13. <maxOccupancy>4</maxOccupancy>
14. <maxAdult>4</maxAdult>
15. <maxExtraBed>0</maxExtraBed>
16. <maxChildren>0</maxChildren>
17. </roomInfo>
18. <specials count="0"></specials>
19. <rateBasis count="1">
20. <rateBasis runno="0" id="0" description="Room Only">
21. <status>unchecked</status>
22. <passengerNamesRequiredForBooking>1</passengerNamesRequiredForBooking>
23. <rateType currencyid="520" currencyshort="USD" description="Dynamic">2</rateType>
24. <allowsExtraMeals>false</allowsExtraMeals>
25. <allowsSpecialRequests>false</allowsSpecialRequests>
26. <allowsBeddingPreference>false</allowsBeddingPreference>
27. <allocationDetails>YTo10ntz0jM6InNpZCI7aToxMDExO3M6ND0ic2Jp
I7czoxOiJuIjtp0jE7czoxOiJzY2EiO2E60Tp7czoyOiJyYyI7czoxOiIznjYiO3M6MjoidHIiO2k6MTc4MDgwMDtz
OjI6InIjJjtz0jQ6IklQUkk1O3M6MzozY2lJjtz0jC6IkNS0tU5Mjc1O3M6MzoicnBjIjtz0jQ6IklQUkk1O3M6Mj
oiY3J1bGVzIjth0jM6e2k6MDtP0jE20iJDYw5jZWxsYXRpb25SdWx1Ijx0NjP7czo4OiJmcm9tRGF0ZSI7Tjtz0jY6
InRvRGF0ZSI7czoxOToimjAxNS0xMi0yO5AMjowMjowMDowMCI7czo4OiJ0aW1lem9uZSI7aTozMDA7czoxODoicmV0dX
JuZWRlCeVNIcHBSaWVYIjtiOjE7czoyMDoiY2FuY2VsbgF0aW9uUnVsZVRleHQiO047czoxND0iY2FuY2VsUG9zc2li
bGUiO2I6MTtz0jEz0iJhbwVuzFBvc3NpYmx1IjtiOjE7czoxO2I0aW1lbnB3ciO2I6MTdz0jE30iJhcnJGRpdGlvbm
fS5w5mbyI7sdz0jE20iJyYm90cm1jZUN1c3RvbWVzIjtp0jM6MTU6InByaWNLVmfSdwbWVuzCI7aTowO3M6MTc6
InByaWNLVmfSdwbWVuz0jE20iJmVzcmlhdHR1ZCI7Tjtz0jEz0iJwcm1jZUN1cn1lbnN5Ijtp0jM6IjyUyMCI7cz
oyMToiChJpY2VjbmNsdwRlci0fSfBRheGVzIjtiOjE7czoxO2I0aW1lbnB3ciO2I6MTdz0jE30iJhcnJGRpdGlvbm
fS5w5mbyI7sdz0jE20iJyYm90cm1jZUN1c3RvbWVzIjtp0jM6MTU6InByaWNLVmfSdwbWVuzCI7aTowO3M6MTc6
InByaWNLVmfSdwbWVuz0jE20iJmVzcmlhdHR1ZCI7Tjtz0jEz0iJwcm1jZUN1cn1lbnN5Ijtp0jM6IjyUyMCI7cz
oyMToiChJpY2VjbmNsdwRlci0fSfBRheGVzIjtiOjE7czoxO2I0aW1lbnB3ciO2I6MTdz0jE30iJhcnJGRpdGlvbm
fS5w5mbyI7sdz0jE20iJyYm90cm1jZUN1c3RvbWVzIjtp0jM6MTU6InByaWNLVmfSdwbWVuzCI7aTowO3M6MTc6
InByaWNLVmfSdwbWVuz0jE20iJmVzcmlhdHR1ZCI7Tjtz0jEz0iJwcm1jZUN1cn1lbnN5Ijtp0jM6IjyUyMCI7cz
oyMToiChJpY2VjbmNsdwRlci0fSfBRheGVzIjtiOjE7czoxO2I0aW1lbnB3ciO2I6MTdz0jE30iJhcnJGRpdGlvbm
fS5w5mbyI7sdz0jE20iJyYm90cm1jZUN1c3RvbWVzIjtp0jM6MTU6InByaWNLVmfSdwbWVuzCI7aTowO3M6MTc6
InByaWNLVmfSdwbWVuz0jE20iJmVzcmlhdHR1ZCI7Tjtz0jEz0iJwcm1jZUN1cn1lbnN5Ijtp0jM6IjyUyMCI7cz
oyMToiChJpY2VjbmNsdwRlci0fSfBRheGVzIjtiOjE7czoxO2I0aW1lbnB3ciO2I6MTdz0jE30iJhcnJGRpdGlvbm
fS5w5mbyI7sdz0jE20iJyYm90cm1jZUN1c3RvbWVzIjtp0jM6MTU6InByaWNLVmfSdwbWVuzCI7aTowO3M6MTc6
InByaWNLVmfSdwbWVuz0jE20iJmVzcmlhdHR1ZCI7Tjtz0jEz0iJwcm1jZUN1cn1lbnN5Ijtp0jM6IjyUyMCI7cz
oyMToiChJpY2VjbmNsdwRlci0fSfBRheGVzIjtiOjE7czoxO2I0aW1lbnB3ciO2I6MTdz0jE30iJhcnJGRpdGlvbm
fS5w5mbyI7sdz0jE20iJyYm90cm1jZUN1c3RvbWVzIjtp0jM6MTU6InByaWNLVmfSdwbWVuzCI7aTowO3M6MTc6
InByaWNLVmfSdwbWVuz0jE20iJmVzcmlhdHR1ZCI7Tjtz0jEz0iJwcm1jZUN1cn1lbnN5Ijtp0jM6IjyUyMCI7cz
oyMToiChJpY2VjbmNsdwRlci0fSfBRheGVzIjtiOjE7czoxO2I0aW1lbnB3ciO2I6MTdz0jE30iJhcnJGRpdGlvbm
fS5w5mbyI7sdz0jE20iJyYm90cm1jZUN1c3RvbWVzIjtp0jM6MTU6InByaWNLVmfSdwbWVuzCI7aTowO3M6MTc6
InByaWNLVmfSdwbWVuz0jE20iJmVzcmlhdHR1ZCI7Tjtz0jEz0iJwcm1jZUN1cn1lbnN5Ijtp0jM6IjyUyMCI7cz
oyMToiChJpY2VjbmNsdwRlci0fSfBRheGVzIjtiOjE7czoxO2I0aW1lbnB3ciO2I6MTdz0jE30iJhcnJGRpdGlvbm
fS5w5mbyI7sdz0jE20iJyYm90cm1jZUN1c3RvbWVzIjtp0jM6MTU6InByaWNLVmfSdwbWVuzCI7aTowO3M6MTc6
InByaWNLVmfSdwbWVuz0jE20iJmVzcmlhdHR1ZCI7Tjtz0jEz0iJwcm1jZUN1cn1lbnN5Ijtp0jM6IjyUyMCI7cz
oyMToiChJpY2VjbmNsdwRlci0fSfBRheGVzIjtiOjE7czoxO2I0aW1lbnB3ciO2I6MTdz0jE30iJhcnJGRpdGlvbm
fS5w5mbyI7sdz0jE20iJyYm90cm1jZUN1c3RvbWVzIjtp0jM6MTU6InByaWNLVmfSdwbWVuzCI7aTowO3M6MTc6
InByaWNLVmfSdwbWVuz0jE20iJmVzcmlhdHR1ZCI7Tjtz0jEz0iJwcm1jZUN1cn1lbnN5Ijtp0jM6IjyUyMCI7cz
oyMToiChJpY2VjbmNsdwRlci0fSfBRheGVzIjtiOjE7czoxO2I0aW1lbnB3ciO2I6MTdz0jE30iJhcnJGRpdGlvbm
fS5w5mbyI7sdz0jE20iJyYm90cm1jZUN1c3RvbWVzIjtp0jM6MTU6InByaWNLVmfSdwbWVuzCI7aTowO3M6MTc6
InByaWNLVmfSdwbWVuz0jE20iJmVzcmlhdHR1ZCI7Tjtz0jEz0iJwcm1jZUN1cn1lbnN5Ijtp0jM6IjyUyMCI7cz
oyMToiChJpY2VjbmNsdwRlci0fSfBRheGVzIjtiOjE7czoxO2I0aW1lbnB3ciO2I6MTdz0jE30iJhcnJGRpdGlvbm
fS5w5mbyI7sdz0jE20iJyYm90cm1jZUN1c3RvbWVzIjtp0jM6MTU6InByaWNLVmfSdwbWVuzCI7aTowO3M6MTc6
InByaWNLVmfSdwbWVuz0jE20iJmVzcmlhdHR1ZCI7Tjtz0jEz0iJwcm1jZUN1cn1lbnN5Ijtp0jM6IjyUyMCI7cz
oyMToiChJpY2VjbmNsdwRlci0fSfBRheGVzIjtiOjE7czoxO2I0aW1lbnB3ciO2I6MTdz0jE30iJhcnJGRpdGlvbm
fS5w5mbyI7sdz0jE20iJyYm90cm1jZUN1c3RvbWVzIjtp0jM6MTU6InByaWNLVmfSdwbWVuzCI7aTowO3M6MTc6
InByaWNLVmfSdwbWVuz0jE20iJmVzcmlhdHR1ZCI7Tjtz0jEz0iJwcm1jZUN1cn1lbnN5Ijtp0jM6IjyUyMCI7cz
oyMToiChJpY2VjbmNsdwRlci0fSfBRheGVzIjtiOjE7czoxO2I0aW1lbnB3ciO2I6MTdz0jE30iJhcnJGRpdGlvbm
fS5w5mbyI7sdz0jE20iJyYm90cm1jZUN1c3RvbWVzIjtp0jM6MTU6InByaWNLVmfSdwbWVuzCI7aTowO3M6MTc6
InByaWNLVmfSdwbWVuz0jE20iJmVzcmlhdHR1ZCI7Tjtz0jEz0iJwcm1jZUN1cn1lbnN5Ijtp0jM6IjyUyMCI7cz
oyMToiChJpY2VjbmNsdwRlci0fSfBRheGVzIjtiOjE7czoxO2I0aW1lbnB3ciO2I6MTdz0jE30iJhcnJGRpdGlvbm
fS5w5mbyI7sdz0jE20iJyYm90cm1jZUN1c3RvbWVzIjtp0jM6MTU6InByaWNLVmfSdwbWVuzCI7aTowO3M6MTc6
InByaWNLVmfSdwbWVuz0jE20iJmVzcmlhdHR1ZCI7Tjtz0jEz0iJwcm1jZUN1cn1lbnN5Ijtp0jM6IjyUyMCI7cz
oyMToiChJpY2VjbmNsdwRlci0fSfBRheGVzIjtiOjE7czoxO2I0aW1lbnB3ciO2I6MTdz0jE30iJhcnJGRpdGlvbm
fS5w5mbyI7sdz0jE20iJyYm90cm1jZUN1c3RvbWVzIjtp0jM6MTU6InByaWNLVmfSdwbWVuzCI7aTowO3M6MTc6
```

I7czox0iJuIjtp0jE7czoz0iJzY2E102E60T7czoy0iJjYyI7czoz0iIzNjYi03M6MjoidHIIi02k6MTE4MDgwMDtz0J6InJ1jztz0j061kIQukk0i03M6MzoiY21jIjztz0j061kNS0T5Ujmcj0i03M6MzoiCnBJ1jztz0j061kIQukk0i03M6NjoiY3J1bGVZj7j0t0j061kM6tMDP0jE20iJDYw5jZwxsYXRpb255dXw1IjoxNjp7czo40iJmcm9tRGF0ZS17jztz0jY6InRvRGF0ZS17czo40ToimjAxAxNS0xMi0y0SAyMjowMjowMDwMCI7czo40iJ0aw11em9uZS17aTozMDA7czo40DoicmV0dXJuZWRCeVN1CHBSawVyIjti0jA7czoyMD0iY2FuY2VsbGFAw9uUnVsZVR1eH0i0047czo40MD0iY2FuY2VsbG9zce211bg0i0216MTz0jE20iJ3bWVudFZBvc3NpYmx1Ijti0jE7czoz0iJub1Nob3k0i0216MDTz0jE30iJHcn3BZGRpG1vlbmF5S5W5mbyI77jztz0jE20iJYmpQcm1jZUN1c3RvbWVyIjti003M6MTU61InByaWN1VmFsdWVBBWVuZC17aTow03M6MTA6InByaWN1VmFsdWU0i02k6MDTz0j061kInZvcmlhdHR1eCI77jztz0jE20iJwcm1jZUN1c3R1bW51jztz0jM6IjYUyMCI7czo40ToiH3pY2V3bmNsduw1R0bFRheGZmci0j061kR7czoz0ToibWlua11bVNB1bgxpbnM0cm1jZS17aTow0331p0jE7ZoxNjoiQ2FyY2VsbGFAw9uUnVsZS16MTY63M60DoiZn3vbURhdGU0i03M6MTk61jWmTUtMTIeMjkgMjI6MDA6MDTz0i03M6NjoidG9YXR1Ijztz0jE50iIyMDE1LEyTLXMDiXDAyOjAwOjAwIjztz0jG6InRpbWV6b251Ijtp0jMwMDTz0jE40iY3ZXR1cm51ZEJ5U3JwZGxpZS17i0216MTz0j0iJw0iY3JYw5jZwxsYXRpb255dXw1VGV4dCI77jztz0jE00iY3JYw5jZwXQB3NzawJzS17Y7jox03M6MT6M1fZk5WUG9zce211bg0i0216MTz0jY6Im5vU2hvdYI7Y7jow3M6MTc61ImFycKfKZG10aw9uYwkJbmZV1jzt003M6MT6Ym91aWw1Nj03vZDg9tZXIi0047czo40NtoicH3pY2VsbGFAw9uUnVsZVR1eH0i0047czoE3NC43MTc5Nzc0T5MT5MTmMjU0NTUxODU1NjE0NDA4ODUwNjY5ODYwODM5ODQzNzU7czo40MD0iXChpY2VWYwX1ZS17ZDoxNzQuNzc0Tc3NDkz0TEZmY21NDU0MTU61jG1NTYxNDQwODg1MDY20Tg2MDgz0Tg0Mzc0i03M60T0iZm9ybwfW0dGVIjzt003M6MT61InByaWN1CHBSawVyIjti0jA7czoyMD0iY2FuY2VsbGFAw9uUnVsZVR1eH0i0047czoE3NC43MTc5Nzc0T5MT5MTmMjU0NTUxODU1NjE0NDA4ODUwNjY5ODYwODM5ODQzNzU7czo40MD0iXChpY2VWYwX1ZS17ZDoxNzQuNzc0Tc3NDkz0TEZmY21NDU0MTU61jG1NTYxNDQwODg1MDY20Tg2MDgz0Tg0Mzc0i03M60T0iZm9ybwfW0dGVIjzt003M6MT61InByaWN1CHBSawVyIjti0jA7czoyMD0iY2FuY2VsbGFAw9uUnVsZVR1eH0i0047czoE3NC43MTc5Nzc0T5MT5MTmMjU0NTUxODU1NjE0NDA4ODUwNjY5ODYwODM5ODQzNzU7czo40MD0iXChpY2VWYwX1ZS17ZDoxNzQuNzc0Tc3NDkz0TEZmY21NDU0MTU61jG1NTYxNDQwODg1MDY20Tg2MDgz0Tg0Mzc0i03M60T0iZm9ybwfW0dGVIjzt003M6MT61InByaWN1CHBSawVyIjti0jA7czoyMD0iY2FuY2VsbGFAw9uUnVsZVR1eH0i0047czoE3NC43MTc5Nzc0T5MT5MTmMjU0NTUxODU1NjE0NDA4ODUwNjY5ODYwODM5ODQzNzU7czo40MD0iXChpY2VWYwX1ZS17ZDoxNzQuNzc0Tc3NDkz0TEZmY21NDU0MTU61jG1NTYxNDQwODg1MDY20Tg2MDgz0Tg0Mzc0i03M60T0iZm9ybwfW0dGVIjzt003M6MT61InByaWN1CHBSawVyIjti0jA7czoyMD0iY2FuY2VsbGFAw9uUnVsZVR1eH0i0047czoE3NC43MTc5Nzc0T5MT5MTmMjU0NTUxODU1NjE0NDA4ODUwNjY5ODYwODM5ODQzNzU7czo40MD0iXChpY2VWYwX1ZS17ZDoxNzQuNzc0Tc3NDkz0TEZmY21NDU0MTU61jG1NTYxNDQwODg1MDY20Tg2MDgz0Tg0Mzc0i03M60T0iZm9ybwfW0dGVIjzt003M6MT61InByaWN1CHBSawVyIjti0jA7czoyMD0iY2FuY2VsbGFAw9uUnVsZVR1eH0i0047czoE3NC43MTc5Nzc0T5MT5MTmMjU0NTUxODU1NjE0NDA4ODUwNjY5ODYwODM5ODQzNzU7czo40MD0iXChpY2VWYwX1ZS17ZDoxNzQuNzc0Tc3NDkz0TEZmY21NDU0MTU61jG1NTYxNDQwODg1MDY20Tg2MDgz0Tg0Mzc0i03M60T0iZm9ybwfW0dGVIjzt003M6MT61InByaWN1CHBSawVyIjti0jA7czoyMD0iY2FuY2VsbGFAw9uUnVsZVR1eH0i0047czoE3NC43MTc5Nzc0T5MT5MTmMjU0NTUxODU1NjE0NDA4ODUwNjY5ODYwODM5ODQzNzU7czo40MD0iXChpY2VWYwX1ZS17ZDoxNzQuNzc0Tc3NDkz0TEZmY21NDU0MTU61jG1NTYxNDQwODg1MDY20Tg2MDgz0Tg0Mzc0i03M60T0iZm9ybwfW0dGVIjzt003M6MT61InByaWN1CHBSawVyIjti0jA7czoyMD0iY2FuY2VsbGFAw9uUnVsZVR1eH0i0047czoE3NC43MTc5Nzc0T5MT5MTmMjU0NTUxODU1NjE0NDA4ODUwNjY5ODYwODM5ODQzNzU7czo40MD0iXChpY2VWYwX1ZS17ZDoxNzQuNzc0Tc3NDkz0TEZmY21NDU0MTU61jG1NTYxNDQwODg1MDY20Tg2MDgz0Tg0Mzc0i03M60T0iZm9ybwfW0dGVIjzt003M6MT61InByaWN1CHBSawVyIjti0jA7czoyMD0iY2FuY2VsbGFAw9uUnVsZVR1eH0i0047czoE3NC43MTc5Nzc0T5MT5MTmMjU0NTUxODU1NjE0NDA4ODUwNjY5ODYwODM5ODQzNzU7czo40MD0iXChpY2VWYwX1ZS17ZDoxNzQuNzc0Tc3NDkz0TEZmY21NDU0MTU61jG1NTYxNDQwODg1MDY20Tg2MDgz0Tg0Mzc0i03M60T0iZm9ybwfW0dGVIjzt003M6MT61InByaWN1CHBSawVyIjti0jA7czoyMD0iY2FuY2VsbGFAw9uUnVsZVR1eH0i0047czoE3NC43MTc5Nzc0T5MT5MTmMjU0NTUxODU1NjE0NDA4ODUwNjY5ODYwODM5ODQzNzU7czo40MD0iXChpY2VWYwX1ZS17ZDoxNzQuNzc0Tc3NDkz0TEZmY21NDU0MTU61jG1NTYxNDQwODg1MDY20Tg2MDgz0Tg0Mzc0i03M60T0iZm9ybwfW0dGVIjzt003M6MT61InByaWN1CHBSawVyIjti0jA7czoyMD0iY2FuY2VsbGFAw9uUnVsZVR1eH0i0047czoE3NC43MTc5Nzc0T5MT5MTmMjU0NTUxODU1NjE0NDA4ODUwNjY5ODYwODM5ODQzNzU7czo40MD0iXChpY2VWYwX1ZS17ZDoxNzQuNzc0Tc3NDkz0TEZmY21NDU0MTU61jG1NTYxNDQwODg1MDY20Tg2MDgz0Tg0Mzc0i03M60T0iZm9ybwfW0dGVIjzt003M6MT61InByaWN1CHBSawVyIjti0jA7czoyMD0iY2FuY2VsbGFAw9uUnVsZVR1eH0i0047czoE3NC43MTc5Nzc0T5MT5MTmMjU0NTUxODU1NjE0NDA4ODUwNjY5ODYwODM5ODQzNzU7czo40MD0iXChpY2VWYwX1ZS17ZDoxNzQuNzc0Tc3NDkz0TEZmY21NDU0MTU61jG1NTYxNDQwODg1MDY20Tg2MDgz0Tg0Mzc0i03M60T0iZm9ybwfW0dGVIjzt003M6MT61InByaWN1CHBSawVyIjti0jA7czoyMD0iY2FuY2VsbGFAw9uUnVsZVR1eH0i0047czoE3NC43MTc5Nzc0T5MT5MTmMjU0NTUxODU1NjE0NDA4ODUwNjY5ODYwODM5ODQzNzU7czo40MD0iXChpY2VWYwX1ZS17ZDoxNzQuNzc0Tc3NDkz0TEZmY21NDU0MTU61jG1NTYxNDQwODg1MDY20Tg2MDgz0Tg0Mzc0i03M60T0iZm9ybwfW0dGVIjzt003M6MT61InByaWN1CHBSawVyIjti0jA7czoyMD0iY2FuY2VsbGFAw9uUnVsZVR1eH0i0047czoE3NC43MTc5Nzc0T5MT5MTmMjU0NTUxODU1NjE0NDA4ODUwNjY5ODYwODM5ODQzNzU7czo40MD0iXChpY2VWYwX1ZS17ZDoxNzQuNzc0Tc3NDkz0TEZmY21NDU0MTU61jG1NTYxNDQwODg1MDY20Tg2MDgz0Tg0Mzc0i03M60T0iZm9ybwfW0dGVIjzt003M6MT61InByaWN1CHBSawVyIjti0jA7czoyMD0iY2FuY2VsbGFAw9uUnVsZVR1eH0i0047czoE3NC43MTc5Nzc0T5MT5MTmMjU0NTUxODU1NjE0NDA4ODUwNjY5ODYwODM5ODQzNzU7czo40MD0iXChpY2VWYwX1ZS17ZDoxNzQuNzc0Tc3NDkz0TEZmY21NDU0MTU61jG1NTYxNDQwODg1

I7czox0iJuJtjp0jE7czoz0i9zY2Ei02E60TP7czoy0iJjYyI7czoz0iIzNjYi03M6MjoidHIIi2k6MTE4MDgwMDtz0J16nJ1jtz0j06i1kUqqk0i03M6Mg0iY2l1jY2j06iKfNS0TUSMj0i03M6Mg0icnBj1jtz0j06i1kUqqk0i03M6Nj0iY3l1bGVZj0j06iJm6e2k6MDTP0jE20iJJDYw5JzXw5YXRPb25SdWd1jx0Np7cz040iJmc9rFG0ZS177tjz0jY6InRvRGF0ZS17czox0iJmJAXNS0xM10y0SAyMjowMDowMC17cz040i30aW11em9uS17aToZMDA7czox0i30gicn0VdXjZWLRCEVN1CHBSawVyIjti0jA7czoyMD2Y2uVsf6G0aw9uUnV5ZVR1eH0i0047czoxND07czY2V50u9Gzc21jbgU0i2I6MT0jEz0iJ3hbVwZ2Fbvc3NpYmY1Ijti0jE7cz020iJub1NBvz3i02I6MD7z0jE0iJ3hc3BZGRpdG1bvmFS5w5mbYI7jtz0jE20iJYyMpQcmljZUN1c3RvbWVzIjti0j03M6MTU6IbnYAwN1Vmf5dWBBWvZU17aTox03M6MTA6InB5aWYAN1Vmf5dWU0i2k6MDtz0j6iKmcZmhdHRL17C17tjz0jE20iJwcm1jZUN1cn1Jbm51Uz0j20jM6iJuyMC17czoyMT0iCH3pY2V3bmd5dWRL10FsfBFRheGVZiJti0jE7czox0ToibWluaW11bVNi1bGxpbbmdQcmljZS17aTow031p0jE7TzoxNjoiQ2Y2V5XRG6aw9uUnV5S16MT0j63M60MD0iZnjbvRhRdG0i03M6MTk6iJ1wMTU0TMTiMtkjmg1I6MDA6MDi03M6Nj06Idg9EY8f1jtz0jE50iIYEMDE1TgYLtMXdAY0jAwJ1jtz0jg6iNRPbbW6b2S1jtz0jPwMD2tjz0jE40iY3ZXR1cm5lZS17Y2V5VmcG6pX2I0i2I6MT0jz0jIw0iJYjW5JzXw5YXRPb25SdWd1GV4dC17tjz0jE0iJ3jYw5JzXw5ZkQ3B2wZw5ZS17Yj0x03M6MT6ImTFt5W5kU69zc21biG0i2I6MT0tj0y6Im5vU2hdvY17jYow03M6MT6iCmfYfckKZQl0aw9uYwXjbmZvIjt003M6MTY6Im9ia1ByawNlQ3VzdG9tZXIi0047czoxNToiCH3pY2V5WwX1ZUFtZW5kIjtz0jE3NAC3M2t5Nzc00T5MTmWuJm0NTUuX0DUjN1jE0ND4AD0uJmY50DY0WDM50QZnWZU7czoxMD0iCH3pY2V5WwX1ZS17ZDox20uNzc2t3NDkz0TEZMD1INDU1MT1NTYXND0W0Dp1jD50t2tMDg2t0tE0mZ2i03M60T0iZm9ybWl0dGQ1I7



```

181.         <minStay></minStay>
182.         <dateApplyMinStay></dateApplyMinStay>
183.         <cancellationRules count="3">
184.             <rule runno="0">
185.                 <toDate>2015-12-29 22:00:00</toDate>
186.                 <toDateDetails>Tue Dec 29, 2015 22:00:00 </toDateDetails>
187.                 <amendCharge>0 <formatted>0.00</formatted>
188.             </rule>
189.             <rule runno="1">
190.                 <fromDate>2015-12-29 22:00:01</fromDate>
191.                 <fromDateDetails>Tue Dec 29, 2015 22:00:01 </fromDateDetails>
192.                 <toDate>2015-12-31 02:00:00</toDate>
193.                 <toDateDetails>Thu Dec 31, 2015 02:00:00 </toDateDetails>
194.                 <amendCharge>174.718 <formatted>174.72</formatted>
195.             </rule>
196.             <rule runno="2">
197.                 <fromDate>2015-12-31 02:00:01</fromDate>
198.                 <fromDateDetails>Thu Dec 31, 2015 02:00:01 </fromDateDetails>
199.                 <amendRestricted>true</amendRestricted>
200.                 <cancelRestricted>true</cancelRestricted>
201.             </rule>
202.         </cancellationRules>
203.         <withinCancellationDeadline>no</withinCancellationDeadline>
204.         <tariffNotes>DOTW HOTEL ONLY KING ROOM 1 king bed: floors 4-12: 34sq m/366 sq ft: gulf
205. view:marble bath: dataport</tariffNotes>
206.         <isBookable>yes</isBookable>
207.         <onRequest>0</onRequest>
208.         <total>174.718 <formatted>174.72</formatted>
209.     </total>
210.     <totalMinimumSelling>197 <formatted>197.00</formatted>
211. </totalMinimumSelling>
212.     <dates count="1">
213.         <date runno="0" datetime="2016-01-01" day="Jan, 01 2016" wday="Friday">
214.             <price>174.718 <formatted>174.72</formatted>
215.         </date>
216.         <priceMinimumSelling>197 <formatted>197.00</formatted>
217.     </price>
218.     <priceMinimumSelling>
219.         <freeStay>no</freeStay>
220.         <dayOnRequest>0</dayOnRequest>
221.         <including count="0"></including>
222.     </price>
223.     </dates>
224.     <leftToSell>1</leftToSell>
225. </rateBasis>
226. </rateBases>
227. </roomType>
228. <roomType runno="1" roomtypecode="6945338">
229.     <roomAmenities count="0"></roomAmenities>
230.     <name>TWIN ROOM 2</name>
231.     <allowsExtraMeals>false</allowsExtraMeals>
232.     <twin>no</twin>
233.     <roomInfo>
234.         <maxOccupancy>4</maxOccupancy>
235.         <maxAdult>4</maxAdult>
236.         <maxExtraBed>0</maxExtraBed>
237.         <maxChildren>0</maxChildren>
238.     </roomInfo>
239.     <specials count="0"></specials>
240. </rateBasis count="1">
241.     <rateBasis runno="0" id="0" description="Room Only">
242.         <status>unchecked</status>
243.         <passengerNamesRequiredForBooking>1</passengerNamesRequiredForBooking>
244.         <rateType currencyid="520" currencyshort="USD" description="Dynamic">2</rateType>
245.         <allowsExtraMeals>false</allowsExtraMeals>
246.         <allowsSpecialRequests>false</allowsSpecialRequests>
247.         <allowsBeddingPreference>false</allowsBeddingPreference>
248.         <allocationDetails>YTo10ntz0jM6InNpZCI7aToxMDExO3M6ND0ic2Jp

```

```

ZDoxNzQuNzE3OTc3NDkzOTEzMDI1NDU1MTg1NTYxNDQwODg1MDY2OTg2MDgzOTg0Mzc1O3M6TOiZm9ybWFOdGVkIj
t0O3M6MTM6InByaWNlQ3VycmVuY3kiO3M6MzoINTIwIjtzOjIwIjwcm1jZUluY2x1ZGVzQWxsVGf4ZXMiO2I6MTtz
OjE5OjIjtaW5pbXVtU2VsbGluZ1ByaWNlIjtpOjA7fwk6MjtpOjE2OjIjYDw5jZwxsYXRpb255SdWx1IjoxNj7czo4Oj
Jmcm9tRGf0ZSI7czo4OjIwIjAxNS0xMi0zMSAwMjowMDowMSI7czo2OjIj0b0RhdGUiO047czo4OjIj0aw1lem9uZSI7
aTozMdA7czo4OjIwIjZWRceVN1cHBsaWVvYjtiOjE7czo4MDoyY2FuY2VsbGF0aw9uUnVsZVRleHQiO047czo4
NDoyY2FuY2VsbG9zc2libGUiO2I6MDtzOjEzOjIjhwVuzFBvc3NpYmxlIjtiOjA7czo2OjIjUb1Nob3ciO2I6MDtz
OjE3OjIjhcjBZGRpdGlvbmFsSW5mbYI7TjtzOjE2OjIjvYmpQcm1jZUN1c3RvbWVvYjtiO03M6MTU6InByaWNlVmFsdw
==</allocationDetails>
256.      <minStay></minStay>
257.      <dateApplyMinStay></dateApplyMinStay>
258.      <cancellationRules count="3">
259.        <rule runno="0">
260.          <toDate>2015-12-29 22:00:00</toDate>
261.          <toDateDetails>Tue Dec 29, 2015 22:00:00 </toDateDetails>
262.          <amendCharge>0 <formatted>0.00</formatted>
263.        </amendCharge>
264.          <cancelCharge>0 <formatted>0.00</formatted>
265.        </cancelCharge>
266.          <charge>0 <formatted>0.00</formatted>
267.        </charge>
268.      </rule>
269.      <rule runno="1">
270.        <fromDate>2015-12-29 22:00:01</fromDate>
271.        <fromDateDetails>Tue Dec 29, 2015 22:00:01 </fromDateDetails>
272.        <toDate>2015-12-31 02:00:00</toDate>
273.        <toDateDetails>Thu Dec 31, 2015 02:00:00 </toDateDetails>
274.        <amendCharge>174.718 <formatted>174.72</formatted>
275.      </amendCharge>
276.        <cancelCharge>174.718 <formatted>174.72</formatted>
277.      </cancelCharge>
278.        <charge>174.718 <formatted>174.72</formatted>
279.      </charge>
280.    </rule>
281.    <rule runno="2">
282.      <fromDate>2015-12-31 02:00:01</fromDate>
283.      <fromDateDetails>Thu Dec 31, 2015 02:00:01 </fromDateDetails>
284.      <amendRestricted>true</amendRestricted>
285.      <cancelRestricted>true</cancelRestricted>
286.    </rule>
287.  </cancellationRules>
288.  <withinCancellationDeadline>no</withinCancellationDeadline>
289.  <tariffNotes>DOTW HOTEL ONLY TWIN ROOM 2 twin beds: floors 4-12: 34 sq m: gulf view
marble bath: dataport</tariffNotes>
290.    <isBookable>yes</isBookable>
291.    <onRequest>0</onRequest>
292.    <total>174.718 <formatted>174.72</formatted>
293.  </total>
294.    <totalMinimumSelling>197 <formatted>197.00</formatted>
295.  </totalMinimumSelling>
296.    <dates count="1">
297.      <date runno="0" datetime="2016-01-01" day="Jan, 01 2016" wday="Friday">
298.        <price>174.718 <formatted>174.72</formatted>
299.      </price>
300.        <priceMinimumSelling>197 <formatted>197.00</formatted>
301.      </priceMinimumSelling>
302.        <freeStay>no</freeStay>
303.        <dayOnRequest>0</dayOnRequest>
304.        <including count="0"></including>
305.      </date>
306.    </dates>
307.    <leftToSell>1</leftToSell>
308.  </rateBasis>
309.  </rateBases>
310.  </roomType>
311.  <lookedForText>Room Number 2: 2 adult/s and 1 child</lookedForText>
312.  </room>
313.  </rooms>
314.  <extraMeals count="1">
315.    <mealDate runno="0" wday="5" day="Fri Jan 01, 2016" datetime="2016-01-01">
316.      <mealType mealtypename="Half Board" mealtypecode="1334">
317.        <meal runno="0" applicablefor="adult">
318.          <mealCode>561215</mealCode>
319.          <mealName>LUNCH OR DINNER (HLF2B)</mealName>
320.          <mealPrice>34.0321 <formatted>34.03</formatted>
321.        </mealPrice>
322.        </meal>
323.      <meal runno="1" applicablefor="child" startage="6" endage="11">
324.        <mealCode>561225</mealCode>
325.        <mealName>LUNCH OR DINNER (HLF2B)</mealName>
326.        <mealPrice>17.1522 <formatted>17.15</formatted>
327.      </mealPrice>
328.      </meal>
329.    </mealType>
330.  </mealDate>
331.  <mealDate runno="1" wday="6" day="Sat Jan 02, 2016" datetime="2016-01-02">
332.    <mealType mealtypename="Half Board" mealtypecode="1334">
333.      <meal runno="0" applicablefor="adult">
334.        <mealCode>561215</mealCode>
335.        <mealName>LUNCH OR DINNER (HLF2B)</mealName>
336.        <mealPrice>34.0321 <formatted>34.03</formatted>
337.      </mealPrice>
338.      </meal>
339.    <meal runno="1" applicablefor="child" startage="6" endage="11">
340.      <mealCode>561225</mealCode>
341.      <mealName>LUNCH OR DINNER (HLF2B)</mealName>
342.      <mealPrice>17.1522 <formatted>17.15</formatted>
343.    </mealPrice>
344.    </meal>

```

# Scenario H4

## Request XML format

56/253



[illegible]

In this case we managed to successfully block both selected rooms (both rooms were returned with `<status>checked</status>`).

## Response XML format

[illegible]

58/253

59/253

I7czox0iJuItpj0pJE7czoz0iIzY2Ei02E60T7p7czoy0iIjYyI7czoz0iIzNjYi03M6MjoiDH1i02k6ME4MDgwMDtz  
Oj16InjIjJtzoJQ6i1kUqqk0i03M6MzoiY2i1jJtzoJc6iKNS0T5UjMjc0i03M6MzoiCnBJI7tzoJQ6i1kUqqk0i03M6Mj  
oiY3i1jNjGvZi7th0jM6e26MDTPOJE20iJDYw5jZwXsYXRpb25SdWxlIjoxNjp7cz040iJmcm9RGFG0ZSI7TjtzoJY6  
InRvRGFG0ZSI7czox0ToimjAxBN50xMi0y0SAYmJowMDowMCI7cz040iJ0aw1lem9uZSI7aTozMDA7czox0DoicmV0dX  
JuZWRcVeNlCH8sAwVvYi7tj0A7czoyMD0Y2FuY2VsbGFG0aw9uUnVsZVR1eHQi0047czoxND0iY2FuY2VsbGUG9cz2c1i  
bGUi02IGMTtz0JE20iJ3hbWVwZFBvc3NpYmXlIjti0JE7czox0iJub1Nob33ci02IGMTtz0JE20iJHcn3JBGzGrpdlGlvbm  
FssW5mbyI7TjtzoJE20iJvYmpQcm1jZUNiC3RvbWVvYi7t003M6MTU6InByaWNlVmFsdWVBBbWVuZCI7aTow03M6MTA6  
InByaWNlVmFsdWU0i02k6MDTzoJk6ImRmczcm1hdhR1ZCI7TjtzoJE20iJwcm1jZUNiC1bm1M5i7tzoJm6iJyUyCM17cz  
oyMToiChJpZV2j3bmNsddhR1c0f5bReGvZi7tj0JE7czox0Toibw1uaw1b1vNlbGxpbnM0cm1jZSI7aTow03M6i7tzoJ  
TzoxND0iQ2FuY2VsbGFG0aw9uUnVsZSI7M6T7e63M60DoiZn3vbUrhGUi03M6MTk6IjIwMtuMTIeMjkgMjIGMDA6MD  
Ei03M6NjoiDG9EYXRlI7tzoJE20iJYME1TIEyLTmXIdAY0jAw0jAwI7tzoJg6InRpbW6b25i1j7tzoJpWMDTzoJE4  
0iYjZXR1c1ZEF53i5VwczGxpZXAi02IGMTtz0jIw0iJjYw5jZwXsYXRpb25SdWxlVGv4dC17TjtzoJE00i1jYw5jZw  
xQB3N2awJzSI7Y7jox03M6MTM6ImFtZWSkUG9cz2c1ibGUi02IGMTtz0jY6Im5vU2hvdYI7Y7jow03M6MTc6ImFycKfK  
ZG10aw9uYwXjbmZvYi7t003M6MT6Im9alByaWNl3VzdG9tZXIi0047czoxND0iChJpZV2VWYwXlZFUZtW5ki7k0J  
E3NC433ci5nzC00T5MTmWjU0NTUx0DU1jIENDA40DTUwNDUwNjY5ODY0DM50GzNzU7czoxMD0iChJpZV2VWYwXlZSI7  
tzoDM6NzQuN2E30tC3NDkz0TfZcYMD1INDU1MTG1NTYxNDQwODG1MDY20Tg2MDgz0Tg0Mzc0i03M60T0iZm9ybwF6dGwKij  
t003M6MT6InByaWNlZSI7YvcwY3k0i03M6MzoiNTIwIj7tzoJiX0iJwcm1jZULuY2k1ZGVZQWxsVGFG42XMi02IGMTtz  
OjE50iJtaw5pbXVtU2VsbGluZi1ByaWNlIjtp0jA7fwk6MjtP0JE20iJDYw5jZwXsYXRpb25SdWxlIjoxNjp7cz040i  
Jmcm9RGFG0ZSI7czox0ToimjAxBN50xMi0zMSAwMjowMDowMSI7cz020iJ0b0RhRdGUi0047cz040iJ0aw1lem9uZSI7a  
TozMDA7czox0DoicmV0dXJuZWRcVeNlCH8sAwVvYi7tj0A7czoyMD0Y2FuY2VsbGFG0aw9uUnVsZVR1eHQi0047cz





```
aTozMDA7czoxODoicmV0dXJuZWRCeVN1cHBsaWVyIjtiOjE7czoyMDoiY2FuY2VsbGF0aw9uUnVsZVR1eHQiO047cz
oxNDoiY2FuY2VzUG9zc2libGUiO2I6MDtzOjEzOjIjhbWVuzFBvc3NpYmxlIjtiOjA7czo2OjIub1Nob3ciO2I6MDtz
OjE3OjIjhcjBZGRpdGlvbmlkZW50byI7IjtzOjE2OjIjYmpQcm1jZUN1c3RvbWVYIjtiO03M6MTU6InByaWNlVmFsdw ==</allocationDetails>
331. <minStay></minStay>
332. <dateApplyMinStay></dateApplyMinStay>
333. <cancellationRules count="3">
334. <rule runno="0">
335. <toDate>2015-12-29 22:00:00</toDate>
336. <toDateDetails>Tue Dec 29, 2015 22:00:00 </toDateDetails>
337. <amendCharge>0 <formatted>0.00</formatted>
338. </amendCharge>
339. <cancelCharge>0 <formatted>0.00</formatted>
340. </cancelCharge>
341. <charge>0 <formatted>0.00</formatted>
342. </charge>
343. </rule>
344. <rule runno="1">
345. <fromDate>2015-12-29 22:00:01</fromDate>
346. <fromDateDetails>Tue Dec 29, 2015 22:00:01 </fromDateDetails>
347. <toDate>2015-12-31 02:00:00</toDate>
348. <toDateDetails>Thu Dec 31, 2015 02:00:00 </toDateDetails>
349. <amendCharge>174.718 <formatted>174.72</formatted>
350. </amendCharge>
351. <cancelCharge>174.718 <formatted>174.72</formatted>
352. </cancelCharge>
353. <charge>174.718 <formatted>174.72</formatted>
354. </charge>
355. </rule>
356. <rule runno="2">
357. <fromDate>2015-12-31 02:00:01</fromDate>
358. <fromDateDetails>Thu Dec 31, 2015 02:00:01 </fromDateDetails>
359. <amendRestricted>true</amendRestricted>
360. <cancelRestricted>true</cancelRestricted>
361. </rule>
362. </cancellationRules>
363. <withinCancellationDeadline>no</withinCancellationDeadline>
364. <tariffNotes>DOTW HOTEL ONLY TWIN ROOM 2 twin beds: floors 4-12: 34 sq m: gulf view
marble bath: dataport</tariffNotes>
365. <isBookable>yes</isBookable>
366. <onRequest>0</onRequest>
367. <total>174.718 <formatted>174.72</formatted>
368. </total>
369. <totalMinimumSelling>197 <formatted>197.00</formatted>
370. </totalMinimumSelling>
371. <dates count="1">
372. <date runno="0" datetime="2016-01-01" day="Jan, 01 2016" wday="Friday">
373. <price>174.718 <formatted>174.72</formatted>
374. </price>
375. <priceMinimumSelling>197 <formatted>197.00</formatted>
376. </priceMinimumSelling>
377. <freeStay>no</freeStay>
378. <dayOnRequest>0</dayOnRequest>
379. <including count="0"></including>
380. </date>
381. </dates>
382. <leftToSell>1</leftToSell>
383. </rateBasis>
384. </rateBases>
385. </roomType>
386. <lookedForText>Room Number 2: 2 adult/s and 1 child</lookedForText>
387. </room>
388. </rooms>
389. <extraMeals count="1">
390. <mealDate runno="0" wday="5" day="Fri Jan 01, 2016" datetime="2016-01-01">
391. <mealType mealtypename="Half Board" mealtypecode="1334">
392. <meal runno="0" applicablefor="adult">
393. <mealCode>561215</mealCode>
394. <mealName>LUNCH OR DINNER (HLF2B)</mealName>
395. <mealPrice>34.0321 <formatted>34.03</formatted>
396. </mealPrice>
397. </meal>
398. <meal runno="1" applicablefor="child" startage="6" endage="11">
399. <mealCode>561225</mealCode>
400. <mealName>LUNCH OR DINNER (HLF2B)</mealName>
401. <mealPrice>17.1522 <formatted>17.15</formatted>
402. </mealPrice>
403. </meal>
404. </mealType>
405. </mealDate>
406. <mealDate runno="1" wday="6" day="Sat Jan 02, 2016" datetime="2016-01-02">
407. <mealType mealtypename="Half Board" mealtypecode="1334">
408. <meal runno="0" applicablefor="adult">
409. <mealCode>561215</mealCode>
410. <mealName>LUNCH OR DINNER (HLF2B)</mealName>
411. <mealPrice>34.0321 <formatted>34.03</formatted>
412. </mealPrice>
413. </meal>
414. <meal runno="1" applicablefor="child" startage="6" endage="11">
415. <mealCode>561225</mealCode>
416. <mealName>LUNCH OR DINNER (HLF2B)</mealName>
417. <mealPrice>17.1522 <formatted>17.15</formatted>
418. </mealPrice>
419. </meal>
420. </mealType>
421. </mealDate>
422. </extraMeals>
423. </hotel>
```

```

424.         <successful>TRUE</successful>
425.     </result>
426. </p>

```

# Save Booking

## General Request

DOTWconnect server has the functionality of temporarily saving a booking: the **savebooking** method. A saved booking does not hold any allotments and the prices calculated for the booking at the time of saving cannot be guaranteed. A saved booking can be accessed at a later stage. The booking process is complete only when the saved bookings are sent to the suppliers. This is achieved by using the method **bookitinerary** (explained in the next section).

Please note that the **savebooking** method must be implemented only if you choose to integrate the bookitinerary booking flow (that allows the Credit Card payment method), otherwise you can choose to ignore this method.

```

01. <customer>
02.   <username>username</username>
03.   <password>md5(password)</password>
04.   <id>company_code</id>
05.   <source>1 <product>hotel</product>
06.     <request command="savebooking">
07.       <bookingdetails>
08.         <parent></parent>
09.         <bookingcode></bookingcode>
10.         <addtobookeditn></addtobookeditn>
11.         <bookeditnparent></bookeditnparent>
12.         <fromdate></fromdate>
13.         <todate></todate>
14.         <currency></currency>
15.         <productid></productid>
16.         <customerreference></customerreference>
17.         <rooms no="">
18.           <room runno="">
19.             <roomtypecode></roomtypecode>
20.             <selectedratebasis></selectedratebasis>
21.             <allocationdetails></allocationdetails>
22.             <adultscore></adultscore>
23.             <actualadults></actualadults>
24.             <children no="">
25.               <child runno=""></child>
26.             </children>
27.             <actualchildren no="">
28.               <actualchild runno="0"></actualchild>
29.             </actualchildren>
30.             <extrabed></extrabed>
31.             <passengernationality></passengernationality>
32.             <passengercountryofresidence></passengercountryofresidence>
33.             <selectedextrameals>
34.               <mealplandate mealplandatetime="">
35.                 <mealplan applicablefor="" childage="" ispassenger="" mealscount=""
passengernumber="" runno="">
36.                   <meal runno="">
37.                     <mealtypecode></mealtypecode>
38.                     <units></units>
39.                     <mealprice></mealprice>
40.                   </meal>
41.                 </mealplan>
42.               </mealplandate>
43.             </selectedextrameals>
44.             <passengersdetails>
45.               <passenger leading="">
46.                 <salutation></salutation>
47.                 <firstname></firstname>
48.                 <lastname></lastname>
49.               </passenger>
50.             </passengersdetails>
51.             <specialrequests count="">
52.               <req runno=""></req>
53.             </specialrequests>
54.             <beddingpreference></beddingpreference>
55.           </room>
56.         </rooms>
57.       </bookingdetails>
58.     </request>
59.   </source>
60. </customer>

```

Item	Type	Parent	Description	Required
bookingdetails	Element	request	Contains the travel dates, product details, passenger details etc. for saving the booking.	Yes.

<b>parent</b>	Element	bookingDetails	Specifies the itinerary code which is an internal code which groups together all services within one itinerary. This is an optional item and if present, this booking will be added to the specified itinerary. This element can be used when the customer is making bookings involving multiple sectors or adding a service to an existing booking.	No.
<b>bookingCode</b>	Element	bookingDetails	Specifies the booking code which is an internal code assigned for each service booked. This is an optional field and if present will replace the existing data against that booking code. This is used while editing an existing service.	No.
<b>addToBookedItln</b>	Element	bookingDetails	Specifies if the current itinerary should be merged into an itinerary all ready booked and confirmed. This merge process will take place only when the current itinerary will be confirmed. Possible values: <ul style="list-style-type: none"> <li>1</li> </ul>	No.
<b>bookedItlnParent</b>	Element	bookingDetails	Specifies an internal code for a booked and confirmed itinerary to which the current itinerary will be added to. Please note that you can only add booking to a confirmed itinerary that was originally made by you.	Yes, if <b>addToBookedItln</b> is present and its value is 1.
<b>fromDate</b>	Element	bookingDetails	Arrival date in DotW date format (YYYY-MM-DD) or Unix timestamp	Yes.
<b>toDate</b>	Element	bookingDetails	Departure date in DotW date format (YYYY-MM-DD) or Unix timestamp	Yes.
<b>currency</b>	Element	bookingDetails	The internal code of the currency in which the prices are calculated.	Yes.
<b>productId</b>	Element	bookingDetails	The internal code of the Hotel which is being booked.	Yes.
<b>customerReference</b>	Element	bookingDetails	Free text that will be assigned to this booking. Maximum 50 characters.	No.
<b>rooms</b>	Element	bookingDetails	Contains a <b>room</b> element for each room the customer wishes to book	Yes.
@no	Attribute	rooms	Specifies the total number of rooms.	Yes.
<b>room</b>	Element	rooms	Encapsulates details about one room.	Yes.
@runno	Attribute	room	Specifies for which room out of the total passed rooms the booking is made for. Please note that the running serial number starts from 0.	Yes.
<b>roomTypeCode</b>	Element	room	Internal code for the Room type of the Hotel being booked.	Yes.
<b>selectedRateBasis</b>	Element	room	Internal code for the selected rate basis.	Yes.
<b>allocationDetails</b>	Element	room	Encrypted string containing details about the room type. This string is received as a response from the <b>getrooms</b> method.	Yes.
<b>actualAdults</b>	Element	room	Number of adults actual in the room	Yes.
<b>actualChildren</b>	Element	room	Specifies the details about the accompanying children in this room.	Yes.



@no	Attribute	actualChildren	Specifies the total number of children in the room. If the booking does not involve any children then the value should be 0.	Yes.
<b>actualChild</b>	Element	actualChildren	Specifies the child age.	No.
@runno	Attribute	actualChild	Specifies for which child the age is applicable.	Yes, if <b>children@no</b> > 0.
<b>adultsCode</b>	Element	room	Number of adults in the room; The possible codes are: <ul style="list-style-type: none"> <li>• 1</li> <li>• 2</li> <li>• 3</li> <li>• 4</li> </ul>	Yes.
<b>children</b>	Element	room	Specifies the details about the accompanying children in this room.	Yes.
@no	Attribute	children	Specifies the total number of children in the room. If the booking does not involve any children then the value should be 0.	Yes.
<b>child</b>	Element	children	Specifies the child age.	No.
@runno	Attribute	child	Specifies for which child the age is applicable.	Yes, if <b>children@no</b> > 0.
<b>extraBed</b>	Element	room	If the rate option selected includes an extra bed the element should contain the value 1. Otherwise 0.	Yes.
<b>selectedExtraMeals</b>	Element	room	Encapsulates information about desired extra meals grouped by dates and passengers. Please Send the request for this element only if you want to book extra meals(optional).	No.
<b>mealPlanDate</b>	Element	selectedExtraMeals	Groups extra meals per a specific date. Each date should be part of the booking period. From the booking period only dates that contain at least one meal plan (either for adult or children) should be sent.	Yes, if parent present..
@mealplandatetime	Attribute	mealPlanDate	Meal plan date in YYYY-MM-DD format.	Yes, if parent present..
<b>mealPlan</b>	Element	mealPlanDate	Encapsulates details about one meal plan for one passenger.	Yes, if parent is present.
@runno	Attribute	mealPlan	Running number starting from 0.	Yes, if parent is present.
@mealscount	Attribute	mealPlan	Number of meals for this passenger.	Yes, if parent is present.
@applicablefor	Attribute	mealPlan	Specifies if this meal plan is for an adult passenger or a child.	Yes, if parent is present.
@childage	Attribute	mealPlan	Specifies the age of the child passenger.	Yes, if <i>@applicablefor</i> value is adult.
@ispassenger	Attribute	mealPlan	Fixed value 1.	Yes, if parent is present.

@passengernumber	Attribute	mealPlan	Specifies the passenger number. All meal plans on a specific date with the same passengernumber will be grouped.	Yes, if parent is present.
meal	Element	mealPlan	Encapsulates details about a particular meal that needs to be booked.	Yes, if parent is present.
@runno	Attribute	meal	Running number starting from 0.	Yes, if parent is present.
code	Element	meal	Meal Internal code.	Yes, if parent is present.
mealTypeCode	Element	meal	Meal Type Internal code.	Yes, if parent is present.
units	Element	meal	Number of meals included in this meal plan (for this passenger).	Yes, if parent is present.
mealPrice	Element	meal	Meal Price received in getRooms method. This should be the price without the formatting.	Yes, if parent is present.
passengersDetails	Element	room	Encapsulates details about passengers in the booking. Please note for each room booked at least one <b>passenger</b> element with @leading value yes should be present.	Yes.
passenger	Element	passengersDetails	Encapsulates details about one passenger in the booking. Please note for each room booked the room will be blocked under the leading passenger.	Yes, at least one occurrence.
@leading	Attribute	passenger	Specifies if the passenger is the leading passenger for this room. You can skip this attribute if the passenger is not the leading one. Possible values: 1. yes 2. no	Yes, at least one occurrence with value `yes`.
salutation	Element	passenger	The internal code for Salutations (Mr, Mrs etc). This code can be obtained by calling the <b>getsalutations</b> method.	Yes.
firstName	Element	passenger	First name of the leading passenger. Following restrictions are required to be implemented <ul style="list-style-type: none"> <li>names should contain minimum 2 characters and maximum 25;</li> <li>no white spaces or special characters allowed;</li> <li>all the adults passenger names should be passed in the confirmbooking request</li> <li>In case of multiple first/last name, automatically trim the white spaces Full Name: James Lee Happy Traveler firstName: JamesLee lastName:HappyTraveler</li> </ul>	Yes.
lastName	Element	passenger	Last name of the leading passenger.	Yes.
beddingPreference	Element	room	Specifies the category of bedding preference. <b>Subject to availability at check-in</b> Possible values: <ul style="list-style-type: none"> <li>0- No preference</li> <li>1- King size</li> <li>2- Queen size</li> <li>3- Twin</li> </ul>	Yes.

<b>specialRequests</b>	Element	room	Encapsulates the details containing the special requests the customers has requested for this room.	Yes.
@count	Attribute	specialRequests	Total number of special requests for the room.	Yes.
<b>req</b>	Element	specialRequests	Internal code for the Special Request. This code can be obtained by calling the <b>getspecialrequestsids</b> method.	No.
@runno	Attribute	req	Running Serial number, starting from 0.	Yes, if parent present.

### savebooking\_hotel.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:include schemaLocation="loginDetails.xsd"></xs:include>
03.   <xs:include schemaLocation="bookingDetails.xsd"></xs:include>
04.   <xs:include schemaLocation="general.xsd"></xs:include>
05.   <xs:element name="customer">
06.     <xs:complexType>
07.       <xs:sequence>
08.         <xs:group ref="loginDetailsGroup"></xs:group>
09.         <xs:element name="product" type="xs:string" fixed="hotel"></xs:element>
10.         <xs:element name="request" type="requestType"></xs:element>
11.       </xs:sequence>
12.     </xs:complexType>
13.   </xs:element>
14.   <!-- ##### -->
15.   <xs:complexType name="requestType">
16.     <xs:sequence>
17.       <xs:element name="bookingDetails" type="confirmBookingBookingDetailsType"></xs:element>
18.     </xs:sequence>
19.     <xs:attribute name="command" type="xs:string" use="required" fixed="savebooking"></xs:attribute>
20.     <xs:attribute name="debug" type="xs:integer" use="optional"></xs:attribute>
21.     <xs:attribute name="defaultnamespace" type="xs:string" use="optional" fixed="true"></xs:attribute>
22.   </xs:complexType>
23. </xs:schema>

```

## General Response

For every **savebooking** request sent to our DOTWconnect Server the response format will be as follows. All the necessary details regarding the elements returned in the savebooking response are presented in the below table. It is important to take into consideration the element **successful** that will inform you upon the **savebooking** method's success or failure

```

01. <result command="savebooking" date="" ip="">
02.   <returnedCode></returnedCode>
03.   <returnedServiceCodes count="">
04.     <returnedServiceCode runno=""></returnedServiceCode>
05.   </returnedServiceCodes>
06.   <successful>TRUE</successful>
07. </result>

```

Item	Type	Parent	Description
<b>result</b>	Element	root	The root element.
@command	Attribute	result	The request command which returned this result.
@date	Attribute	result	The date and time when the result was provided in unix timestamp.
@ip	Attribute	result	The IPv4 address the request was made from.
<b>returnedCode</b>	Element	result	Internal code for the Itinerary. The Itinerary code can be used when booking multiple sectors or adding a service to an existing booking.

<b>returnedServiceCodes</b>	Element	result	Groups the Internal Codes of each service within the Itinerary that is saved.
@count	Attribute	returnedServiceCodes	Number of services in the itinerary that was saved.
<b>returnedServiceCode</b>	Element	returnedServiceCodes	Internal Code for the Service booked. Each service booked will have a unique service code and this code can be used for all subsequent modifications to the service.
@runno	Attribute	returnedServiceCode	Running serial number starting from 0.
<b>successful</b>	Element	result	Specifies if the request was successfully processed. Possible values: <ul style="list-style-type: none"> <li>• TRUE</li> <li>• FALSE</li> </ul>

## savebooking\_response.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="result" type="resultType"></xs:element>
03.   <xs:complexType name="resultType">
04.     <xs:all>
05.       <xs:element name="currencyShort" type="currencyShortType" minOccurs="0"></xs:element>
06.       <xs:element name="returnedCode" type="xs:nonNegativeInteger"></xs:element>
07.       <xs:element name="returnedServiceCodes" type="returnedServiceCodesType"></xs:element>
08.       <xs:element name="successful" type="trueOrFalse"></xs:element>
09.     </xs:all>
10.     <xs:attribute name="command" type="xs:string" use="required" fixed="savebooking"></xs:attribute>
11.     <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
12.     <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
13.     <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
14.     <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
15.   </xs:complexType>
16.   <xs:simpleType name="dotwIP">
17.     <xs:restriction base="xs:string">
18.       <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0)\.(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0)\.(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0)\.(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0)" /></xs:pattern>
19.     </xs:restriction>
20.   </xs:simpleType>
21.   <xs:simpleType name="dotwDateType">
22.     <xs:restriction base="xs:string">
23.       <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}(\s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})?|[0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2}(\s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})?|[0-9]{4,4}T[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2}(\s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})?" /></xs:pattern>
24.     </xs:restriction>
25.   </xs:simpleType>
26.   <xs:simpleType name="versionType">
27.     <xs:restriction base="xs:string">
28.       <xs:pattern value="[1-9]{1}([0-9])*\.[0-9]{1,2}" /></xs:pattern>
29.     </xs:restriction>
30.   </xs:simpleType>
31.   <xs:simpleType name="trueOrFalse">
32.     <xs:restriction base="xs:string">
33.       <xs:pattern value="true|false|TRUE|FALSE" /></xs:pattern>
34.     </xs:restriction>
35.   </xs:simpleType>
36.   <xs:simpleType name="currencyShortType">
37.     <xs:restriction base="xs:string">
38.       <xs:pattern value="[A-Z]{3}" /></xs:pattern>
39.     </xs:restriction>
40.   </xs:simpleType>
41.   <xs:complexType name="returnedServiceCodesType">
42.     <xs:sequence>
43.       <xs:element name="returnedServiceCode" type="returnedServiceCodeType" maxOccurs="unbounded"></xs:element>
44.     </xs:sequence>
45.     <xs:attribute name="count" type="xs:nonNegativeInteger" use="required"></xs:attribute>
46.   </xs:complexType>
47.   <xs:complexType name="returnedServiceCodeType">
48.     <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"></xs:attribute>
49.   </xs:complexType>
50. </xs:schema>

```

## Scenario H6

After selecting and blocking the desired Room Types the customer has the option of either saving this booking information or confirm it with DOTWconnect.

## Request XML format

69/253

```

42.         <passengersDetails>
43.             <passenger leading="yes">
44.                 <salutation>147</salutation>
45.                 <firstName>test</firstName>
46.                 <lastName>two</lastName>
47.             </passenger>
48.         </passengersDetails>
49.     </room>
50. </rooms>
51. </bookingDetails>
52. </request>
53. </customer>

```

Response XML format

```

01. <p>
02.     <result command="savebooking" tID="1424687343000001" ip="127.0.0.1" date="2015-02-
23 10:29:03" version="2.0" elapsedTime="0.095901966094971">
03.         <returnedCode>1063997692</returnedCode>
04.         <returnedServiceCodes count="2">
05.             <returnedServiceCode runno="0">1063997712</returnedServiceCode>
06.             <returnedServiceCode runno="1">1063997702</returnedServiceCode>
07.         </returnedServiceCodes>
08.         <successful>TRUE</successful>
09.     </result>
10. </p>

```

## Confirm Booking

### General Request

The **confirmbooking** method of DOTWconnect is used to generate an Itinerary which contains one or more successfully booked rooms or successfully booked services. Each booked room or service will have a unique reference number (booking code) which can be individually amended or cancelled.

Multiple rooms or services booked in the same booking flow will be grouped together under the same unique itinerary number.

When using the **confirmbooking** method you have the option of generating a new itinerary or of adding services to an already confirmed itinerary. The format of the request and response for this method is explained in the following section.

```

01. <customer>
02.     <username>username</username>
03.     <password>md5(password)</password>
04.     <id>company_code</id>
05.     <source>1</source>
06.     <product>hotel</product>
07.     <request command="confirmbooking">
08.         <bookingDetails>
09.             <parent></parent>
10.             <bookingCode></bookingCode>
11.             <addToBookedItin></addToBookedItin>
12.             <bookedItinParent></bookedItinParent>
13.             <fromDate></fromDate>
14.             <toDate></toDate>
15.             <currency></currency>
16.             <productId></productId>
17.             <customerReference></customerReference>
18.             <rooms no="">
19.                 <room runno="">
20.                     <roomTypeCode></roomTypeCode>
21.                     <selectedRateBasis></selectedRateBasis>
22.                     <allocationDetails></allocationDetails>
23.                     <adultsCode></adultsCode>
24.                     <actualAdults></actualAdults>
25.                     <children no="">
26.                         <child runno=""></child>
27.                     </children>
28.                     <actualChildren no="">
29.                         <actualChild runno="0"></actualChild>
30.                     </actualChildren>
31.                     <extraBed></extraBed>
32.                     <passengerNationality></passengerNationality>
33.                     <passengerCountryOfResidence></passengerCountryOfResidence>
34.                     <selectedExtraMeals>
35.                         <mealPlanDate mealplandatetime="">
36.                             <mealPlan applicablefor="" childage="" ispassenger="" mealscount=""
passengernumber="" runno="">
37.                                 <meal runno="">
38.                                     <mealTypeCode></mealTypeCode>
39.                                     <units></units>
40.                                     <mealPrice></mealPrice>
41.                                 </meal>

```

```

42.         </mealPlan>
43.     </mealPlanDate>
44. </selectedExtraMeals>
45. <passengersDetails>
46.     <passenger leading="">
47.         <salutation></salutation>
48.         <firstName></firstName>
49.         <lastName></lastName>
50.     </passenger>
51. </passengersDetails>
52. <specialRequests count="">
53.     <req runno=""></req>
54. </specialRequests>
55. <beddingPreference></beddingPreference>
56. </room>
57. </rooms>
58. </bookingDetails>
59. </request>
60. </customer>

```

Item	Type	Parent	Description	Required
<b>bookingDetails</b>	Element	request	Contains the travel dates, product details, passenger details etc. for the booking.	Yes.
<b>parent</b>	Element	bookingDetails	Specifies the itinerary code which is an internal code which groups together all services within one itinerary. This is an optional item and if present, this booking will be added to the specified itinerary. This element can be used when the customer is making bookings involving multiple sectors or adding a service to an existing booking	No.
<b>bookingCode</b>	Element	bookingDetails	Specifies the booking code which is an internal code assigned for each service booked. This is an optional field and if present will replace the existing data against that booking code. This is used while editing an existing service.	No.
<b>addToBookedItln</b>	Element	bookingDetails	Specifies if the current itinerary should be merged into an itinerary all ready booked and confirmed. This merge process will take place only when the current itinerary will be confirmed. Possible values: 1	No.
<b>bookedItlnParent</b>	Element	bookingDetails	Specifies an internal code for a booked and confirmed itinerary to which the current itinerary will be added to. Please note that you can only add booking to a confirmed itinerary that was originally made by you.	Yes, if <b>add_to_booked_itln</b> is present and its value is value is 1
<b>fromDate</b>	Element	bookingDetails	Arrival date in DotW date format (YYYY-MM-DD) or Unix timestamp	Yes.
<b>toDate</b>	Element	bookingDetails	Departure date in DotW date format (YYYY-MM-DD) or Unix timestamp	Yes.
<b>currency</b>	Element	bookingDetails	The internal code of the currency in which the prices are calculated.	Yes.
<b>productId</b>	Element	bookingDetails	The internal code of the Hotel which is being booked.	Yes.
<b>customerReference</b>	Element	bookingDetails	Agent Reference. Free text that will be assigned to this booking Maximum 50 characters.	No.
<b>rooms</b>	Element	bookingDetails	Contains a <b>room</b> element for each room the customer wishes to book	Yes.

@no	Attribute	rooms	Specifies the total number of rooms.	Yes.
room	Element	rooms	Encapsulates details about one room.	Yes.
@runno	Attribute	room	Specifies for which room out of the total passed rooms the booking is made for. Please note that the running serial number starts from 0.	Yes.
roomTypeCode	Element	room	Internal code for the Room type of the Hotel being booked.	Yes.
selectedRateBasis	Element	room	Internal code for the selected rate basis.	Yes.
allocationDetails	Element	room	Encrypted string containing details about the room type. This string is received as a response from the <b>getrooms</b> method.	Yes.
actualAdults	Element	room	Indicates the number of adults the initial search was made for	Yes.
actualChildren	Element	room	Indicates the number of children the initial search was made for	Yes.
actualChild	Element	room	Specifies the child's age.	Yes.
adultsCode	Element	room	<p>Number of adults in the room; The possible codes are:</p> <ul style="list-style-type: none"> <li>• 1</li> <li>• 2</li> <li>• 3</li> <li>• 4</li> </ul> <p>The value sent in this element may vary only if an offer with an extraBed has been selected (changedOccupancy element returned with the last parameter set on 1)</p> <p>If an adult has been fitted in the extra bed, he/she will not be included in this element anymore</p>	Yes.
children	Element	room	Specifies the details about the accompanying children in this room. If a child has been fitted in the extra bed, he/she will not be included in this element anymore	Yes.
@no	Attribute	children	Specifies the total number of children in the room. If the booking does not involve any children then the value should be 0.	Yes.
child	Element	children	Specifies the child age.	No.
@runno	Attribute	child	Specifies for which child the age is applicable.	Yes, if <b>children@no</b> > 0.
runno	Element	actualChild	Running number starting from 0 Yes.	Yes
extraBed	Element	room	If for this room the customer wants also to include an extra bed, then this field will have the value 1. Otherwise the value will be 0.	Yes.
selectedExtraMeals	Element	room	Encapsulates information about desired extra meals grouped by dates and passengers. Please Send the request for this element only if you want to book extra meals(optional).	No.



<b>mealPlanDate</b>	Element	selectedExtraMeals	Groups extra meals per a specific date. Each date should be part of the booking period. From the booking period only dates that contain at least one meal plan (either for adult or children) should be sent.	Yes, if parent present..
@mealplandatetime	Attribute	mealPlanDate	Meal plan date in YYYY-MM-DD format.	Yes, if parent present..
<b>mealPlan</b>	Element	mealPlanDate	Encapsulates details about one meal plan for one passenger.	Yes, if parent is present.
@runno	Attribute	mealPlan	Running number starting from 0.	Yes, if parent is present.
@mealscount	Attribute	mealPlan	Number of meals for this passenger.	Yes, if parent is present.
@applicablefor	Attribute	mealPlan	Specifies if this meal plan is for an adult passenger or a child.	Yes, if parent is present.
@childage	Attribute	mealPlan	Specifies the age of the child passenger.	Yes, if <i>@applicablefor</i> value is adult.
@ispassenger	Attribute	mealPlan	Fixed value 1.	Yes, if parent is present.
@passengernumber	Attribute	mealPlan	Specifies the passenger number. All meal plans on a specific date with the same passengernumber will be grouped.	Yes, if parent is present.
<b>meal</b>	Element	mealPlan	Encapsulates details about a particular meal that needs to be booked.	Yes, if parent is present.
@runno	Attribute	meal	Running number starting from 0.	Yes, if parent is present.
<b>code</b>	Element	meal	Meal Internal code.	Yes, if parent is present.
<b>mealTypeCode</b>	Element	meal	Meal Type Internal code.	Yes, if parent is present.
<b>units</b>	Element	meal	Number of meals included in this meal plan (for this passenger).	Yes, if parent is present.
<b>mealPrice</b>	Element	meal	Meal price received in the <b>getRooms</b> method. This should be the price without the formatting.	Yes, if parent is present.
<b>passengersDetails</b>	Element	room	Encapsulates details about passengers in the booking. Please note for each room booked at least one <b>passenger</b> element with @leading value yes should be present.	Yes.
<b>passenger</b>	Element	passengersDetails	Encapsulates details about one passenger in the booking. Please note for each room booked the room will be blocked under the leading passenger.	Yes, at least one occurrence.
@leading	Attribute	passenger	Specifies if the passenger is the leading passenger for this room. You can skip this attribute if the passenger is not the leading one. Possible values: 1. yes 2. no	Yes, at least one occurrence with value `yes`.

<b>salutation</b>	Element	passenger	The internal code for Salutations (Mr, Mrs etc). This code can be obtained by calling the <b>getsalutations</b> method.	Yes.
<b>firstName</b>	Element	passenger	First name of the leading passenger. Following restrictions are required to be implemented <ul style="list-style-type: none"> <li>names should contain minimum 2 characters and maximum 25;</li> <li>no white spaces or special characters allowed;</li> <li>all the adults passenger names should be passed in the confirmbooking request</li> <li>In case of multiple first/last name, automatically trim the white spaces</li> </ul> Full Name: James Lee Happy Traveler firstName: JamesLee lastName:HappyTraveler	Yes.
<b>lastName</b>	Element	passenger	Last name of the leading passenger.	Yes.
<b>specialRequests</b>	Element	room	Encapsulates the details containing the special requests the customers has requested for this room.	Yes.
<b>@count</b>	Attribute	specialRequests	Total number of special requests for the room.	Yes.
<b>req</b>	Element	specialRequests	Internal code for the Special Request. This code can be obtained by calling the <b>getspecialrequestsids</b> method.	No.
<b>@runno</b>	Attribute	req	Running Serial number, starting from 0.	Yes, if parent present.
<b>beddingPreference (V3 &amp; V4 only)</b>	Element	room	Specifies the category of bedding preference. <b>Subject to availability at check-in</b> Possible values: <ul style="list-style-type: none"> <li>0- No preference</li> <li>1- King size</li> <li>2- Queen size</li> <li>3- Twin</li> </ul>	Yes.

### confirmbooking\_hotel.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:include schemaLocation="loginDetails.xsd"></xs:include>
03.   <xs:include schemaLocation="bookingDetails.xsd"></xs:include>
04.   <xs:include schemaLocation="general.xsd"></xs:include>
05.   <xs:element name="customer">
06.     <xs:complexType>
07.       <xs:sequence>
08.         <xs:group ref="loginDetailsGroup"></xs:group>
09.         <xs:element name="product" type="xs:string" fixed="hotel"></xs:element>
10.         <xs:element name="request" type="requestType"></xs:element>
11.       </xs:sequence>
12.     </xs:complexType>
13.   </xs:element>
14.   <!-- ##### -->
15.   <xs:complexType name="requestType">
16.     <xs:sequence>
17.       <xs:element name="bookingDetails" type="confirmBookingBookingDetailsType"></xs:element>
18.     </xs:sequence>
19.     <xs:attribute name="command" type="xs:string" use="required" fixed="confirmbooking"></xs:attribute>
20.     <xs:attribute name="debug" type="xs:integer" use="optional"></xs:attribute>
21.     <xs:attribute name="defaultnamespace" type="xs:string" use="optional" fixed="true"></xs:attribute>
22.   </xs:complexType>
23. </xs:schema>

```

# General Response

For every **confirmbooking** request sent to our DOTWconnect Server the response format will be as follows. All the necessary details regarding the elements returned in the confirmbooking response are presented in the below table. It is important to take into consideration the element **successful** that will inform you upon the **confirmbooking** method's success or failure.

```

01. <result command="confirmbooking" ip="192.168.0.1" date="1227776854">
02.   <confirmationText></confirmationText>
03.   <returnedCode></returnedCode>
04.   <bookings>
05.     <booking runno="0">
06.       <bookingCode></bookingCode>
07.       <bookingReferenceNumber></bookingReferenceNumber>
08.       <bookingStatus></bookingStatus>
09.       <servicePrice>
10.         <formatted></formatted>
11.       </servicePrice>
12.       <mealsPrice>
13.         <formatted></formatted>
14.       </mealsPrice>
15.       <price>
16.         <formatted></formatted>
17.       </price>
18.       <currency></currency>
19.       < type>hotel</ type>
20.       <voucher></voucher>
21.       <paymentGuaranteedBy></paymentGuaranteedBy>
22.       <emergencyContacts count="">
23.         <emergencyContact runno="">
24.           <salutation code=""></salutation>
25.           <fullName></fullName>
26.           <phone></phone>
27.         </emergencyContact>
28.       </emergencyContacts>
29.     </booking>
30.   </bookings>
31.   <successful>TRUE</successful>
32. </result>

```

Item	Type	Parent	Description
<b>result</b>	Element	root	The root element.
@command	Attribute	result	The request command which returned this result.
@date	Attribute	result	The date and time when the result was provided in unix timestamp.
@ip	Attribute	result	The IPv4 address the request was made from.
<b>confirmationText</b>	Element	result	Itinerary Confirmation Text in HTML format.
<b>returnedCode</b>	Element	product	Internal itinerary code. This will have to be passed to all other operations regarding this booking and accepts itinerary codes.
<b>bookings</b>	Element	product	Encapsulates information about all bookings.
<b>booking</b>	Element	bookings	Information about one booking
@runno	Attribute	booking	Running number starting from 0.
<b>bookingCode</b>	Element	booking	Internal booking code. This will have to be passed to all other operations regarding this booking.
<b>bookingReferenceNumber</b>	Element	booking	Confirmation number for this booking. The unique confirmation number generated by DOTWconnect. This number is provided to the Customers and Suppliers and is a key to identify this booking. The confirmation number is the internal booking code prefixed with the service and booking office details.

<b>bookingStatus</b>	Element	booking	Specifies if the booking is confirmed from allotment or on request. Possible values: <ul style="list-style-type: none"> <li>1 - on request</li> <li>2 - confirmed</li> </ul>
<b>servicePrice</b>	Element	booking	Payable amount for this booking. Extra meals price is not included.
<b>formatted</b>	Element	servicePrice	This element contains the payable amount for this booking formatted as per the customer preference (decimal places, thousand separator, decimal separator)
<b>mealsPrice</b>	Element	booking	Payable amount for this booking's extra meals.
<b>formatted</b>	Element	mealsPrice	This element contains the payable amount for this booking's extra meals formatted as per the customer preference (decimal places, thousand separator, decimal separator)
<b>price</b>	Element	booking	Total payable amount for this booking, including extra meals.
<b>formatted</b>	Element	price	This element contains the total payable amount for this booking, including extra meals. formatted as per the customer preference (decimal places, thousand separator, decimal separator)
<b>currency</b>	Element	booking	Internal code for the currency in which the prices are calculated
<b>type</b>	Element	booking	Service type. Possible values: <ul style="list-style-type: none"> <li>Hotel</li> <li>Apartment</li> </ul>
<b>voucher</b>	Element	booking	Booking voucher in HTML format.
<b>paymentGuaranteedBy</b>	Element	booking	Specifies who guarantees for the booking. This information needs to be present on the voucher.
<b>emergencyContacts</b>	Element	booking	Groups relevant contacts in case of emergency. These contact numbers need to be present on the voucher.
<b>count</b>	Attribute	emergencyContacts	Specifies how many contacts are available for this booking.
<b>emergencyContact</b>	Element	emergencyContacts	Groups information about an emergency contact.
<b>runno</b>	Attribute	emergencyContacts	Serial number starting from 0.
<b>salutation</b>	Element	emergencyContact	Contact Person Salutation
<b>id</b>	Attribute	salutation	Internal code for the salutation
<b>fullName</b>	Element	emergencyContact	Contact Person full name
<b>phone</b>	Element	emergencyContact	Contact phone number
<b>successful</b>	Element	result	Specifies if the request was successfully processed. Possible values: <ul style="list-style-type: none"> <li>TRUE</li> <li>FALSE</li> </ul>

confirmbooking\_response.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="result" type="resultType"></xs:element>
03.   <xs:complexType name="resultType">
04.     <xs:all>
05.       <xs:element name="currencyShort" type="currencyShortType"></xs:element>
06.       <xs:element name="confirmationText" type="xs:string"></xs:element>

```

```

07.         <xs:element name="returnedCode" type="xs:nonNegativeInteger"></xs:element>
08.         <xs:element name="bookings" type="bookingsType"></xs:element>
09.         <xs:element name="successful" type="trueOrFalse"></xs:element>
10.     </xs:all>
11.     <xs:attribute name="command" type="xs:string" use="required" fixed="confirmbooking"></xs:attribute>
12.     <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
13.     <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
14.     <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
15.     <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
16. </xs:complexType>
17. <xs:simpleType name="currencyShortType">
18.     <xs:restriction base="xs:string">
19.         <xs:pattern value="[A-Z]{3}"></xs:pattern>
20.     </xs:restriction>
21. </xs:simpleType>
22. <xs:simpleType name="trueOrFalse">
23.     <xs:restriction base="xs:string">
24.         <xs:pattern value="true|false|TRUE|FALSE"></xs:pattern>
25.     </xs:restriction>
26. </xs:simpleType>
27. <xs:simpleType name="dotwIP">
28.     <xs:restriction base="xs:string">
29.         <xs:pattern value="{25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9][0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0}\.(25[0-5]|2[0-4][0-9]|0-1){1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0}\.(25[0-5]|2[0-4][0-9]|0-1){1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0}\."></xs:pattern>
30.     </xs:restriction>
31. </xs:simpleType>
32. <xs:simpleType name="dotwDateType">
33.     <xs:restriction base="xs:string">
34.         <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}(\s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*|([0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2})(\s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*"></xs:pattern>
35.     </xs:restriction>
36. </xs:simpleType>
37. <xs:simpleType name="versionType">
38.     <xs:restriction base="xs:string">
39.         <xs:pattern value="[1-9]{1}([0-9])*\.[0-9]{1}([0-9])*"></xs:pattern>
40.     </xs:restriction>
41. </xs:simpleType>
42. <xs:complexType name="bookingsType">
43.     <xs:sequence>
44.         <xs:element name="booking" type="bookingType" minOccurs="1" maxOccurs="unbounded"></xs:element>
45.     </xs:sequence>
46. </xs:complexType>
47. <xs:complexType name="bookingType">
48.     <xs:sequence>
49.         <xs:element name="bookingCode" type="xs:nonNegativeInteger"></xs:element>
50.         <xs:element name="bookingReferenceNumber" type="xs:string"></xs:element>
51.         <xs:element name="bookingStatus" type="xs:nonNegativeInteger"></xs:element>
52.         <xs:element name="servicePrice" type="servicePriceType"></xs:element>
53.         <xs:element name="mealsPrice" type="servicePriceType"></xs:element>
54.         <xs:element name="price" type="servicePriceType"></xs:element>
55.         <xs:element name="currency" type="xs:nonNegativeInteger"></xs:element>
56.         <xs:element name="type" type="xs:string"></xs:element>
57.         <xs:element name="voucher" type="xs:string"></xs:element>
58.         <xs:element name="paymentGuaranteedBy" type="xs:string"></xs:element>
59.         <xs:element name="emergencyContacts" type="emergencyContactsType"></xs:element>
60.     </xs:sequence>
61.     <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"></xs:attribute>
62. </xs:complexType>
63. <xs:complexType name="servicePriceType" mixed="true">
64.     <xs:sequence>
65.         <xs:element name="formatted" type="xs:string"></xs:element>
66.     </xs:sequence>
67. </xs:complexType>
68. <xs:complexType name="emergencyContactsType">
69.     <xs:sequence>
70.         <xs:element name="emergencyContact" type="emergencyContactType" minOccurs="0" maxOccurs="unbounded">
71.         </xs:sequence>
72.         <xs:attribute name="count" type="xs:nonNegativeInteger" use="required"></xs:attribute>
73.     </xs:complexType>
74. <xs:complexType name="emergencyContactType">
75.     <xs:sequence>
76.         <xs:element name="salutation">
77.             <xs:complexType>
78.                 <xs:simpleContent>
79.                     <xs:extension base="xs:string">
80.                         <xs:attribute name="id" type="xs:nonNegativeInteger" use="required"></xs:attribute>
81.                     </xs:extension>
82.                 </xs:simpleContent>
83.             </xs:complexType>
84.         </xs:element>
85.         <xs:element name="fullName" type="xs:string"></xs:element>
86.         <xs:element name="phone" type="xs:string"></xs:element>
87.     </xs:sequence>
88.     <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"></xs:attribute>
89. </xs:complexType>
90. </xs:schema>

```

## Re-confirm booking process

The new feature has the purpose to enhance our customers experience, by providing alternative offers in cases when DOTW receive from its suppliers different conditions in the confirmation step.

Therefore, instead of only returning an error message in such cases, the re-confirmation process will provide additional details about the new booking conditions, offering to our customers the possibility to finalize the booking.

The confirmation response will still return an error Code and error message, but in addition to this, the extraDetails tag will contain the new booking conditions.

**important:** For those customers who are interested to implement the re-confirmation process logic, it is mandatory to add in the confirmbooking request a new tag: <returnReconfirm>. Additional details can be found under Hotel Comm Structure - Confirm Booking -> General Request section.

It is mandatory that in the new confirmbooking request, the customer will use the **allocationDetails** token generated in the extraDetails tag, as this encapsulates the new booking conditions.

```

01. <!-- ?xml version="1.0" encoding="UTF-8"? -->
02. <result command="confirmbooking" date="2018-05-
19 07:51:23" elapsedtime="58.839843034744" ip="192.168.0.71" tid="1526716224100001" version="3.0">
03.   <request>
04.     <successful>FALSE</successful>
05.     <error>
06.       <class>GeneralRequestConfirmBooking</class>
07.       <code>151</code>
08.       <details>Unable to confirm the booking due to a rate change from supplier</details>
09.       <extradetails>
10.         <rooms no="1">
11.           <room changed="price" haserror="true" runno="0">
12.             <currencyshort>USD</currencyshort>
13.             <code>31723509</code>
14.             <selectedratebasis>0</selectedratebasis>
15.             <allocationdetails>15267162260000018101180</allocationdetails>
16.             <price> 44.267408421958 <formatted>44.267408421958</formatted>
17.           </price>
18.           <cancellationrules count="3">
19.             <rule runno="0">
20.               <todate>2018-05-23 14:59:59</todate>
21.               <todatedetails>Wed, 01 May 2018 14:59:59</todatedetails>
22.               <amendcharge> 0 <formatted>0.00</formatted>
23.             </amendcharge>
24.             <cancelcharge> 0 <formatted>0.00</formatted>
25.             <charge> 0 <formatted>0.00</formatted>
26.           </rule>
27.           <rule runno="1">
28.             <fromdate>2018-05-23 15:00:00</fromdate>
29.             <fromdatedetails>Wed, 01 May 2018 15:00:00</fromdatedetails>
30.             <amendcharge> 67.2194 <formatted>67.22</formatted>
31.             <cancelcharge> 67.2194 <formatted>67.22</formatted>
32.             <charge> 67.2194 <formatted>67.22</formatted>
33.           </rule>
34.           <rule runno="2">
35.             <fromdate>2018-05-25 00:00:00</fromdate>
36.             <fromdatedetails>Fri, 01 May 2018 00:00:00 / Midnight</fromdatedetails>
37.             <noshowpolicy>true</noshowpolicy>
38.             <charge> 67.2194 <formatted>67.22</formatted>
39.           </rule>
40.         </rooms>
41.       </extradetails>
42.     </error>
43.   </request>
44. </result>

```

Item	Type	Parent	Description
result	Element	root	The root element.
@date	Attribute	result	The unix timestamp date and time when the result has been provided.
@command	Attribute	result	The command for which the result is shown.
request	Element	result	Contains specific data for the unsuccessful request command.
successful	Element	request	Indicates that the request was not successfully processed.
error	Element	request	Contains information about the error.

<b>code</b>	Element	error	Internal error code.	
<b>details</b>	Element		Details about the error.	
<b>extraDetails</b>	Element	error	Extra details regarding the error.	
<b>successful</b>	element	request	Indicates if the response is a successful or a failed one. Possible values <ul style="list-style-type: none"> <li>• <b>FALSE</b></li> <li>• <b>TRUE</b></li> </ul>	No.
<b>rooms</b>	Element	extraDetails	Specifies the number of rooms for which new conditions have been returned.	No.
<b>room</b>	Element	rooms	Encapsulates the booking conditions for the first room.	No.
<b>haserror</b>	attribute	response	Indicates if the confirmation response triggered an error from DOTW server. Fixed value: 'true'	No.
<b>changed</b>	attribute	response	Specifies the reason of the booking failure and which conditions have changed. Possible values: <ul style="list-style-type: none"> <li>• <b>price</b></li> <li>• <b>price cxl</b></li> <li>• <b>cxl</b></li> </ul>	No.
<b>currencysort</b>	element	room	Short currency code in which rates are returned	No.
<b>code</b>	Element	room	DOTW Internal RoomTypeCode for the selected room.	No.
<b>selectedratebasis</b>	Element	room	DOTW Internal Code for the selected rateBasis	No.
<b>allocationdetails</b>	Element	room	AllocationDetails Token which encapsulates the new booking conditions. To be used in the next confirmbooking request;	No.
<b>price</b>	Element	room	New booking price	No.
<b>cancellationrules</b>	element	room	Encapsulates details about the new cancellation rules	No.
<b>rule</b>	Element	cancellationrules	Indicates the cancellation rule number.	No.
<b>fromdate</b>	Element	rule	Starting date of the rule. From this day forward until toDate (if present), the specified charge will be applied for any cancellations or amendments. If this element is not present then the charge will be applied from the current date until toDate. Date format is: YYYY-MM-DD HH:MM:SS	No.
<b>fromdatedetails</b>	Element	rule	From Date in Weekday Month Day, Year HH:MM:SS format.	No.
<b>amendcharge</b>	Element	rule	Amendment charge that will be applied if booking is amended in the period defined by this rule.	No.
<b>cancelCharge</b>	Element	rule	Cancellation charge that will be applied if booking is canceled in the period defined by this rule.	No.
<b>cancelRestricted</b>	Element	rule	If present, this element indicates that a future cancel (using the cancelbooking or deleteitinerary methods) done in the time period defined by this rule, will not be possible. Fixed value: TRUE	No.
<b>amendRestricted</b>	Element	rule	If present, this element indicates that a future amendment (using the updatebooking method) done in the time period defined by this rule, will not be possible. Fixed value: TRUE	No.
<b>noshowpolicy</b>	Element	rule	If present, this element indicates that the presented charge is a no show charge. In this case the elements fromDate, fromDateDetails, toDate, toDateDetails, amendingPossible will be absent. Fixed value: TRUE	No.

# Get Booking Details

## General Request

This request is used to retrieve all the available details that belong to an already existing booking (**saved** - using the savebooking method or **confirmed** using confirmbooking/bookitinerary methods). This method can be used for all DOTW services but the response might vary from service to service.

```

01.  <customer>
02.    <username>username</username>
03.    <password>md5(password)</password>
04.    <id>company code</id>
05.    <source>1</source>
06.    <request command="getbookingdetails">
07.      <bookingDetails>
08.        <bookingType></bookingType>
09.        <bookingCode></bookingCode>
10.      </bookingDetails>
11.    </request>
12.  </customer>

```

Item	Type	Parent	Description	Required
bookingDetails	Element	request	Encapsulates the detail of the booking for which the details are requested for	Yes.
bookingType	Element	bookingDetails	Specifies at what stage the booking is currently. A booking can be either in Saved stage or Confirmed stage. Possible values: <ul style="list-style-type: none"> <li>1 - Confirmed</li> <li>2 - Saved</li> </ul>	Yes.
bookingCode	Element	bookingDetails	Internal code for the Booking which was returned by DOTWconnect when the booking was Saved or Confirmed.	Yes.

### getbookingdetails.xsd

```

01.  <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.    <xs:include schemaLocation="loginDetails.xsd"></xs:include>
03.    <xs:include schemaLocation="general.xsd"></xs:include>
04.    <!-- ##### -->
05.    <xs:element name="customer">
06.      <xs:complexType>
07.        <xs:sequence>
08.          <xs:group ref="loginDetailsGroup"></xs:group>
09.          <xs:element name="request" type="requestType"></xs:element>
10.        </xs:sequence>
11.      </xs:complexType>
12.    </xs:element>
13.    <!-- ##### -->
14.    <xs:complexType name="requestType">
15.      <xs:all>
16.        <xs:element name="bookingDetails">
17.          <xs:complexType>
18.            <xs:sequence>
19.              <xs:group ref="bookingTypeAndCode"></xs:group>
20.            </xs:sequence>
21.          </xs:complexType>
22.        </xs:element>
23.      </xs:all>
24.      <xs:attribute name="command" type="xs:string" use="required" fixed="getbookingdetails"></xs:attribute>
25.      <xs:attribute name="debug" type="xs:integer"></xs:attribute>
26.      <xs:attribute name="defaultnamespace" type="xs:string" use="optional" fixed="true"></xs:attribute>
27.    </xs:complexType>
28.  </xs:schema>

```

## General Response (Hotel)

For a service which is booked on the DOTWconnect server the getbookingdetails response has the following format. The response will list all the details pertaining to the specified booking (i.e. room details, passenger details including adults and children, meals, special requests if any etc).



```

01. <result command=" " date="" ip="">
02.   <product>
03.     <productSpecialRequests count="">
04.       <specialRequest id="" checked="checked"></specialRequest>
05.     </productSpecialRequests>
06.     <booked></booked>
07.     <code></code>
08.     <bookingReferenceNumber></bookingReferenceNumber>
09.     <servicePrice> Actual Service Price <formatted></formatted>
10.   </servicePrice>
11.   <currency></currency>
12.   <shortCurrency></shortCurrency>
13.   <paymentGuaranteedBy></paymentGuaranteedBy>
14.   <emergencyContacts count="">
15.     <emergencyContact runno="">
16.       <salutation id=""></salutation>
17.       <fullName></fullName>
18.       <phone></phone>
19.     </emergencyContact>
20.   </emergencyContacts>
21.   <invoiced></invoiced>
22.   <status></status>
23.   <service></service>
24.   <serviceId></serviceId>
25.   <serviceName></serviceName>
26.   <adults></adults>
27.   <children no="">
28.     <child runno=""></child>
29.   </children>
30.   <extraBed></extraBed>
31.   <cancellationRules count="">
32.     <rule runno="">
33.       <fromDate></fromDate>
34.       <fromDateDetails></fromDateDetails>
35.       <toDate></toDate>
36.       <toDateDetails></toDateDetails>
37.     </rule>
38.   </cancellationRules>
39.   <serviceLocation></serviceLocation>
40.   <cancel></cancel>
41.   <allowAmend></allowAmend>
42.   <onRequest></onRequest>
43.   <customerReference></customerReference>
44.   <passengersDetails>
45.     <passenger leading="">
46.       <salutation value=""></salutation>
47.       <firstName></firstName>
48.       <lastName></lastName>
49.     </passenger>
50.   </passengersDetails>
51.   <from></from>
52.   <to></to>
53.   <numberOfNights></numberOfNights>
54.   <fromShort></fromShort>
55.   <toShort></toShort>
56.   <roomTypeCode></roomTypeCode>
57.   <rateBasis></rateBasis>
58.   <roomName></roomName>
59.   <roomInfo>
60.     <maxAdult></maxAdult>
61.     <maxExtraBed></maxExtraBed>
62.     <allowTwin></allowTwin>
63.     <maxChildren></maxChildren>
64.   </roomInfo>
65.   <roomCategory></roomCategory>
66.   <extraMeals>
67.     <mealDate runno="" wday="" day="" datetime="">
68.       <mealType mealtypeName="" mealtypecode="">
69.         <meal runno="" applicablefor="" startage="" endage="">
70.           <mealCode></mealCode>
71.           <mealName></mealName>
72.           <mealPrice>
73.             <formatted></formatted>
74.           </mealPrice>
75.         </meal>
76.       </mealType>
77.     </mealDate>
78.   </extraMeals>
79.   <selectedExtraMeals>
80.     <mealPlanDate mealplandatetime="">
81.       <mealPlan runno="" mealscount="" applicablefor="" childage="" ispassenger="" passengernumber="">
82.         <meal runno="">
83.           <code></code>
84.           <mealTypeCode></mealTypeCode>
85.           <units></units>
86.           <mealPrice>
87.             <formatted></formatted>
88.           </mealPrice>
89.           <mealTypeName></mealTypeName>
90.           <mealName></mealName>
91.           <bookedMealCode></bookedMealCode>
92.         </meal>
93.       </mealPlan>
94.     </mealPlanDate>
95.
96.

```

```

97.      </selectedExtraMeals>
98.      </product>
99.      <successful>TRUE</successful>
100.    </result>

```

Item	Type	Parent	Description
<b>result</b>	Element	root	The root element.
@command	Attribute	result	The request command which returned this result.
@date	Attribute	result	The date and time when the result was provided in unix timestamp.
@ip	Attribute	result	The IPv4 address the request was made from.
<b>product</b>	Element	result	Contains information about a specific booked service.
<b>productSpecialRequests</b>	Element	product	Encapsulates a list with all the special requests made for this booking.
@count	Attribute	specialRequests	Total number of special requests that can be requested while making a booking for Hotels
<b>specialRequest</b>	Element	specialRequests	Internal code for the special request
@runno	Attribute	specialRequest	Running number starting from 0
<b>booked</b>	Element	product	Indicates whether the booking is a saved booking or confirmed booking. Possible values: <ul style="list-style-type: none"> <li>• yes</li> <li>• no</li> </ul>
<b>code</b>	Element	product	Internal Code generated by DOTWconnect for this booking.
<b>bookingReferenceNumber</b>	Element	product	Confirmation number for this booking. The unique confirmation number generated by DOTWconnect. This number is provided to the Customers and Suppliers and is a key to identify this booking. The confirmation number is the internal booking code prefixed with the service and booking office details.
<b>supplierConfirmation</b>	Element	product	The confirmation response
<b>servicePrice</b>	Element	product	Total payable amount for this booking.
<b>formatted</b>	Element	servicePrice	This element contains the total price payable for this booking formatted as per the customer preference (decimal places, thousand separator, decimal separator)
<b>currency</b>	Element	product	Internal code for the currency in which the prices are calculated
<b>currencyShort</b>	Element	product	Three letter code for the currency
<b>paymentGuaranteedBy</b>	Element	product	The payment guaranty information.
<b>emergencyContacts</b>	Element	product	Groups information about the emergency contacts.
<b>emergencyContact</b>	Element	emergencyContacts	Encapsulates emergency contact data.
@runno	Attribute	emergencyContact	Running number starting from 0.
<b>salutation</b>	Element	emergencyContact	Salutation text
@id	Attribute	salutation	Salutation ID
<b>fullName</b>	Element	emergencyContact	Full name.
<b>phone</b>	Element	emergencyContact	Phone number

<b>invoiced</b>	Element	product	This element indicates if the booking is invoiced or not. Possible values: <ul style="list-style-type: none"> <li>• true</li> <li>• false</li> </ul>
<b>status</b>	Element	product	This element indicates the status of the booking. Possible values: <ul style="list-style-type: none"> <li>• 1665 - On Request</li> <li>• 1666 - Confirmed</li> <li>• 1667 - Canceled</li> <li>• 1668 - Amended On Request</li> <li>• 1669 - Amended Confirmed</li> <li>• 1707 - Denied</li> <li>• 1708 - Saved</li> </ul>
<b>service</b>	Element	product	This element indicates the service involved in this booking. For Hotel bookings this will have a value <b>hotel</b> .
<b>serviceId</b>	Element	product	Internal Code for the Hotel booked
<b>serviceName</b>	Element	product	Name of the Hotel
<b>adults</b>	Element	product	Number of adults for this booking.
<b>children</b>	Element	product	Contains info about the children for this booking.
<b>@no</b>	Attribute	children	Total number of children for this booking.
<b>child</b>	Element	children	Specifies child age.
<b>@runno</b>	Attribute	child	Specifies for which child the age applies.
<b>extraBed</b>	Element	product	Number of extra beds in the room for this booking.
<b>cancellationRules</b>	Element	product	Encapsulates details about the cancellation policy applicable for this room type and rate basis.
<b>@count</b>	Attribute	cancellationRules	Specifies the number of cancellation policies.
<b>rule</b>	Element	cancellationRules	Contains details about a specific cancellation policy.
<b>@runno</b>	Attribute	rule	Running serial number starting from 0.
<b>fromDate</b>	Element	rule	Starting date of the rule. From this date forward until toDate (if present), the specified charge will be applied for any cancellations or amendments. If this element is not present then the charge will be applied from date the booking was made until toDate. Date format is: YYYY-MM-DD HH:MM:SS
<b>fromDateDetails</b>	Element	rule	From Date in Weekday Month Day, Year HH:MM:SS format.
<b>toDate</b>	Element	rule	Ending date of the rule. The specified charge will be applied for any cancellations or amendments until this date. If this element is not present then the charge from fromDate onwards. Date format is: YYYY-MM-DD HH:MM:SS
<b>toDateDetails</b>	Element	rule	To Date in Weekday Month Day, Year HH:MM:SS format.
<b>charge</b>	Element	rule	Cancellation/Amendment charge that will be applied if booking cancelled following this rule.
<b>formatted</b>	Element	charge	Cancellation/Amendments charge formatted as per the customer preference (decimal places, thousand separator, decimal separator).
<b>serviceLocation</b>	Element	product	Hotel location in <i>City, Country</i> format

<b>cancel</b>	Element	product	Specifies if this booking can be cancelled. Possible values: <ul style="list-style-type: none"> <li>• yes</li> <li>• no</li> </ul>
<b>allowAmmend</b>	Element	product	Specifies if this booking can be amended. Possible values: <ul style="list-style-type: none"> <li>• yes</li> <li>• no</li> </ul>
<b>onRequest</b>	Element	product	Specifies if this booking is on request. Possible values: <ul style="list-style-type: none"> <li>• yes</li> <li>• no</li> </ul>
<b>customerReference</b>	Element	product	Internal reference provided by the customer.
<b>passengersDetails</b>	Element	product	Groups information about the passengers.
<b>passenger</b>	Element	passengersDetails	Encapsulates details about one passenger in the booking.
@leading	Attribute	passenger	Specifies if the passenger is the leading passenger for this room.
@runno	Attribute	passenger	Running number starting from 0.
<b>code</b>	Element	passenger	Passenger code.
<b>salutation</b>	Element	passenger	Salutation for the leading person.
<b>firstName</b>	Element	passenger	First Name of the leading Person
<b>lastName</b>	Element	passenger	Last Name of the leading Person
<b>from</b>	Element	product	Arrival date in the YYYY-MM-DD format.
<b>to</b>	Element	product	Departure date in the YYYY-MM-DD format.
<b>numberOfNights</b>	Element	product	Number of nights.
<b>fromShort</b>	Element	product	Arrival date in a formatted text showing weekday and name of the month.
<b>toShort</b>	Element	product	Departure date in a formatted text showing weekday and name of the month.
<b>roomTypeCode</b>	Element	product	Internal code for the room type.
<b>rateBasis</b>	Element	product	Internal code for the rate basis booked with this room type.
<b>roomName</b>	Element	product	Name of the Room Type
<b>roomInfo</b>	Element	product	Contains information about the occupancy of the room.
<b>maxAdult</b>	Element Element	roomInfo	Maximum number of adults this room can accommodate.
<b>maxExtraBed</b>	Element	roomInfo	Number of extrabeds this room can accommodate.
<b>allowTwin</b>	Element	roomInfo	Specifies if this room is twin or not. Possible values: <ul style="list-style-type: none"> <li>• 0</li> <li>• 1</li> </ul>
<b>maxChildren</b>	Element	roomInfo	Maximum number of children this room can accommodate.
<b>roomCategory</b>	Element	product	Category of this Room
<b>extraMeals</b>	Element	product	Encapsulates information about extra meals provided by the hotel grouped by the date.
@count	Attribute	extraMeals	Meals number

<b>mealDate</b>	Element	extraMeals	Contains details about extra meals provided by the hotel on a specific date grouped by meal types.
@wday	Attribute	mealDate	Week day number (from 0 (Sunday) to 6 (Saturday)).
day	Attribute	mealDate	Day-of-the-week name Month, day-of-the-month, year.
@datetime	Attribute	mealDate	Date in YYYY-MM-DD HH:MM:SS format.
<b>mealType</b>	Element	mealDate	Contains information about each meal in a certain category(type) - e.g. Breakfast, Lunch.
@mealtypename	Attribute	mealType	Meal Type Name.
@mealtypecode	Attribute	mealType	Meal Type Internal Code.
<b>meal</b>	Element	mealType	Groups together details of one specific meal
@runno	Attribute	meal	Running Number starting from 0.
@applicablefor	Attribute	meal	Specifies if this meal (and its price) is applicable for adults or children. Possible values: <ul style="list-style-type: none"> <li>adult</li> <li>child</li> </ul>
@startage	Attribute	meal	If <b>@applicablefor</b> is <b>child</b> this attribute will indicate from what age this meal is applicable
@endage	Attribute	meal	If <b>@applicablefor</b> is <b>child</b> this attribute will indicate upto what age this meal is applicable
<b>mealCode</b>	Element	meal	Internal Code for the Meal
<b>mealName</b>	Element	meal	Name of the Meal
<b>mealPrice</b>	Element	meal	Meal price.
<b>formatted</b>	Element	mealPrice	This element contains the meal price formatted as per the customer preference (decimal places, thousand separator, decimal separator)
<b>selectedExtraMeals</b>	Element	product	Encapsulates information about booked extra meals grouped by dates and passengers.
<b>mealPlanDate</b>	Element	selectedExtraMeals	Groups extra meals per a specific date.
@mealplandatetime	Attribute	mealPlanDate	Meal plan date in YYYY-MM-DD format.
<b>mealPlan</b>	Element	mealPlanDate	Encapsulates details about one meal plan for one passenger.
@runno	Attribute	mealPlan	Running number starting from 0.
@mealscount	Attribute	mealPlan	Number of meals for this passenger.
@applicablefor	Attribute	mealPlan	Specifies if this meal plan is for an adult passenger or a child.
@childage	Attribute	mealPlan	Specifies the age of the child passenger.
@ispassenger	Attribute	mealPlan	Fixed value 1.
@passengernumber	Attribute	mealPlan	Specified the passenger number this meal plan was booked for.
<b>meal</b>	Element	mealPlan	Encapsulates details about a booked meal.
@runno	Attribute	meal	Running number starting from 0.
<b>code</b>	Element	meal	Meal Internal code.
<b>units</b>	Element	meal	Number of meals included in this meal plan (for this passenger).

<b>mealTypeCode</b>	Element	meal	Meal Type Internal code.
<b>mealPrice</b>	Element	meal	Meal price.
<b>formatted</b>	Element	mealPrice	This element contains the meal price formatted as per the customer preference (decimal places, thousand separator, decimal separator)
<b>mealTypeName</b>	Element	meal	Meal type name.
<b>mealName</b>	Element	meal	Meal Name
<b>bookedMealCode</b>	Element	meal	Booked Meal internal code.
<b>successful</b>	Element	result	Specifies if the request was successfully processed. Possible values: <ul style="list-style-type: none"> <li>• TRUE</li> <li>• FALSE</li> </ul>

## getbookingdetails\_response.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="result" type="resultType"></xs:element>
03.   <xs:complexType name="resultType">
04.     <xs:sequence>
05.       <xs:choice>
06.         <xs:element name="itinerary" type="itineraryType" minOccurs="0" maxOccurs="1"></xs:element>
07.         <xs:element name="product" type="productType" minOccurs="0" maxOccurs="unbounded"></xs:element>
08.       </xs:choice>
09.       <xs:element name="successful" type="trueOrFalse"></xs:element>
10.     </xs:sequence>
11.     <xs:attribute name="command" type="xs:string" use="required" fixed="getbookingdetails"></xs:attribute>
12.     <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
13.     <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
14.     <xs:attribute name="sip" type="dotwIP" use="optional"></xs:attribute>
15.     <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
16.     <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
17.     <xs:attribute name="elapsedTime" type="xs:decimal" use="required"></xs:attribute>
18.   </xs:complexType>
19.   <xs:simpleType name="dotwIP">
20.     <xs:restriction base="xs:string">
21.       <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[ 1][0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[0-9])" />
22.     </xs:restriction>
23.   </xs:simpleType>
24.   <xs:simpleType name="dotwDateType">
25.     <xs:restriction base="xs:string">
26.       <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}(\s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*|[0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2}(\s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*"></xs:pattern>
27.     </xs:restriction>
28.   </xs:simpleType>
29.   <xs:simpleType name="versionType">
30.     <xs:restriction base="xs:string">
31.       <xs:pattern value="[1-9]{1}([0-9])*.([0-9])*"></xs:pattern>
32.     </xs:restriction>
33.   </xs:simpleType>
34.   <xs:complexType name="itineraryType">
35.     <xs:sequence>
36.       <xs:element name="code" type="xs:integer"></xs:element>
37.       <xs:element name="itineraryReferenceNumber" type="xs:string"></xs:element>
38.       <xs:element name="containing" type="containingType"></xs:element>
39.     </xs:sequence>
40.   </xs:complexType>
41.   <xs:complexType name="containingType">
42.     <xs:sequence>
43.       <xs:element name="product" type="productType" minOccurs="1" maxOccurs="unbounded"></xs:element>
44.     </xs:sequence>
45.   </xs:complexType>
46.   <xs:complexType name="productType">
47.     <xs:all>
48.       <xs:element name="rateBases" type="rateBasesType"></xs:element>
49.       <xs:element name="beddingPreferences" type="beddingPreferencesType"></xs:element>
50.       <xs:element name="specialRequests" type="specialRequestsType"></xs:element>
51.       <xs:element name="salutations" type="salutationsType"></xs:element>
52.       <xs:element name="booked" type="yesOrNo" maxOccurs="1"></xs:element>
53.       <xs:element name="code" type="xs:integer" maxOccurs="1"></xs:element>
54.       <xs:element name="bookingReferenceNumber" type="xs:string"></xs:element>
55.       <xs:element name="supplierConfirmation" type="xs:string"></xs:element>
56.       <xs:element name="servicePrice" type="servicePriceType"></xs:element>
57.       <xs:element name="currency" type="xs:unsignedInt"></xs:element>
58.       <xs:element name="currencyShort" type="currencyShortType"></xs:element>
59.       <xs:element name="paymentGuaranteedBy" type="xs:string"></xs:element>

```

```

60.     <xs:element name="emergencyContacts" type="emergencyContactsType"/></xs:element>
61.     <xs:element name="invoiced" type="xs:boolean"/></xs:element>
62.     <xs:element name="status" type="statusType"/></xs:element>
63.     <xs:element name="service" type="xs:string"/></xs:element>
64.     <xs:element name="serviceId" type="xs:unsignedInt"/></xs:element>
65.     <xs:element name="serviceName" type="xs:string"/></xs:element>
66.     <xs:element name="adults" type="adultsCodeType"/></xs:element>
67.     <xs:element name="children" type="childrenType"/></xs:element>
68.     <xs:element name="beddingPreference" type="beddingPreferenceType"/></xs:element>
69.     <xs:element name="actualAdults" type="adultsCodeType"/></xs:element>
70.     <xs:element name="actualChildren" type="actualChildType"/></xs:element>
71.     <xs:element name="productSpecialRequests" type="productSpecialRequestsType"/></xs:element>
72.     <xs:element name="cancellationRules" type="cancellationRulesType"/></xs:element>
73.     <xs:element name="serviceLocation" type="xs:string"/></xs:element>
74.     <xs:element name="cancel" type="yesOrNo" maxOccurs="1"/></xs:element>
75.     <xs:element name="allowAmend" type="yesOrNo" maxOccurs="1"/></xs:element>
76.     <xs:element name="onRequest" type="yesOrNo" maxOccurs="1"/></xs:element>
77.     <xs:element name="customerReference" type="xs:string" maxOccurs="1"/></xs:element>
78.     <xs:element name="passengersDetails" type="passengersDetailsType"/></xs:element>
79.     <xs:element name="extraMeals" type="extraMealsType"/></xs:element>
80.     <xs:element name="rateType" type="rateTypeType" minOccurs="0"/></xs:element>
81.     <xs:element name="from" type="xs:date"/></xs:element>
82.     <xs:element name="to" type="xs:date"/></xs:element>
83.     <xs:element name="numberOfNights" type="xs:unsignedShort"/></xs:element>
84.     <xs:element name="fromShort" type="xs:string"/></xs:element>
85.     <xs:element name="toShort" type="xs:string"/></xs:element>
86.     <xs:element name="roomTypeCode" type="xs:unsignedInt"/></xs:element>
87.     <xs:element name="rateBasis" type="xs:unsignedInt"/></xs:element>
88.     <xs:element name="roomName" type="xs:string"/></xs:element>
89.     <xs:element name="extraBed" type="xs:unsignedShort"/></xs:element>
90.     <xs:element name="paymentMode" type="xs:string" fixed="CC" minOccurs="0"/></xs:element>
91.     <xs:element name="selectedExtraMeals" type="selectedExtraMealsType" minOccurs="0"/></xs:element>
92.     <xs:element name="voucher" type="xs:string"/></xs:element>
93.     <xs:element name="roomInfo" type="roomInfoType"/></xs:element>
94.     <xs:element name="roomCapacityInfo" type="roomCapacityInfoType"/></xs:element>
95.     <xs:element name="roomCategory" type="xs:string"/></xs:element>
96.     <xs:element name="dates" type="datesType"/></xs:element>
97.     <xs:element name="penaltiesApplied" type="penaltiesAppliedType" minOccurs="0"/></xs:element>
98.     <xs:element name="additionalServicesRelatedInformation"
type="additionalServicesRelatedInformationType" minOccurs="0"/></xs:element>
99.   </xs:all>
100.   <xs:attribute name="runno" type="xs:integer" use="required"/></xs:attribute>
101.   <xs:attribute name="customeracceptance" type="tORf" use="required"/></xs:attribute>
102. </xs:complexType>
103. <xs:simpleType name="beddingPreferenceType">
104.   <xs:restriction base="xs:string">
105.     <xs:enumeration value="0"/></xs:enumeration>
106.     <xs:enumeration value="1"/></xs:enumeration>
107.     <xs:enumeration value="2"/></xs:enumeration>
108.     <xs:enumeration value="3"/></xs:enumeration>
109.   </xs:restriction>
110. </xs:simpleType>
111. <xs:complexType name="roomCapacityInfoType">
112.   <xs:sequence>
113.     <xs:element name="roomPaxCapacity" type="xs:nonNegativeInteger"/></xs:element>
114.     <xs:element name="allowedAdultsWithoutChildren" type="xs:nonNegativeInteger"/></xs:element>
115.     <xs:element name="allowedAdultsWithChildren" type="xs:nonNegativeInteger"/></xs:element>
116.     <xs:element name="allowedChildren" type="xs:nonNegativeInteger"/></xs:element>
117.     <xs:element name="maxExtraBed" type="oneOrZero"/></xs:element>
118.     <xs:element name="allowTwin" type="oneOrZero"/></xs:element>
119.   </xs:sequence>
120. </xs:complexType>
121. <xs:simpleType name="trueOrFalse">
122.   <xs:restriction base="xs:string">
123.     <xs:pattern value="true|false|TRUE|FALSE"/></xs:pattern>
124.   </xs:restriction>
125. </xs:simpleType>
126. <xs:simpleType name="tORf">
127.   <xs:restriction base="xs:string">
128.     <xs:pattern value="t|f"/></xs:pattern>
129.   </xs:restriction>
130. </xs:simpleType>
131. <xs:simpleType name="yesOrNo">
132.   <xs:restriction base="xs:string">
133.     <xs:pattern value="yes|no"/></xs:pattern>
134.   </xs:restriction>
135. </xs:simpleType>
136. <xs:complexType name="servicePriceType" mixed="true">
137.   <xs:sequence>
138.     <xs:element name="formatted" type="xs:string"/></xs:element>
139.   </xs:sequence>
140. </xs:complexType>
141. <xs:simpleType name="currencyShortType">
142.   <xs:restriction base="xs:string">
143.     <xs:pattern value="[A-Z]{3}"/></xs:pattern>
144.   </xs:restriction>
145. </xs:simpleType>
146. <xs:complexType name="emergencyContactsType">
147.   <xs:sequence>
148.     <xs:element name="emergencyContact" type="emergencyContactType" minOccurs="0" maxOccurs="unbounded"/>
</xs:element>
149.   </xs:sequence>
150.   <xs:attribute name="count" type="xs:unsignedInt" use="required"/></xs:attribute>
151. </xs:complexType>
152. <xs:complexType name="emergencyContactType">
153.   <xs:sequence>
154.     <xs:element name="salutation" type="salutationType"/></xs:element>

```

```
155.         <xs:element name="fullName" type="xs:string"></xs:element>
156.         <xs:element name="phone" type="phoneType"></xs:element>
157.     </xs:sequence>
158.     <xs:attribute name="runno" type="xs:unsignedShort" use="required"></xs:attribute>
159. </xs:complexType>
160. <xs:simpleType name="statusType">
161.     <xs:restriction base="xs:integer">
162.         <xs:pattern value="1665|1666|1667|1668|1669|1707|1708"></xs:pattern>
163.     </xs:restriction>
164. </xs:simpleType>
165. <xs:complexType name="salutationType">
166.     <xs:simpleContent>
167.         <xs:extension base="xs:string">
168.             <xs:attribute name="id" type="xs:nonNegativeInteger" use="required"></xs:attribute>
169.         </xs:extension>
170.     </xs:simpleContent>
171. </xs:complexType>
172. <xs:complexType name="childrenType">
173.     <xs:sequence>
174.         <xs:element name="child" type="childType" minOccurs="0" maxOccurs="unbounded"></xs:element>
175.     </xs:sequence>
176.     <xs:attribute name="no" type="xs:unsignedShort" use="required"></xs:attribute>
177. </xs:complexType>
178. <xs:complexType name="actualChildType">
179.     <xs:sequence>
180.         <xs:element name="actualChild" type="childType" minOccurs="0" maxOccurs="unbounded"></xs:element>
181.     </xs:sequence>
182.     <xs:attribute name="no" type="xs:unsignedShort" use="required"></xs:attribute>
183. </xs:complexType>
184. <xs:complexType name="childType" mixed="true">
185.     <xs:attribute name="runno" type="xs:unsignedShort" use="required"></xs:attribute>
186. </xs:complexType>
187. <xs:complexType name="rateBasesType">
188.     <xs:sequence>
189.         <xs:element name="option" type="selectedOptionType" maxOccurs="unbounded"></xs:element>
190.     </xs:sequence>
191.     <xs:attribute name="count" type="xs:unsignedInt" use="required"></xs:attribute>
192. </xs:complexType>
193. <xs:complexType name="beddingPreferencesType">
194.     <xs:sequence>
195.         <xs:element name="option" type="selectedOptionType" maxOccurs="unbounded"></xs:element>
196.     </xs:sequence>
197.     <xs:attribute name="count" type="xs:unsignedInt" use="required"></xs:attribute>
198. </xs:complexType>
199. <xs:complexType name="selectedOptionType" mixed="true">
200.     <xs:attribute name="runno" type="xs:unsignedInt" use="required"></xs:attribute>
201.     <xs:attribute name="value" type="xs:unsignedInt" use="required"></xs:attribute>
202.     <xs:attribute name="selected" type="xs:string" fixed="selected"></xs:attribute>
203. </xs:complexType>
204. <xs:complexType name="specialRequestsType">
205.     <xs:sequence>
206.         <xs:element name="option" type="selectedOptionType" minOccurs="0" maxOccurs="unbounded"></xs:element>
207.     </xs:sequence>
208.     <xs:attribute name="count" type="xs:unsignedInt" use="required"></xs:attribute>
209. </xs:complexType>
210. <xs:complexType name="optionType" mixed="true">
211.     <xs:attribute name="runno" type="xs:unsignedInt" use="required"></xs:attribute>
212.     <xs:attribute name="value" type="xs:unsignedInt" use="required"></xs:attribute>
213. </xs:complexType>
214. <xs:complexType name="salutationsType">
215.     <xs:sequence>
216.         <xs:element name="option" type="optionType" maxOccurs="unbounded"></xs:element>
217.     </xs:sequence>
218.     <xs:attribute name="count" type="xs:unsignedInt" use="required"></xs:attribute>
219. </xs:complexType>
220. <xs:complexType name="productSpecialRequestsType">
221.     <xs:sequence>
222.         <xs:element name="specialRequest" type="specialRequestType" minOccurs="0" maxOccurs="unbounded">
</xs:element>
223.     </xs:sequence>
224.     <xs:attribute name="count" type="xs:unsignedInt" use="required"></xs:attribute>
225. </xs:complexType>
226. <xs:complexType name="specialRequestType" mixed="true">
227.     <xs:attribute name="runno" type="xs:unsignedInt" use="required"></xs:attribute>
228. </xs:complexType>
229. <xs:complexType name="cancellationRulesType">
230.     <xs:sequence>
231.         <xs:element name="rule" type="ruleType" maxOccurs="unbounded"></xs:element>
232.     </xs:sequence>
233.     <xs:attribute name="count" type="xs:unsignedInt" use="required"></xs:attribute>
234. </xs:complexType>
235. <xs:complexType name="ruleType">
236.     <xs:sequence>
237.         <xs:element name="fromDate" type="dotwDateType" minOccurs="0" maxOccurs="1"></xs:element>
238.         <xs:element name="fromDateDetails" type="xs:string" minOccurs="0" maxOccurs="1"></xs:element>
239.         <xs:element name="toDate" type="dotwDateType" minOccurs="0" maxOccurs="1"></xs:element>
240.         <xs:element name="toDateDetails" type="xs:string" minOccurs="0" maxOccurs="1"></xs:element>
241.         <xs:element name="amendRestricted" type="trueOrFalse" minOccurs="0"></xs:element>
242.         <xs:element name="cancelRestricted" type="trueOrFalse" minOccurs="0"></xs:element>
243.         <xs:element name="charge" type="servicePriceType" minOccurs="0"></xs:element>
244.         <xs:element name="cancelCharge" type="servicePriceType" minOccurs="0"></xs:element>
245.         <xs:element name="amendCharge" type="servicePriceType" minOccurs="0"></xs:element>
246.         <xs:element name="noShowPolicy" type="trueOrFalse" minOccurs="0"></xs:element>
247.     </xs:sequence>
248.     <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"></xs:attribute>
249. </xs:complexType>
250. <xs:complexType name="passengersDetailsType">
```



```

251.     <xs:sequence>
252.         <xs:element name="passenger" type="passengerType" maxOccurs="unbounded"/></xs:element>
253.     </xs:sequence>
254. </xs:complexType>
255. <xs:complexType name="passengerType">
256.     <xs:sequence>
257.         <xs:element name="code" type="xs:unsignedInt"/></xs:element>
258.         <xs:element name="salutation" type="xs:unsignedInt"/></xs:element>
259.         <xs:element name="firstName" type="xs:string"/></xs:element>
260.         <xs:element name="lastName" type="xs:string"/></xs:element>
261.         <xs:element name="passengerNationality" type="passengerNationalityType"/></xs:element>
262.     </xs:sequence>
263.     <xs:attribute name="runno" type="xs:unsignedInt" use="required"/></xs:attribute>
264.     <xs:attribute name="leading" type="yesOrNo" use="required"/></xs:attribute>
265. </xs:complexType>
266. <xs:complexType name="passengerNationalityType">
267.     <xs:simpleContent>
268.         <xs:extension base="xs:string">
269.             <xs:attribute name="code" type="xs:positiveInteger"/></xs:attribute>
270.         </xs:extension>
271.     </xs:simpleContent>
272. </xs:complexType>
273. <xs:complexType name="extraMealsType">
274.     <xs:sequence>
275.         <xs:element name="mealDate" type="mealDateType" minOccurs="0" maxOccurs="unbounded"/></xs:element>
276.     </xs:sequence>
277.     <xs:attribute name="count" type="xs:unsignedInt" use="required"/></xs:attribute>
278. </xs:complexType>
279. <xs:complexType name="mealDateType">
280.     <xs:sequence>
281.         <xs:element name="mealType" type="mealTypeType" maxOccurs="unbounded"/></xs:element>
282.     </xs:sequence>
283.     <xs:attribute name="runno" type="xs:unsignedInt" use="required"/></xs:attribute>
284.     <xs:attribute name="wday" type="wdayType" use="required"/></xs:attribute>
285.     <xs:attribute name="day" type="xs:string" use="required"/></xs:attribute>
286.     <xs:attribute name="datetime" type="dotwDateType" use="required"/></xs:attribute>
287. </xs:complexType>
288. <xs:simpleType name="wdayType">
289.     <xs:restriction base="xs:integer">
290.         <xs:pattern value="[0-6]{1}"/></xs:pattern>
291.     </xs:restriction>
292. </xs:simpleType>
293. <xs:complexType name="mealTypeType">
294.     <xs:sequence>
295.         <xs:element name="meal" type="mealComplexType" maxOccurs="unbounded"/></xs:element>
296.     </xs:sequence>
297.     <xs:attribute name="mealtypeName" type="xs:string" use="required"/></xs:attribute>
298.     <xs:attribute name="mealtypecode" type="xs:unsignedInt" use="required"/></xs:attribute>
299. </xs:complexType>
300. <xs:complexType name="mealComplexType">
301.     <xs:sequence>
302.         <xs:element name="mealCode" type="xs:unsignedInt"/></xs:element>
303.         <xs:element name="mealName" type="xs:string"/></xs:element>
304.         <xs:element name="mealPrice" type="servicePriceType"/></xs:element>
305.     </xs:sequence>
306.     <xs:attribute name="runno" type="xs:unsignedInt" use="required"/></xs:attribute>
307.     <xs:attribute name="applicablefor" type="applicableforType" use="required"/></xs:attribute>
308.     <xs:attribute name="startage" type="xs:unsignedShort"/></xs:attribute>
309.     <xs:attribute name="endage" type="xs:unsignedShort"/></xs:attribute>
310. </xs:complexType>
311. <xs:simpleType name="applicableforType">
312.     <xs:restriction base="xs:string">
313.         <xs:pattern value="adult|child"/></xs:pattern>
314.     </xs:restriction>
315. </xs:simpleType>
316. <xs:complexType name="selectedExtraMealsType">
317.     <xs:sequence>
318.         <xs:element name="mealPlanDate" type="mealPlanDateType" minOccurs="0" maxOccurs="unbounded"/></xs:element>
319.     </xs:sequence>
320. </xs:complexType>
321. <xs:complexType name="mealPlanDateType">
322.     <xs:sequence>
323.         <xs:element name="mealPlan" type="mealPlanType" maxOccurs="unbounded"/></xs:element>
324.     </xs:sequence>
325.     <xs:attribute name="mealplandatetime" type="xs:date" use="required"/></xs:attribute>
326. </xs:complexType>
327. <xs:complexType name="mealPlanType">
328.     <xs:sequence>
329.         <xs:element name="meal" type="mealType" minOccurs="0" maxOccurs="unbounded"/></xs:element>
330.     </xs:sequence>
331.     <xs:attribute name="runno" type="xs:unsignedShort" use="required"/></xs:attribute>
332.     <xs:attribute name="mealscount" type="xs:unsignedShort" use="required"/></xs:attribute>
333.     <xs:attribute name="applicablefor" type="applicableforType" use="required"/></xs:attribute>
334.     <xs:attribute name="childage" type="xs:unsignedShort"/></xs:attribute>
335.     <xs:attribute name="ispassenger" type="xs:integer" fixed="1"/></xs:attribute>
336.     <xs:attribute name="passengernumber" type="xs:unsignedShort" use="required"/></xs:attribute>
337. </xs:complexType>
338. <xs:complexType name="mealType">
339.     <xs:all>
340.         <xs:element name="code" type="xs:unsignedInt"/></xs:element>
341.         <xs:element name="units" type="xs:unsignedInt"/></xs:element>
342.         <xs:element name="mealTypeCode" type="xs:unsignedInt"/></xs:element>
343.         <xs:element name="mealPrice" type="servicePriceType"/></xs:element>
344.         <xs:element name="mealtypeName" type="xs:string"/></xs:element>
345.         <xs:element name="mealName" type="xs:string"/></xs:element>
346.         <xs:element name="bookedMealCode" type="xs:string"/></xs:element>
347.     </xs:all>

```

```

348.     <xs:attribute name="runno" type="xs:unsignedInt" use="required"></xs:attribute>
349. </xs:complexType>
350. <xs:complexType name="roomInfoType">
351.   <xs:sequence>
352.     <xs:element name="maxOccupancy" type="xs:unsignedShort"></xs:element>
353.     <xs:element name="maxAdultWithChildren" type="xs:unsignedShort"></xs:element>
354.     <xs:element name="minChildAge" type="xs:unsignedShort"></xs:element>
355.     <xs:element name="maxChildAge" type="xs:unsignedShort"></xs:element>
356.     <xs:element name="maxAdult" type="xs:unsignedShort"></xs:element>
357.     <xs:element name="maxExtraBed" type="xs:unsignedShort"></xs:element>
358.     <xs:element name="allowTwin" type="oneOrZero" minOccurs="0"></xs:element>
359.     <xs:element name="maxChildren" type="xs:unsignedShort"></xs:element>
360.   </xs:sequence>
361. </xs:complexType>
362. <xs:simpleType name="oneOrZero">
363.   <xs:restriction base="xs:integer">
364.     <xs:pattern value="0|1"></xs:pattern>
365.   </xs:restriction>
366. </xs:simpleType>
367. <xs:simpleType name="phoneType">
368.   <xs:restriction base="xs:string">
369.     <xs:pattern value="[ +]?[0-9]*[/]?[0-9]*"></xs:pattern>
370.   </xs:restriction>
371. </xs:simpleType>
372. <xs:simpleType name="adultsCodeType">
373.   <xs:restriction base="xs:string">
374.     <xs:enumeration value="1"></xs:enumeration>
375.     <xs:enumeration value="2"></xs:enumeration>
376.     <xs:enumeration value="3"></xs:enumeration>
377.     <xs:enumeration value="4"></xs:enumeration>
378.     <xs:enumeration value="5"></xs:enumeration>
379.     <xs:enumeration value="6"></xs:enumeration>
380.     <xs:enumeration value="7"></xs:enumeration>
381.     <xs:enumeration value="8"></xs:enumeration>
382.     <xs:enumeration value="9"></xs:enumeration>
383.     <xs:enumeration value="10"></xs:enumeration>
384.   </xs:restriction>
385. </xs:simpleType>
386. <xs:complexType name="rateTypeType">
387.   <xs:simpleContent>
388.     <xs:extension base="rateTypeRestriction">
389.       <xs:attribute name="nonrefundable" type="xs:string" fixed="yes" use="optional"></xs:attribute>
390.     </xs:extension>
391.   </xs:simpleContent>
392. </xs:complexType>
393. <xs:simpleType name="rateTypeRestriction">
394.   <xs:restriction base="xs:integer">
395.     <xs:minInclusive value="1"></xs:minInclusive>
396.     <xs:maxInclusive value="2"></xs:maxInclusive>
397.   </xs:restriction>
398. </xs:simpleType>
399. <xs:complexType name="datesType">
400.   <xs:sequence>
401.     <xs:element name="date" type="dateType" maxOccurs="unbounded"></xs:element>
402.   </xs:sequence>
403.   <xs:attribute name="count" type="xs:nonNegativeInteger" use="required"></xs:attribute>
404. </xs:complexType>
405. <xs:complexType name="dateType">
406.   <xs:all>
407.     <xs:element name="price" type="servicePriceType"></xs:element>
408.     <xs:element name="freeStay" type="yesOrNo"></xs:element>
409.     <xs:element name="dayOnRequest" type="oneOrZero"></xs:element>
410.     <xs:element name="including" type="includingType"></xs:element>
411.   </xs:all>
412.   <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"></xs:attribute>
413.   <xs:attribute name="datetime" type="dotwDateType" use="required"></xs:attribute>
414.   <xs:attribute name="day" type="xs:string" use="required"></xs:attribute>
415.   <xs:attribute name="wday" type="xs:string" use="required"></xs:attribute>
416. </xs:complexType>
417. <xs:complexType name="includingType">
418.   <xs:all>
419.     <xs:element name="includedSupplement" type="includedSupplementType" minOccurs="0"></xs:element>
420.     <xs:element name="includedMeal" type="includedMealType" minOccurs="0"></xs:element>
421.     <xs:element name="includedAdditionalService" type="includedAdditionalServiceType" minOccurs="0"
maxOccurs="1"></xs:element>
422.   </xs:all>
423.   <xs:attribute name="count" type="xs:nonNegativeInteger" use="required"></xs:attribute>
424. </xs:complexType>
425. <xs:complexType name="includedSupplementType">
426.   <xs:sequence>
427.     <xs:element name="supplementName" type="xs:string"></xs:element>
428.     <xs:element name="description" type="xs:string"></xs:element>
429.   </xs:sequence>
430.   <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"></xs:attribute>
431. </xs:complexType>
432. <xs:complexType name="includedAdditionalServiceType">
433.   <xs:sequence>
434.     <xs:element name="serviceId" type="xs:nonNegativeInteger"></xs:element>
435.     <xs:element name="serviceName" type="xs:string"></xs:element>
436.   </xs:sequence>
437.   <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"></xs:attribute>
438. </xs:complexType>
439. <xs:complexType name="includedMealType">
440.   <xs:sequence>
441.     <xs:element name="mealName" type="xs:string"></xs:element>
442.     <xs:element name="type"></xs:element>
443.   </xs:sequence>

```

```

444.         <xs:simpleContent>
445.             <xs:extension base="xs:string">
446.                 <xs:attribute name="code" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
447.             </xs:extension>
448.         </xs:simpleContent>
449.     </xs:complexType>
450. </xs:element>
451. </xs:sequence>
452. <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
453. </xs:complexType>
454. <xs:complexType name="penaltiesAppliedType">
455.     <xs:sequence>
456.         <xs:element name="penaltyApplied" type="penaltyAppliedType" maxOccurs="unbounded"/></xs:element>
457.     </xs:sequence>
458.     <xs:attribute name="count" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
459. </xs:complexType>
460. <xs:complexType name="penaltyAppliedType">
461.     <xs:all>
462.         <xs:element name="dateApplied" type="dotwDateType"/></xs:element>
463.         <xs:element name="value" type="servicePriceType"/></xs:element>
464.         <xs:element name="currency" type="xs:unsignedInt"/></xs:element>
465.     </xs:all>
466.     <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
467.     <xs:attribute name="type" type="penaltyType" use="required"/></xs:attribute>
468. </xs:complexType>
469. <xs:simpleType name="penaltyType">
470.     <xs:restriction base="xs:string">
471.         <xs:pattern value="amend|cancel"/></xs:pattern>
472.     </xs:restriction>
473. </xs:simpleType>
474. <xs:complexType name="additionalServicesRelatedInformationType">
475.     <xs:sequence>
476.         <xs:element name="additionalServiceRelatedInformation" type="additionalServiceRelatedInformationType"
maxOccurs="unbounded"/></xs:element>
477.     </xs:sequence>
478. </xs:complexType>
479. <xs:complexType name="additionalServiceRelatedInformationType">
480.     <xs:sequence>
481.         <xs:element name="information" type="informationType" maxOccurs="unbounded"/></xs:element>
482.     </xs:sequence>
483.     <xs:attribute name="serviceid" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
484. </xs:complexType>
485. <xs:complexType name="informationType">
486.     <xs:sequence>
487.         <xs:element name="answer" type="xs:string" minOccurs="1" maxOccurs="unbounded"/></xs:element>
488.     </xs:sequence>
489.     <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
490.     <xs:attribute name="id" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
491. </xs:complexType>
492. </xs:schema>

```

## Amend Bookings

### Hotel Amend

#### General Request

The **updatebooking** method is used for amending an already existing booking. Amending a booking is a two step process: the first step is designed to calculate the booking value as per the new availability and rates and the second step is designed to confirm the changes.

This approach gives the customer the option to revert to the original booking request if they are not satisfied with the change (amendment charges and policies).

For an already existing booking you can make any of the following changes: period, room occupancy, board basis, extra meals, special requests and customer reference. **We do not allow changes of the room type, passenger salutation or passenger names.**

```

01. <customer>
02.   <username>username</username>
03.   <password>md5(password)</password>
04.   <id>company code</id>
05.   <source>1</source>
06.   <product>hotel</product>
07.   <request command="updatebooking">
08.     <bookingDetails>
09.       <bookingType></bookingType>
10.       <bookingCode></bookingCode>
11.       <confirm></confirm>
12.       <testPricesAndAllocation>
13.         <service referencenumber="">
14.           <testPrice></testPrice>
15.           <allocationDetails></allocationDetails>
16.           <penaltyApplied></penaltyApplied>
17.         </service>
18.       </testPricesAndAllocation>
19.       <customerReference></customerReference>
20.       <fromDate></fromDate>

```

```

21.         <toDate></toDate>
22.         <adultscode></adultscode>
23.         <actualadults></actualadults>
24.         <children no="">
25.             <child runno=""></child>
26.         </children>
27.         <actualchildren no="">
28.             <actualchild runno="0"></actualchild>
29.         </actualchildren>
30.         <extrabed></extrabed>
31.         <rateBasis></rateBasis>
32.         <passengersDetails>
33.             <passenger leading="">
34.                 <salutation></salutation>
35.                 <firstName></firstName>
36.                 <lastName></lastName>
37.             </passenger>
38.         </passengersDetails>
39.         <selectedExtraMeals>
40.             <mealPlanDate mealplandatetime="">
41.                 <mealPlan applicablefor="" childage="" ispassenger="1" passengernumber="1" runno="">
42.                     <meal runno="">
43.                         <units></units>
44.                         <bookedMealCode></bookedMealCode>
45.                     </meal>
46.                 </mealPlan>
47.             </mealPlanDate>
48.         </selectedExtraMeals>
49.         <specialRequests count="">
50.             <req runno=""></req>
51.         </specialRequests>
52.         <beddingPreference></beddingPreference>
53.     </bookingDetails>
54. </request>
55. </customer>

```

Item	Type	Parent	Description	Required
<b>product</b>	Element	customer	Product type. Fixed value: <b>hotel</b>	No
<b>bookingDetails</b>	Element	request	Used to specify details about the request: dates, pax, rooms.	Yes.
<b>bookingType</b>	Element	bookingDetails	Specifies if the booking is confirmed or saved. Possible values: <ul style="list-style-type: none"> <li>1</li> <li>2</li> </ul>	Yes.
<b>bookingCode</b>	Element	bookingDetails	Internal booking code.	Yes.
<b>confirm</b>	Element	bookingDetails	While amending an existing booking, system will recalculate prices and availability which may differ from the original booking request. In order to proceed with the amendment, the customer will have to confirm these changes. This element specifies the Customer accepted the new prices and he confirms the amending. Possible values: <ul style="list-style-type: none"> <li>No</li> <li>Yes</li> </ul>	Yes.
<b>testPricesAndAllocation</b>	Element	bookingDetails	Groups information about prices, allocation and penalties for each service.	Yes, if confirm nodevalue is yes.
<b>service</b>	Element	testPricesAndAllocation	Specifies for which service the details are about.	Yes.
@referencenumber	Attribute	service	Booking Internal Code - same value as <b>bookingCode</b>	Yes.
<b>testPrice</b>	Element	service	Specifies the new price of the booking. This will be as per the current prices in DOTWconnect system. The customer will have to pass the testprice in the actual format received in the response list and not the formatted price.	Yes, if confirm node value is yes.

<b>allocationDetails</b>	Element	service	An encrypted string containing information about the room type that was blocked as per the changes customer made.	Yes, if confirm nodevalue is yes
<b>penaltyApplied</b>	Element	service	Specifies the penalty charge for amending this booking.	Yes, if amending this services implies a penalty charge.
<b>customerReference</b>	Element	bookingDetails	Internal reference provided by the customer. If you do not want to provide an internal reference you may pass an empty element.	Yes.
<b>fromDate</b>	Element	bookingDetails	Arrival date in DotW date format (YYYY-MM-DD) or Unix timestamp	Yes.
<b>toDate</b>	Element	bookingDetails	Departure date in DotW date format (YYYY-MM-DD) or Unix timestamp	Yes.
<b>adultsCode</b>	Element	bookingDetails	Number of adults in the room; The possible codes are: <ul style="list-style-type: none"> <li>• 1</li> <li>• 2</li> <li>• 3</li> <li>• 4</li> </ul>	Yes.
<b>children</b>	Element	bookingDetails	Specifies the details about the children in this room.	Yes.
@no	Attribute	children	Specifies how many children are included in the room. If the booking does not include any child then the no attribute should contain the value 0.	Yes.
<b>child</b>	Element	children	Specifies the child age.	No.
@runno	Attribute	child	Specifies for which child the age is applicable.	Yes, if parent present.
<b>extraBed</b>	Element	bookingDetails	If for this room the customer wants also to include an extra bed then this field will have the value 1. Otherwise the value will be 0.	Yes.
<b>actualAdults</b>	Element	bookingDetails	Indicates the number of adults the initial search was made for	Yes.
<b>actualChildren</b>	Element	bookingDetails	Indicates the number of children the initial search was made for	Yes.
<b>actualChild</b>	Element	bookingDetails	Specifies the child's age.	Yes.
<b>runno</b>	Element	actualChild	Running	Running number starting from 0 Yes.
<b>rateBasis</b>	Element	bookingDetails	Rate Basis internal code.	Yes.

<b>passengersDetails</b>	Element	room	Encapsulates details about passengers in the booking. Please note for each room booked at least one <b>passenger</b> element with @leading value yes should be present. For confirmed bookings the passengers details should be exactly the ones received from <b>getbookingdetails</b> request	Yes.
<b>passenger</b>	Element	passengersDetails	Encapsulates details about one passenger in the booking. Please note for each room booked the room will be blocked under the leading passenger.	Yes, at least one occurrence.
@leading	Attribute	passenger	Specifies if the passenger is the leading passenger for this room. You can skip this attribute if the passenger is not the leading one. Possible values: 1. yes 2. no	Yes, at least one occurrence with value `yes`.
<b>salutation</b>	Element	passenger	The internal code for Salutations (Mr, Mrs etc). This code can be obtained by calling the <b>getsalutations</b> method.	Yes.
<b>firstName</b>	Element	passenger	First name of the leading passenger	Yes.
<b>lastName</b>	Element	passenger	Last name of the leading passenger.	Yes.
<b>selectedExtraMeals</b>	Element	room	Encapsulates information about desired extra meals grouped by dates and passengers. Please Send the request for this element only if you want to book extra meals(optional).	No.
<b>mealPlanDate</b>	Element	selectedExtraMeals	Groups extra meals per a specific date. Each date should be part of the booking period. From the booking period only dates that contain at least one meal plan (either for adult or children) should be sent.	Yes, if parent present.
@mealplandatetime	Attribute	mealPlanDate	Meal plan date in YYYY-MM-DD format.	Yes, if parent present.
<b>mealPlan</b>	Element	mealPlanDate	Contains information about meal plan for one type of passenger (adult or child).	Yes.
@applicablefor	Attribute	mealPlan	Specifies if this meal plan is for an adult passenger or a child.	
@childage	Attribute	mealPlan	Specifies the age of the child passenger.	Yes, if @applicablefor value is child.
@ispassenger	Attribute	mealPlan	Fixed value 1.	Yes.
@passengernumber	Attribute	mealPlan	Specified the passenger number this meal plan was booked for.	Yes.
<b>meal</b>	Element	mealPlan	Encapsulates details about a particular meal that needs to be booked or it is already booked.	Yes, if parent is present.
@runno	Attribute	meal	Running number starting from 0.	Yes, if parent is present.
<b>code</b>	Element	meal	Meal Internal code.	Yes, if parent is present.

<b>units</b>	Element	meal	Number of meals included in this meal plan (for this adult passenger).	Yes, if parent is present.
<b>bookedMealCode</b>	Element	meal	Internal code for booked meal. If this is an already booked meal the ccustomer should pass here the bookedMealCode he received after an <b>getbookingdetails</b> request	Yes, if parent is present.
<b>specialRequests</b>	Element	bookingDetails	Contains a list with all the special requests the customer has for this room.	Yes.
@count	Attribute	specialRequests	Total number of special requests for the room.	Yes.
<b>req</b>	Element	specialRequests	Specifies the special requests` code. This code can be obtained using the `getspecialrequests` command.	No.
@runno	Attribute	req	Running number starting from 0.	Yes, if parent present.
<b>beddingPreference V3 Only</b>	Element	room	Specifies the category of bedding preference. <b>Subject to availability at check-in</b> Possible values: <ul style="list-style-type: none"> <li>• 0- No preference</li> <li>• 1- King size</li> <li>• 2- Queen size</li> <li>• 3- Twin</li> </ul>	Yes

## updatebooking.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:include schemaLocation="loginDetails.xsd"></xs:include>
03.   <xs:include schemaLocation="bookingDetails.xsd"></xs:include>
04.   <xs:include schemaLocation="general.xsd"></xs:include>
05.   <!-- ##### -->
06.   <xs:element name="customer">
07.     <xs:complexType>
08.       <xs:sequence>
09.         <xs:group ref="loginDetailsGroup"></xs:group>
10.         <xs:element name="product" type="xs:string" fixed="hotel" minOccurs="0"></xs:element>
11.         <xs:element name="request" type="requestType"></xs:element>
12.       </xs:sequence>
13.     </xs:complexType>
14.   </xs:element>
15.   <!-- ##### -->
16.   <xs:complexType name="requestType">
17.     <xs:sequence>
18.       <xs:element name="bookingDetails" type="updateBookingBookingDetails"></xs:element>
19.     </xs:sequence>
20.     <xs:attribute name="command" type="xs:string" use="required" fixed="updatebooking"></xs:attribute>
21.     <xs:attribute name="debug" type="xs:integer"></xs:attribute>
22.     <xs:attribute name="defaultnamespace" type="xs:string" use="optional" fixed="true"></xs:attribute>
23.   </xs:complexType>
24. </xs:schema>

```

## General Response

```

01. <result command="updatebooking" tID="" ip="" date="" version="" elapsedTime="">
02.   <bookingDetails>
03.     <bookingType></bookingType>
04.     <bookingCode></bookingCode>
05.     <rateBasis></rateBasis>
06.     <confirm></confirm>
07.     <customerReference></customerReference>
08.     <fromDate></fromDate>
09.     <toDate></toDate>

```

```

10.      <passengersDetails>
11.          <passenger leading="">
12.              <salutation></salutation>
13.              <firstName></firstName>
14.              <lastName></lastName>
15.          </passenger>
16.      </passengersDetails>
17.      <adultsCode></adultsCode>
18.      <children no=""></children>
19.      <extraBed></extraBed>
20.      <selectedExtraMeals></selectedExtraMeals>
21.      <specialRequests count=""></specialRequests>
22.  </bookingDetails>
23.  <currencyShort></currencyShort>
24.  <rateTypes count="">
25.      <rateType runno="">
26.          <cancellationRules count=""></cancellationRules>
27.          <withinCancellationDeadline></withinCancellationDeadline>
28.          <available></available>
29.          <servicePrice>
30.              <formatted></formatted>
31.          </servicePrice>
32.          <mealsPrice></mealsPrice>
33.          <allocationDetails></allocationDetails>
34.          <service></service>
35.          <validForOccupancy>
36.              <adults></adults>
37.              <extraBed></extraBed>
38.              <extraBedOccupant></extraBedOccupant>
39.          </validForOccupancy>
40.          <changedOccupancy></changedOccupancy>
41.          <dates count="">
42.              <date runno="" datetime="" day="" wday="">
43.                  <price>
44.                      <formatted></formatted>
45.                  </price>
46.                  <dayOnRequest></dayOnRequest>
47.                  <allotmentfrom></allotmentfrom>
48.                  <freeStay></freeStay>
49.                  <including count="">
50.                      <includedMeal runno="">
51.                          <mealName></mealName>
52.                          <mealType code=""></mealType>
53.                      </includedMeal>
54.                  </including>
55.              </date>
56.          </dates>
57.          <price>
58.              <formatted></formatted>
59.          </price>
60.          <fromShort></fromShort>
61.          <toShort></toShort>
62.          <onRequest></onRequest>
63.      </rateType>
64.  </rateTypes>
65.  <successful></successful>
66. </result>

```

Item	Type	Parent	Description
<b>result</b>	Element	root	The root element.
@date	Attribute	result	The unix timestamp date and time when the result has been provided.
@command	Attribute	result	The command for which the result is shown.
<b>bookingDetails</b>	Element	result	Contains travel dates, detailed room occupancy and the currency code in which the prices are returned.
<b>bookingType</b>	Element	bookingDetails	Specifies if the booking is confirmed or saved. Possible values: <ul style="list-style-type: none"> <li>• 1 For confirmed bookings</li> <li>• 2 For saved bookings</li> </ul>
<b>bookingCode</b>	Element	bookingDetails	DOTW Internal booking code
<b>rateBasis</b>	Element	bookingDetails	Rate Basis internal code.



confirm	Attribute	bookingDetails	While amending an existing booking, system will recalculate prices and availability which may differ from the original booking request. In order to proceed with the amendment, the customer will have to confirm these changes. This element specifies the Customer accepted the new prices and he confirms the amending. Possible values: <ul style="list-style-type: none"> <li>• No</li> <li>• Yes</li> </ul>
customerReference	Element	bookingDetails	Internal reference provided by the customer. If you do not want to provide an internal reference you may pass an empty element.
fromDate	Element	bookingDetails	Starting date of the rule. From this date forward until toDate (if present), the specified charge will be applied for any cancellations or amendments. If this element is not present then the charge will be applied from date the booking was made until toDate. Date format is: YYYY-MM-DD HH:MM:SS
toDate	Element	bookingDetails	From Date in Weekday Month Day, Year HH:MM:SS format.
passengerDetails	Element	bookingDetails	Encapsulates details about passengers in the booking. Please note for each room booked at least one passenger element with @leading value yes should be present.
passenger	Element	passengerDetails	Encapsulates details about one passenger in the booking. Please note for each room booked the room will be blocked under the leading passenger.
@leading	Attribute	passenger	Specifies if the passenger is the leading passenger for this room. You can skip this attribute if the passenger is not the leading one. Possible values: <ul style="list-style-type: none"> <li>• Yes</li> <li>• No</li> </ul>
salutation	Element	passenger	The internal code for Salutations (Mr, Mrs etc). This code can be obtained by calling the getsalutations method.
firstName	Element	passenger	First name of the leading passenger
lastName	Element	passenger	Last name of the leading passenger
adultsCode	Element	passengerDetails	Number of adults in the room; The possible codes are: <ul style="list-style-type: none"> <li>• 1</li> <li>• 2</li> <li>• 3</li> <li>• 4</li> </ul>
children	Element	passengerDetails	Specifies the details about the accompanying children in this room.
@no	Attribute	children	Specifies the total number of children in the room. If the booking does not involve any children then the value should be 0.
extraBed	Element	passengerDetails	If for this room the customer wants also to include an extra bed, then this field will have the value 1. Otherwise the value will be 0.

<b>selectedExtraMeals</b>	Element	Encapsulates information about desired extra meals grouped by dates and passengers. Please Send the request for this element only if you want to book extra meals(optional).	
<b>specialRequests</b>	Element	bookingDetails	Encapsulates the details containing the special requests the customers has requested for this room.
<b>count</b>	Attribute	specialRequests	Total number of special requests for the room
<b>currencyShort</b>	Element	result	Shortening for the currency name.
<b>rateTypes V3 Only</b>	Element	result	Container which encapsulates details about all the available rates for the new given criteria.
<b>count</b>	Attribute	rateTypes	Specifies the number of rate types available for the given criteria
<b>rateType</b>	Element	rateTypes	Encapsulates details about this particular rate.
<b>runno</b>	Attribute	rateType	Running serial number starting from 0.
<b>specialsApplied</b>	Element	rateType	Encapsulates a list of promotions that are available for this rateType in the specified period
<b>count</b>	Attribute	specialsApplied	Specifies the number of special promotions that are applicable for this rateType.
<b>special</b>	Element	specialsApplied	
<b>runno</b>	Attribute	special	Running serial number starting from 0.
<b>type</b>	Element	special	Indicates the special promotion type
<b>specialName</b>	Element	special	Indicates the special promotion name
<b>stay</b>	Element	special	Specifies the number of stay days required for promotion to apply
<b>pay</b>	Element	special	Indicates the number of days that will be charged out of the total number of stay days.
<b>discount V3 Only</b>	Element	special	Specifies the discount, in percentages, that is being applied for the discounted nights
<b>upgradeToMealId v3 Only</b>	Element	special	DOTW internal code of the rateBasis that is being upgraded to
<b>upgradeToRoomId V3 Only</b>	Element	special	The roomTypeCode that is being upgraded to
<b>condition V3 Only</b>	Element	special	Specifies if there is a special condition that has to be in act in order to qualify for the promotion
<b>description V3 Only</b>	Element	special	Short description of the package
<b>notes V3 Only</b>	Element	special	Additional notes regarding the promotion / package
<b>discountedNights V3 Only</b>	Element	special	Number of discounted nights in the promotion
<b>cancellationRules</b>	Element	rateType	Encapsulates details about the cancellation policy applicable for this room type and rate basis.
<b>count</b>	Element	cancellationRules	Specifies the number of cancellation policies.
<b>rule</b>	Element	cancellationRules	Contains details about a specific cancellation policy.
<b>runno</b>	Element	rule	Running serial number starting from 0.

<b>fromDate</b>	Element	rule	Starting date of the rule. From this date forward until toDate (if present), the specified charge will be applied for any cancellations or amendments. If this element is not present then the charge will be applied from date the booking was made until toDate. Date format is: YYYY-MM-DD HH:MM:SS
<b>fromDateDetails</b>	Element	fromDate	From Date in Weekday Month Day, Year HH:MM:SS format.
<b>toDate</b>	Element	rule	Ending date of the rule. The specified charge will be applied for any cancellations or amendments until this date. If this element is not present then the charge from fromDate onwards. Date format is: YYYY-MM-DD HH:MM:SS
<b>toDateDetails</b>	Element	rule	To Date in Weekday Month Day, Year HH:MM:SS format.
<b>amendCharge V3 Only</b>	Element	rule	The penalty that will apply if the booking is amended in the period defined by this rule
<b>formatted</b>	Element	amendCharge	The amend charge formatted as per the customer preference (decimal places, thousand separator, decimal separator).
<b>cancelCharge V3 Only</b>	Element	rule	The penalty that will apply if the booking is cancelled in the period defined by this rule
<b>formatted</b>	Element	cancelCharge	The cancel charge formatted as per the customer preference (decimal places, thousand separator, decimal separator)
<b>charge</b>	Element		
<b>withinCancellationDeadline</b>	Element	rateType	Specifies if this particular rateType is within cancellation deadline. Possible values: <ul style="list-style-type: none"> <li>• Yes</li> <li>• No</li> </ul>
<b>available</b>	Element	rateType	Specifies if the service is available as per the current availability. Possible values: <ul style="list-style-type: none"> <li>• True</li> <li>• False</li> </ul>
<b>servicePrice</b>	Element	rateType	This element contains the total price (excluding meal supplements) in two formats one without any formatting and the other one properly formatted.
<b>formatted</b>	Element	servicePrice	This element contains the total price formatted as per the customer preference (decimal places, thousand separator, decimal separator)
<b>mealsPrice</b>	Element	rateType	This element contains the meal price in two formats one without any formatting and the other one properly formatted.
<b>formatted</b>	Element	mealsPrice	This element contains the meal price formatted as per the customer preference (decimal places, thousand separator, decimal separator)
<b>allocationDetails</b>	Element	rateType	An encrypted string containing information about the room type that was blocked as per the changes customer made.
<b>service</b>	Element	rateType	

<b>validForOccupancy (V3 Only)</b>	Element	rateType	Encapsulates details regarding the bedding setting valid for the requested occupancy. If the room supports an extra bed the system will return a setting that will include one of the passengers in the extra bed
<b>adultsCode</b>	Element	validForOccupancy	Indicates the number of adults that will be accommodated on the standard bedding
<b>children</b>	Element	validForOccupancy	Indicates the number of children that will be accommodated in the room on standard bedding (excluding the extra bed)
<b>childrenAges</b>	Element	validForOccupancy	Specifies the children ages.
<b>extraBed</b>	Element	validForOccupancy	Number of extra beds available for the room
<b>extrabedOccupancy</b>	Element	validForOccupancy	Specifies the type of occupant of the extrabed. Possible values: <ul style="list-style-type: none"> <li>• adult</li> <li>• child</li> </ul>
<b>changedOccupancy</b>	Element	rateType	
<b>dates</b>	Element	rateType	Encapsulates daily break down of the rates for this room type and rate Basis.
<b>count</b>	Element	dates	Total number of days for the staying period. This may include any additional nights to be stayed for satisfying the minimum stay conditions.
<b>date</b>	Element	dates	Groups together information for one day.
<b>runno</b>	Attribute	date	Running number starting from 0.
<b>datetime</b>	Attribute	date	Date in YYYY-MM-DD HH:MM:SS format.
<b>day</b>	Attribute	date	Day-of-the-week name Month, day-of-the-month, year.
<b>wday</b>	Attribute	date	Weekday number (from 0 (Sun) - 6 (Sat)).
<b>price</b>	Element	date	This element contains the price for the day in two formats one without any formatting and the other one properly formatted. The price is returned in the currency indicated in the rateType/@currencyid attribute ((the rateType/@currencyid is different from the requested only currency only if this is a Non Refundable Advance Purchase Rate)
<b>formatted</b>	Element	price	This element contains the price formatted as per the customer preference (decimal places, thousand separator, decimal separator)
<b>dayOnRequest</b>	Element	date	Specifies if this the room type and rate basis is on request on this day. Possible values: <ul style="list-style-type: none"> <li>• 0 - this room type and rate basis has an allotment and rate.</li> <li>• 1 - this room type and rate basis does not have allotment or rates defined.</li> </ul>
<b>freeStay</b>	Element	date	Indicates if this particular day is free or not. Possible values: <ul style="list-style-type: none"> <li>• Yes</li> <li>• No</li> </ul>
<b>including</b>	Element	date	Encapsulates details about any type of included meal or service.

<b>count</b>	Attribute	including	Specifies the number of included meals/services
<b>includedMeal</b>	Element	including	Details about a certain meal supplement included in the price for this day.
<b>runno</b>	Attribute	includedMeal	Running number starting from 0.
<b>mealType</b>	Element	includedMeal	Meal type. Possible values: <ul style="list-style-type: none"> <li>• Breakfast</li> <li>• Lunch</li> <li>• Dinner</li> <li>• Half Board</li> <li>• Full Board</li> <li>• All Inclusive</li> </ul>
<b>code</b>	Attribute	mealType	Dotw Internal meal plan code
<b>price</b>	Element	rateType	This element contains the total price (room and meal) in two formats one without any formatting and the other one properly formatted.
<b>formatted</b>	Element	price	This element contains the total price formatted as per the customer preference (decimal places, thousand separator, decimal separator)
<b>fromShort</b>	Element	rateType	Arrival date in <i>short DOTW format</i> .
<b>toShort</b>	Element	mealType	Departure date in short DOTW format
<b>onRequest</b>	Element	rateBasis	Specifies if this room type and rate basis is on request. Possible values: <ul style="list-style-type: none"> <li>• 0 (the room type and rate basis is not on request)</li> <li>• 1 (the room type and rate basis is on request)</li> </ul>
<b>successful</b>	Element	result	Specifies if the request was successful. Possible values: <ul style="list-style-type: none"> <li>• TRUE</li> <li>• FALSE</li> </ul>

## updatebooking\_response.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="result" type="resultType"></xs:element>
03.   <xs:complexType name="resultType">
04.     <xs:sequence>
05.       <xs:element name="currencyShort" type="currencyShortType"></xs:element>
06.       <xs:element name="product" type="productType" maxOccurs="unbounded"></xs:element>
07.       <xs:element name="confirmationText" type="xs:string" minOccurs="0"></xs:element>
08.       <xs:element name="returnedCode" type="xs:nonNegativeInteger" minOccurs="0"></xs:element>
09.       <xs:element name="bookings" type="bookingsType" minOccurs="0"></xs:element>
10.       <xs:element name="successful" type="trueOrFalse" minOccurs="1" maxOccurs="1"></xs:element>
11.     </xs:sequence>
12.     <xs:attribute name="command" type="bookItineraryType" use="required"></xs:attribute>
13.     <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
14.     <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
15.     <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
16.     <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
17.     <xs:attribute name="elapsedTime" type="xs:decimal" use="required"></xs:attribute>
18.   </xs:complexType>
19.   <xs:simpleType name="dotwIP">
20.     <xs:restriction base="xs:string">
21.       <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1]{0-9}{2}|[1-9]{1}[0-9]{1}|[1-9]|0)\.(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0)\.(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0)\.(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0)" /></xs:restriction>
22.     </xs:simpleType>
23.   <xs:simpleType name="dotwDateType">
24.     <xs:restriction base="xs:string">
25.

```

```

26.      <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}(\s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*|([0-9]
{4,4})/([0-9]{1,2})/([0-9]{1,2})(\s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*"></xs:pattern>
27.    </xs:restriction>
28.  </xs:simpleType>
29.  <xs:simpleType name="versionType">
30.    <xs:restriction base="xs:string">
31.      <xs:pattern value="[1-9]{1}([0-9])*\.([0-9])*"></xs:pattern>
32.    </xs:restriction>
33.  </xs:simpleType>
34.  <xs:complexType name="productType">
35.    <xs:all>
36.      <xs:element name="cancellationRules" type="cancellationRulesType" minOccurs="0"></xs:element>
37.      <xs:element name="withinCancellationDeadline" type="yesOrNo" minOccurs="0"></xs:element>
38.      <xs:element name="available" type="trueOrFalse"></xs:element>
39.      <xs:element name="servicePrice" type="formattedPriceType" minOccurs="0"></xs:element>
40.      <xs:element name="mealsPrice" type="formattedPriceType" minOccurs="0"></xs:element>
41.      <xs:element name="allocationDetails" type="xs:string" minOccurs="0"></xs:element>
42.      <xs:element name="dates" type="datesType" minOccurs="0" maxOccurs="1"></xs:element>
43.      <xs:element name="price" type="formattedPriceType"></xs:element>
44.      <xs:element name="currencyShort" type="currencyShortType" minOccurs="0"></xs:element>
45.      <xs:element name="fromShort" type="xs:string"></xs:element>
46.      <xs:element name="toShort" type="xs:string"></xs:element>
47.      <xs:element name="onRequest" type="oneOrZero"></xs:element>
48.    </xs:all>
49.    <xs:attribute name="runno" type="xs:integer" use="required"></xs:attribute>
50.    <xs:attribute name="code" type="xs:nonNegativeInteger" use="required"></xs:attribute>
51.    <xs:attribute name="type" type="typeType" use="required"></xs:attribute>
52.    <xs:attribute name="servicename" type="xs:string"></xs:attribute>
53.  </xs:complexType>
54.  <xs:complexType name="datesType">
55.    <xs:sequence>
56.      <xs:element name="date" type="dateType" maxOccurs="unbounded"></xs:element>
57.    </xs:sequence>
58.    <xs:attribute name="count" type="xs:nonNegativeInteger" use="required"></xs:attribute>
59.  </xs:complexType>
60.  <xs:complexType name="dateType">
61.    <xs:all>
62.      <xs:element name="price" type="servicePriceType"></xs:element>
63.      <xs:element name="priceMinimumSelling" type="servicePriceType" minOccurs="0"></xs:element>
64.      <xs:element name="priceInRequestedCurrency" type="servicePriceType" minOccurs="0"></xs:element>
65.      <xs:element name="priceMinimumSellingInRequestedCurrency" type="servicePriceType" minOccurs="0">
</xs:element>
66.      <xs:element name="freeStay" type="yesOrNo"></xs:element>
67.      <xs:element name="dayOnRequest" type="oneOrZero"></xs:element>
68.      <xs:element name="including" type="includingType"></xs:element>
69.    </xs:all>
70.    <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"></xs:attribute>
71.    <xs:attribute name="datetime" type="dotwDateType" use="required"></xs:attribute>
72.    <xs:attribute name="day" type="xs:string" use="required"></xs:attribute>
73.    <xs:attribute name="wday" type="xs:string" use="required"></xs:attribute>
74.  </xs:complexType>
75.  <xs:complexType name="includingType">
76.    <xs:all>
77.      <xs:element name="includedSupplement" type="includedSupplementType" minOccurs="0"></xs:element>
78.      <xs:element name="includedMeal" type="includedMealType" minOccurs="0"></xs:element>
79.      <xs:element name="includedAdditionalService" type="includedAdditionalServiceType" minOccurs="0"
maxOccurs="1"></xs:element>
80.    </xs:all>
81.    <xs:attribute name="count" type="xs:nonNegativeInteger"></xs:attribute>
82.  </xs:complexType>
83.  <xs:complexType name="includedSupplementType">
84.    <xs:sequence>
85.      <xs:element name="supplementName" type="xs:string"></xs:element>
86.      <xs:element name="description" type="xs:string"></xs:element>
87.    </xs:sequence>
88.    <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"></xs:attribute>
89.  </xs:complexType>
90.  <xs:complexType name="includedAdditionalServiceType">
91.    <xs:sequence>
92.      <xs:element name="serviceId" type="xs:nonNegativeInteger"></xs:element>
93.      <xs:element name="serviceName" type="xs:string"></xs:element>
94.    </xs:sequence>
95.    <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"></xs:attribute>
96.  </xs:complexType>
97.  <xs:complexType name="includedMealType">
98.    <xs:sequence>
99.      <xs:element name="mealName" type="xs:string"></xs:element>
100.      <xs:element name="type">
101.        <xs:complexType>
102.          <xs:simpleContent>
103.            <xs:extension base="xs:string">
104.              <xs:attribute name="code" type="xs:nonNegativeInteger" use="required"></xs:attribute>
105.            </xs:extension>
106.          </xs:simpleContent>
107.        </xs:complexType>
108.      </xs:element>
109.    </xs:sequence>
110.    <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"></xs:attribute>
111.  </xs:complexType>
112.  <xs:simpleType name="trueOrFalse">
113.    <xs:restriction base="xs:string">
114.      <xs:pattern value="true|false|TRUE|FALSE"></xs:pattern>
115.    </xs:restriction>
116.  </xs:simpleType>
117.  <xs:simpleType name="yesOrNo">
118.    <xs:restriction base="xs:string">
119.      <xs:pattern value="yes|no"></xs:pattern>

```

```

120.     </xs:restriction>
121. </xs:simpleType>
122. <xs:complexType name="formattedPriceType" mixed="true">
123.   <xs:sequence>
124.     <xs:element name="formatted" type="xs:string"/></xs:element>
125.   </xs:sequence>
126. </xs:complexType>
127. <xs:complexType name="cancellationRulesType">
128.   <xs:sequence>
129.     <xs:element name="rule" type="ruleType" maxOccurs="unbounded"/></xs:element>
130.   </xs:sequence>
131.   <xs:attribute name="count" type="xs:unsignedInt" use="required"/></xs:attribute>
132. </xs:complexType>
133. <xs:complexType name="ruleType">
134.   <xs:sequence>
135.     <xs:element name="fromDate" type="dotwDateType" minOccurs="0" maxOccurs="1"/></xs:element>
136.     <xs:element name="fromDateDetails" type="xs:string" minOccurs="0" maxOccurs="1"/></xs:element>
137.     <xs:element name="toDate" type="dotwDateType" minOccurs="0" maxOccurs="1"/></xs:element>
138.     <xs:element name="toDateDetails" type="xs:string" minOccurs="0" maxOccurs="1"/></xs:element>
139.     <xs:element name="amendRestricted" type="trueOrFalse" minOccurs="0"/></xs:element>
140.     <xs:element name="cancelRestricted" type="trueOrFalse" minOccurs="0"/></xs:element>
141.     <xs:element name="noShowPolicy" type="trueOrFalse" minOccurs="0"/></xs:element>
142.     <xs:element name="amendCharge" type="servicePriceType" minOccurs="0"/></xs:element>
143.     <xs:element name="cancelCharge" type="servicePriceType" minOccurs="0"/></xs:element>
144.     <xs:element name="charge" type="servicePriceType" minOccurs="0"/></xs:element>
145.   </xs:sequence>
146.   <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
147. </xs:complexType>
148. <xs:simpleType name="currencyShortType">
149.   <xs:restriction base="xs:string">
150.     <xs:pattern value="[A-Z]{3}"/></xs:pattern>
151.   </xs:restriction>
152. </xs:simpleType>
153. <xs:simpleType name="oneOrZero">
154.   <xs:restriction base="xs:integer">
155.     <xs:pattern value="0|1"/></xs:pattern>
156.   </xs:restriction>
157. </xs:simpleType>
158. <xs:simpleType name="typeType">
159.   <xs:restriction base="xs:string">
160.     <xs:pattern value="hotel|apartment|tour|transfer"/></xs:pattern>
161.   </xs:restriction>
162. </xs:simpleType>
163. <xs:simpleType name="bookItineraryType">
164.   <xs:restriction base="xs:string">
165.     <xs:pattern value="bookitinerary|confirmbooking"/></xs:pattern>
166.   </xs:restriction>
167. </xs:simpleType>
168. <xs:complexType name="bookingsType">
169.   <xs:sequence>
170.     <xs:element name="booking" type="bookingType" maxOccurs="unbounded"/></xs:element>
171.   </xs:sequence>
172. </xs:complexType>
173. <xs:complexType name="bookingType">
174.   <xs:sequence>
175.     <xs:element name="bookingCode" type="xs:nonNegativeInteger"/></xs:element>
176.     <xs:element name="bookingReferenceNumber" type="xs:string"/></xs:element>
177.     <xs:element name="bookingStatus" type="xs:nonNegativeInteger"/></xs:element>
178.     <xs:element name="servicePrice" type="servicePriceType"/></xs:element>
179.     <xs:element name="mealsPrice" type="servicePriceType"/></xs:element>
180.     <xs:element name="price" type="servicePriceType"/></xs:element>
181.     <xs:element name="currency" type="xs:nonNegativeInteger"/></xs:element>
182.     <xs:element name="type" type="xs:string"/></xs:element>
183.     <xs:element name="voucher" type="xs:string"/></xs:element>
184.     <xs:element name="paymentGuaranteedBy" type="xs:string"/></xs:element>
185.     <xs:element name="emergencyContacts" type="emergencyContactsType"/></xs:element>
186.   </xs:sequence>
187.   <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
188. </xs:complexType>
189. <xs:complexType name="servicePriceType" mixed="true">
190.   <xs:sequence>
191.     <xs:element name="formatted" type="xs:string"/></xs:element>
192.   </xs:sequence>
193. </xs:complexType>
194. <xs:complexType name="emergencyContactsType">
195.   <xs:sequence>
196.     <xs:element name="emergencyContact" type="emergencyContactType" minOccurs="0" maxOccurs="unbounded"/>
197.   </xs:sequence>
198.   <xs:attribute name="count" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
199. </xs:complexType>
200. <xs:complexType name="emergencyContactType">
201.   <xs:sequence>
202.     <xs:element name="salutation">
203.       <xs:complexType>
204.         <xs:simpleContent>
205.           <xs:extension base="xs:string">
206.             <xs:attribute name="id" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
207.           </xs:extension>
208.         </xs:simpleContent>
209.       </xs:complexType>
210.     </xs:element>
211.     <xs:element name="fullName" type="xs:string"/></xs:element>
212.     <xs:element name="phone" type="xs:string"/></xs:element>
213.   </xs:sequence>
214.   <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
215. </xs:complexType>

```

## Book Itinerary

A saved itinerary can be confirmed at a later time. In order to do this you must use the bookitinerary command.

**The confirmation of a saved itinerary is a process made in two steps.** After the first step (bookitinerary **with confirm no**) the system will return the corresponding details of each service of the itinerary - if it can be booked, the actual prices, etc. The second step requires another bookitinerary request that specifies the confirmation (**confirm yes**).

## General Request

```

01. <customer>
02.   <username>username</username>
03.   <password>md5(password)</password>
04.   <id>company code</id>
05.   <source>1</source>
06.   <request command="bookitinerary">
07.     <bookingDetails>
08.       <bookingType></bookingType>
09.       <bookingCode></bookingCode>
10.       <confirm></confirm>
11.       <sendCommunicationTo></sendCommunicationTo>
12.       <testPricesAndAllocation>
13.         <service referencenumber="">
14.           <testPrice></testPrice>
15.           <allocationDetails></allocationDetails>
16.         </service>
17.       </testPricesAndAllocation>
18.       <creditCardPaymentDetails>
19.         <paymentMethod></paymentMethod>
20.         <usedCredit></usedCredit>
21.         <creditCardCharge></creditCardCharge>
22.         <creditCardDetails>
23.           <creditCardType></creditCardType>
24.           <creditCardNumber></creditCardNumber>
25.           <creditCardHolderName></creditCardHolderName>
26.           <creditCardExpMonth></creditCardExpMonth>
27.           <creditCardExpYear></creditCardExpYear>
28.           <creditCardCVC></creditCardCVC>
29.         <avsDetails>
30.           <avsFirstName></avsFirstName>
31.           <avsLastName></avsLastName>
32.           <avsAddress></avsAddress>
33.           <avsZip></avsZip>
34.           <avsCountry></avsCountry>
35.           <avsCity></avsCity>
36.           <avsEmail></avsEmail>
37.           <avsPhone></avsPhone>
38.         </avsDetails>
39.       </creditCardDetails>
40.     </creditCardPaymentDetails>
41.   </bookingDetails>
42. </request>
43. </customer>

```

Item	Type	Parent	Description	Required
bookingDetails	Element	request	Used to specify details about the request: dates, pax, rooms.	Yes.
bookingType	Element	bookingDetails	Value 2 specifies that the itinerary is a saved one.	Yes.
bookingCode	Element	bookingDetails	Internal itinerary code.	Yes.
confirm	Element	bookingDetails	This element specifies if the customer saw the new prices and he wants to confirm the booking or if he wants to just see new prices. Possible values: <ul style="list-style-type: none"> <li>no</li> <li>yes</li> </ul>	Yes.



<b>sendCommunicationTo</b>	Element	bookingDetails	Use this field to send the communication for all the bookings of this itinerary (the confirmation one and all subsequent amendments and cancellations) to a different email address rather than the one of the customer profile. Accepted values: valid email address.	Yes.
<b>testPricesAndAllocation</b>	Element	bookingDetails	Only present in the second request. Contains a list with all prices and allocation details received after the first response for each service of the itinerary.	Yes, if confirm value is yes
<b>service</b>	Element	testPricesAndAllocation	Groups the price and allocation details for each service of the itinerary.	Yes, if parent present.
@referencenumber	Attribute	service	Specifies for which service the price and allocation details are applicable. This is the internal saved service code.	Yes, if parent present.
<b>testPrice</b>	Element	service	The price received after the first request for the service specified in service@id attribute.	Yes, fi parent present.
<b>allocationDetails</b>	Element	service	Allocation details received after the first request for the service specified in service@id attribute.	Yes, if parent present.
<b>creditCardPaymentDetails</b>	Element	bookingDetails	Only present in the second request. Contains the information about the credit card and as well about the credit card owner.	Yes, if customer is registered as credit card customer or at least one of the rates chosen has the value CC in the payment mode element.
<b>paymentMethod</b>	Element	creditCardPaymentDetails	Only present in the second request. Depending on the payment method can have 2 possible values: <ul style="list-style-type: none"> <li>• CC_PAYMENT_NET</li> <li>• CC_PAYMENT_COMMISSIONABLE</li> </ul>	Yes, if parent present.
<b>usedCredit</b>	Element	creditCardPaymentDetails		Yes, if parent present.
<b>creditCardCharge</b>	Element	creditCardPaymentDetails	The amount of money that will be charged.	Yes, if parent present.
<b>creditCardDetails</b>	Element	creditCardPaymentDetails	Contains information about the credit card	Yes, if parent present.
<b>creditCardType</b>	Element	creditCardDetails	Depending on the credit card type it can have 3 possible values: <ul style="list-style-type: none"> <li>• 100 (which correspond to Visa)</li> <li>• 101 (which correspond to Mastercard)</li> </ul>	Yes, if parent present.
<b>creditCardNumber</b>	Element	creditCardDetails	Contains the credit card number.	Yes, if parent present.

<b>creditCardHolderName</b>	Element	creditCardDetails	Contains the credit card holder name. The format of the name should be First name Last name.	Yes, if parent present.
<b>creditCardExpMonth</b>	Element	creditCardDetails	Contains the credit card expiration month	Yes, if parent present.
<b>creditCardExpYear</b>	Element	creditCardDetails	Contains the credit card expiration year.	Yes, if parent present.
<b>creditCardCVC</b>	Element	creditCardDetails	Contains the credit card CVC.	Yes, if parent present.
<b>avsDetails</b>	Element	creditCardDetails	Contains information about the person claiming to own the credit card.	Yes, if parent present.
<b>avsFirstName</b>	Element	avsDetails	Contains the first name of the credit card holder	Yes, if parent present.
<b>avsLastName</b>	Element	avsDetails	Contains the last name of the credit card holder	Yes, if parent present.
<b>avsLastName</b>	Element	avsDetails	Contains the last name of the credit card holder	Yes, if parent present.
<b>avsAddress</b>	Element	avsDetails	Contains the address of the credit card holder	Yes, if parent present.
<b>avsZip</b>	Element	avsDetails	Contains the zip code of the credit card holder	Yes, if parent present.
<b>avsCountry</b>	Element	avsDetails	Contains the ISO country code of the credit card holder	Yes, if parent present.
<b>avsCity</b>	Element	avsDetails	Contains the city of the credit card holder	Yes, if parent present.
<b>avsEmail</b>	Element	avsDetails	Contains the email of the credit card holder	Yes, if parent present.
<b>avsPhone</b>	Element	avsDetails	Contains the phone of the credit card holder	Yes, if parent present.

## bookitinerary.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:include schemaLocation="loginDetails.xsd"></xs:include>
03.   <xs:include schemaLocation="general.xsd"></xs:include>
04.   <xs:include schemaLocation="bookingDetails.xsd"></xs:include>
05.   <!-- ##### -->
06.   <xs:element name="customer">
07.     <xs:complexType>
08.       <xs:sequence>
09.         <xs:group ref="loginDetailsGroup"></xs:group>
10.         <xs:element name="request" type="requestType"></xs:element>
11.       </xs:sequence>
12.     </xs:complexType>
13.   </xs:element>
14.   <!-- ##### -->
15.   <xs:complexType name="requestType">
16.     <xs:all>
17.       <xs:element name="bookingDetails">
18.         <xs:complexType>
19.           <xs:sequence>
20.             <xs:group ref="bookingTypeAndCode" minOccurs="1"></xs:group>
21.             <xs:element name="confirm" type="confirmType" minOccurs="1" maxOccurs="1"></xs:element>
22.             <xs:element name="sendCommunicationTo" type="validEmailType" minOccurs="0"></xs:element>
23.             <xs:element name="testPricesAndAllocation" type="bookTestPricesAndAllocationType" minOccurs="0">
</xs:element>

```

```

24.         <xs:element name="creditCardPaymentDetails" type="creditCardPaymentDetailsType" minOccurs="0">
25.     </xs:element>
26.         </xs:sequence>
27.     </xs:complexType>
28. </xs:element>
29. </xs:all>
30. <xs:attribute name="command" type="xs:string" use="required" fixed="bookitinerary"></xs:attribute>
31. <xs:attribute name="debug" type="xs:integer"></xs:attribute>
32. <xs:attribute name="defaultnamespace" type="xs:string" use="optional" fixed="true"></xs:attribute>
33. </xs:complexType>
34. </xs:schema>

```

## General Response

```

01. <result command="bookitinerary" date="">
02.     <product runno="" code="" type="" servicename="">
03.         <available></available>
04.         <servicePrice>Service (Hotel / Apartment) Price <formatted></formatted>
05.     </servicePrice>
06.         <mealsPrice>Extra Meals Price <formatted></formatted>
07.     </mealsPrice>
08.         <price>Total Booking Cost <formatted></formatted>
09.     </price>
10.         <currency></currency>
11.         <currencyShort></currencyShort>
12.         <fromShort></fromShort>
13.         <toShort></toShort>
14.         <onRequest></onRequest>
15.         <minStay>
16.             <min></min>
17.             <from></from>
18.             <to></to>
19.         </minStay>
20.     </product>
21.     <confirmationText></confirmationText>
22.     <returnedCode></returnedCode>
23.     <bookings>
24.         <booking runno="">
25.             < type></ type>
26.             <bookingStatus></bookingStatus>
27.             <bookingCode></bookingCode>
28.             <bookingReferenceNumber></bookingReferenceNumber>
29.             <servicePrice> Service (Hotel) Price <formatted></formatted>
30.         </servicePrice>
31.             <mealsPrice>Extra Meals Price <formatted></formatted>
32.         </mealsPrice>
33.             <price>Total Booking Cost <formatted></formatted>
34.         </price>
35.             <currency></currency>
36.         </booking>
37.     </bookings>
38.     <successful></successful>
39. </result>

```

Item	Type	Parent	Description
<b>result</b>	Element	root	The root element.
<b>@date</b>	Attribute	result	The unix timestamp date and time when the result has been provided.
<b>@command</b>	Element	result	The command for which the result is shown.
<b>product</b>	Element	result	Contains details about a service of the itinerary. For each service in the itinerary one product element will be returned.
<b>@runno</b>	Attribute	product	Running number starting from 0.
<b>@code</b>	Attribute	product	Internal service code.
<b>@type</b>	Attribute	product	Service type. Possible values: <ul style="list-style-type: none"> <li>Hotel</li> <li>Apartment</li> </ul>
<b>@servicename</b>	Attribute	product	Service name.
<b>available</b>	Element	product	Specifies if the service is available and can be booked.

<b>servicePrice</b>	Element	booking	ServicePrice indicates the breakup in price for Room (excluded meal supplements)
<b>formatted</b>	Element	servicePrice	This element contains the service price formatted as per the customer preference (decimal places, thousand separator, decimal separator).
<b>mealsPrice</b>	Element	booking	MealsPrice indicates the breakup in price for meals (excluded Room rate)
<b>formatted</b>	Element	mealsPrice	This element contains the meals price formatted as per the customer preference (decimal places, thousand separator, decimal separator).
<b>price</b>	Element	booking	Total payable for this booking (including rooms and meals).
<b>formatted</b>	Element	price	This element contains the total price formatted as per the customer preference (decimal places, thousand separator, decimal separator)
<b>currency</b>	Element	product	Internal code for the currency in which the prices are displayed.
<b>currencyShort</b>	Element	product	Specifies the shortening for the currency used to display the price.
<b>fromShort</b>	Element	product	Starting date of the service in <i>DOTW format</i> .
<b>toShort</b>	Element	product	Ending date of the service in <i>DOTW format</i> .
<b>onRequest</b>	Element	product	Specifies if the service is on request or not. Possible values: <ul style="list-style-type: none"> <li>• 0</li> <li>• 1</li> </ul>
<b>minStay</b>	Element	product	Used for hotels and apartments to specify if the service requires a minimum staying for the period it will be booked for.
<b>min</b>	Element	minStay	Specifies the minimum staying.
<b>from</b>	Element	minStay	Specifies the starting date of the min stay.in DOTW format.
<b>to</b>	Element	minStay	Specifies the ending date of the min stay in DOTW format.
<b>confirmationText</b>	Element	result	Confirmation text for the itinerary in a HTML format. This element will be returned only if the request was posted with <b>confirm</b> value Yes.
<b>returnedCode</b>	Element	result	Confirmed itinerary code. This element will be returned only if the request was posted with <b>confirm</b> value Yes.
<b>bookings</b>	Element	result	Encapsulates a list with all the services booked under this itinerary. This element and all its siblings will be returned only if the request was posted with <b>confirm</b> value Yes.
<b>booking</b>	Element	bookings	Encapsulates information about a booked services.
<b>@runno</b>	Attribute	booking	Running number starting from 0.
<b>bookingStatus</b>	Element	booking	Specifies the status of the Booking. Indicates whether the booking is confirmed on request. Possible values: <ul style="list-style-type: none"> <li>• 1 - onrequest</li> <li>• 2 - confirmed</li> </ul>
<b>bookingCode</b>	Element	booking	Specifies the internal code of the booking. This will be different from the internal code of the saved service and it will be the internal code used to further process the booking.
<b>bookingReferenceNumber</b>	Element	booking	The confirmation number generated by DOTWconnect server. This will be a unique number generated by the system under which our service providers will record this booking.
<b>servicePrice</b>	Element	booking	ServicePrice indicates the breakup in price for Room (excluded meal supplements)

<b>formatted</b>	Element	servicePrice	This element contains the service price formatted as per the customer preference (decimal places, thousand separator, decimal separator).
<b>mealsPrice</b>	Element	booking	MealsPrice indicates the breakup in price for meals (excluded Room rate)
<b>formatted</b>	Element	mealsPrice	This element contains the meals price formatted as per the customer preference (decimal places, thousand separator, decimal separator).
<b>price</b>	Element	booking	Total payable for this booking (including rooms and meals).
<b>formatted</b>	Element	price	This element contains the total price formatted as per the customer preference (decimal places, thousand separator, decimal separator)
<b>currency</b>	Element	booking	The internal code for the Currency in which the rates are calculated.
<b>successful</b>	Element	product	Specifies if the request was successfully porcessed.

bookitinerary\_response.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="result" type="resultType"></xs:element>
03.   <xs:complexType name="resultType">
04.     <xs:sequence>
05.       <xs:element name="currencyShort" type="currencyShortType"></xs:element>
06.       <xs:element name="product" type="productType" maxOccurs="unbounded"></xs:element>
07.       <xs:element name="confirmationText" type="xs:string" minOccurs="0"></xs:element>
08.       <xs:element name="returnedCode" type="xs:nonNegativeInteger" minOccurs="0"></xs:element>
09.       <xs:element name="bookings" type="bookingsType" minOccurs="0"></xs:element>
10.       <xs:element name="successful" type="trueOrFalse" minOccurs="1" maxOccurs="1"></xs:element>
11.     </xs:sequence>
12.     <xs:attribute name="command" type="bookItineraryType" use="required"></xs:attribute>
13.     <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
14.     <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
15.     <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
16.     <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
17.     <xs:attribute name="elapsedTime" type="xs:decimal" use="required"></xs:attribute>
18.   </xs:complexType>
19.   <xs:simpleType name="dotwIP">
20.     <xs:restriction base="xs:string">
21.       <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[ {1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0)\.(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0)\.(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0)" /></xs:pattern>
22.     </xs:restriction>
23.   </xs:simpleType>
24.   <xs:simpleType name="dotwDateType">
25.     <xs:restriction base="xs:string">
26.       <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}(\s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*|([0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2})(\s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*" /></xs:pattern>
27.     </xs:restriction>
28.   </xs:simpleType>
29.   <xs:simpleType name="versionType">
30.     <xs:restriction base="xs:string">
31.       <xs:pattern value="[1-9]{1}([0-9])*\.([0-9])*" /></xs:pattern>
32.     </xs:restriction>
33.   </xs:simpleType>
34.   <xs:complexType name="productType">
35.     <xs:all>
36.       <xs:element name="cancellationRules" type="cancellationRulesType" minOccurs="0"></xs:element>
37.       <xs:element name="withinCancellationDeadline" type="yesOrNo" minOccurs="0"></xs:element>
38.       <xs:element name="available" type="trueOrFalse"></xs:element>
39.       <xs:element name="servicePrice" type="formattedPriceType" minOccurs="0"></xs:element>
40.       <xs:element name="mealsPrice" type="formattedPriceType" minOccurs="0"></xs:element>
41.       <xs:element name="allocationDetails" type="xs:string" minOccurs="0"></xs:element>
42.       <xs:element name="dates" type="datesType" minOccurs="0" maxOccurs="1"></xs:element>
43.       <xs:element name="price" type="formattedPriceType"></xs:element>
44.       <xs:element name="currencyShort" type="currencyShortType" minOccurs="0"></xs:element>
45.       <xs:element name="fromShort" type="xs:string"></xs:element>
46.       <xs:element name="toShort" type="xs:string"></xs:element>
47.       <xs:element name="onRequest" type="oneOrZero"></xs:element>
48.     </xs:all>
49.     <xs:attribute name="runno" type="xs:integer" use="required"></xs:attribute>
50.     <xs:attribute name="code" type="xs:nonNegativeInteger" use="required"></xs:attribute>
51.     <xs:attribute name="type" type="typeType" use="required"></xs:attribute>
52.     <xs:attribute name="servicename" type="xs:string"></xs:attribute>
53.   </xs:complexType>
54.   <xs:complexType name="datesType">
55.     <xs:sequence>
56.       <xs:element name="date" type="dateType" maxOccurs="unbounded"></xs:element>
57.     </xs:sequence>
58.     <xs:attribute name="count" type="xs:nonNegativeInteger" use="required"></xs:attribute>
59.   </xs:complexType>

```

```

60.     <xs:complexType name="dateType">
61.         <xs:all>
62.             <xs:element name="price" type="servicePriceType"/></xs:element>
63.             <xs:element name="priceMinimumSelling" type="servicePriceType" minOccurs="0"/></xs:element>
64.             <xs:element name="priceInRequestedCurrency" type="servicePriceType" minOccurs="0"/></xs:element>
65.             <xs:element name="priceMinimumSellingInRequestedCurrency" type="servicePriceType" minOccurs="0"/>
</xs:element>
66.         <xs:element name="freeStay" type="yesOrNo"/></xs:element>
67.         <xs:element name="dayOnRequest" type="oneOrZero"/></xs:element>
68.         <xs:element name="including" type="includingType"/></xs:element>
69.     </xs:all>
70.     <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
71.     <xs:attribute name="datetime" type="dotwDateType" use="required"/></xs:attribute>
72.     <xs:attribute name="day" type="xs:string" use="required"/></xs:attribute>
73.     <xs:attribute name="wday" type="xs:string" use="required"/></xs:attribute>
74. </xs:complexType>
75. <xs:complexType name="includingType">
76.     <xs:all>
77.         <xs:element name="includedSupplement" type="includedSupplementType" minOccurs="0"/></xs:element>
78.         <xs:element name="includedMeal" type="includedMealType" minOccurs="0"/></xs:element>
79.         <xs:element name="includedAdditionalService" type="includedAdditionalServiceType" minOccurs="0"
maxOccurs="1"/></xs:element>
80.     </xs:all>
81.     <xs:attribute name="count" type="xs:nonNegativeInteger"/></xs:attribute>
82. </xs:complexType>
83. <xs:complexType name="includedSupplementType">
84.     <xs:sequence>
85.         <xs:element name="supplementName" type="xs:string"/></xs:element>
86.         <xs:element name="description" type="xs:string"/></xs:element>
87.     </xs:sequence>
88.     <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
89. </xs:complexType>
90. <xs:complexType name="includedAdditionalServiceType">
91.     <xs:sequence>
92.         <xs:element name="serviceId" type="xs:nonNegativeInteger"/></xs:element>
93.         <xs:element name="serviceName" type="xs:string"/></xs:element>
94.     </xs:sequence>
95.     <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
96. </xs:complexType>
97. <xs:complexType name="includedMealType">
98.     <xs:sequence>
99.         <xs:element name="mealName" type="xs:string"/></xs:element>
100.        <xs:element name="type">
101.            <xs:complexType>
102.                <xs:simpleContent>
103.                    <xs:extension base="xs:string">
104.                        <xs:attribute name="code" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
105.                    </xs:extension>
106.                </xs:simpleContent>
107.            </xs:complexType>
108.        </xs:element>
109.    </xs:sequence>
110.    <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
111. </xs:complexType>
112. <xs:simpleType name="trueOrFalse">
113.     <xs:restriction base="xs:string">
114.         <xs:pattern value="true|false|TRUE|FALSE"/></xs:pattern>
115.     </xs:restriction>
116. </xs:simpleType>
117. <xs:simpleType name="yesOrNo">
118.     <xs:restriction base="xs:string">
119.         <xs:pattern value="yes|no"/></xs:pattern>
120.     </xs:restriction>
121. </xs:simpleType>
122. <xs:complexType name="formattedPriceType" mixed="true">
123.     <xs:sequence>
124.         <xs:element name="formatted" type="xs:string"/></xs:element>
125.     </xs:sequence>
126. </xs:complexType>
127. <xs:complexType name="cancellationRulesType">
128.     <xs:sequence>
129.         <xs:element name="rule" type="ruleType" maxOccurs="unbounded"/></xs:element>
130.     </xs:sequence>
131.     <xs:attribute name="count" type="xs:unsignedInt" use="required"/></xs:attribute>
132. </xs:complexType>
133. <xs:complexType name="ruleType">
134.     <xs:sequence>
135.         <xs:element name="fromDate" type="dotwDateType" minOccurs="0" maxOccurs="1"/></xs:element>
136.         <xs:element name="fromDateDetails" type="xs:string" minOccurs="0" maxOccurs="1"/></xs:element>
137.         <xs:element name="toDate" type="dotwDateType" minOccurs="0" maxOccurs="1"/></xs:element>
138.         <xs:element name="toDateDetails" type="xs:string" minOccurs="0" maxOccurs="1"/></xs:element>
139.         <xs:element name="amendRestricted" type="trueOrFalse" minOccurs="0"/></xs:element>
140.         <xs:element name="cancelRestricted" type="trueOrFalse" minOccurs="0"/></xs:element>
141.         <xs:element name="noShowPolicy" type="trueOrFalse" minOccurs="0"/></xs:element>
142.         <xs:element name="amendCharge" type="servicePriceType" minOccurs="0"/></xs:element>
143.         <xs:element name="cancelCharge" type="servicePriceType" minOccurs="0"/></xs:element>
144.         <xs:element name="charge" type="servicePriceType" minOccurs="0"/></xs:element>
145.     </xs:sequence>
146.     <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
147. </xs:complexType>
148. <xs:simpleType name="currencyShortType">
149.     <xs:restriction base="xs:string">
150.         <xs:pattern value="[A-Z]{3}"/></xs:pattern>
151.     </xs:restriction>
152. </xs:simpleType>
153. <xs:simpleType name="oneOrZero">
154.     <xs:restriction base="xs:integer">

```

```

155.         <xs:pattern value="0|1"></xs:pattern>
156.     </xs:restriction>
157. </xs:simpleType>
158. <xs:simpleType name="typeType">
159.     <xs:restriction base="xs:string">
160.         <xs:pattern value="hotel|apartment|tour|transfer"></xs:pattern>
161.     </xs:restriction>
162. </xs:simpleType>
163. <xs:simpleType name="bookItineraryType">
164.     <xs:restriction base="xs:string">
165.         <xs:pattern value="bookitinerary|confirmbooking"></xs:pattern>
166.     </xs:restriction>
167. </xs:simpleType>
168. <xs:complexType name="bookingsType">
169.     <xs:sequence>
170.         <xs:element name="booking" type="bookingType" maxOccurs="unbounded"></xs:element>
171.     </xs:sequence>
172. </xs:complexType>
173. <xs:complexType name="bookingType">
174.     <xs:sequence>
175.         <xs:element name="bookingCode" type="xs:nonNegativeInteger"></xs:element>
176.         <xs:element name="bookingReferenceNumber" type="xs:string"></xs:element>
177.         <xs:element name="bookingStatus" type="xs:nonNegativeInteger"></xs:element>
178.         <xs:element name="servicePrice" type="servicePriceType"></xs:element>
179.         <xs:element name="mealsPrice" type="servicePriceType"></xs:element>
180.         <xs:element name="price" type="servicePriceType"></xs:element>
181.         <xs:element name="currency" type="xs:nonNegativeInteger"></xs:element>
182.         <xs:element name="type" type="xs:string"></xs:element>
183.         <xs:element name="voucher" type="xs:string"></xs:element>
184.         <xs:element name="paymentGuaranteedBy" type="xs:string"></xs:element>
185.         <xs:element name="emergencyContacts" type="emergencyContactsType"></xs:element>
186.     </xs:sequence>
187.     <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"></xs:attribute>
188. </xs:complexType>
189. <xs:complexType name="servicePriceType" mixed="true">
190.     <xs:sequence>
191.         <xs:element name="formatted" type="xs:string"></xs:element>
192.     </xs:sequence>
193. </xs:complexType>
194. <xs:complexType name="emergencyContactsType">
195.     <xs:sequence>
196.         <xs:element name="emergencyContact" type="emergencyContactType" minOccurs="0" maxOccurs="unbounded">
197.     </xs:sequence>
198.     <xs:attribute name="count" type="xs:nonNegativeInteger" use="required"></xs:attribute>
199. </xs:complexType>
200. <xs:complexType name="emergencyContactType">
201.     <xs:sequence>
202.         <xs:element name="salutation">
203.             <xs:complexType>
204.                 <xs:simpleContent>
205.                     <xs:extension base="xs:string">
206.                         <xs:attribute name="id" type="xs:nonNegativeInteger" use="required"></xs:attribute>
207.                     </xs:extension>
208.                 </xs:simpleContent>
209.             </xs:complexType>
210.         </xs:element>
211.         <xs:element name="fullName" type="xs:string"></xs:element>
212.         <xs:element name="phone" type="xs:string"></xs:element>
213.     </xs:sequence>
214.     <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"></xs:attribute>
215. </xs:complexType>
216. </xs:schema>

```

## Re-confirm booking process

The new feature has the purpose to enhance our customers experience, by providing alternative offers in cases when DOTW receive from its suppliers different conditions in the confirmation step.

Therefore, instead of only returning an error message in such cases, the re-confirmation process will provide additional details about the new booking conditions, offering to our customers the possibility to finalize the booking.

The bookItinerary response will still return an error Code and error message, but in addition to this, the extraDetails tag will contain the new booking conditions.

**important:** For those customers who are interested to implement the re-confirmation process logic, it is mandatory to add in the bookItinerary request a new tag: <returnReconfirm>. Additional details can be found under Hotel Comm Structure -> BookItinerary -> General Request section.

It is mandatory that in the new bookItinerary request, the customer will use the **allocationDetails** token generated in the extraDetails tag, as this encapsulates the new booking conditions.

```

01. <response>
02.     <request>
03.         <successful>FALSE</successful>
04.         <error>

```

```

05.      <class>GeneralRequestBookItinerary</class>
06.      <code>151</code>
07.      <details>Unable to confirm the booking due to a rate change from supplier</details>
08.      <extraDetails>
09.          <products no="2">
10.              <product runno="0" haserror="true" changed="price">
11.                  <currencyShort>USD</currencyShort>
12.                  <code>3509 <!-- room type code -->
13.              </product>
14.              <product runno="1" haserror="true" changed="price">
15.                  <currencyShort>USD</currencyShort>
16.                  <code>3509 <!-- room type code -->
17.              </product>
18.          </products>
19.          <referenceNumber>1081364085 <!-- saved booking code -->
20.          </referenceNumber>
21.          <selectedRateBasis>0</selectedRateBasis>
22.          <allocationDetails>1526716226000001B1011B0</allocationDetails>
23.          <price>44.267408421958 <formatted>44.267408421958</formatted>
24.          </price>
25.          <cancellationRules count="3">
26.              <rule runno="0">
27.                  <toDate>2018-05-23 14:59:59</toDate>
28.                  <toDateDetails>Wed, 01 May 2018 14:59:59</toDateDetails>
29.                  <amendCharge>0 <formatted>0.00</formatted>
30.                  </amendCharge>
31.                  <cancelCharge>0 <formatted>0.00</formatted>
32.                  </cancelCharge>
33.                  <charge>0 <formatted>0.00</formatted>
34.              </rule>
35.              <rule runno="1">
36.                  <fromDate>2018-05-23 15:00:00</fromDate>
37.                  <fromDateDetails>Wed, 01 May 2018 15:00:00</fromDateDetails>
38.                  <amendCharge>67.2194 <formatted>67.22</formatted>
39.                  </amendCharge>
40.                  <cancelCharge>67.2194 <formatted>67.22</formatted>
41.                  </cancelCharge>
42.                  <charge>67.2194 <formatted>67.22</formatted>
43.              </rule>
44.              <rule runno="2">
45.                  <fromDate>2018-05-25 00:00:00</fromDate>
46.                  <fromDateDetails>Fri, 01 May 2018 00:00:00 / Midnight</fromDateDetails>
47.                  <noShowPolicy>true</noShowPolicy>
48.                  <charge>67.2194 <formatted>67.22</formatted>
49.              </rule>
50.          </cancellationRules>
51.          </product>
52.          <product runno="1">
53.              <currencyShort>USD</currencyShort>
54.              <code>3509 <!-- room type code -->
55.          </product>
56.          </code>
57.          <referenceNumber>1081364095 <!-- saved booking code -->
58.          </referenceNumber>
59.          <selectedRateBasis>0</selectedRateBasis>
60.          <allocationDetails>1526716226000001B1011B0</allocationDetails>
61.          <price>44.267408421958 <formatted>44.267408421958</formatted>
62.          </price>
63.          <cancellationRules count="3">
64.              <rule runno="0">
65.                  <toDate>2018-05-23 14:59:59</toDate>
66.                  <toDateDetails>Wed, 01 May 2018 14:59:59</toDateDetails>
67.                  <amendCharge>0 <formatted>0.00</formatted>
68.                  </amendCharge>
69.                  <cancelCharge>0 <formatted>0.00</formatted>
70.                  </cancelCharge>
71.                  <charge>0 <formatted>0.00</formatted>
72.              </rule>
73.              <rule runno="1">
74.                  <fromDate>2018-05-23 15:00:00</fromDate>
75.                  <fromDateDetails>Wed, 01 May 2018 15:00:00</fromDateDetails>
76.                  <amendCharge>67.2194 <formatted>67.22</formatted>
77.                  </amendCharge>
78.                  <cancelCharge>67.2194 <formatted>67.22</formatted>
79.                  </cancelCharge>
80.                  <charge>67.2194 <formatted>67.22</formatted>
81.              </rule>
82.              <rule runno="2">
83.                  <fromDate>2018-05-25 00:00:00</fromDate>
84.                  <fromDateDetails>Fri, 01 May 2018 00:00:00 / Midnight</fromDateDetails>
85.                  <noShowPolicy>true</noShowPolicy>
86.                  <charge>67.2194 <formatted>67.22</formatted>
87.              </rule>
88.          </cancellationRules>
89.          </product>
90.      </products>
91.      </extraDetails>
92.      </error>
93.      </request>
94.  </response>

```

Item	Type	Parent	Description
response	Element	root	The root element.



@date	Attribute	response	The unix timestamp date and time when the response has been provided.
@command	Attribute	response	The command for which the response is shown.
request	Element	response	Contains specific data for the unsuccessful request command.
successful	Element	request	Indicates that the request was not successfully processed.
error	Element	request	Contains information about the error.
code	Element	error	Internal error code.
details	Element		Details about the error.
extraDetails	Element	error	Extra details regarding the error.
successful	element	request	Indicates if the response is a successful or a failed one. Possible values <ul style="list-style-type: none"> <li>• FALSE</li> <li>• TRUE</li> </ul>
products	Element	extraDetails	Specifies the number of services under the itinerary.
product	Element	products	Encapsulates the booking conditions for the first service (room).
haserror	attribute	response	Indicates if the confirmation response triggered an error from DOTW server. Fixed value: 'true'
changed	attribute	response	Specifies the reason of the booking failure and which conditions have changed. Possible values: <ul style="list-style-type: none"> <li>• price</li> <li>• price cxl</li> <li>• price</li> </ul>
currencysort	element	product	Short currency code in which rates are returned
code	Element	product	DOTW Internal RoomTypeCode for the selected room.
referencenumber	Element	product	DOTW code for the saved booking. To be used in the new bookItinerary request
selectedratebasis	Element	product	DOTW Internal Code for the selected rateBasis
allocationdetails	Element	product	AllocationDetails Token which encapsulates the new booking conditions. To be used in the next confirmbooking request;
price	Element	product	New booking price. The exact value from tag needs to be used in the new bookItinerary request.
cancellationrules	element	product	Encapsulates details about the new cancellation rules
rule	Element	cancellationrules	Indicates the cancellation rule number.
fromdate	Element	rule	Starting date of the rule. From this day forward until toDate (if present), the specified charge will be applied for any cancellations or amendments. If this element is not present then the charge will be applied from the current date until toDate. Date format is: YYYY-MM-DD HH:MM:SS
fromdatedetails	Element	rule	From Date in Weekday Month Day, Year HH:MM:SS format.
amendcharge	Element	rule	Amendment charge that will be applied if booking is amended in the period defined by this rule.
cancelCharge	Element	rule	Cancellation charge that will be applied if booking is canceled in the period defined by this rule.

<b>cancelRestricted</b>	Element	rule	If present, this element indicates that a future cancel (using the cancelbooking or deleteitinerary methods) done in the time period defined by this rule, will not be possible. Fixed value: TRUE
<b>amendRestricted</b>	Element	rule	If present, this element indicates that a future amendment (using the updatebooking method) done in the time period defined by this rule, will not be possible. Fixed value: TRUE
<b>noshowpolicy</b>	Element	rule	If present, this element indicates that the presented charge is a no show charge. In this case the elements fromDate, fromDateDetails, toDate, toDateDetails, amendingPossible will be absent. Fixed value: TRUE

## Cancel Booking

The following request can be used to cancel a booking (booking code) that is confirmed or delete a booking that is saved.

Please note that this method is a two steps process:

1.<confirm>no</confirm>; 2.<confirm>yes</confirm>.

If you want to cancel an entire itinerary using the cancelBooking method you have to send separate cancelbooking requests for each of the booking codes in your itinerary.

## General Request

```

01.  <customer>
02.    <username>username</username>
03.    <password>md5(password)</password>
04.    <id>company code</id>
05.    <source>1</source>
06.    <request command="cancelbooking">
07.      <bookingDetails>
08.        <bookingType></bookingType>
09.        <bookingCode>internal booking code</bookingCode>
10.        <confirm></confirm>
11.        <testPricesAndAllocation>
12.          <service referencenumber="">
13.            <penaltyApplied></penaltyApplied>
14.          </service>
15.        </testPricesAndAllocation>
16.      </bookingDetails>
17.    </request>
18.  </customer>

```

Item	Type	Parent	Description	Required
<b>bookingDetails</b>	Element	request	Used to specify details about the request.	Yes.
<b>bookingType</b>	Element	bookingDetails	Specifies if the booking is confirmed or saved. Possible values: <ul style="list-style-type: none"> <li>1 - confirmed</li> <li>2 - saved</li> </ul>	Yes.
<b>bookingCode</b>	Element	bookingDetails	Booking internal code.	Yes.

<b>confirm</b>	Element	bookingDetails	For confirmed bookings the cancellation process takes place in two steps to ensure the customer is agreeing to any cancellation penalty that should be applied. In the first step, the request is indicating which booking the customer wishes to cancel - confirm value: no. The second step also provides details about cancellation penalty (by mentioning this, the customer is in fact agreeing to that cancellation penalty.) - confirm value: yes. Possible values: <ul style="list-style-type: none"> <li>• yes</li> <li>• no</li> </ul>	Yes.
<b>testPricesAndAllocation</b>	Element	bookingDetails	Groups information about prices, allocation and penalties for each service.	Yes, if confirm nodevalue is yes.
<b>service</b>	Element	testPricesAndAllocation	Specifies for which service the details are about.	Yes.
@referencenumber	Attribute	service	Booking Internal Code - same value as bookingCode	Yes.
<b>penaltyApplied</b>	Element	service	Specifies the penalty charge for canceling this booking, the customer agrees to. This should be the exact value received from the system and not the formatted one.	Yes.

## cancelbooking.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:include schemaLocation="loginDetails.xsd"></xs:include>
03.   <xs:include schemaLocation="general.xsd"></xs:include>
04.   <xs:include schemaLocation="bookingDetails.xsd"></xs:include>
05.   <!-- ##### -->
06.   <xs:element name="customer">
07.     <xs:complexType>
08.       <xs:sequence>
09.         <xs:group ref="loginDetailsGroup"></xs:group>
10.         <xs:element name="request" type="requestType"></xs:element>
11.       </xs:sequence>
12.     </xs:complexType>
13.   </xs:element>
14.   <!-- ##### -->
15.   <xs:complexType name="requestType">
16.     <xs:sequence>
17.       <xs:element name="bookingDetails">
18.         <xs:complexType>
19.           <xs:sequence>
20.             <xs:group ref="bookingTypeAndCode"></xs:group>
21.             <xs:element name="confirm" type="confirmType"></xs:element>
22.             <xs:element name="testPricesAndAllocation"
type="cancelTestPricesAndAllocationType" minOccurs="0"></xs:element>
23.           </xs:sequence>
24.         </xs:complexType>
25.       </xs:element>
26.     </xs:sequence>
27.     <xs:attribute name="command" type="xs:string" use="required" fixed="cancelbooking"></xs:attribute>
28.     <xs:attribute name="debug" type="xs:integer"></xs:attribute>
29.     <xs:attribute name="defaultnamespace" type="xs:string" use="optional" fixed="true"></xs:attribute>
30.   </xs:complexType>
31. </xs:schema>

```

## General Response

In case of cancelBooking failure (if the booking can't be cancelled successfully after a few tries) we strongly recommend that you contact us immediately so that we can analyze the cause and suggest a course of action (i.e. reporting the issue in real time to our suppliers so that they can manually cancel it from their side).

```

01. <result command="cancelbooking" date="">
02.   <services>
03.     <service code="" runno="">
04.       <cancellationPenalty>
05.         <penaltyApplied>
06.           <formatted></formatted>
07.         </penaltyApplied>
08.         <currency></currency>
09.         <currencyShort></currencyShort>
10.       </cancellationPenalty>
11.     </service>
12.   </services>
13.   <successful>TRUE</successful>
14. </result>

```

Item	Type	Parent	Description
<b>result</b>	Element	root	The root element.
@date	Attribute	result	The Unix timestamp date and time when the result has been provided.
@command	Attribute	result	The command for which the result is shown.
<b>services</b>	Element	result	Groups information about the services that were canceled.
<b>service</b>	Element	services	Encapsulates information about the penalty that was applied for this booking.
@runno	Element	service	Serial running number starting from 0.
@code	Element	service	Internal code for the booking that was canceled.
<b>cancellationPenalty</b>	Element	result	Encapsulates details about the cancellation policy applied for this booking.
<b>penaltyApplied</b>	Element	cancellationPenalty	Cancellation charge applied for this booking.
<b>formatted</b>	Element	penaltyApplied	Cancellation charge formatted as per the customer preference (decimal places, thousand separator, decimal separator).
<b>currency</b>	Element	cancellationPenalty	Internal code of the currency in which the cancellation charge is provided.
<b>currencyShort</b>	Element	cancellationPenalty	The 3 letter code which identify the currency in which the cancellation charge is provided.
<b>successful</b>	Element	result	Specifies if the request was successfully processed.

#### cancelbooking\_response.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="result" type="resultType"></xs:element>
03.   <xs:complexType name="resultType">
04.     <xs:all>
05.       <xs:element name="productsLeftOnItinerary" type="xs:unsignedShort" minOccurs="0"></xs:element>
06.       <xs:element name="services" type="servicesType"></xs:element>
07.       <xs:element name="successful" type="trueOrFalse"></xs:element>
08.     </xs:all>
09.     <xs:attribute name="command" type="xs:string" use="required" fixed="cancelbooking"></xs:attribute>
10.     <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
11.     <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
12.     <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
13.     <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
14.     <xs:attribute name="elapsedTime" type="xs:decimal" use="required"></xs:attribute>
15.   </xs:complexType>
16.   <xs:simpleType name="dotwIP">
17.     <xs:restriction base="xs:string">
18.       <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1]{0-9}{2}|[1-9]{1}[0-9]{1}|[1-9]|0)\.(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0)\.(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0)\.(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0)" /></xs:pattern>
19.     </xs:restriction>
20.   </xs:simpleType>
21.   <xs:simpleType name="dotwDateType">
22.     <xs:restriction base="xs:string">

```

```

23.      <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}(\s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*|[0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2}(\s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*"></xs:pattern>
24.    </xs:restriction>
25.  </xs:simpleType>
26.  <xs:simpleType name="trueOrFalse">
27.    <xs:restriction base="xs:string">
28.      <xs:pattern value="true|false|TRUE|FALSE"></xs:pattern>
29.    </xs:restriction>
30.  </xs:simpleType>
31.  <xs:simpleType name="versionType">
32.    <xs:restriction base="xs:string">
33.      <xs:pattern value="[1-9]{1}([0-9])*\.([0-9])*"></xs:pattern>
34.    </xs:restriction>
35.  </xs:simpleType>
36.  <xs:simpleType name="currencyShortType">
37.    <xs:restriction base="xs:string">
38.      <xs:pattern value="[A-Z]{3}"></xs:pattern>
39.    </xs:restriction>
40.  </xs:simpleType>
41.  <xs:complexType name="servicesType">
42.    <xs:sequence>
43.      <xs:element name="service" type="serviceType"></xs:element>
44.    </xs:sequence>
45.  </xs:complexType>
46.  <xs:complexType name="serviceType">
47.    <xs:sequence>
48.      <xs:element name="cancellationPenalty" type="cancellationPenaltyType" maxOccurs="unbounded"></xs:element>
49.    </xs:sequence>
50.    <xs:attribute name="runno" type="xs:unsignedByte" use="required"></xs:attribute>
51.    <xs:attribute name="code" type="xs:nonNegativeInteger" use="required"></xs:attribute>
52.  </xs:complexType>
53.  <xs:complexType name="cancellationPenaltyType">
54.    <xs:sequence>
55.      <xs:choice>
56.        <xs:element name="penaltyApplied" type="formattedPriceType"></xs:element>
57.        <xs:element name="charge" type="formattedPriceType"></xs:element>
58.      </xs:choice>
59.      <xs:element name="currency" type="xs:unsignedShort"></xs:element>
60.      <xs:element name="currencyShort" type="currencyShortType"></xs:element>
61.    </xs:sequence>
62.  </xs:complexType>
63.  <xs:complexType name="formattedPriceType" mixed="true">
64.    <xs:sequence>
65.      <xs:element name="formatted" type="xs:string"></xs:element>
66.    </xs:sequence>
67.  </xs:complexType>
68. </xs:schema>

```

## Delete Itinerary

An itinerary can contain one or more services. You can use this method to delete all services in a saved itinerary or cancel all services in a confirmed itinerary.

Please note that this method is a two steps process:

**1.<confirm>no</confirm>; 2.<confirm>yes</confirm>.**

When implementing the deleteitinerary method you **always have to take into consideration the value of the element** returned in our deletelitinerary with yes response.

If the value of this element is greater or equal to 1 the application should display a message informing the user that not all of the services have been successfully cancelled:

**e.g.**If you send a deleteitinerary request for a booking of 3 rooms and our system returns the element **<productsLeftOnItinerary>2</productsLeftOnItinerary>** it means that 2 out of the 3 booked rooms could not be cancelled.

**In cases when the value returned by this element is different than 0 please retry to cancel the itinerary and immediately contact us if you still can't succeed so we can raise the issue with our suppliers.**

## General Request

```

01.  <customer>
02.    <username>username</username>
03.    <password>md5(password)</password>
04.    <id>company code</id>
05.    <source>1</source>
06.    <request command="deleteitinerary">
07.      <bookingDetails>
08.        <bookingType></bookingType>
09.        <bookingCode></bookingCode>
10.        <confirm></confirm>
11.        <testPricesAndAllocation>
12.          <service referencenumber="">
13.            <penaltyApplied></penaltyApplied>
14.          </service>
15.        </testPricesAndAllocation>

```

```

16.         </bookingDetails>
17.     </request>
18. </customer>

```

Item	Type	Parent	Description	Required
<b>bookingDetails</b>	Element	request	Used to specify details about the request.	Yes.
<b>bookingType</b>	Element	bookingdetails	Specifies if the booking is confirmed or saved. Possible values: <ul style="list-style-type: none"> <li>1 - confirmed</li> <li>2 - saved</li> </ul>	Yes.
<b>bookingCode</b>	Element	bookingdetails	Itinerary internal code.	Yes.
<b>confirm</b>	Element	bookingDetails	For confirmed bookings the cancellation process takes place in two steps to ensure the customer is agreeing to any cancellation penalty that should be applied. In the first step, the request is indicating which booking the customer wishes to cancel - confirm value: no. The second step also provides details about cancellation penalty (by mentioning this, the customer is in fact agreeing to that cancellation penalty.) - confirm value: yes. Possible values: <ul style="list-style-type: none"> <li>yes</li> <li>no</li> </ul>	Yes.
<b>testPricesAndAllocation</b>	Element	bookingDetails	Groups information about prices, allocation and penalties for each service.	Yes, if confirm nodevalue is yes.
<b>service</b>	Element	testPricesAndAllocation	Specifies for which service the details are about.	Yes.
@referencenumber	Attribute	service	Booking Internal Code - same value as bookingCode	Yes.
<b>penaltyApplied</b>	Element	service	Specifies the penalty charge for canceling this booking, the customer agrees to. This should be the exact value received from the system and not the formatted one.	Yes.

## deleteitinerary.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.     <xs:include schemaLocation="loginDetails.xsd"></xs:include>
03.     <xs:include schemaLocation="general.xsd"></xs:include>
04.     <xs:include schemaLocation="bookingDetails.xsd"></xs:include>
05.     <!-- ##### -->
06.     <xs:element name="customer">
07.         <xs:complexType>
08.             <xs:sequence>
09.                 <xs:group ref="loginDetailsGroup"></xs:group>
10.                 <xs:element name="request" type="requestType"></xs:element>
11.             </xs:sequence>
12.         </xs:complexType>
13.     </xs:element>
14.     <!-- ##### -->
15.     <xs:complexType name="requestType">
16.         <xs:all>
17.             <xs:element name="bookingDetails">
18.                 <xs:complexType>
19.                     <xs:sequence>
20.                         <xs:group ref="bookingTypeAndCode"></xs:group>
21.                         <xs:element name="confirm" type="confirmType"></xs:element>
22.                         <xs:element name="testPricesAndAllocation"
type="deleteTestPricesAndAllocationType" minOccurs="0"></xs:element>
23.                     </xs:sequence>
24.                 </xs:complexType>
25.             </xs:element>

```

```

26.         </xs:all>
27.         <xs:attribute name="command" type="xs:string" use="required" fixed="deleteitinerary"></xs:attribute>
28.         <xs:attribute name="debug" type="xs:integer"></xs:attribute>
29.         <xs:attribute name="defaultnamespace" type="xs:string" use="optional" fixed="true"></xs:attribute>
30.     </xs:complexType>
31. </xs:schema>

```

## General Response

In case of deleteitinerary failure (if not all the bookings under the requested itinerary can be cancelled successfully after a few tries) we strongly recommend that you contact us immediately so that we can analyze the cause and suggest a course of action (i.e. reporting the issue in real time to our suppliers so that they can manually cancel it from their side).

```

01. <result command="deleteitinerary" ip="" date="" version="">
02.   <currencyShort></currencyShort>
03.   <productsLeftOnItinerary></productsLeftOnItinerary>
04.   <services>
05.     <service runno="0" code="">
06.       <cancellationPenalty>
07.         <charge>
08.           <formatted></formatted>
09.         </charge>
10.         <currency>413</currency>
11.         <currencyShort>EUR</currencyShort>
12.       </cancellationPenalty>
13.     </service>
14.     <service runno="1" code="14275817">
15.       <cancellationPenalty>
16.         <charge>
17.           <formatted></formatted>
18.         </charge>
19.         <currency>413</currency>
20.         <currencyShort>EUR</currencyShort>
21.       </cancellationPenalty>
22.     </service>
23.   </services>
24.   <successful></successful>
25. </result>

```

Item	Type	Parent	Description
<b>result</b>	Element	root	The root element.
@date	Attribute	result	The unix timestamp date and time when the result has been provided.
@command	Attribute	result	The command for which the result is shown.
<b>productsLeftOnItinerary</b>	Element	result	Specifies how many services are still confirmed and part of the itinerary after the cancellation request. <b>It is important to take into consideration this element and implement a validation to verify if the value returned is different than 0. In such case you should immediately contact DOTW team in order to successfully cancel the itinerary.</b>
<b>services</b>	Element	result	Groups information about the services that are to be canceled.
<b>service</b>	Element	services	Encapsulates information about the penalty that was applied for this booking.
@runno	Element	service	Serial running number starting from 0.
@code	Element	service	Internal code for the booking that was canceled.
<b>cancellationPenalty</b>	Element	result	Encapsulates details about the cancellation policy applied for this booking.
<b>penaltyApplied</b>	Element	cancellationPenalty	Cancellation charge applied for this booking.
<b>formatted</b>	Element	penaltyApplied	Cancellation charge formatted as per the customer preference (decimal places, thousand separator, decimal separator).

<b>currency</b>	Element	cancellationPenalty	Internal code of the currency in which the cancellation charge is provided.
<b>currencyShort</b>	Element	cancellationPenalty	The 3 letter code which identify the currency in which the cancellation charge is provided.
<b>successful</b>	Element	result	Specifies if the request was successfully processed.

## deleteitinerary\_response.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="result" type="resultType"></xs:element>
03.   <xs:complexType name="resultType">
04.     <xs:all>
05.       <xs:element name="currencyShort" type="currencyShortType" minOccurs="0"></xs:element>
06.       <xs:element name="productsLeftOnItinerary" type="xs:unsignedShort" minOccurs="0"></xs:element>
07.       <xs:element name="services" type="servicesType"></xs:element>
08.       <xs:element name="successful" type="trueOrFalse"></xs:element>
09.     </xs:all>
10.     <xs:attribute name="command" type="xs:string" use="required" fixed="deleteitinerary"></xs:attribute>
11.     <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
12.     <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
13.     <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
14.     <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
15.     <xs:attribute name="elapsedTime" type="xs:decimal" use="required"></xs:attribute>
16.   </xs:complexType>
17.   <xs:simpleType name="dotwIP">
18.     <xs:restriction base="xs:string">
19.       <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{0-9}{2}|[1-9]{1}[0-9]{1}|[1-9]|0)\.(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0)\.(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0)\.(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0)" /></xs:pattern>
20.     </xs:restriction>
21.   </xs:simpleType>
22.   <xs:simpleType name="dotwDateType">
23.     <xs:restriction base="xs:string">
24.       <xs:pattern value="[0-9]{10}|[0-9]{4}-[0-9]{1,2}-[0-9]{1,2}(\s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})?|([0-9]{4}-[0-9]{1,2}-[0-9]{1,2})(\s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})?" /></xs:pattern>
25.     </xs:restriction>
26.   </xs:simpleType>
27.   <xs:simpleType name="trueOrFalse">
28.     <xs:restriction base="xs:string">
29.       <xs:pattern value="true|false|TRUE|FALSE"></xs:pattern>
30.     </xs:restriction>
31.   </xs:simpleType>
32.   <xs:simpleType name="versionType">
33.     <xs:restriction base="xs:string">
34.       <xs:pattern value="[1-9]{1}([0-9])?*" /></xs:pattern>
35.     </xs:restriction>
36.   </xs:simpleType>
37.   <xs:simpleType name="currencyShortType">
38.     <xs:restriction base="xs:string">
39.       <xs:pattern value="[A-Z]{3}" /></xs:pattern>
40.     </xs:restriction>
41.   </xs:simpleType>
42.   <xs:complexType name="servicesType">
43.     <xs:sequence>
44.       <xs:element name="service" type="serviceType" minOccurs="1" maxOccurs="unbounded"></xs:element>
45.     </xs:sequence>
46.   </xs:complexType>
47.   <xs:complexType name="serviceType">
48.     <xs:sequence>
49.       <xs:element name="cancellationPenalty" type="cancellationPenaltyType" maxOccurs="unbounded"></xs:element>
50.     </xs:sequence>
51.     <xs:attribute name="runno" type="xs:unsignedByte" use="required"></xs:attribute>
52.     <xs:attribute name="code" type="xs:nonNegativeInteger" use="required"></xs:attribute>
53.   </xs:complexType>
54.   <xs:complexType name="cancellationPenaltyType">
55.     <xs:sequence>
56.       <xs:choice>
57.         <xs:element name="penaltyApplied" type="formattedPriceType"></xs:element>
58.         <xs:element name="charge" type="formattedPriceType"></xs:element>
59.       </xs:choice>
60.       <xs:element name="currency" type="xs:unsignedShort"></xs:element>
61.       <xs:element name="currencyShort" type="currencyShortType"></xs:element>
62.     </xs:sequence>
63.   </xs:complexType>
64.   <xs:complexType name="formattedPriceType" mixed="true">
65.     <xs:sequence>
66.       <xs:element name="formatted" type="xs:string"></xs:element>
67.     </xs:sequence>
68.   </xs:complexType>
69. </xs:schema>

```



Based on the search criteria provided in the XML request, this method returns the (mandatory) additional services provided by the hotel for a specific period. When additional services are returned, the charges applicable for these services are always included in the total payable price for that particular room. In addition to the Authentication data the elements required to be passed for this method are defined in the following table.

```

01. <customer>
02.   <username>username</username>
03.   <password>md5(password)</password>
04.   <id>company_code</id>
05.   <source>1</source>
06.   <product>hotel</product>
07.   <request command="getadditionalserviceinfo">
08.     <fromDate>dotw date format</fromDate>
09.     <toDate>dotw date format</toDate>
10.     <currency>currency internal code</currency>
11.     <hotelId>hotel internal code</hotelId>
12.     <additionalServices>
13.       <additionalServiceId></additionalServiceId>
14.     </additionalServices>
15.   </request>
16. </customer>

```

Item	Type	Parent	Description	Required
fromDate	Element	request	Arrival date in dotw date format.	Yes.
toDate	Element	request	Departure date in dotw date format.	Yes.
currency	Element	request	Internal code of the currency in which the customer will see the prices. Include this element only if you are interested to get prices of the additional services.	No.
hotelId	Element	request	Internal code for the hotel you wish to see the additional services.	Yes.
additionalServices	Element	request	Groups several additional services ids. Send this element only if you want to receive information for specific services. If this element is not present, the request will return details for all additional services valid for the specified period.	No.
additionalServiceId	Element	request	Internal code for the additional service you want to receive details. Repeat this element if you wish to receive details for more services.	Yes, if parent present.

Our getadditionalserviceinfo response will provide information regarding the additional services that apply for the requested period. If the request was sent for specific additional service ids, the result will list only information about the mentioned services, if they are applicable for the requested period.

```

01. <result command="getadditionalserviceinfo" date="" elapsedtime="" ip="" tid="" version="2.0">
02.   <additionalServices count="">
03.     <additionalService id="" runno="">
04.       <name>mandatory transfer airport to hotel</name>
05.       <appliedto>person</appliedto>
06.       <appliedon>checkIn</appliedon>
07.       <adultrate> Adult Rate <formatted></formatted>
08.     </adultrate>
09.     <childrate> Child Rate <formatted></formatted>
10.   </childrate>
11.     <relatedinformation count="">
12.       <relatedinformationitem id="" runno="">
13.         < type id=""></ type>
14.         <info></info>
15.         <answerchoises count="">
16.           <answer runno="0"></answer>
17.         </answerchoises>
18.       </relatedinformationitem>
19.     </relatedinformation>
20.   </additionalService>
21. </additionalServices>
22. </result>

```

Item	Type	Parent	Description
<b>result</b>	Element	root	The root element.
@date	Attribute	result	The date and time when the result was provided in unix timestamp.
@command	Attribute	result	The request command which returned this result.
@ip	Attribute	result	The Ipv4 address the request was made from.
<b>additionalServices</b>	Element	result	Groups information about the additional services applied for the period request. If the request was sent with specific additional services ids, the result will contain only information about the mentioned services, if they are valid for the requested period.
@count	Attribute	additionalServices	Total number of additional services valid for the requested period and specific additional services requested.
<b>additionalService</b>	Element	additionalServices	Groups information about one additional service.
@id	Attribute	additionalService	Internal code for this additional service. This needs to be specified in the <b>confirmbooking</b> request along with any information needed by the hotel for this additional service.
runno	Attribute	additionalService	Running number starting from 0.
<b>name</b>	Element	additionalService	Additional service name as entered by the hotel.
<b>appliedTo</b>	Element	additionalService	Specified how this additional service is applied. Possible values: <ul style="list-style-type: none"> <li>• person</li> <li>• room</li> </ul> If service is applied per person, the specified rates (adult and/or child) will apply in the same manner.
<b>appliedOn</b>	Element	additionalService	Specified when this additional service is applied. Possible values: <ul style="list-style-type: none"> <li>• checkIn</li> <li>• checkOut</li> </ul> Depending on when it is applied, the rate for the service, is included in the first night or last night rate. In the <b>getRooms</b> response, the nightly rates include the additional services rates. If you want to display the additional service rate you can use information in this response to compute the total rate for additional services. Please note that any additional services defined by the hotel are mandatory and bookings can not be made without these services included.
<b>adultRate</b>	Element	additionalService	This element contains the adult rate for this additional service. Returned only if the request contains the currency element and if the service is applied per person.
<b>formatted</b>	Element	adultRate	This element contains the adult rate formatted as per the customer preference (decimal places, thousand separator, decimal separator)
<b>childRate</b>	Element	additionalService	This element contains the child rate for this additional service. Returned only if the request contains the currency element and if the service is applied per person.
<b>formatted</b>	Element	childRate	This element contains the child rate formatted as per the customer preference (decimal places, thousand separator, decimal separator)
<b>rate</b>	Element	additionalService	This element contains the additional service rate for this additional service. Returned only if the request contains the currency element and if the service is applied per room.

<b>formatted</b>	Element	rate	This element contains the additional service rate formatted as per the customer preference (decimal places, thousand separator, decimal separator)
<b>relatedInformation</b>	Element	additionalService	In order to book an additional service, the hotel might need several additional information from the end customer. (flight numbers, luggage info). If present, this elements flags that there is at least one information required by the hotel for this additional service.
<b>relatedInformationItem</b>	Element	relatedInformation	This element contains details about a specific info required by the hotel. Please note that there might be multiple info required for one additional service.
<b>info</b>	Element	additionalService	Specifies which is the information required by the hotel.
<b>type</b>	Element	relatedInformation	Specifies which type of information is required by the hotel. Possible values: <ul style="list-style-type: none"> <li>• Radio selection - one single answer; the answerChoices element will contain the possible answers for the information required</li> <li>• Multiple choices - multiple answers allowed; the answerChoices element will contain the possible answers for the information required</li> <li>• Free text - free text answer up to 200 characters</li> <li>• Date - date in YYYY-mm-dd format</li> <li>• Date Time - date time in YYYY-mm-dd HH:SS</li> <li>• Date Interval - two dates specifying an interval (YYYY-mm-dd YYYY-mm-dd)</li> </ul>
<b>id</b>	Attribute	type	Internal code for the type of answer, in case you want to write your application using internal codes rather than strings. This is in fact the preferred way to do it. The actual text description of the expected answer might change slightly during time the code will never change. If you want to get a complete list of the codes, please use <b>getrelatedinfotypeids</b> request, documented in the Internal Codes section.
<b>answerChoices</b>	Element	relatedInformation	Element is returned when the hotel has already predefined the possible answers and at confirm only one of these are accepted.
<b>answerChoice</b>	Element	type	Specifies one possible answer predefined by the hotel.
<b>runno</b>	Attribute	answerChoice	Running number starting from 0.

Based on the criteria provided in the searchBookings request, this method will return details for all the DOTW bookings created by the same customer (including passenger names, booking status and booking code). In addition to the Authentication data you have to also pass in your method the elements defined in the following table.

1

```

01.  <customer>
02.    <username></username>
03.    <password></password>
04.    <id></id>
05.    <source>1</source>
06.    <product>hotel</product>
07.    <request command="searchbookings" debug="1">
08.      <bookingDetails>
09.        <passengerFirstName></passengerFirstName>
10.        <passengerLastName></passengerLastName>
11.        <bookedCity></bookedCity>
12.        <bookingType></bookingType>
13.        <serviceDate type="bookingdate">
14.          <!-- type="checkindate | checkoutdate | bookingdate" -->
15.          <from></from>
16.          <to></to>

```

```

17.         </serviceDate>
18.         <serviceType></serviceType>
19.         <status></status>
20.         <agentReference></agentReference>
21.     </bookingDetails>
22. </request>
23. </customer>

```

Item	Type	Parent	Description	Required
<b>bookingDetails</b>	Element	request	Contains filtering options in order to retrieve DOTW bookings, as passenger names, booking date, travel dates. Please note that at least two filters have to be specified in the XML request.	Yes
<b>passengerFirstName</b>	Element	bookingDetails	Passenger first name	No
<b>passengerLastName</b>	Element	bookingDetails	Passenger last name	No
<b>bookedCity</b>	Element	bookingDetails	DOTW internal code of the city where bookings have been created in.	No
<b>bookingType</b>	Element	bookingDetails	Internal code of the booking status. Possible values: <ul style="list-style-type: none"> <li>• <b>1 Confirmed</b></li> <li>• <b>2 Saved</b></li> </ul>	No
<b>serviceDate</b>	Element	bookingDetails	Date in unix time stamp or YYYY-MM-DD format	No
<b>type</b>	Attribute	serviceDate	Specifies the date type. Possible values: <ul style="list-style-type: none"> <li>• <b>checkindate</b></li> <li>• <b>checkoutdate</b></li> <li>• <b>bookingdate</b></li> </ul>	No
<b>from</b>	Element	serviceDate	Specifies the starting date on which the user wants to retrieve bookings, based on the serviceDate type provided	No
<b>to</b>	Element	serviceDate	Specifies the end date until which the user wants to retrieve bookings, based on the serviceDate type provided	No
<b>status</b>	Element	bookingDetails	Specifies the booking status. Possible values: <ul style="list-style-type: none"> <li>• <b>1666 Confirmed</b></li> <li>• <b>1667 Cancelled</b></li> <li>• <b>1669 Amended Confirmed</b></li> <li>• <b>1705 Aborted</b></li> </ul>	No
<b>agentReference</b>	Element	bookingDetails	Filters the bookings based on the customerReference number, if this has been provided in the confirmbooking request.	No

Our searchbookings response will provide information regarding the DOTW bookings made by a customer.

Push Notification mechanism is a functionality of DOTWconnect Booking engine, which facilitates DOTWconnect API to push the rates & availability using the OTA standard to any Customer who is interested to build a local cache system on their side.

The first step for those customers which are interested in implementing to build a local cache and using DOTW push notification is to contact XML Support team at [xmlsupport@dotw.com](mailto:xmlsupport@dotw.com), as several settings are needed to be performed on our side in order to setup the notifications on the Demo environment.

Following information must be provided in order for the setup to be created for Demo PUSH:

URL where the rates must be pushed	
URL where the availability must be pushed	
URL where hotel info must be pushed.	
URL where PromotionRate must be pushed.	
Credentials to be used when pushing the rates & availability	
Should we resend all rates when Exchange Rates fluctuate	Yes/No

Customers can provide an endpoint for each component, or since each XML request contains the component's name, same endpoint URL can be fed for all the request types.

Once the setup for Push Notification has been activated and confirmed by the Support team, customer can start sending requests for the subscription of hotels that must be included in the push. The request for subscription is issued by the customer by sending a subscribeToPush request to DOTW API.

If the **subscribebeforepush** method received a **Success** flag from DOTW API, then in few minutes DOTWconnect will start sending the rates and availability for all subscribed hotels for the next 180 days. The details will be pushed to the endpoint URL setup in their account. The push notification will also send the notification when the rates of availability for the subscribed hotels changes in DOTWconnect. In addition to this everyday the rate for the 180th day is also sent to ensure the customer always has the rates for the next 180 days locally.

DOTW offers dynamic currency conversion and anytime the currency exchange rate against the currency chosen by the Customer changes, the push notification will send all rates affected. The customer has the option of skipping the push when exchange rates are changed and is setup in the customer profile if they do not wish to receive a large amount of data daily.

In addition to the scheduled push notifications, the customer can also request for a fresh push of all the subscribed properties by using the dedicated **forcepush** request. *Please see the dedicated section for this method for more details.*

At anytime the customer can receive a list of hotels they have subscribed to by sending the **getsubscribedhotels** request. This will assist the customer in making any changes to the subscribed hotel list by adding or removing any properties. Unsubscribing a property from the subscription list can be done by sending the request **unsubscribefrompush**

DOTW system can push the notification in two methods:

**Full dump:** all the data is pushed in one shot once or twice per day, as agreed with customer.

**Incremental:** One initial full dump is required, then the system will push notifications nearly in real time. This is also the recommended method to be used by our customers.

The Push notification methods are based on OTA Standards and the following are the methods

- OTA\_RatesNotifRQ – for the rates
- OTA\_AvailNotifRQ – for the availability
- OTA\_HotelDescriptiveInforRQ for hotel information
- OTA\_HotelRatePlanRQ this request provides information about applicable promotions. At the moment DOTW system only push two types of promotions:
  - StayXPayY;
  - StayXGetDiscount


Please see the dedicated section for these methods under the Push Communication Structure for more detailed information.

### Booking methods

As stated initially the push mechanism is in place to help the customers build a local copy (cache) of the rates so that any search rates and availability can be performed locally at their end without the need of reaching out to DOTW Booking Engine.

While performing bookings please ensure the customer uses the dedicated methods of in our Customer API. The methods are listed below.

Before making the booking, the customer should send a request to double check the rates and availability and to obtain the necessary booking token that would allow him to perform the booking. The below diagram depicts a basic integration of the Push Notification Engine and Booking Engine methods provided by the DOTW API.

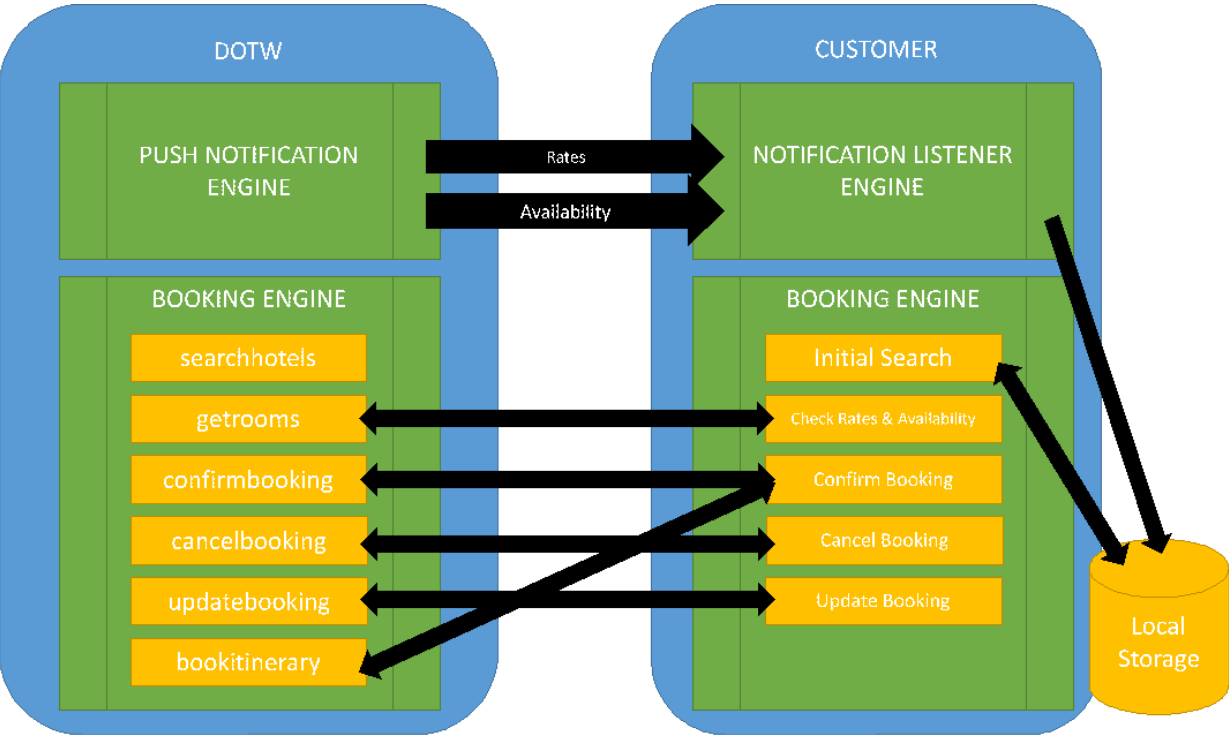

## General Request

This method can be used by an XML customer to subscribe for DOTW's push mechanism which will send updates on Rate and Inventory changes.

```
01. <customer>
02.   <username>username</username>
03.   <password>md5(password)</password>
04.   <id>company_code</id>
05.   <source>1</source>
06.   <request command="subscribetopush">
07.     <hotelIds>
08.       <hotelId></hotelId>
09.     </hotelIds>
10.   </request>
11. </customer>
```

Item	Type	Parent	Description	Required
hotelIds	Element	request	Contains a hotelId element for every hotel the customer wishes to subscribe to	Yes
hotelId	Element	hotelIds	Hotel Id	Yes

## General Response

Response returned by the webservice

```
01. <result command="subscribetopush" date="2015-11-
02. 17 08:43:22" elapsedtime="0.39209508895874" ip="10.10.10.10" tid="123456789" version="3.0">
    <successful>TRUE/FALSE</successful>
```

03. **</result>**

Item	Type	Parent	Description
<b>result</b>	Element	root	The root element
<i>@command</i>	Attribute	result	The request command which returned this result.
<i>@tID</i>	Attribute	result	The unique transaction Id that has been attributed to the response
<i>@ip</i>	Attribute	result	The Ipv4 address the request was made from.
<i>@date</i>	Attribute	result	The date and time when the result was provided in unix timestamp.
<i>@version</i>	Attribute	result	The version this request was made for (only 3 for push requests)
<i>@elapsedTime</i>	Attribute	result	The time required to process the request and return the response
<b>successful</b>	Element	result	TRUE/FALSE

## General Request

The OTA\_HotelRateAmountNotifRQ message is used to push rates to subscribed customers.

```

01. <OTA_HotelRateAmountNotifRQ xmlns="http://www.opentravel.org/OTA/2003/05" Version="2.1" PrimaryLangId="en-
02.   us" Timestamp="2015-11-12T07:59:21+00:00">
03.     <POS>
04.       <Source>
05.         <RequestorID ID="" MessagePassword="" Type="1">
06.           <CompanyName Code="C" CodeContext=""></CompanyName>
07.         </RequestorID>
08.       </Source>
09.     </POS>
10.     <RateAmountMessages HotelCode="">
11.       <RateAmountMessage>
12.         <StatusApplicationControl RatePlanCategory="501" RatePlanCode="" InvTypeCode=""></StatusApplicationControl>
13.         <Rates>
14.           <Rate Start="2015-12-06" End="2015-12-23">
15.             <BaseByGuestAmts>
16.               <BaseByGuestAmt Code="Sell" AmountAfterTax="" CurrencyCode="USD"></BaseByGuestAmt>
17.             </BaseByGuestAmts>
18.             <MealsIncluded Breakfast="true" NumberOfBreakfast=""></MealsIncluded>
19.           </Rate>
20.         </Rates>
21.       </RateAmountMessage>
22.     </RateAmountMessages>
23.   </OTA_HotelRateAmountNotifRQ>

```

Item	Type	Parent	Description
<b>POS</b>	Element	OTA_HotelRateAmountNotifRQ	Point of sale container, used to hold login information
<b>Source</b>	Element	POS	
<b>RequestorID</b>	Element	Source	Element used for login information
<i>@ID</i>	Attribute	RequestorID	Customer login username
<i>@MessagePassword</i>	Attribute	RequestorID	Customer login password
<i>@Type</i>	Attribute	RequestorID	This is always 1
<b>CompanyName</b>	Element	RequestorID	
<i>@Code</i>	Attribute	CompanyName	Internal Code, always "C"
<i>@CodeContext</i>	Attribute	CompanyName	Unique ID, will be provided by DOTW

<b>RateAmountMessages</b>	Element	OTA_HotelRateAmountNotifRQ	Element used to hold rate information
<i>@HotelCode</i>	Attribute	RateAmountMessages	DOTW Hotel Code
<b>RateAmountMessage</b>	Element	RateAmountMessages	
<b>StatusApplicationControl</b>	Element	RateAmountMessage	
<i>@RatePlanCategory</i>	Attribute	StatusApplicationControl	Payment method, always 501
<i>@RatePlanCode</i>	Attribute	StatusApplicationControl	DOTW Rate ID
<i>@InvTypeCode</i>	Attribute	StatusApplicationControl	DOTW Room type ID
<b>Rates</b>	Element	StatusApplicationControl	Container used to hold multiple rate periods
<b>Rate</b>	Element	Rates	Rate element
<i>@Start</i>	Attribute	Rate	Start date of the rate
<i>@End</i>	Attribute	Rate	End date of the rate
<b>BaseByGuestAmts</b>	Element	Rate	
<b>BaseByGuestAmt</b>	Element	BaseByGuestAmts	Guest amount
<i>@Code</i>	Attribute	BaseByGuestAmt	Default value "Sell"
<i>@AmountAfterTax</i>	Attribute	BaseByGuestAmt	Rate price after taxes have been applied
<i>@CurrencyCode</i>	Attribute	BaseByGuestAmt	Rate currency, configured in customer profile
<b>MealsIncluded</b>	Element	Rate	Specifies if meals are included ( <b>optional</b> )
<i>@Breakfast</i>	Attribute	MealsIncluded	true/false
<i>@NumberOfBreakfast</i>	Attribute	MealsIncluded	Number of breakfasts included in the specified period

## General Request

The OTA\_HotelAvailNotifRQ message is used to push availability to subscribed customers.

```

01. <OTA_HotelAvailNotifRQ xmlns="http://www.opentravel.org/OTA/2003/05" Version="2.1" PrimaryLangId="en-us" Timestamp="2015-
02. 11-12T07:59:22+00:00">
03.   <POS>
04.     <Source>
05.       <RequestorID ID="" MessagePassword="" Type="1">
06.         <CompanyName Code="C" CodeContext=""></CompanyName>
07.       </RequestorID>
08.     </Source>
09.   </POS>
10.   <AvailStatusMessages HotelCode="">
11.     <AvailStatusMessage BookingLimit="1" BookingLimitMessageType="SetLimit">
12.       <StatusApplicationControl Start="2015-11-12" End="2015-12-
13. 16" RatePlanCode="" InvTypeCode="" RatePlanCategory="501">
14.         <RestrictionStatus Status="Open"></RestrictionStatus>
15.       </StatusApplicationControl>
16.     </AvailStatusMessage>
17.   </AvailStatusMessages>
18. </OTA_HotelAvailNotifRQ>

```

Item	Type	Parent	Description
<b>POS</b>	Element	OTA_HotelAvailNotifRQ	Point of sale container, used to hold login information
<b>Source</b>	Element	POS	



RequestorID	Element	Source	Element used for login information
@ID	Attribute	RequestorID	Customer login username
@MessagePassword	Attribute	RequestorID	Customer login password
@Type	Attribute	RequestorID	This is always 1
CompanyName	Element	RequestorID	
@Code	Attribute	CompanyName	Internal Code, always "C"
@CodeContext	Attribute	CompanyName	Unique ID, will be provided by DOTW
AvailStatusMessages	Element	OTA_HotelAvailNotifRQ	Container for a collection of status messages
@HotelCode	Attribute	AvailStatusMessages	DOTW hotel ID
AvailStatusMessage	Element	AvailStatusMessages	
@BookingLimit	Attribute	AvailStatusMessage	The number of rooms available for this hotel
@BookingLimitMessageType	Attribute	AvailStatusMessage	Defaults to SetLimit
StatusApplicationControl	Element	AvailStatusMessage	Availability message
@Start	Attribute	StatusApplicationControl	Availability start date
@End	Attribute	StatusApplicationControl	Availability end date
@RatePlanCode	Attribute	StatusApplicationControl	DOTW rate ID
@InvTypeCode	Attribute	StatusApplicationControl	DOTW room type ID
@RatePlanCategory	Attribute	StatusApplicationControl	Defaults to 501
RestrictionStatus	Element	StatusApplicationControl	
@Status	Attribute	RestrictionStatus	Inventory status "Open/Close". Can be used to open or close allocation for a specific period.

## General Request

The OTA\_HotelRateAmountNotifRQ message is used to push rates, grouped by hotel code, to subscribed customers.

```

01. <OTA_HotelRateAmountNotifRQ xmlns="http://www.opentravel.org/OTA/2003/05" Version="2.1" PrimaryLangId="en-
02.   us" Timestamp="2017-10-12T15:23:23+00:00">
03.     <POS>
04.       <Source>
05.         <RequestorID ID="" MessagePassword="" Type="1">
06.           <CompanyName Code="C" CodeContext=""></CompanyName>
07.         </RequestorID>
08.       </Source>
09.     </POS>
10.     <RateAmountMessages HotelCode="1234">
11.       <RateAmountMessage>
12.         <StatusApplicationControl RatePlanCategory="501" InvTypeCode="1234" RatePlanCode="1234">
13.           </StatusApplicationControl>
14.           <Rates>
15.             <Rate Start="2017-10-12" End="2017-10-19">
16.               <BaseByGuestAmts>
17.                 <BaseByGuestAmt Code="Sell" AgeQualifyingCode="10" Count="1" AmountAfterTax="57.719" CurrencyCode
18.                   ="USD"></BaseByGuestAmt>
19.                 <BaseByGuestAmt Code="Sell" AgeQualifyingCode="10" Count="2" AmountAfterTax="86.579" CurrencyCode
20.                   ="USD"></BaseByGuestAmt>
21.                 <BaseByGuestAmt Code="Sell" AgeQualifyingCode="10" Count="3" AmountAfterTax="115.438" CurrencyCod
22.                   e="USD"></BaseByGuestAmt>
23.                 <BaseByGuestAmt Code="Sell" AgeQualifyingCode="10" Count="4" AmountAfterTax="144.298" CurrencyCod
24.                   e="USD"></BaseByGuestAmt>
25.                 <BaseByGuestAmt Code="Sell" AgeQualifyingCode="10" Count="5" AmountAfterTax="173.157" CurrencyCod
26.                   e="USD"></BaseByGuestAmt>

```

```
20.         </BaseByGuestAmts>
21.         <MealsIncluded Breakfast="false" RateBasis="0"></MealsIncluded>
22.         <CancellationRules count="2">
23.             <CancellationRule>
24.                 <Type>1</Type>
25.                 <Deadline>15</Deadline>
26.                 <Penalty Type="1">50</Penalty>
27.                 <IsRestricted>false</IsRestricted>
28.             </CancellationRule>
29.             <CancellationRule>
30.                 <Type>4</Type>
31.                 <Penalty Type="1">100</Penalty>
32.                 <IsRestricted>false</IsRestricted>
33.             </CancellationRule>
34.         </CancellationRules>
35.     </Rate>
36.     <Rate Start="2017-10-20" End="2017-12-31">
37.         <BaseByGuestAmts>
38.             <BaseByGuestAmt Code="Sell" AgeQualifyingCode="10" Count="1" AmountAfterTax="43.289" CurrencyCode
39. = "USD"></BaseByGuestAmt>
40.             <BaseByGuestAmt Code="Sell" AgeQualifyingCode="10" Count="2" AmountAfterTax="72.149" CurrencyCode
41. = "USD"></BaseByGuestAmt>
42.             <BaseByGuestAmt Code="Sell" AgeQualifyingCode="10" Count="3" AmountAfterTax="95.236" CurrencyCode
43. = "USD"></BaseByGuestAmt>
44.             <BaseByGuestAmt Code="Sell" AgeQualifyingCode="10" Count="4" AmountAfterTax="121.21" CurrencyCode
45. = "USD"></BaseByGuestAmt>
46.             <BaseByGuestAmt Code="Sell" AgeQualifyingCode="10" Count="5" AmountAfterTax="144.298" CurrencyCod
47. e="USD"></BaseByGuestAmt>
48.         </BaseByGuestAmts>
49.         <MealsIncluded Breakfast="false" RateBasis="0"></MealsIncluded>
50.         <CancellationRules count="2">
51.             <CancellationRule>
52.                 <Type>1</Type>
53.                 <Deadline>15</Deadline>
54.                 <Penalty Type="1">50</Penalty>
55.                 <IsRestricted>false</IsRestricted>
56.             </CancellationRule>
57.             <CancellationRule>
58.                 <Type>4</Type>
59.                 <Penalty Type="1">100</Penalty>
60.                 <IsRestricted>false</IsRestricted>
61.             </CancellationRule>
62.         </CancellationRules>
63.     </Rate>
64. </Rates>
65. <ValidMarkets>
66.     <Market Type="R">0</Market>
67. </ValidMarkets>
68. </RateAmountMessage>
69. <RateAmountMessage>
70.     <StatusApplicationControl RatePlanCategory="501" InvTypeCode="5555" RatePlanCode="5555">
71. </StatusApplicationControl>
72. <Rates>
73.     <Rate Start="2017-10-12" End="2017-10-19">
74.         <BaseByGuestAmts>
75.             <BaseByGuestAmt Code="Sell" AgeQualifyingCode="10" Count="1" AmountAfterTax="60.692" CurrencyCode
76. = "USD"></BaseByGuestAmt>
77.             <BaseByGuestAmt Code="Sell" AgeQualifyingCode="10" Count="2" AmountAfterTax="92.524" CurrencyCode
78. = "USD"></BaseByGuestAmt>
79.             <BaseByGuestAmt Code="Sell" AgeQualifyingCode="10" Count="3" AmountAfterTax="124.356" CurrencyCod
80. e="USD"></BaseByGuestAmt>
81.             <BaseByGuestAmt Code="Sell" AgeQualifyingCode="10" Count="4" AmountAfterTax="156.188" CurrencyCod
82. e="USD"></BaseByGuestAmt>
83.             <BaseByGuestAmt Code="Sell" AgeQualifyingCode="10" Count="5" AmountAfterTax="188.02" CurrencyCode
84. = "USD"></BaseByGuestAmt>
85.         </BaseByGuestAmts>
86.         <MealsIncluded Breakfast="true" RateBasis="1331" NumberOfBreakfast="1"></MealsIncluded>
87.         <CancellationRules count="2">
88.             <CancellationRule>
89.                 <Type>1</Type>
90.                 <Deadline>15</Deadline>
91.                 <Penalty Type="1">50</Penalty>
92.                 <IsRestricted>false</IsRestricted>
93.             </CancellationRule>
94.             <CancellationRule>
95.                 <Type>4</Type>
96.                 <Penalty Type="1">100</Penalty>
97.                 <IsRestricted>false</IsRestricted>
98.             </CancellationRule>
99.         </CancellationRules>
100.     </Rate>
101.     <Rate Start="2017-10-20" End="2017-12-31">
102.         <BaseByGuestAmts>
103.             <BaseByGuestAmt Code="Sell" AgeQualifyingCode="10" Count="1" AmountAfterTax="46.262" CurrencyCode
104. = "USD"></BaseByGuestAmt>
105.             <BaseByGuestAmt Code="Sell" AgeQualifyingCode="10" Count="2" AmountAfterTax="78.094" CurrencyCode
106. = "USD"></BaseByGuestAmt>
107.             <BaseByGuestAmt Code="Sell" AgeQualifyingCode="10" Count="3" AmountAfterTax="104.154" CurrencyCod
108. e="USD"></BaseByGuestAmt>
109.             <BaseByGuestAmt Code="Sell" AgeQualifyingCode="10" Count="4" AmountAfterTax="133.1" CurrencyCode=
110. "USD"></BaseByGuestAmt>
111.             <BaseByGuestAmt Code="Sell" AgeQualifyingCode="10" Count="5" AmountAfterTax="159.16" CurrencyCode
112. = "USD"></BaseByGuestAmt>
113.             <BaseByGuestAmt Code="Sell" AgeQualifyingCode="8" Count="1" AgeFrom="0" AgeTo="11" AmountAfterTax
114. = "FREE" CurrencyCode="USD"></BaseByGuestAmt>
115.             <BaseByGuestAmt Code="Sell" AgeQualifyingCode="8" Count="2" AgeFrom="0" AgeTo="11" AmountAfterTax
116. = "FREE" CurrencyCode="USD"></BaseByGuestAmt>
```

```

99.         </BaseByGuestAmts>
100.        <MealsIncluded Breakfast="true" RateBasis="1331" NumberOfBreakfast="1"></MealsIncluded>
101.        <CancellationRules count="2">
102.            <CancellationRule>
103.                <Type>1</Type>
104.                <Deadline>15</Deadline>
105.                <Penalty Type="1">50</Penalty>
106.                <IsRestricted>false</IsRestricted>
107.            </CancellationRule>
108.            <CancellationRule>
109.                <Type>4</Type>
110.                <Penalty Type="1">100</Penalty>
111.                <IsRestricted>false</IsRestricted>
112.            </CancellationRule>
113.        </CancellationRules>
114.    </Rate>
115. </Rates>
116. <ValidMarkets>
117.     <Market Type="R">12</Market>
118.     <Market Type="C">16</Market>
119. </ValidMarkets>
120. </RateAmountMessage>
121. </RateAmountMessages>
122. </OTA_HotelRateAmountNotifRQ>

```

Item	Type	Parent	Description
<b>POS</b>	Element	OTA_HotelRateAmountNotifRQ	Point of sale container, used to hold login information
<b>Source</b>	Element	POS	
<b>RequestorID</b>	Element	Source	Element used for login information
<i>@ID</i>	Attribute	RequestorID	Customer login username
<i>@MessagePassword</i>	Attribute	RequestorID	Customer login password
<i>@Type</i>	Attribute	RequestorID	This is always 1
<b>CompanyName</b>	Element	RequestorID	
<i>@Code</i>	Attribute	CompanyName	Internal Code, always "C"
<i>@CodeContext</i>	Attribute	CompanyName	Unique ID, will be provided by DOTW
<b>RateAmountMessages</b>	Element	OTA_HotelRateAmountNotifRQ	Element used to hold rate information
<i>@HotelCode</i>	Attribute	RateAmountMessages	DOTW Hotel Code
<b>RateAmountMessage</b>	Element	RateAmountMessages	
<b>StatusApplicationControl</b>	Element	RateAmountMessage	
<i>@RatePlanCategory</i>	Attribute	StatusApplicationControl	Payment method, always 501
<i>@RatePlanCode</i>	Attribute	StatusApplicationControl	DOTW Rate ID
<i>@InvTypeCode</i>	Attribute	StatusApplicationControl	DOTW Room type ID
<b>Rates</b>	Element	StatusApplicationControl	Container used to hold multiple rate periods
<b>Rate</b>	Element	Rates	Rate element
<i>@Start</i>	Attribute	Rate	Start date of the rate
<i>@End</i>	Attribute	Rate	End date of the rate
<i>@MinStay</i>	Attribute	Rate	Min length of stay for this rate period, in days
<i>@MaxStay</i>	Attribute	Rate	Max length of stay for this rate period, in days
<i>@NoCheckIn</i>	Attribute	Rate	Will be present if there is a no check-in restriction for this interval. Possible values "true/false"
<i>@NoCheckOut</i>	Attribute	Rate	Will be present if there is a no check-out restriction for this interval. Possible values "true/false"

<b>BaseByGuestAmts</b>	Element	Rate	
<b>BaseByGuestAmt</b>	Element	BaseByGuestAmts	Guest amount
<i>@Code</i>	Attribute	BaseByGuestAmt	Default value "Sell"
<i>@AgeQualifyingCode</i>	Attribute	BaseByGuestAmt	Specifies if this is an adult or child rate. Values: 10 - Adult, 8 - child
<i>@AmountAfterTax</i>	Attribute	BaseByGuestAmt	Rate price after taxes have been applied
<i>@CurrencyCode</i>	Attribute	BaseByGuestAmt	Rate currency, configured in customer profile
<i>@Count</i>	Attribute	BaseByGuestAmt	The occupancy number: 1 - one adult, 2 - two adults, etc
<i>@AgeFrom</i>	Attribute	BaseByGuestAmt	Only valid if AgeQualifyingCode = 8 (child). Will have the start age of the child interval
<i>@AgeTo</i>	Attribute	BaseByGuestAmt	Only valid if AgeQualifyingCode = 8 (child). Will have the end age of the child interval
<b>MealsIncluded</b>	Element	Rate	Specifies if meals are included ( <b>optional</b> )
<i>@Breakfast</i>	Attribute	MealsIncluded	true/false
<i>@NumberOfBreakfast</i>	Attribute	MealsIncluded	Number of breakfasts included in the specified period, always 1 if breakfast is included
<i>@RateBasis</i>	Attribute	MealsIncluded	DOTW internal meal ID, this is also returned at the getrooms step in order for the customer to identify the meal searched for
<b>CancellationRules</b>	Element	Rate	Will hold a collection of cancellation rules applicable for this rate period
<i>@count</i>	Attribute	CancellationRules	The number of cancellation rules
<b>CancellationRule</b>	Element	CancellationRules	
<b>Type</b>	Element	CancellationRule	The type of cancellation rule. 1 - Cancel/Amend, 2 - Cancel, 3 - Amend, 4 - No Show Rule
<b>Deadline</b>	Element	CancellationRule	The cancellation deadline, in hours
<b>Penalty</b>	Element	CancellationRule	The amount of the cancellation
<i>@Type</i>	Attribute	Penalty	Will reflect the type of the amount. 1 - Percent, 2 - Amount
<b>IsRestricted</b>	Element	CancellationRule	Specifies if the cancellation is restricted. Possible values: "true/false"
<b>ValidMarkets</b>	Element	RateAmountMessage	Specifies the market validity for the current rate element
<b>Market</b>	Element	ValidMarkets	DOTW internal value of the Region/Country
<i>@Type</i>	Attribute	Market	The type of market, R - Region, C - Country. A type of R with a value of 0 means that the rate is applicable to all markets

## General Request

This method can be used by an XML customer to force the push of rates and availability for a specific period of time. Customers must first subscribe to the push mechanism.

```

01. <customer>
02.   <username>username</username>
03.   <password>md5(password)</password>
04.   <id>company_code</id>
05.   <source>1</source>
06.   <request command="forcepush">
07.     <fromDate>2015-11-20</fromDate>
08.     <toDate>2015-11-30</toDate>
09.     <hotelIds>
10.       <hotelId>123456</hotelId>
11.     </hotelIds>
12.   </request>
13. </customer>

```

Item	Type	Parent	Description	Required
<b>fromDate</b>	Element	request	Force push start date	Yes
<b>toDate</b>	Element	request	Force push end date	Yes
<b>hotelIds</b>	Element	request	Contains a hotelId element for every hotel the customer wishes to force rates and availability.	Yes
<b>hotelId</b>	Element	hotelIds	Hotel Id	Yes

## General Response

Response returned by the webservice

```

01. <result command="forcepush" date="2015-11-
17 08:43:22" elapsedtime="0.39209508895874" ip="10.10.10.10" tid="123456798" version="3.0">
02.   <successful>TRUE/FALSE</successful>
03. </result>

```

Item	Type	Parent	Description
<b>result</b>	Element	root	The root element
<i>@command</i>	Attribute	result	The request command which returned this result.
<i>@tID</i>	Attribute	result	The unique transaction Id that has been attributed to the response
<i>@ip</i>	Attribute	result	The Ipv4 address the request was made from.
<i>@date</i>	Attribute	result	The date and time when the result was provided in unix timestamp.
<i>@version</i>	Attribute	result	The version this request was made for (only 3 for push requests)
<i>@elapsedTime</i>	Attribute	result	The time required to process the request and return the response
<b>successful</b>	Element	result	TRUE/FALSE

## General Request

Get a list of hotels the customer is subscribed to.

```
01. <customer>
02.   <username>username</username>
03.   <password>md5(password)</password>
04.   <id>company_code</id>
05.   <source>1</source>
06.   <request command="getsubscribedhotels"></request>
07. </customer>
```

# General Response

List of hotels the customer is subscribed to.

```
01. <result command="getsubscribedhotels" tID="123456789" ip="10.10.10.10" date="2015-11-
17 11:05:51" version="3.0" elapsedTime="0.012107849121094">
02.   <hotelIds count="3">
03.     <hotelId>123</hotelId>
04.     <hotelId>456</hotelId>
05.     <hotelId>789</hotelId>
06.   </hotelIds>
07.   <successful>TRUE</successful>
08. </result>
```

Item	Type	Parent	Description
result	Element	root	The root element
@command	Attribute	result	The request command which returned this result.
@tID	Attribute	result	The unique transaction Id that has been attributed to the response
@ip	Attribute	result	The ipv4 address the request was made from.
@date	Attribute	result	The date and time when the result was provided in unix timestamp.
@version	Attribute	result	The version this request was made for (only 3 for push requests)
@elapsedTime	Attribute	result	The time required to process the request and return the response
hotelIds	Element	result	Will hold a collection of hotelId elements
@count	Attribute	hotelIds	The number of hotels the customer is subscribed to
hotelId	Element	hotelIds	DOTW Hotel ID
successful	Element	result	TRUE/FALSE

# General Request

Method used to unsubscribe from the push mechanism for a list of hotel Ids.

```
01. <customer>
02.   <username>username</username>
03.   <password>md5(password)</password>
04.   <id>company_code</id>
05.   <source>1</source>
06.   <request command="unsubscribefrompush">
07.     <hotelIds>
08.       <hotelId>123</hotelId>
09.     </hotelIds>
```

```
10.     </request>
11. </customer>
```

Item	Type	Parent	Description	Required
hotelIds	Element	request	Contains a hotelId element for every hotel the customer wishes to unsubscribe from.	Yes
hotelId	Element	hotelIds	DOTW Hotel ID	Yes

## General Response

Response returned by the webservice

Push Notifications Overview Push Notification is a new functionality introduced in the Booking engine of DOTWconnect. This mechanism facilitates DOTWconnect to push the rates and availability using the OTA standard to any Customer who wish to receive these information. Customers who has activated these notifications will be able to build and store a local copy (cache) of our rates and inventory so that they can do the search locally within their infrastructure and benefit from the faster response.

```
01. <result command="unsubscribefrompush" date="2015-11-
17 08:43:22" elapsedtime="0.39209508895874" ip="10.10.10.10" tid="123456798" version="3.0">
02.   <successful>TRUE/FALSE</successful>
03. </result>
```

Item	Type	Parent	Description
result	Element	root	The root element
@command	Attribute	result	The request command which returned this result.
@tID	Attribute	result	The unique transaction Id that has been attributed to the response
@ip	Attribute	result	The Ipv4 address the request was made from.
@date	Attribute	result	The date and time when the result was provided in unix timestamp.
@version	Attribute	result	The version this request was made for (only 3 for push requests)
@elapsedTime	Attribute	result	The time required to process the request and return the response
successful	Element	result	TRUE/FALSE

## General Request

The OTA\_HotelAvailNotifRQ message is used to push availability grouped by hotel id to subscribed customers.

```
01. <OTA_HotelAvailNotifRQ xmlns="http://www.opentravel.org/OTA/2003/05" Version="2.1" PrimaryLangId="en-us" Timestamp="2015-
11-12T07:59:22+00:00">
02.   <POS>
03.     <Source>
04.       <RequestorID ID="" MessagePassword="" Type="1">
05.         <CompanyName Code="C" CodeContext=""></CompanyName>
06.       </RequestorID>
07.     </Source>
08.   </POS>
09.   <AvailStatusMessages HotelCode="1234">
10.     <AvailStatusMessage BookingLimit="0" BookingLimitMessageType="SetLimit">
```

```

11.      <StatusApplicationControl Start="2017-10-12" End="2017-12-
12. 31" InvTypeCode="1234" RatePlanCode="1234" RatePlanCategory="501"></StatusApplicationControl>
13.      <RestrictionStatus Status="Close"></RestrictionStatus>
14.      </AvailStatusMessage>
15.      <AvailStatusMessage BookingLimit="15" Cutoff="1" BookingLimitMessageType="SetLimit">
16.      <StatusApplicationControl Start="2018-01-01" End="2018-12-
17. 14" InvTypeCode="1234" RatePlanCode="1234" RatePlanCategory="501"></StatusApplicationControl>
18.      <RestrictionStatus Status="Open"></RestrictionStatus>
19.      </AvailStatusMessage>
20.      <AvailStatusMessage BookingLimit="15" Cutoff="1" BookingLimitMessageType="SetLimit">
21.      <StatusApplicationControl Start="2017-10-12" End="2017-10-
22. 24" InvTypeCode="4321" RatePlanCode="4321" RatePlanCategory="501"></StatusApplicationControl>
23.      <RestrictionStatus Status="Open"></RestrictionStatus>
24.      </AvailStatusMessage>
25.      <AvailStatusMessage BookingLimit="14" Cutoff="1" BookingLimitMessageType="SetLimit">
26.      <StatusApplicationControl Start="2017-10-25" End="2017-10-
27. 28" InvTypeCode="4321" RatePlanCode="4321" RatePlanCategory="501"></StatusApplicationControl>
28.      <RestrictionStatus Status="Close"></RestrictionStatus>
29.      </AvailStatusMessage>
30.      </AvailStatusMessages>
31.      </OTA_HotelAvailNotifRQ>

```

Item	Type	Parent	Description
<b>POS</b>	Element	OTA_HotelAvailNotifRQ	Point of sale container, used to hold login information
<b>Source</b>	Element	POS	
<b>RequestorID</b>	Element	Source	Element used for login information
<i>@ID</i>	Attribute	RequestorID	Customer login username
<i>@MessagePassword</i>	Attribute	RequestorID	Customer login password
<i>@Type</i>	Attribute	RequestorID	This is always 1
<b>CompanyName</b>	Element	RequestorID	
<i>@Code</i>	Attribute	CompanyName	Internal Code, always "C"
<i>@CodeContext</i>	Attribute	CompanyName	Unique ID, will be provided by DOTW
<b>AvailStatusMessages</b>	Element	OTA_HotelAvailNotifRQ	Container for a collection of status messages
<i>@HotelCode</i>	Attribute	AvailStatusMessages	DOTW hotel ID
<b>AvailStatusMessage</b>	Element	AvailStatusMessages	
<i>@BookingLimit</i>	Attribute	AvailStatusMessage	The number of rooms available for this hotel
<i>@Cutoff</i>	Attribute	AvailStatusMessage	The release of the current allocation segment, in days
<i>@BookingLimitMessageType</i>	Attribute	AvailStatusMessage	Defaults to SetLimit
<b>StatusApplicationControl</b>	Element	AvailStatusMessage	Availability message
<i>@Start</i>	Attribute	StatusApplicationControl	Availability start date
<i>@End</i>	Attribute	StatusApplicationControl	Availability end date
<i>@RatePlanCode</i>	Attribute	StatusApplicationControl	DOTW rate ID
<i>@InvTypeCode</i>	Attribute	StatusApplicationControl	DOTW room type ID
<i>@RatePlanCategory</i>	Attribute	StatusApplicationControl	Defaults to 501
<b>RestrictionStatus</b>	Element	StatusApplicationControl	
<i>@Status</i>	Attribute	RestrictionStatus	Inventory status "Open/Close". Can be used to open or close allocation for a specific period.

## General Request



The OTA\_HotelDescriptiveInfoRQ message is used to push hotel information to subscribed customers.

```

01. <OTA_HotelDescriptiveInfoRQ xmlns="http://www.opentravel.org/OTA/2003/05" Version="2.1" PrimaryLangId="en-
    us" Timestamp="2017-11-10T12:41:45+00:00">
02.   <POS>
03.     <Source>
04.       <RequestorID ID="" MessagePassword="" Type="1">
05.         <CompanyName Code="C" CodeContext=""></CompanyName>
06.       </RequestorID>
07.     </Source>
08.   </POS>
09.   <HotelDescriptiveInfo HotelCode="1234">
10.     <CheckInTime>15:00</CheckInTime>
11.     <SingleAdultAndChildBookings>0</SingleAdultAndChildBookings>
12.     <MarketSpecificRatesPolicy>1</MarketSpecificRatesPolicy>
13.   </HotelDescriptiveInfo>
14. </OTA_HotelDescriptiveInfoRQ>

```

Item	Type	Parent	Description
<b>POS</b>	Element	OTA_HotelDescriptiveInfoRQ	Point of sale container, used to hold login information
<b>Source</b>	Element	POS	
<b>RequestorID</b>	Element	Source	Element used for login information
<i>@ID</i>	Attribute	RequestorID	Customer login username
<i>@MessagePassword</i>	Attribute	RequestorID	Customer login password
<i>@Type</i>	Attribute	RequestorID	This is always 1
<b>CompanyName</b>	Element	RequestorID	
<i>@Code</i>	Attribute	CompanyName	Internal Code, always "C"
<i>@CodeContext</i>	Attribute	CompanyName	Unique ID, will be provided by DOTW
<b>HotelDescriptiveInfo</b>	Element	OTA_HotelDescriptiveInfoRQ	
<b>CheckInTime</b>	Element	HotelDescriptiveInfo	Hotel check-in time in 24-hour format
<b>SingleAdultAndChildBookings</b>	Element	HotelDescriptiveInfo	Specifies how single adult with children bookings will be handled if the child age is > than the child max age for the room. Possible values: 0 - Apply 1 adult & child rate, 1 - Convert the child to an adult and apply adult prices
<b>MarketSpecificRatesPolicy</b>	Element	HotelDescriptiveInfo	Specifies how the rate ValidMarket is applied. Possible values: 0 - Based on Travel Agent Location, 1 - Based on Passenger Residency, 2 - Based on Passenger Nationality

## General Request

The OTA\_HotelRatePlanRQ message is used to push promotion information to subscribed customers.

```

01. <OTA_HotelRatePlanRQ xmlns="http://www.opentravel.org/OTA/2003/05" Version="2.1" PrimaryLangId="en-us" Timestamp="2017-
    09-27T12:42:46+00:00">
02.   <POS>
03.     <Source>
04.       <RequestorID ID="" MessagePassword="" Type="1">
05.         <CompanyName Code="C" CodeContext=""></CompanyName>
06.       </RequestorID>
07.     </Source>

```

```

08.    </POS>
09.    <Offers HotelCode="1234">
10.        <Offer OfferCode="template1:template1" OfferStatus="new">
11.            <OfferRules>
12.                <OfferRule>
13.                    <DateRestriction RestrictionType="booking" Start="2017-09-27" End="2017-11-30"></DateRestriction>
14.                    <DateRestriction RestrictionType="stay" Start="2017-09-27" End="2017-11-30"></DateRestriction>
15.                    <DateRestriction RestrictionType="maxStay" Days="30"></DateRestriction>
16.                    <DOW_Restrictions>
17.                        <AvailableDaysOfWeek Sun="true" Mon="true" Tue="true" Thu="true" Fri="true" Sat="true">
18.                    </AvailableDaysOfWeek>
19.                    </DOW_Restrictions>
20.                </OfferRule>
21.            </OfferRules>
22.            <Discount NightsRequired="4" NightsDiscounted="1"></Discount>
23.            <ApplicableRatePlanCodes>
24.                <ApplicableRatePlanCode>1234</ApplicableRatePlanCode>
25.            </ApplicableRatePlanCodes>
26.            <AppliesMultipleTimes>TRUE</AppliesMultipleTimes>
27.            <CancellationPolicy>
28.                <CancelRestricted>TRUE</CancelRestricted>
29.                <AmendRestricted>TRUE</AmendRestricted>
30.            </CancellationPolicy>
31.        </Offer>
32.        <Offer OfferCode="test:test" OfferStatus="deleted">
33.            <OfferRules>
34.                <OfferRule>
35.                    <DateRestriction RestrictionType="booking" Start="2017-09-26" End="2017-10-31"></DateRestriction>
36.                    <DateRestriction RestrictionType="stay" Start="2017-09-26" End="2017-11-30"></DateRestriction>
37.                    <DateRestriction RestrictionType="maxStay" Days="30"></DateRestriction>
38.                    <DOW_Restrictions>
39.                        <AvailableDaysOfWeek Mon="true" Tue="true" Wed="true" Thu="true" Fri="true">
40.                    </AvailableDaysOfWeek>
41.                    </DOW_Restrictions>
42.                </OfferRule>
43.            </OfferRules>
44.            <Discount NightsRequired="4" NightsDiscounted="1"></Discount>
45.            <ApplicableRatePlanCodes>
46.                <ApplicableRatePlanCode>1234</ApplicableRatePlanCode>
47.            </ApplicableRatePlanCodes>
48.            <Closeouts>
49.                <StartDate>2018-06-05</StartDate>
50.                <EndDate>2018-07-01</EndDate>
51.            </Closeouts>
52.            <AppliesMultipleTimes>FALSE</AppliesMultipleTimes>
53.            <CancellationPolicy>
54.                <CancelRestricted>TRUE</CancelRestricted>
55.                <AmendRestricted>FALSE</AmendRestricted>
56.            </CancellationPolicy>
57.        </Offer>
58.        <Offer OfferCode="test2:test2" OfferStatus="updated">
59.            <OfferRules>
60.                <OfferRule>
61.                    <DateRestriction RestrictionType="booking" Start="2017-09-26" End="2017-11-30"></DateRestriction>
62.                    <DateRestriction RestrictionType="stay" Start="2017-09-26" End="2017-11-30"></DateRestriction>
63.                    <DateRestriction RestrictionType="maxStay" Days="30"></DateRestriction>
64.                    <DOW_Restrictions>
65.                        <AvailableDaysOfWeek Tue="true" Wed="true" Thu="true" Fri="true"></AvailableDaysOfWeek>
66.                    </DOW_Restrictions>
67.                </OfferRule>
68.            </OfferRules>
69.            <Discount NightsRequired="3" Percent="20"></Discount>
70.            <ApplicableRatePlanCodes>
71.                <ApplicableRatePlanCode>1234</ApplicableRatePlanCode>
72.            </ApplicableRatePlanCodes>
73.            <AppliesMultipleTimes>TRUE</AppliesMultipleTimes>
74.            <CancellationPolicy>
75.                <CancelRestricted>FALSE</CancelRestricted>
76.                <AmendRestricted>TRUE</AmendRestricted>
77.            </CancellationPolicy>
78.        </Offer>
79.        <OfferCombinations>
80.            <OfferCombination>
81.                <OfferCode>test2:test2</OfferCode>
82.                <OfferCode>test:test</OfferCode>
83.            </OfferCombination>
84.        </OfferCombinations>
85.    </Offers>
86. </OTA_HotelRatePlanRQ>

```

Item	Type	Parent	Description
POS	Element	OTA_HotelRateAmountNotifRQ	Point of sale container, used to hold login information
Source	Element	POS	
RequestorID	Element	Source	Element used for login information
@ID	Attribute	RequestorID	Customer login username
@MessagePassword	Attribute	RequestorID	Customer login password

<i>@Type</i>	Attribute	RequestorID	This is always 1
<b>CompanyName</b>	Element	RequestorID	
<i>@Code</i>	Attribute	CompanyName	Internal Code, always "C"
<i>@CodeContext</i>	Attribute	CompanyName	Unique ID, will be provided by DOTW
<b>Offers</b>	Element	OTA_HotelRatePlanRQ	Element used to hold rate information
<i>@HotelCode</i>	Attribute	Offers	DOTW Hotel Code
<b>Offer</b>	Element	Offers	
<i>@OfferCode</i>	Attribute	Offer	Offer Code
<i>@OfferStatus</i>	Attribute	Offer	<p>The status of the offer. Can be any of new/updated/deleted</p> <ul style="list-style-type: none"> <li>• new: a new promotion was added to the applicable rate plan code/s</li> <li>• updated: the offer was updated</li> <li>• deleted: the offer is no longer valid for the applicable rate plan code/s</li> </ul>
<b>OfferRules</b>	Element	Offer	
<b>OfferRule</b>	Element	OfferRules	
<b>DateRestriction</b>	Element	OfferRule	Element containing Offer date restriction rules
<i>@RestrictionType</i>	Attribute	DateRestriction	<p>Attribute which states what the restriction applies to. Possible values: "booking/stay/maxStay"</p> <ul style="list-style-type: none"> <li>• booking - add a restriction to the booking date (bookings created in this interval will not benefit of the promotion)</li> <li>• stay - add a restriction to the booking stay (bookings with travel periods in this interval will not benefit of the promotion)</li> <li>• maxStay - a booking for a period greater than the maxStay will not benefit of the promotion</li> </ul>
<i>@Start</i>	Attribute	DateRestriction	Start date of the restriction
<i>@End</i>	Attribute	DateRestriction	End date of the restriction
<b>DOW_Restrictions</b>	Element	OfferRule	Day of Week restrictions
<b>AvailableDaysOfWeek</b>	Element	DOW_Restrictions	Element which governs the available days of week for this offer to apply
<i>@Sun</i>	Attribute	AvailableDaysOfWeek	Per day attributes which state if the restriction applies on the specified day of week
<i>@Mon</i>	Attribute	AvailableDaysOfWeek	Per day attributes which state if the restriction applies on the specified day of week
<i>@Tue</i>	Attribute	AvailableDaysOfWeek	Per day attributes which state if the restriction applies on the specified day of week
<i>@Wed</i>	Attribute	AvailableDaysOfWeek	Per day attributes which state if the restriction applies on the specified day of week
<i>@Thu</i>	Attribute	AvailableDaysOfWeek	Per day attributes which state if the restriction applies on the specified day of week
<i>@Fri</i>	Attribute	AvailableDaysOfWeek	Per day attributes which state if the restriction applies on the specified day of week

<i>@Sat</i>	Attribute	AvailableDaysOfWeek	Per day attributes which state if the restriction applies on the specified day of week
<b>Discount</b>	Element	Offer	The amount of the offer
<i>NightsRequired</i>	Attribute	Discount	The number of stay nights required for this Offer to apply
<i>NightsDiscounted</i>	Attribute	Discount	The number of stay nights discounted if the Offer is applied
<i>Percent</i>	Attribute	Discount	The discount percent applied on the rate price if the Offer is applied
<b>ApplicableRatePlanCodes</b>	Element	Offer	
<b>ApplicableRatePlanCode</b>	Element	ApplicableRatePlanCodes	DOTW rate ID's this Offer applies to (@RatePlanCode from OTA_HotelRateAmountNotifRQ request)
<b>Closeouts</b>	Element	Closeouts	Container which holds a Start/End period when the offer is not applicable
<b>StartDate</b>	Element	Closeouts	The start date of the closeout
<b>EndDate</b>	Element	Closeouts	The end date of the closeout
<b>AppliesMultipleTimes</b>	Element	Offer	Specifies if the promotion can be applied multiple times. Possible values: TRUE/FALSE
<b>CancellationPolicy</b>	Element	Offer	
<b>CancelRestricted</b>	Element	CancellationPolicy	Specifies if by applying the promotion the rate cancellation policy will become restricted. Possible values: TRUE/FALSE
<b>AmendRestricted</b>	Element	CancellationPolicy	Specifies if by applying the promotion the rate amendment policy will become restricted. Possible values: TRUE/FALSE
<b>OfferCombinations</b>	Element	Offers	Offer combinations container
<b>OfferCombination</b>	Element	OfferCombinations	Will hold one offer combination
<b>OfferCode</b>	Element	OfferCombination	Promotion code which can be combined. There will be two elements for every OfferCombination element

## Requests To Get Internal Codes

This section contains details of all methods which can be used to retrieve the internal codes we use in DOTWconnect system. The internal codes can be for the Countries, Cities, Hotels etc. All methods have the same format. The following requests can be made in order to get internal codes from the system. If not specified explicitly for the command, all requests have the same format with some of them needing the presence of the product element in order to be correct. The value of the command is different from one request to another.

### General Request

```

01.  <customer>
02.    <username>username</username>
03.    <password>md5(password)</password>
04.    <id>company code</id>
05.    <source>1</source>
06.    <product></product>
07.    <request command=""></request>
08.  </customer>

```

This command is used to get a complete list with all information needed about cities in the system.

# General Request

```
01. <customer>
02.   <username>username</username>
03.   <password>md5(password)</password>
04.   <id>company code</id>
05.   <source>1</source>
06.   <request command="getallcities">
07.     <return>
08.       <filters>
09.         <countryCode></countryCode>
10.         <countryName></countryName>
11.       </filters>
12.       <fields>
13.         <field>countryName</field>
14.         <field>countryCode</field>
15.       </fields>
16.     </return>
17.   </request>
18. </customer>
```

Item	Type	Parent	Description	Required
return	Element	root	Groups elements that control what to be returned.	No.
filters	Element	result	Groups the filter that will be applied.	No.
countryCode	Element	filters	For filtering and returning only cities from the country with the specified internal code.	No.
countryName	Element	filters	For filtering and returning only cities from the country with the specified name.	No.
fields	Element	result	Encapsulates elements that specify what should be returned for each city.	No.
field	Element	result	Specifies what elements to be returned along with the name and internal code for each city. Possible values: <ul style="list-style-type: none"><li>countryName - the response will return the country name for each city</li><li>countryCode - the response will return the country internal code for each city</li></ul>	No.

# General Request XSD

getallcities.xsd

```
01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="customer">
03.     <xs:complexType>
04.       <xs:sequence>
05.         <xs:group ref="loginDetailsGroup"></xs:group>
06.         <xs:element name="request" type="requestType"></xs:element>
07.       </xs:sequence>
08.     </xs:complexType>
09.   </xs:element>
10.   <!-- ##### -->
11.   <xs:complexType name="requestType">
12.     <xs:sequence>
13.       <xs:element name="return" type="returnType" minOccurs="0"></xs:element>
14.     </xs:sequence>
15.     <xs:attribute name="command" type="xs:string" use="required" fixed="getallcities"></xs:attribute>
16.     <xs:attribute name="debug" type="xs:integer" use="optional"></xs:attribute>
17.   </xs:complexType>
18.   <!-- ##### -->
19.   <xs:complexType name="returnType">
20.     <xs:sequence>
21.       <xs:element name="filters" type="filtersType" minOccurs="0"></xs:element>
22.       <xs:element name="fields" type="fieldsType" minOccurs="0"></xs:element>
23.     </xs:sequence>
24.   </xs:complexType>
25.   <!-- ##### -->
26.   <xs:complexType name="filtersType">
27.     <xs:sequence>
28.       <xs:element name="countryCode" minOccurs="0">
29.         <xs:simpleType>
30.           <xs:restriction base="xs:string">
```

```

31.         <xs:pattern value="([0-9]) "></xs:pattern>
32.     </xs:restriction>
33. </xs:simpleType>
34. </xs:element>
35. <xs:element name="countryName" minOccurs="0">
36.     <xs:simpleType>
37.         <xs:restriction base="xs:string">
38.             <xs:pattern value="([a-z A-Z]) "></xs:pattern>
39.         </xs:restriction>
40.     </xs:simpleType>
41. </xs:element>
42. </xs:sequence>
43. </xs:complexType>
44. <!-- ##### -->
45. <xs:complexType name="fieldsType">
46.     <xs:sequence>
47.         <xs:element name="field" maxOccurs="2" minOccurs="0">
48.             <xs:simpleType>
49.                 <xs:restriction base="xs:string">
50.                     <xs:enumeration value="countryName"></xs:enumeration>
51.                     <xs:enumeration value="countryCode"></xs:enumeration>
52.                 </xs:restriction>
53.             </xs:simpleType>
54.         </xs:element>
55.     </xs:sequence>
56. </xs:complexType>
57. <!-- ##### -->
58. <xs:group name="loginDetailsGroup">
59.     <xs:sequence>
60.         <xs:element name="username" type="xs:string"></xs:element>
61.         <xs:element name="password" type="passwordType"></xs:element>
62.         <xs:element name="id" type="xs:nonNegativeInteger"></xs:element>
63.         <xs:element name="source" type="sourceType"></xs:element>
64.     </xs:sequence>
65. </xs:group>
66. <!-- ##### -->
67. <xs:simpleType name="passwordType">
68.     <xs:restriction base="xs:string">
69.         <xs:length value="32"></xs:length>
70.     </xs:restriction>
71. </xs:simpleType>
72. <!-- ##### -->
73. <xs:simpleType name="sourceType">
74.     <xs:restriction base="xs:string">
75.         <xs:enumeration value="1"></xs:enumeration>
76.     </xs:restriction>
77. </xs:simpleType>
78. </xs:schema>

```

## General Response

```

01. <result command="getallcities" date="">
02.     <cities count="">
03.         <city runno="">
04.             <name></name>
05.             <code></code>
06.             <countryName></countryName>
07.             <countryCode></countryCode>
08.         </city>
09.     </cities>
10.     <successful>TRUE</successful>
11. </result>

```

Item	Type	Parent	Description
<b>result</b>	Element	root	The root element.
@date	Attribute	result	The unix timestamp date and time when the result has been provided.
@command	Attribute	result	The command for which the result is shown.
<b>cities</b>	Element	result	Contains a list with all the cities.
@count	Attribute	cities	Total number of cities.
<b>city</b>	Element	cities	Contains information about the city.
@runno	Attribute	city	Running number starting from 0.
<b>name</b>	Element	city	City name. Returned by default.
<b>code</b>	Element	city	Internal code for the city. Returned by default.
<b>countryName</b>	Element	city	Country name of this city's country. Returned only if specified in the request.

<b>countryCode</b>	Element	city	Country internal code for this city's country. Returned only if specified in the request.
<b>successful</b>	Element	result	Specifies if the request was successfully processed. Possible values: <ul style="list-style-type: none"> <li>• TRUE</li> <li>• FALSE</li> </ul>

## General Response XSD

getallcities.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="result" type="resultType"></xs:element>
03.   <xs:complexType name="resultType">
04.     <xs:sequence>
05.       <xs:element name="cities" type="citiesType"></xs:element>
06.       <xs:element name="successful" type="TrueOrFalse"></xs:element>
07.     </xs:sequence>
08.     <xs:attribute name="command" type="xs:string" use="required" fixed="getallcities"></xs:attribute>
09.     <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
10.     <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
11.     <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
12.     <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
13.   </xs:complexType>
14.   <xs:simpleType name="dotwIP">
15.     <xs:restriction base="xs:string">
16.       <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[ 1][0-9]{2}|1[0-9]{1}[0-9]{1}|1[0-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[0-9])" />
17.     </xs:restriction>
18.   </xs:simpleType>
19.   <xs:simpleType name="dotwDateType">
20.     <xs:restriction base="xs:string">
21.       <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}(\s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*|[-0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2}(\s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*|[-0-9]{4,4}:[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*"></xs:pattern>
22.     </xs:restriction>
23.   </xs:simpleType>
24.   <xs:simpleType name="versionType">
25.     <xs:restriction base="xs:string">
26.       <xs:pattern value="[1-9]{1}([0-9])*.([0-9])*"></xs:pattern>
27.     </xs:restriction>
28.   </xs:simpleType>
29.   <xs:complexType name="citiesType">
30.     <xs:sequence>
31.       <xs:element name="city" type="cityType" minOccurs="0" maxOccurs="unbounded"></xs:element>
32.     </xs:sequence>
33.     <xs:attribute name="count" type="xs:integer" use="required"></xs:attribute>
34.   </xs:complexType>
35.   <xs:simpleType name="TrueOrFalse">
36.     <xs:restriction base="xs:string">
37.       <xs:pattern value="true|false|TRUE|FALSE"></xs:pattern>
38.     </xs:restriction>
39.   </xs:simpleType>
40.   <xs:complexType name="cityType">
41.     <xs:sequence>
42.       <xs:element name="name">
43.         <xs:simpleType>
44.           <xs:restriction base="xs:string">
45.             <xs:pattern value="([a-zA-Z])*"></xs:pattern>
46.           </xs:restriction>
47.         </xs:simpleType>
48.       </xs:element>
49.       <xs:element name="code" type="xs:unsignedInt"></xs:element>
50.       <xs:element name="countryCode" type="xs:unsignedInt"></xs:element>
51.       <xs:element name="countryName">
52.         <xs:simpleType>
53.           <xs:restriction base="xs:string">
54.             <xs:pattern value="([a-zA-Z])*"></xs:pattern>
55.           </xs:restriction>
56.         </xs:simpleType>
57.       </xs:element>
58.     </xs:sequence>
59.     <xs:attribute name="runno" type="xs:integer"></xs:attribute>
60.   </xs:complexType>
61. </xs:schema>

```

This command is used to get a complete list with all information needed about countries in the system.

## General Request

```

01. <customer>
02.   <username>username</username>

```

```

03.      <password>md5(password)</password>
04.      <id>company code</id>
05.      <source>1</source>
06.      <request command="getallcountries">
07.          <return>
08.              <fields>
09.                  <field>regionName</field>
10.                  <field>regionCode</field>
11.              </fields>
12.          </return>
13.      </request>
14.  </customer>

```

Item	Type	Parent	Description	Required
return	Element	root	Groups elements that control what to be returned.	No.
fields	Element	result	Encapsulates elements that specify what should be returned for each country.	No.
field	Element	result	Specifies what elements to be returned along with the name and internal code for each country. Possible values: <ul style="list-style-type: none"> <li>regionName - the response will return the region name for each country</li> <li>regionCode - the response will return the region code for each country</li> </ul>	No.

## General Request XSD

getallcountries.xsd

```

01.  <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.      <xs:element name="customer">
03.          <xs:complexType>
04.              <xs:sequence>
05.                  <xs:group ref="loginDetailsGroup"></xs:group>
06.                  <xs:element name="request" type="requestType"></xs:element>
07.              </xs:sequence>
08.          </xs:complexType>
09.      </xs:element>
10.      <!-- ##### -->
11.      <xs:complexType name="requestType">
12.          <xs:sequence>
13.              <xs:element name="return" type="returnType" minOccurs="0"></xs:element>
14.          </xs:sequence>
15.          <xs:attribute name="command" type="xs:string" use="required" fixed="getallcountries"></xs:attribute>
16.          <xs:attribute name="debug" type="xs:integer" use="optional"></xs:attribute>
17.      </xs:complexType>
18.      <!-- ##### -->
19.      <xs:complexType name="returnType">
20.          <xs:sequence>
21.              <xs:element name="fields" type="fieldsType" minOccurs="0"></xs:element>
22.          </xs:sequence>
23.      </xs:complexType>
24.      <!-- ##### -->
25.      <xs:complexType name="fieldsType">
26.          <xs:sequence>
27.              <xs:element name="field" maxOccurs="2" minOccurs="0">
28.                  <xs:simpleType>
29.                      <xs:restriction base="xs:string">
30.                          <xs:enumeration value="regionName"></xs:enumeration>
31.                          <xs:enumeration value="regionCode"></xs:enumeration>
32.                      </xs:restriction>
33.                  </xs:simpleType>
34.              </xs:element>
35.          </xs:sequence>
36.      </xs:complexType>
37.      <!-- ##### -->
38.      <xs:group name="loginDetailsGroup">
39.          <xs:sequence>
40.              <xs:element name="username" type="xs:string"></xs:element>
41.              <xs:element name="password" type="passwordType"></xs:element>
42.              <xs:element name="id" type="xs:nonNegativeInteger"></xs:element>
43.              <xs:element name="source" type="sourceType"></xs:element>
44.          </xs:sequence>
45.      </xs:group>
46.      <!-- ##### -->
47.      <xs:simpleType name="passwordType">
48.          <xs:restriction base="xs:string">
49.              <xs:length value="32"></xs:length>
50.          </xs:restriction>
51.      </xs:simpleType>
52.      <!-- ##### -->
53.      <xs:simpleType name="sourceType">
54.          <xs:restriction base="xs:string">
55.              <xs:enumeration value="1"></xs:enumeration>
56.          </xs:restriction>
57.      </xs:simpleType>
58.  </xs:schema>

```



## General Response

```

01. <result command="getallcountries" date="">
02.   <countries count="">
03.     <country runno="">
04.       <name></name>
05.       <code></code>
06.       <regionName></regionName>
07.       <regionCode></regionCode>
08.     </country>
09.   </countries>
10.   <successful>TRUE</successful>
11. </result>

```

Item	Type	Parent	Description
<b>result</b>	Element	root	The root element.
@date	Attribute	result	The unix timestamp date and time when the result has been provided.
@command	Attribute	result	The command for which the result is shown.
<b>countries</b>	Element	result	Contains a list with all the countries.
@count	Attribute	cities	Total number of countries.
<b>country</b>	Element	cities	Contains information about the country.
@runno	Attribute	city	Running number starting from 0.
<b>name</b>	Element	city	Country name.
<b>code</b>	Element	city	Internal code for the country.
<b>regionName</b>	Element	city	Region name of this city's region.
<b>regionCode</b>	Element	city	Region internal code for this city's region.
<b>successful</b>	Element	result	Specifies if the request was successfully processed. Possible values: <ul style="list-style-type: none"> <li>TRUE</li> <li>FALSE</li> </ul>

## General Response XSD

getallcountries\_response.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="result" type="resultType"></xs:element>
03.   <xs:complexType name="resultType">
04.     <xs:sequence>
05.       <xs:element name="countries" type="countriesType"></xs:element>
06.       <xs:element name="successful" type="TrueOrFalse"></xs:element>
07.     </xs:sequence>
08.     <xs:attribute name="command" type="xs:string" use="required" fixed="getallcountries"></xs:attribute>
09.     <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
10.     <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
11.     <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
12.     <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
13.   </xs:complexType>
14.   <xs:simpleType name="dotwIP">
15.     <xs:restriction base="xs:string">
16.       <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9][0-9]{2}|1[0-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|1[0-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|1[0-9]{1}[0-9]{1}|[1-9]|0)" />
17.     </xs:restriction>
18.   </xs:simpleType>
19.   <xs:simpleType name="dotwDateType">
20.     <xs:restriction base="xs:string">
21.       <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*|([0-9]{4,4})/([0-9]{1,2}/[0-9]{1,2})(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*" />
22.     </xs:restriction>
23.   </xs:simpleType>
24.   <xs:simpleType name="versionType">
25.     <xs:restriction base="xs:string">
26.       <xs:pattern value="[1-9]{1}([0-9])*(([0-9])*)" />
27.     </xs:restriction>
28.   </xs:simpleType>
29.   <xs:complexType name="countriesType">

```

```

30.         <xs:sequence>
31.             <xs:element name="country" type="countryType" minOccurs="0" maxOccurs="unbounded"></xs:element>
32.         </xs:sequence>
33.         <xs:attribute name="count" type="xs:integer" use="required"></xs:attribute>
34.     </xs:complexType>
35.     <xs:simpleType name="TrueOrFalse">
36.         <xs:restriction base="xs:string">
37.             <xs:pattern value="true|false|TRUE|FALSE"></xs:pattern>
38.         </xs:restriction>
39.     </xs:simpleType>
40.     <xs:complexType name="countryType">
41.         <xs:sequence>
42.             <xs:element name="name">
43.                 <xs:simpleType>
44.                     <xs:restriction base="xs:string">
45.                         <xs:pattern value="([a-z A-Z])*"></xs:pattern>
46.                     </xs:restriction>
47.                 </xs:simpleType>
48.             </xs:element>
49.             <xs:element name="code" type="xs:unsignedInt"></xs:element>
50.             <xs:element name="regionName">
51.                 <xs:simpleType>
52.                     <xs:restriction base="xs:string">
53.                         <xs:pattern value="([a-z A-Z])*"></xs:pattern>
54.                     </xs:restriction>
55.                 </xs:simpleType>
56.             </xs:element>
57.             <xs:element name="regionCode" type="xs:unsignedInt"></xs:element>
58.         </xs:sequence>
59.         <xs:attribute name="runno" type="xs:integer"></xs:attribute>
60.     </xs:complexType>
61. </xs:schema>

```

The requests for this command must have the product element present. Its value will see for what service the servicing cities will be returned. Possible values for the value of product element: hotel, apartment. These command are used to get a complete list with all informaton needed about the cities in the system that have at least one hotel/apartment available in the future.

## Genreal Request

The **topDeals**, **luxury**, **specialDeals** siblings of **filters** element is to be present only when product value is hotel.

```

01.     <customer>
02.         <username>username</username>
03.         <password>md5(password)</password>
04.         <id>company code</id>
05.         <source>1</source>
06.         <product></product>
07.         <request command="getservingcities">
08.             <return>
09.                 <filters>
10.                     <topDeals>true</topDeals>
11.                     <luxury>true</luxury>
12.                     <specialDeals>true</specialDeals>
13.                     <countryCode></countryCode>
14.                     <countryName></countryName>
15.                 </filters>
16.                 <fields>
17.                     <field>countryName</field>
18.                     <field>countryCode</field>
19.                 </fields>
20.             </return>
21.         </request>
22.     </customer>

```

Item	Type	Parent	Description	Required
<b>return</b>	Element	root	Groups elements that control the response.	No.
<b>filters</b>	Element	result	Groups the filter that will be applied.	No.
<b>topDeals</b>	Element	filters	For filtering and returning only cities with hotels which have at least one booking made in the next week of the search date. Fixed value: <b>true</b> .	No.
<b>luxury</b>	Element	filters	For filtering and returning only cities with at least one hotel that is marked as luxury in the system.	No.
<b>specialDeals</b>	Element	filters	For filtering and returning only cities with hotels that have at least one special deal in the next two month form the search date. Special deals are PAY - STAY OFFERS. Fixed value: <b>true</b> ;	No.

<b>countryCode</b>	Element	filters	For filtering and returning only cities from the country with the specified internal code.	No.
<b>countryName</b>	Element	filters	For filtering and returning only cities from the country with the specified name.	No.
<b>fields</b>	Element	result	Encapsulates elements that specify what should be returned for each city.	No.
<b>field</b>	Element	result	Specifies what elements to be returned along with the name and internal code for each city. Possible values: <ul style="list-style-type: none"> <li>countryName the response will return the country name for each city</li> <li>countryCode the response will return the country internal code for each city</li> </ul>	No.

## General Request XSD

getservingcities.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="customer">
03.     <xs:complexType>
04.       <xs:sequence>
05.         <xs:group ref="loginDetailsGroup"/></xs:group>
06.         <xs:element name="product" type="productType"/></xs:element>
07.         <xs:element name="request" type="requestType"/></xs:element>
08.       </xs:sequence>
09.     </xs:complexType>
10.   </xs:element>
11.   <!-- ##### -->
12.   <xs:complexType name="requestType">
13.     <xs:sequence>
14.       <xs:element name="return" type="returnType" minOccurs="0"/></xs:element>
15.     </xs:sequence>
16.     <xs:attribute name="command" type="xs:string" use="required" fixed="getservingcities"/></xs:attribute>
17.   </xs:complexType>
18.   <!-- ##### -->
19.   <xs:complexType name="returnType">
20.     <xs:sequence>
21.       <xs:element name="filters" type="filtersType" minOccurs="0"/></xs:element>
22.       <xs:element name="fields" type="fieldsType" minOccurs="0"/></xs:element>
23.     </xs:sequence>
24.   </xs:complexType>
25.   <!-- ##### -->
26.   <xs:complexType name="filtersType">
27.     <xs:sequence>
28.       <xs:element name="topDeals" type="TrueOrFalse" minOccurs="0"/></xs:element>
29.       <xs:element name="luxury" type="TrueOrFalse" minOccurs="0"/></xs:element>
30.       <xs:element name="specialDeals" type="TrueOrFalse" minOccurs="0"/></xs:element>
31.       <xs:element name="countryCode" minOccurs="0">
32.         <xs:simpleType>
33.           <xs:restriction base="xs:string">
34.             <xs:pattern value="([0-9])"/></xs:pattern>
35.           </xs:restriction>
36.         </xs:simpleType>
37.       </xs:element>
38.       <xs:element name="countryName" minOccurs="0">
39.         <xs:simpleType>
40.           <xs:restriction base="xs:string">
41.             <xs:pattern value="([a-z A-Z])"/></xs:pattern>
42.           </xs:restriction>
43.         </xs:simpleType>
44.       </xs:element>
45.     </xs:sequence>
46.   </xs:complexType>
47.   <!-- ##### -->
48.   <xs:complexType name="fieldsType">
49.     <xs:sequence>
50.       <xs:element name="field" maxOccurs="4" minOccurs="0">
51.         <xs:simpleType>
52.           <xs:restriction base="xs:string">
53.             <xs:enumeration value="countryName"/></xs:enumeration>
54.             <xs:enumeration value="countryCode"/></xs:enumeration>
55.             <xs:enumeration value="code"/></xs:enumeration>
56.             <xs:enumeration value="name"/></xs:enumeration>
57.           </xs:restriction>
58.         </xs:simpleType>
59.       </xs:element>
60.     </xs:sequence>
61.   </xs:complexType>
62.   <!-- ##### -->
63.   <xs:group name="loginDetailsGroup">
64.     <xs:sequence>
65.       <xs:element name="username" type="xs:string"/></xs:element>
66.       <xs:element name="password" type="passwordType"/></xs:element>

```

```

67.         <xs:element name="id" type="xs:nonNegativeInteger"></xs:element>
68.         <xs:element name="source" type="sourceType"></xs:element>
69.     </xs:sequence>
70. </xs:group>
71. <!-- ##### -->
72. <xs:simpleType name="passwordType">
73.     <xs:restriction base="xs:string">
74.         <xs:length value="32"></xs:length>
75.     </xs:restriction>
76. </xs:simpleType>
77. <!-- ##### -->
78. <xs:simpleType name="sourceType">
79.     <xs:restriction base="xs:string">
80.         <xs:enumeration value="1"></xs:enumeration>
81.     </xs:restriction>
82. </xs:simpleType>
83. <!-- ##### -->
84. <xs:simpleType name="TrueOrFalse">
85.     <xs:restriction base="xs:string">
86.         <xs:pattern value="true|false"></xs:pattern>
87.     </xs:restriction>
88. </xs:simpleType>
89. <!-- ##### -->
90. <xs:simpleType name="productType">
91.     <xs:restriction base="xs:string">
92.         <xs:pattern value="hotel|apartment"></xs:pattern>
93.     </xs:restriction>
94. </xs:simpleType>
95. </xs:schema>

```

## General Response

```

01. <result command=" getservicingities" date="">
02.     <cities count="">
03.         <city runno="">
04.             <name></name>
05.             <code></code>
06.             <countryName></countryName>
07.             <countryCode></countryCode>
08.         </city>
09.     </cities>
10.     <successful>TRUE</successful>
11. </result>

```

Item	Type	Parent	Description
<b>result</b>	Element	root	The root element.
@date	Attribute	result	The unix timestamp date and time when the result has been provided.
@command	Attribute	result	The command for which the result is shown.
<b>cities</b>	Element	result	Contains a list with all the cities.
@count	Attribute	cities	Total number of cities.
<b>city</b>	Element	cities	Contains information about the city.
@runno	Attribute	city	Running number starting from 0.
<b>name</b>	Element	city	City name.
<b>code</b>	Element	city	Internal code for the city.
<b>countryName</b>	Element	city	Country name of this city's country. Returned only if specified in the request.
<b>countryCode</b>	Element	city	Country internal code for this city's country. Returned only if specified in the request.
<b>successful</b>	Element	result	Specifies if the request was successfully processed. Possible values: <ul style="list-style-type: none"> <li>• TRUE</li> <li>• FALSE</li> </ul>

## General Response XSD

getservicingities\_response.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.     <xs:element name="result" type="resultType"></xs:element>

```

```

03.     <xs:complexType name="resultType">
04.         <xs:sequence>
05.             <xs:element name="cities" type="citiesType"/></xs:element>
06.             <xs:element name="successful" type="TrueOrFalse"/></xs:element>
07.         </xs:sequence>
08.         <xs:attribute name="command" type="xs:string" use="required" fixed="getservingcities"/></xs:attribute>
09.         <xs:attribute name="tID" type="xs:integer" use="required"/></xs:attribute>
10.         <xs:attribute name="ip" type="dotwIP" use="required"/></xs:attribute>
11.         <xs:attribute name="date" type="dotwDateType" use="required"/></xs:attribute>
12.         <xs:attribute name="version" type="versionType" use="required"/></xs:attribute>
13.     </xs:complexType>
14.     <xs:simpleType name="dotwIP">
15.         <xs:restriction base="xs:string">
16.             <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9][0-9]{2}|1[0-9]{1}[0-9]{1}|1[0-9]{1}|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|1[0-9]{1}[0-9]{1}|[0-9])" />
17.         </xs:restriction>
18.     </xs:simpleType>
19.     <xs:simpleType name="dotwDateType">
20.         <xs:restriction base="xs:string">
21.             <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*|([0-9]{4,4})/([0-9]{1,2})/([0-9]{1,2})(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*|([0-9]{1,2})*"/>
22.         </xs:restriction>
23.     </xs:simpleType>
24.     <xs:simpleType name="versionType">
25.         <xs:restriction base="xs:string">
26.             <xs:pattern value="[1-9]{1}([0-9])*.([0-9])*" /></xs:pattern>
27.         </xs:restriction>
28.     </xs:simpleType>
29.     <xs:complexType name="citiesType">
30.         <xs:sequence>
31.             <xs:element name="city" type="cityType" minOccurs="0" maxOccurs="unbounded"/></xs:element>
32.         </xs:sequence>
33.         <xs:attribute name="count" type="xs:integer" use="required"/></xs:attribute>
34.     </xs:complexType>
35.     <xs:simpleType name="TrueOrFalse">
36.         <xs:restriction base="xs:string">
37.             <xs:pattern value="true|false|TRUE|FALSE"/></xs:pattern>
38.         </xs:restriction>
39.     </xs:simpleType>
40.     <xs:complexType name="cityType">
41.         <xs:sequence>
42.             <xs:element name="name">
43.                 <xs:simpleType>
44.                     <xs:restriction base="xs:string">
45.                         <xs:pattern value="[a-zA-Z]" /></xs:pattern>
46.                     </xs:restriction>
47.                 </xs:simpleType>
48.             </xs:element>
49.             <xs:element name="code" type="xs:unsignedInt"/></xs:element>
50.             <xs:element name="countryName">
51.                 <xs:simpleType>
52.                     <xs:restriction base="xs:string">
53.                         <xs:pattern value="[a-zA-Z]" /></xs:pattern>
54.                     </xs:restriction>
55.                 </xs:simpleType>
56.             </xs:element>
57.             <xs:element name="countryCode" type="xs:unsignedInt"/></xs:element>
58.         </xs:sequence>
59.         <xs:attribute name="runno" type="xs:integer"/></xs:attribute>
60.     </xs:complexType>
61. </xs:schema>

```

The requests for this command must have the product element present. Its value will see for what service the servicing countries will be returned. Possible values for the value of product element: *hotel, apartment, tour, transfer, visa*. This commands is used to get a complete list with all informaton needed about the countries in the system that have at least one hotel/apartment available in the future.

## General Request

The **topDeals**, **luxury**, **specialDeals** siblings of **filters** element is to be present only when product value is hotel.

```

01. <customer>
02.     <username>username</username>
03.     <password>md5(password)</password>
04.     <id>company code</id>
05.     <source>1</source>
06.     <product></product>
07.     <request command="getservingcountries">
08.         <return>
09.             <filters>
10.                 <topDeals>true</topDeals>
11.                 <luxury>true</luxury>
12.                 <specialDeals>true</specialDeals>
13.             </filters>
14.             <fields>
15.                 <field>name</field>
16.                 <field>code</field>

```

```

17.         <field>regionName</field>
18.         <field>regionCode</field>
19.     </fields>
20. </return>
21. </request>
22. </customer>

```

Item	Type	Parent	Description	Required
<b>return</b>	Element	root	Groups elements that control the response.	No.
<b>filters</b>	Element	result	Groups the filter that will be applied.	No.
<b>topDeals</b>	Element	filters	For filtering and returning only countries with hotels which have at least one booking made in the next week of the search date. Fixed value: <b>true</b> .	No.
<b>luxury</b>	Element	filters	For filtering and returning only countries with at least one hotel that is marked as luxury in the system.	No.
<b>specialDeals</b>	Element	filters	For filtering and returning only countries with hotels that have at least one special deal that is available in the following two month of the search date. Special deals are PAY - STAY OFFERS. Fixed value: <b>true</b> ;	No.
<b>countryCode</b>	Element	filters	For filtering and returning only cities from the country with the specified internal code.	No.
<b>countryName</b>	Element	filters	For filtering and returning only cities from the country with the specified name.	No.
<b>fields</b>	Element	result	Encapsulates elements that specify what should be returned for each country.	No.
<b>field</b>	Element	result	Specifies what elements to be returned along with the name and internal code for each country. Possible values: <ul style="list-style-type: none"> <li>• <b>regionName</b> - the response will return the region name for each country</li> <li>• <b>regionCode</b> - the response will return the region internal code for each country</li> </ul>	No.

## General Request XSD

getservincountries.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="customer">
03.     <xs:complexType>
04.       <xs:sequence>
05.         <xs:group ref="loginDetailsGroup"></xs:group>
06.         <xs:element name="product" type="productType"></xs:element>
07.         <xs:element name="request" type="requestType"></xs:element>
08.       </xs:sequence>
09.     </xs:complexType>
10.   </xs:element>
11.   <!-- ##### -->
12.   <xs:complexType name="requestType">
13.     <xs:sequence>
14.       <xs:element name="return" type="returnType" minOccurs="0"></xs:element>
15.     </xs:sequence>
16.     <xs:attribute name="command" type="xs:string" use="required" fixed="getservingcountries"></xs:attribute>
17.   </xs:complexType>
18.   <!-- ##### -->
19.   <xs:complexType name="returnType">
20.     <xs:sequence>
21.       <xs:element name="filters" type="filtersType" minOccurs="0"></xs:element>
22.       <xs:element name="fields" type="fieldsType" minOccurs="0"></xs:element>
23.     </xs:sequence>
24.   </xs:complexType>
25.   <!-- ##### -->
26.   <xs:complexType name="filtersType">
27.     <xs:sequence>
28.       <xs:element name="topDeals" type="TrueOrFalse" minOccurs="0"></xs:element>
29.       <xs:element name="luxury" type="TrueOrFalse" minOccurs="0"></xs:element>
30.       <xs:element name="specialDeals" type="TrueOrFalse" minOccurs="0"></xs:element>
31.     </xs:sequence>
32.   </xs:complexType>
33.   <!-- ##### -->
34.   <xs:complexType name="fieldsType">
35.     <xs:sequence>
36.       <xs:element name="field" maxOccurs="4" minOccurs="0">

```

```

37.         <xs:simpleType>
38.             <xs:restriction base="xs:string">
39.                 <xs:enumeration value="name"></xs:enumeration>
40.                 <xs:enumeration value="code"></xs:enumeration>
41.                 <xs:enumeration value="regionName"></xs:enumeration>
42.                 <xs:enumeration value="regionCode"></xs:enumeration>
43.             </xs:restriction>
44.         </xs:simpleType>
45.     </xs:element>
46. </xs:sequence>
47. </xs:complexType>
48. <!-- ##### -->
49. <xs:group name="loginDetailsGroup">
50.     <xs:sequence>
51.         <xs:element name="username" type="xs:string"></xs:element>
52.         <xs:element name="password" type="passwordType"></xs:element>
53.         <xs:element name="id" type="xs:nonNegativeInteger"></xs:element>
54.         <xs:element name="source" type="sourceType"></xs:element>
55.     </xs:sequence>
56. </xs:group>
57. <!-- ##### -->
58. <xs:simpleType name="passwordType">
59.     <xs:restriction base="xs:string">
60.         <xs:length value="32"></xs:length>
61.     </xs:restriction>
62. </xs:simpleType>
63. <!-- ##### -->
64. <xs:simpleType name="sourceType">
65.     <xs:restriction base="xs:string">
66.         <xs:enumeration value="1"></xs:enumeration>
67.     </xs:restriction>
68. </xs:simpleType>
69. <!-- ##### -->
70. <xs:simpleType name="productType">
71.     <xs:restriction base="xs:string">
72.         <xs:pattern value="hotel|apartment"></xs:pattern>
73.     </xs:restriction>
74. </xs:simpleType>
75. </xs:schema>

```

## General Response

```

01. <result command="getservingcountries" date="">
02.     <countries count="">
03.         <country runno="">
04.             <name></name>
05.             <code></code>
06.             <regionname></regionname>
07.             <regioncode></regioncode>
08.         </country>
09.     </countries>
10.     <successful>TRUE</successful>
11. </result>

```

Item	Type	Parent	Description
<b>result</b>	Element	root	The root element.
@date	Attribute	result	The unix timestamp date and time when the result has been provided.
@command	Attribute	result	The command for which the result is shown.
<b>countries</b>	Element	result	Contains a list with all the countries.
@count	Attribute	countries	Total number of countries.
<b>country</b>	Element	countries	Contains information about the country.
@runno	Attribute	country	Running number starting from 0.
<b>name</b>	Element	country	Country name.
<b>code</b>	Element	country	Internal code for the country.
<b>regionname</b>	Element	country	Region name of this country's region.
<b>regioncode</b>	Element	country	Region internal code for this country's region.
<b>successful</b>	Element	result	Specifies if the request was successfully processed. Possible values: <ul style="list-style-type: none"> <li>• TRUE</li> <li>• FALSE</li> </ul>

# General Response XSD

getservicingcountries\_response.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="result" type="resultType"></xs:element>
03.   <xs:complexType name="resultType">
04.     <xs:sequence>
05.       <xs:element name="countries" type="countriesType"></xs:element>
06.       <xs:element name="successful" type="TrueOrFalse"></xs:element>
07.     </xs:sequence>
08.     <xs:attribute name="command" type="xs:string" use="required" fixed="getservicingcountries"></xs:attribute>
09.     <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
10.     <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
11.     <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
12.     <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
13.   </xs:complexType>
14.   <xs:simpleType name="dotwIP">
15.     <xs:restriction base="xs:string">
16.       <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[ 1][0-9]{2}|1[0-9]{1}[0-9]{1}|1[0-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|1[0-9]{1}[0-9]{1}|1[0-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|1[0-9]{1}[0-9]{1}|[0-9])" />
17.     </xs:restriction>
18.   </xs:simpleType>
19.   <xs:simpleType name="dotwDateType">
20.     <xs:restriction base="xs:string">
21.       <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}([0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*|([0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2})([0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*" />
22.     </xs:restriction>
23.   </xs:simpleType>
24.   <xs:simpleType name="versionType">
25.     <xs:restriction base="xs:string">
26.       <xs:pattern value="[1-9]{1}([0-9])*.([0-9])*" />
27.     </xs:restriction>
28.   </xs:simpleType>
29.   <xs:complexType name="countriesType">
30.     <xs:sequence>
31.       <xs:element name="country" type="countryType" minOccurs="0" maxOccurs="unbounded"></xs:element>
32.     </xs:sequence>
33.     <xs:attribute name="count" type="xs:integer" use="required"></xs:attribute>
34.   </xs:complexType>
35.   <xs:simpleType name="TrueOrFalse">
36.     <xs:restriction base="xs:string">
37.       <xs:pattern value="true|false|TRUE|FALSE"></xs:pattern>
38.     </xs:restriction>
39.   </xs:simpleType>
40.   <xs:complexType name="countryType">
41.     <xs:sequence>
42.       <xs:element name="name">
43.         <xs:simpleType>
44.           <xs:restriction base="xs:string">
45.             <xs:pattern value="([a-z A-Z])*" />
46.           </xs:restriction>
47.         </xs:simpleType>
48.       </xs:element>
49.       <xs:element name="code" type="xs:unsignedInt"></xs:element>
50.       <xs:element name="regionName">
51.         <xs:simpleType>
52.           <xs:restriction base="xs:string">
53.             <xs:pattern value="([a-z A-Z])*" />
54.           </xs:restriction>
55.         </xs:simpleType>
56.       </xs:element>
57.       <xs:element name="regionCode" type="xs:unsignedInt"></xs:element>
58.     </xs:sequence>
59.     <xs:attribute name="runno" type="xs:integer"></xs:attribute>
60.   </xs:complexType>
61. </xs:schema>

```

This command is used to get a complete list with all information needed about currencies in the system.

## General Request

```

01. <customer>
02.   <username></username>
03.   <password></password>
04.   <id></id>
05.   <source>1</source>
06.   <request command="getcurrenciesids"></request>
07. </customer>

```

## General Request XSD



```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:include schemaLocation="loginDetails.xsd"></xs:include>
03.   <xs:element name="customer">
04.     <xs:complexType>
05.       <xs:sequence>
06.         <xs:group ref="loginDetailsGroup"></xs:group>
07.         <xs:element name="request" type="requestType"></xs:element>
08.       </xs:sequence>
09.     </xs:complexType>
10.   </xs:element>
11.   <!-- ##### -->
12.   <xs:complexType name="requestType">
13.     <xs:attribute name="command" type="xs:string" use="required" fixed="getcurrenciesids"></xs:attribute>
14.   </xs:complexType>
15.   <!-- ##### -->
16.   <xs:group name="loginDetailsGroup">
17.     <xs:sequence>
18.       <xs:element name="username" type="xs:string"></xs:element>
19.       <xs:element name="password" type="passwordType"></xs:element>
20.       <xs:element name="id" type="xs:nonNegativeInteger"></xs:element>
21.       <xs:element name="source" type="sourceType"></xs:element>
22.     </xs:sequence>
23.   </xs:group>
24.   <!-- ##### -->
25.   <xs:simpleType name="passwordType">
26.     <xs:restriction base="xs:string">
27.       <xs:length value="32"></xs:length>
28.     </xs:restriction>
29.   </xs:simpleType>
30.   <!-- ##### -->
31.   <xs:simpleType name="sourceType">
32.     <xs:restriction base="xs:string">
33.       <xs:enumeration value="1"></xs:enumeration>
34.     </xs:restriction>
35.   </xs:simpleType>
36. </xs:schema>

```

## General Response

```

01. <result command="getcurrencies" date="">
02.   <currency>
03.     <option runno="" shortcut=" " value=""></option>
04.   </currency>
05.   <successful>TRUE</successful>
06. </result>

```

Item	Type	Parent	Description
<b>result</b>	Element	root	The root element.
@date	Attribute	result	The unix timestamp date and time when the result has been provided.
@command	Attribute	result	The command for which the result is shown.
<b>currency</b>	Element	result	Contains a list with all the currencies available.
<b>option</b>	Element	currency	Contains the full name of the currency.
@runno	Attribute	option	Running number starting from 0.
@shortcut	Attribute	option	Shortening for the currency name.
@value	Attribute	option	Internal code for this currency.
<b>successful</b>	Element	result	Specifies if the request was successfully processed. Possible values: <ul style="list-style-type: none"> <li>TRUE</li> <li>FALSE</li> </ul>

## General Response XSD

getcurrenciesids\_response.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="result" type="resultType"></xs:element>
03.   <xs:complexType name="resultType">
04.     <xs:sequence>
05.       <xs:element name="currency" type="currencyType"></xs:element>
06.       <xs:element name="successful" type="TrueOrFalse"></xs:element>
07.     </xs:sequence>

```

```

08.     <xs:attribute name="command" type="xs:string" use="required" fixed="getcurrenciessids"></xs:attribute>
09.     <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
10.     <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
11.     <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
12.     <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
13. </xs:complexType>
14. <xs:simpleType name="dotwIP">
15.     <xs:restriction base="xs:string">
16.         <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[ 1][0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[0-9])" />
17.     </xs:restriction>
18. </xs:simpleType>
19. <xs:simpleType name="dotwDateType">
20.     <xs:restriction base="xs:string">
21.         <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*[0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*"></xs:pattern>
22.     </xs:restriction>
23. </xs:simpleType>
24. <xs:simpleType name="versionType">
25.     <xs:restriction base="xs:string">
26.         <xs:pattern value="[1-9]{1}([0-9])*.([0-9])*"></xs:pattern>
27.     </xs:restriction>
28. </xs:simpleType>
29. <xs:complexType name="currencyType">
30.     <xs:sequence>
31.         <xs:element name="option" type="optionType" minOccurs="0" maxOccurs="unbounded"></xs:element>
32.     </xs:sequence>
33.     <xs:attribute name="count" type="xs:integer" use="required"></xs:attribute>
34. </xs:complexType>
35. <xs:simpleType name="TrueOrFalse">
36.     <xs:restriction base="xs:string">
37.         <xs:pattern value="true|false|TRUE|FALSE"></xs:pattern>
38.     </xs:restriction>
39. </xs:simpleType>
40. <xs:complexType name="optionType">
41.     <xs:attribute name="runno" type="xs:integer" use="required"></xs:attribute>
42.     <xs:attribute name="shortcut" type="shortcutType" use="required"></xs:attribute>
43.     <xs:attribute name="value" type="xs:unsignedInt" use="required"></xs:attribute>
44. </xs:complexType>
45. <xs:simpleType name="shortcutType">
46.     <xs:restriction base="xs:string">
47.         <xs:pattern value="[A-Z]{3}"></xs:pattern>
48.     </xs:restriction>
49. </xs:simpleType>
50. </xs:schema>

```

Use this command to get a list with all available languages in the system.

## General Request

```

01. <customer>
02.     <username></username>
03.     <password></password>
04.     <id></id>
05.     <source>1</source>
06.     <request command="getlanguagesids"></request>
07. </customer>

```

## General Request XSD

getlanguages.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.     <xs:element name="customer">
03.         <xs:complexType>
04.             <xs:sequence>
05.                 <xs:group ref="loginDetailsGroup"></xs:group>
06.                 <xs:element name="request" type="requestType"></xs:element>
07.             </xs:sequence>
08.         </xs:complexType>
09.     </xs:element>
10.     <!-- ##### -->
11.     <xs:complexType name="requestType">
12.         <xs:attribute name="command" type="xs:string" use="required" fixed="getlanguagesids"></xs:attribute>
13.     </xs:complexType>
14.     <!-- ##### -->
15.     <xs:group name="loginDetailsGroup">
16.         <xs:sequence>
17.             <xs:element name="username" type="xs:string"></xs:element>
18.             <xs:element name="password" type="passwordType"></xs:element>
19.             <xs:element name="id" type="xs:nonNegativeInteger"></xs:element>
20.             <xs:element name="source" type="sourceType"></xs:element>

```

```

21.         </xs:sequence>
22.     </xs:group>
23.     <!-- ##### -->
24.     <xs:simpleType name="passwordType">
25.         <xs:restriction base="xs:string">
26.             <xs:length value="32"/></xs:length>
27.         </xs:restriction>
28.     </xs:simpleType>
29.     <!-- ##### -->
30.     <xs:simpleType name="sourceType">
31.         <xs:restriction base="xs:string">
32.             <xs:enumeration value="1"/></xs:enumeration>
33.         </xs:restriction>
34.     </xs:simpleType>
35. </xs:schema>

```

## General Response

```

01. <result command="getlanguagesids" date="">
02.     <languages>
03.         <option runno="" shortcut="" value=""></option>
04.     </languages>
05.     <successful>TRUE</successful>
06. </result>

```

Item	Type	Parent	Description
<b>result</b>	Element	root	The root element.
@date	Attribute	result	The unix timestamp date and time when the result has been provided.
@command	Attribute	result	The command for which the result is shown.
<b>languages</b>	Element	result	Contains a list with the languages.
<b>option</b>	Attribute	languages	Language name.
@runno	Attribute	option	Running number starting from 0.
@shortcut	Attribute	option	Shortening for language name.
@value	Attribute	option	Internal language code.
<b>successful</b>	Element	result	Specifies if the request was successfully processed. Possible values: <ul style="list-style-type: none"> <li>TRUE</li> <li>FALSE</li> </ul>

## General Response XSD

getlanguagesids\_response.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.     <xs:element name="result" type="resultType"></xs:element>
03.     <xs:complexType name="resultType">
04.         <xs:sequence>
05.             <xs:element name="languages" type="languagesType"></xs:element>
06.             <xs:element name="successful" type="TrueOrFalse"></xs:element>
07.         </xs:sequence>
08.         <xs:attribute name="command" type="xs:string" use="required" fixed="getlanguagesids"></xs:attribute>
09.         <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
10.         <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
11.         <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
12.         <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
13.     </xs:complexType>
14.     <xs:simpleType name="dotwIP">
15.         <xs:restriction base="xs:string">
16.             <xs:pattern value="(25[0-5]|2[0-4][0-9]|0[0-1]{1}[0-9]{2}|[ 1][0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|0[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|0[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[0-9])" >
17.         </xs:restriction>
18.     </xs:simpleType>
19.     <xs:simpleType name="dotwDateType">
20.         <xs:restriction base="xs:string">
21.             <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*|[0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*"></xs:pattern>
22.         </xs:restriction>
23.     </xs:simpleType>
24.     <xs:simpleType name="versionType">
25.         <xs:restriction base="xs:string">
26.             <xs:pattern value="[1-9]{1}([0-9])*.([0-9])*"></xs:pattern>
27.         </xs:restriction>

```

```

28.     </xs:simpleType>
29.     <xs:complexType name="languagesType">
30.         <xs:sequence>
31.             <xs:element name="option" type="optionType" minOccurs="0" maxOccurs="unbounded"/></xs:element>
32.         </xs:sequence>
33.         <xs:attribute name="count" type="xs:integer" use="required"/></xs:attribute>
34.     </xs:complexType>
35.     <xs:simpleType name="TrueOrFalse">
36.         <xs:restriction base="xs:string">
37.             <xs:pattern value="true|false|TRUE|FALSE"/></xs:pattern>
38.         </xs:restriction>
39.     </xs:simpleType>
40.     <xs:complexType name="optionType">
41.         <xs:attribute name="runno" type="xs:integer" use="required"/></xs:attribute>
42.         <xs:attribute name="shortcut" type="shortcutType" use="required"/></xs:attribute>
43.         <xs:attribute name="value" type="xs:unsignedInt" use="required"/></xs:attribute>
44.     </xs:complexType>
45.     <xs:simpleType name="shortcutType">
46.         <xs:restriction base="xs:string">
47.             <xs:pattern value="[a-z]{2}"/></xs:pattern>
48.         </xs:restriction>
49.     </xs:simpleType>
50. </xs:schema>

```

This command is used to get a list with all hotel leisure and sports amenities.

## General Request

```

01.     <customer>
02.         <username></username>
03.         <password></password>
04.         <id></id>
05.         <source>1</source>
06.         <request command="getleisureids"/></request>
07.     </customer>

```

## General Request XSD

getleisureids.xsd

```

01.     <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.         <xs:element name="customer">
03.             <xs:complexType>
04.                 <xs:sequence>
05.                     <xs:group ref="loginDetailsGroup"/></xs:group>
06.                     <xs:element name="request" type="requestType"/></xs:element>
07.                 </xs:sequence>
08.             </xs:complexType>
09.         </xs:element>
10.         <!-- ##### -->
11.         <xs:complexType name="requestType">
12.             <xs:attribute name="command" type="xs:string" use="required" fixed="getleisureids"/></xs:attribute>
13.         </xs:complexType>
14.         <!-- ##### -->
15.         <xs:group name="loginDetailsGroup">
16.             <xs:sequence>
17.                 <xs:element name="username" type="xs:string"/></xs:element>
18.                 <xs:element name="password" type="passwordType"/></xs:element>
19.                 <xs:element name="id" type="xs:nonNegativeInteger"/></xs:element>
20.                 <xs:element name="source" type="sourceType"/></xs:element>
21.             </xs:sequence>
22.         </xs:group>
23.         <!-- ##### -->
24.         <xs:simpleType name="passwordType">
25.             <xs:restriction base="xs:string">
26.                 <xs:length value="32"/></xs:length>
27.             </xs:restriction>
28.         </xs:simpleType>
29.         <!-- ##### -->
30.         <xs:simpleType name="sourceType">
31.             <xs:restriction base="xs:string">
32.                 <xs:enumeration value="1"/></xs:enumeration>
33.             </xs:restriction>
34.         </xs:simpleType>
35.     </xs:schema>

```

## General Response

```

01.     <result command="getleisureids" date="">
02.         <leisures>

```

```

03.         <option runno="" value=""></option>
04.     </leisures>
05.     <successful>TRUE</successful>
06. </result>

```

Item	Type	Parent	Description
<b>result</b>	Element	root	The root element.
@date	Attribute	result	The unix timestamp date and time when the result has been provided.
@command	Attribute	result	The command for which the result is shown.
<b>leisures</b>	Element	result	Contains a list with the leisure and sports amenities.
<b>option</b>	Attribute	leisures	Leisure and sports amenitie name.
@runno	Attribute	option	Running number starting from 0.
@value	Attribute	option	Internal leisure ans sports amenitie code.
<b>successful</b>	Element	result	Specifies if the request was successfully processed. Possible values: <ul style="list-style-type: none"> <li>TRUE</li> <li>FALSE</li> </ul>

## General Response XSD

getleisureids\_response.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.     <xs:element name="result" type="resultType"></xs:element>
03.     <xs:complexType name="resultType">
04.         <xs:sequence>
05.             <xs:element name="leisures" type="leisuresType"></xs:element>
06.             <xs:element name="successful" type="TrueOrFalse"></xs:element>
07.         </xs:sequence>
08.         <xs:attribute name="command" type="xs:string" use="required" fixed="getleisureids"></xs:attribute>
09.         <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
10.         <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
11.         <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
12.         <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
13.     </xs:complexType>
14.     <xs:simpleType name="dotwIP">
15.         <xs:restriction base="xs:string">
16.             <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9][0-9]{2}|1[0-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|0-1){1}[0-9]{2}|1-9{1}[0-9]{1}|1-9|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|1-9{1}[0-9]{1}|0-9)" />
17.         </xs:restriction>
18.     </xs:simpleType>
19.     <xs:simpleType name="dotwDateType">
20.         <xs:restriction base="xs:string">
21.             <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*| [0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*" />
22.         </xs:restriction>
23.     </xs:simpleType>
24.     <xs:simpleType name="versionType">
25.         <xs:restriction base="xs:string">
26.             <xs:pattern value="[1-9]{1}([0-9])*.([0-9])*" />
27.         </xs:restriction>
28.     </xs:simpleType>
29.     <xs:complexType name="leisuresType">
30.         <xs:sequence>
31.             <xs:element name="option" type="optionType" minOccurs="0" maxOccurs="unbounded"></xs:element>
32.         </xs:sequence>
33.         <xs:attribute name="count" type="xs:integer" use="required"></xs:attribute>
34.     </xs:complexType>
35.     <xs:simpleType name="TrueOrFalse">
36.         <xs:restriction base="xs:string">
37.             <xs:pattern value="true|false|TRUE|FALSE" />
38.         </xs:restriction>
39.     </xs:simpleType>
40.     <xs:complexType name="optionType">
41.         <xs:attribute name="runno" type="xs:integer" use="required"></xs:attribute>
42.         <xs:attribute name="value" type="xs:unsignedInt" use="required"></xs:attribute>
43.     </xs:complexType>
44. </xs:schema>

```

Use this command to get a list with all business features.

## General Request

```

01. <customer>
02.   <username></username>
03.   <password></password>
04.   <id></id>
05.   <source>1</source>
06.   <request command="getbusinessids"></request>
07. </customer>

```

## General Request XSD

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="customer">
03.     <xs:complexType>
04.       <xs:sequence>
05.         <xs:group ref="loginDetailsGroup"></xs:group>
06.         <xs:element name="request" type="requestType"></xs:element>
07.       </xs:sequence>
08.     </xs:complexType>
09.   </xs:element>
10.   <!-- ##### -->
11.   <xs:complexType name="requestType">
12.     <xs:attribute name="command" type="xs:string" use="required" fixed="getbusinessids"></xs:attribute>
13.   </xs:complexType>
14.   <!-- ##### -->
15.   <xs:group name="loginDetailsGroup">
16.     <xs:sequence>
17.       <xs:element name="username" type="xs:string"></xs:element>
18.       <xs:element name="password" type="passwordType"></xs:element>
19.       <xs:element name="id" type="xs:nonNegativeInteger"></xs:element>
20.       <xs:element name="source" type="sourceType"></xs:element>
21.     </xs:sequence>
22.   </xs:group>
23.   <!-- ##### -->
24.   <xs:simpleType name="passwordType">
25.     <xs:restriction base="xs:string">
26.       <xs:length value="32"></xs:length>
27.     </xs:restriction>
28.   </xs:simpleType>
29.   <!-- ##### -->
30.   <xs:simpleType name="sourceType">
31.     <xs:restriction base="xs:string">
32.       <xs:enumeration value="1"></xs:enumeration>
33.     </xs:restriction>
34.   </xs:simpleType>
35. </xs:schema>

```

## General Response

```

01. <result command="getbusinessids" date="">
02.   <business>
03.     <option runno="" value=""></option>
04.   </business>
05.   <successful>TRUE</successful>
06. </result>

```

Item	Type	Parent	Description
<b>result</b>	Element	root	The root element.
@date	Attribute	result	The unix timestamp date and time when the result has been provided.
@command	Attribute	result	The command for which the result is shown.
<b>business</b>	Element	result	Contains a list with the business features.
<b>option</b>	Attribute	leisures	Business feature name.
@runno	Attribute	option	Running number starting from 0.
@value	Attribute	option	Internal leisure code.
<b>successful</b>	Element	result	Specifies if the request was successfully processed. Possible values: <ul style="list-style-type: none"> <li>TRUE</li> <li>FALSE</li> </ul>

## General Response XSD

getbusinessids\_response.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="result" type="resultType"></xs:element>
03.   <xs:complexType name="resultType">
04.     <xs:sequence>
05.       <xs:element name="business" type="businessType"></xs:element>
06.       <xs:element name="successful" type="TrueOrFalse"></xs:element>
07.     </xs:sequence>
08.     <xs:attribute name="command" type="xs:string" use="required" fixed="getbusinessids"></xs:attribute>
09.     <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
10.     <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
11.     <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
12.     <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
13.   </xs:complexType>
14.   <xs:simpleType name="dotwIP">
15.     <xs:restriction base="xs:string">
16.       <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{0-9}[0-9]{2}|[1-9][0-9]{2}|1[0-9]{2}|1[0-9]{1}|1[0-9]|0).(25[0-5]|2[0-4][0-9]|2[0-9]{1}|[0-1]{0-9}[0-9]{2}|1[0-9]{2}|1[0-9]{1}|1[0-9]|0).(25[0-5]|2[0-4][0-9]|2[0-9]{1}|[0-1]{0-9}[0-9]{2}|1[0-9]{2}|1[0-9]{1}|1[0-9]|0).(</xs:pattern>
17.     </xs:restriction>
18.   </xs:simpleType>
19.   <xs:simpleType name="dotwDateType">
20.     <xs:restriction base="xs:string">
21.       <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*|[0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*"></xs:pattern>
22.     </xs:restriction>
23.   </xs:simpleType>
24.   <xs:simpleType name="versionType">
25.     <xs:restriction base="xs:string">
26.       <xs:pattern value="[1-9]{1}([0-9])*(<xs:pattern>
27.     </xs:restriction>
28.   </xs:simpleType>
29.   <xs:complexType name="businessType">
30.     <xs:sequence>
31.       <xs:element name="option" type="optionType" minOccurs="0" maxOccurs="unbounded"></xs:element>
32.     </xs:sequence>
33.     <xs:attribute name="count" type="xs:integer" use="required"></xs:attribute>
34.   </xs:complexType>
35.   <xs:simpleType name="TrueOrFalse">
36.     <xs:restriction base="xs:string">
37.       <xs:pattern value="true|false|TRUE|FALSE"></xs:pattern>
38.     </xs:restriction>
39.   </xs:simpleType>
40.   <xs:complexType name="optionType">
41.     <xs:attribute name="runno" type="xs:integer" use="required"></xs:attribute>
42.     <xs:attribute name="value" type="xs:unsignedInt" use="required"></xs:attribute>
43.   </xs:complexType>
44. </xs:schema>

```

## General Request

Use this command to get a list with all hotel/apartment amenities.

```

01. <customer>
02.   <username></username>
03.   <password></password>
04.   <id></id>
05.   <source>1</source>
06.   <request command="getamenities"></request>
07. </customer>

```

## General Request XSD

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="customer">
03.     <xs:complexType>
04.       <xs:sequence>
05.         <xs:group ref="loginDetailsGroup"></xs:group>
06.         <xs:element name="request" type="requestType"></xs:element>
07.       </xs:sequence>
08.     </xs:complexType>
09.   </xs:element>
10.   <!-- ##### -->
11.   <xs:complexType name="requestType">
12.     <xs:attribute name="command" type="xs:string" use="required" fixed="getamenities"></xs:attribute>
13.   </xs:complexType>
14.   <!-- ##### -->
15.   <xs:group name="loginDetailsGroup">
16.     <xs:sequence>
17.       <xs:element name="username" type="xs:string"></xs:element>
18.       <xs:element name="password" type="passwordType"></xs:element>
19.       <xs:element name="id" type="xs:nonNegativeInteger"></xs:element>
20.       <xs:element name="source" type="sourceType"></xs:element>

```

```

21.         </xs:sequence>
22.     </xs:group>
23.     <!-- ##### -->
24.     <xs:simpleType name="passwordType">
25.         <xs:restriction base="xs:string">
26.             <xs:length value="32"/></xs:length>
27.         </xs:restriction>
28.     </xs:simpleType>
29.     <!-- ##### -->
30.     <xs:simpleType name="sourceType">
31.         <xs:restriction base="xs:string">
32.             <xs:enumeration value="1"/></xs:enumeration>
33.         </xs:restriction>
34.     </xs:simpleType>
35. </xs:schema>

```

## General Response

```

01. <result command="getamenitieids" date="">
02.     <amenities>
03.         <option runno="" value=""></option>
04.     </amenities>
05.     <successful>TRUE</successful>
06. </result>

```

Item	Type	Parent	Description
result	Element	root	The root element.
@date	Attribute	result	The unix timestamp date and time when the result has been provided.
@command	Attribute	result	The command for which the result is shown.
amenities	Element	result	Contains a list with the amenities.
option	Element	amenities	Amenitie name.
@runno	Attribute	option	Running number starting from 0.
@value	Attribute	option	Internal amentie code.
successful	Element	result	Specifies if the request was successfully processed. Possible values: <ul style="list-style-type: none"> <li>TRUE</li> <li>FALSE</li> </ul>

## General Response XSD

getamenitieids\_response.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.     <xs:element name="result" type="resultType"></xs:element>
03.     <xs:complexType name="resultType">
04.         <xs:sequence>
05.             <xs:element name="amenities" type="amenitiesType"></xs:element>
06.             <xs:element name="successful" type="TrueOrFalse"></xs:element>
07.         </xs:sequence>
08.         <xs:attribute name="command" type="xs:string" use="required" fixed="getamenitieids"></xs:attribute>
09.         <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
10.         <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
11.         <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
12.         <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
13.     </xs:complexType>
14.     <xs:simpleType name="dotwIP">
15.         <xs:restriction base="xs:string">
16.             <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[ 1][0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[0-9])" />
17.         </xs:restriction>
18.     </xs:simpleType>
19.     <xs:simpleType name="dotwDateType">
20.         <xs:restriction base="xs:string">
21.             <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*| [0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*" /></xs:pattern>
22.         </xs:restriction>
23.     </xs:simpleType>
24.     <xs:simpleType name="versionType">
25.         <xs:restriction base="xs:string">
26.             <xs:pattern value="[1-9]{1}([0-9])*" /></xs:pattern>
27.         </xs:restriction>
28.     </xs:simpleType>
29.     <xs:complexType name="amenitiesType">
30.         <xs:sequence>

```



```
31.         <xs:element name="option" type="optionType" minOccurs="0" maxOccurs="unbounded"></xs:element>
32.     </xs:sequence>
33.     <xs:attribute name="count" type="xs:integer" use="required"></xs:attribute>
34. </xs:complexType>
35. <xs:simpleType name="TrueOrFalse">
36.     <xs:restriction base="xs:string">
37.         <xs:pattern value="true|false|TRUE|FALSE"></xs:pattern>
38.     </xs:restriction>
39. </xs:simpleType>
40. <xs:complexType name="optionType">
41.     <xs:attribute name="runno" type="xs:integer" use="required"></xs:attribute>
42.     <xs:attribute name="value" type="xs:unsignedInt" use="required"></xs:attribute>
43. </xs:complexType>
44. </xs:schema>
```

Use this command to get a list with all room/apartment amenities.

## General Request

```
01. <customer>
02.     <username></username>
03.     <password></password>
04.     <id></id>
05.     <source>1</source>
06.     <request command="getroomamenitieids"></request>
07. </customer>
```

## General Request XSD

```
01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.     <xs:element name="customer">
03.         <xs:complexType>
04.             <xs:sequence>
05.                 <xs:group ref="loginDetailsGroup"></xs:group>
06.                 <xs:element name="request" type="requestType"></xs:element>
07.             </xs:sequence>
08.         </xs:complexType>
09.     </xs:element>
10.     <!-- ##### -->
11.     <xs:group name="loginDetailsGroup">
12.         <xs:sequence>
13.             <xs:element name="username" type="xs:string"></xs:element>
14.             <xs:element name="password" type="passwordType"></xs:element>
15.             <xs:element name="id" type="xs:nonNegativeInteger"></xs:element>
16.             <xs:element name="source" type="sourceType"></xs:element>
17.         </xs:sequence>
18.     </xs:group>
19.     <!-- ##### -->
20.     <xs:simpleType name="passwordType">
21.         <xs:restriction base="xs:string">
22.             <xs:length value="32"></xs:length>
23.         </xs:restriction>
24.     </xs:simpleType>
25.     <!-- ##### -->
26.     <xs:simpleType name="sourceType">
27.         <xs:restriction base="xs:string">
28.             <xs:enumeration value="1"></xs:enumeration>
29.         </xs:restriction>
30.     </xs:simpleType>
31.     <!-- ##### -->
32.     <xs:complexType name="requestType">
33.         <xs:attribute name="command" type="xs:string" use="required" fixed="getroomamenitieids"></xs:attribute>
34.     </xs:complexType>
35. </xs:schema>
```

## General Response

```
01. <result command="getroomamenitieids" date="">
02.     <amenities>
03.         <option runno="" value=""></option>
04.     </amenities>
05.     <successful>TRUE</successful>
06. </result>
```

Item	Type	Parent	Description
result	Element	root	The root element.

@date	Attribute	result	The unix timestamp date and time when the result has been provided.
@command	Attribute	result	The command for which the result is shown.
amenities	Element	result	Contains a list with the amenities.
option	Element	amenities	Amenitie name.
@runno	Attribute	option	Running number starting from 0.
@value	Attribute	option	Internal amentie code.
successful	Element	result	Specifies if the request was successfully processed. Possible values: <ul style="list-style-type: none"> <li>• TRUE</li> <li>• FALSE</li> </ul>

## General Response XSD

getroomamenitieids\_response.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="result" type="resultType"></xs:element>
03.   <xs:complexType name="resultType">
04.     <xs:sequence>
05.       <xs:element name="amenities" type="amenitiesType"></xs:element>
06.       <xs:element name="successful" type="TrueOrFalse"></xs:element>
07.     </xs:sequence>
08.     <xs:attribute name="command" type="xs:string" use="required" fixed="getroomamenitieids"></xs:attribute>
09.     <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
10.     <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
11.     <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
12.     <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
13.   </xs:complexType>
14.   <xs:simpleType name="dotwIP">
15.     <xs:restriction base="xs:string">
16.       <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1][0-9]{2}|1[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|1[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|1[0-9]{1}|[1-9]|0)" />
17.     </xs:restriction>
18.   </xs:simpleType>
19.   <xs:simpleType name="dotwDateType">
20.     <xs:restriction base="xs:string">
21.       <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*| [0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*"></xs:pattern>
22.     </xs:restriction>
23.   </xs:simpleType>
24.   <xs:simpleType name="versionType">
25.     <xs:restriction base="xs:string">
26.       <xs:pattern value="[1-9]{1}([0-9])*(([0-9])*)"></xs:pattern>
27.     </xs:restriction>
28.   </xs:simpleType>
29.   <xs:complexType name="amenitiesType">
30.     <xs:sequence>
31.       <xs:element name="option" type="optionType" minOccurs="0" maxOccurs="unbounded"></xs:element>
32.     </xs:sequence>
33.     <xs:attribute name="count" type="xs:integer" use="required"></xs:attribute>
34.   </xs:complexType>
35.   <xs:simpleType name="TrueOrFalse">
36.     <xs:restriction base="xs:string">
37.       <xs:pattern value="true|false|TRUE|FALSE"></xs:pattern>
38.     </xs:restriction>
39.   </xs:simpleType>
40.   <xs:complexType name="optionType">
41.     <xs:attribute name="runno" type="xs:integer" use="required"></xs:attribute>
42.     <xs:attribute name="value" type="xs:integer" use="required"></xs:attribute>
43.   </xs:complexType>
44. </xs:schema>

```

Use this command to get a list with all salutations available for the system.

## General Request

```

01. <customer>
02.   <username></username>
03.   <password></password>
04.   <id></id>
05.   <source>1</source>
06. </customer>
07. <request command="getsalutationsids"></request>

```

07. </customer>

General Request XSD

```
01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="customer">
03.     <xs:complexType>
04.       <xs:sequence>
05.         <xs:group ref="loginDetailsGroup"></xs:group>
06.         <xs:element name="request" type="requestType"></xs:element>
07.       </xs:sequence>
08.     </xs:complexType>
09.   </xs:element>
10.   <!-- ##### -->
11.   <xs:complexType name="requestType">
12.     <xs:attribute name="command" type="xs:string" use="required" fixed="getsalutationsids"></xs:attribute>
13.   </xs:complexType>
14.   <!-- ##### -->
15.   <xs:group name="loginDetailsGroup">
16.     <xs:sequence>
17.       <xs:element name="username" type="xs:string"></xs:element>
18.       <xs:element name="password" type="passwordType"></xs:element>
19.       <xs:element name="id" type="xs:nonNegativeInteger"></xs:element>
20.       <xs:element name="source" type="sourceType"></xs:element>
21.     </xs:sequence>
22.   </xs:group>
23.   <!-- ##### -->
24.   <xs:simpleType name="passwordType">
25.     <xs:restriction base="xs:string">
26.       <xs:length value="32"></xs:length>
27.     </xs:restriction>
28.   </xs:simpleType>
29.   <!-- ##### -->
30.   <xs:simpleType name="sourceType">
31.     <xs:restriction base="xs:string">
32.       <xs:enumeration value="1"></xs:enumeration>
33.     </xs:restriction>
34.   </xs:simpleType>
35. </xs:schema>
```

General Response

```
01. <result command="getsalutationsids" date="">
02.   <salutations>
03.     <option runno="" value=""></option>
04.   </salutations>
05.   <successful>TRUE</successful>
06. </result>
```

Item	Type	Parent	Description
result	Element	root	The root element.
@date	Attribute	result	The unix timestamp date and time when the result has been provided.
@command	Attribute	result	The command for which the result is shown.
salutations	Element	result	Contains a list with the salutations.
option	Element	salutations	Salutation name.
@runno	Attribute	option	Running number starting from 0.
@value	Attribute	option	Internal salutation code.
successful	Element	result	Specifies if the request was successfully processed. Possible values: <ul style="list-style-type: none"><li>• TRUE</li><li>• FALSE</li></ul>

General Response XSD

getsalutationsids\_response.xsd

```
01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="result" type="resultType"></xs:element>
03.   <xs:complexType name="resultType">
04.     <xs:sequence>
05.       <xs:element name="salutations" type="salutationsType"></xs:element>
06.       <xs:element name="successful" type="TrueOrFalse"></xs:element>
```

```

07.         </xs:sequence>
08.         <xs:attribute name="command" type="xs:string" use="required" fixed="getsalutationsids"></xs:attribute>
09.         <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
10.         <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
11.         <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
12.         <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
13.     </xs:complexType>
14.     <xs:simpleType name="dotwIP">
15.         <xs:restriction base="xs:string">
16.             <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[ 1][0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[0-9])" />
17.         </xs:restriction>
18.     </xs:simpleType>
19.     <xs:simpleType name="dotwDateType">
20.         <xs:restriction base="xs:string">
21.             <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*|"[0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*"></xs:pattern>
22.         </xs:restriction>
23.     </xs:simpleType>
24.     <xs:simpleType name="versionType">
25.         <xs:restriction base="xs:string">
26.             <xs:pattern value="[1-9]{1}([0-9])*" /></xs:pattern>
27.         </xs:restriction>
28.     </xs:simpleType>
29.     <xs:complexType name="salutationsType">
30.         <xs:sequence>
31.             <xs:element name="option" type="optionType" minOccurs="0" maxOccurs="unbounded"></xs:element>
32.         </xs:sequence>
33.         <xs:attribute name="count" type="xs:integer" use="required"></xs:attribute>
34.     </xs:complexType>
35.     <xs:simpleType name="TrueOrFalse">
36.         <xs:restriction base="xs:string">
37.             <xs:pattern value="true|false|TRUE|FALSE"></xs:pattern>
38.         </xs:restriction>
39.     </xs:simpleType>
40.     <xs:complexType name="optionType">
41.         <xs:attribute name="runno" type="xs:integer" use="required"></xs:attribute>
42.         <xs:attribute name="value" type="xs:unsignedInt" use="required"></xs:attribute>
43.     </xs:complexType>
44. </xs:schema>

```

This command can be used to receive all the available special requests and their corresponding internal codes for each of the following services - hotel, apartment. The service you wish to see the special requests for must be specified through the product element.

## General Request

```

01. <customer>
02.   <username></username>
03.   <password></password>
04.   <id></id>
05.   <source>1</source>
06.   <product>hotel</product>
07.   <request command="getspecialrequestsids"></request>
08. </customer>

```

## General Request XSD

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="customer">
03.     <xs:complexType>
04.       <xs:sequence>
05.         <xs:group ref="loginDetailsGroup"></xs:group>
06.         <xs:element name="product" type="productType"></xs:element>
07.         <xs:element name="request" type="requestType"></xs:element>
08.       </xs:sequence>
09.     </xs:complexType>
10.   </xs:element>
11.   <xs:group name="loginDetailsGroup">
12.     <xs:sequence>
13.       <xs:element name="username" type="xs:string"></xs:element>
14.       <xs:element name="password" type="passwordType"></xs:element>
15.       <xs:element name="id" type="xs:nonNegativeInteger"></xs:element>
16.       <xs:element name="source" type="sourceType"></xs:element>
17.     </xs:sequence>
18.   </xs:group>
19.   <!-- ##### -->
20.   <xs:simpleType name="passwordType">
21.     <xs:restriction base="xs:string">
22.       <xs:length value="32"></xs:length>
23.     </xs:restriction>
24.   </xs:simpleType>
25.   <!-- ##### -->

```

```

26.     <xs:simpleType name="sourceType">
27.         <xs:restriction base="xs:string">
28.             <xs:enumeration value="1"></xs:enumeration>
29.         </xs:restriction>
30.     </xs:simpleType>
31.     <xs:simpleType name="productType">
32.         <xs:restriction base="xs:string">
33.             <xs:pattern value="hotel|apartment"></xs:pattern>
34.         </xs:restriction>
35.     </xs:simpleType>
36.     <!-- ##### -->
37.     <xs:complexType name="requestType">
38.         <xs:attribute name="command" type="xs:string" use="required" fixed="getspecialrequestsids"></xs:attribute>
39.     </xs:complexType>
40. </xs:schema>

```

## General Response

```

01. <result command="getspecialrequestsids" date="">
02.     <specialRequests count="">
03.         <specialRequest runno="" code=""></specialRequest>
04.     </specialRequests>
05.     <successful>TRUE</successful>
06. </result>

```

Item	Type	Parent	Description
<b>result</b>	Element	root	The root element.
@date	Attribute	result	The unix timestamp date and time when the result has been provided.
@command	Attribute	result	The command for which the result is shown.
<b>specialRequests</b>	Element	result	Contains a list with the special requests.
@count	Attribute	specialRequests	Total number of special requests for the indicated service.
<b>specialRequest</b>	Element	specialRequests	Special_request name.
@runno	Attribute	specialRequest	Running number starting from 0.
@code	Attribute	specialRequest	Internal code.
<b>successful</b>	Element	result	Specifies if the request was successfully processed. Possible values: <ul style="list-style-type: none"> <li>• TRUE</li> <li>• FALSE</li> </ul>

## General Response XSD

getspecialrequestsids\_response.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.     <xs:element name="result" type="resultType"></xs:element>
03.     <xs:complexType name="resultType">
04.         <xs:sequence>
05.             <xs:element name="specialRequests" type="specialRequestsType"></xs:element>
06.             <xs:element name="successful" type="TrueOrFalse"></xs:element>
07.         </xs:sequence>
08.         <xs:attribute name="command" type="xs:string" use="required" fixed="getspecialrequestsids"></xs:attribute>
09.         <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
10.         <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
11.         <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
12.         <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
13.     </xs:complexType>
14.     <xs:simpleType name="dotwIP">
15.         <xs:restriction base="xs:string">
16.             <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[ 1][0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[0-9])" >
17.         </xs:restriction>
18.     </xs:simpleType>
19.     <xs:simpleType name="dotwDateType">
20.         <xs:restriction base="xs:string">
21.             <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*|[0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*"></xs:pattern>
22.         </xs:restriction>
23.     </xs:simpleType>
24.     <xs:simpleType name="versionType">
25.         <xs:restriction base="xs:string">
26.             <xs:pattern value="[1-9]{1}([0-9])*.([0-9])*"></xs:pattern>
27.         </xs:restriction>

```

```

28.     </xs:simpleType>
29.     <xs:complexType name="specialRequestsType">
30.         <xs:sequence>
31.             <xs:element name="option" type="optionType" minOccurs="0" maxOccurs="unbounded"></xs:element>
32.         </xs:sequence>
33.         <xs:attribute name="count" type="xs:integer" use="required"></xs:attribute>
34.     </xs:complexType>
35.     <xs:simpleType name="TrueOrFalse">
36.         <xs:restriction base="xs:string">
37.             <xs:pattern value="true|false|TRUE|FALSE"></xs:pattern>
38.         </xs:restriction>
39.     </xs:simpleType>
40.     <xs:complexType name="optionType">
41.         <xs:attribute name="runno" type="xs:integer" use="required"></xs:attribute>
42.         <xs:attribute name="value" type="xs:unsignedInt" use="required"></xs:attribute>
43.     </xs:complexType>
44. </xs:schema>

```

Use this command to get a list with all chains available for the system.

## General Request

```

01.     <customer>
02.         <username></username>
03.         <password></password>
04.         <id></id>
05.         <source>1</source>
06.         <request command="gethotelchainsids"></request>
07.     </customer>

```

## General Request XSD

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.     <xs:element name="customer">
03.         <xs:complexType>
04.             <xs:sequence>
05.                 <xs:group ref="loginDetailsGroup"></xs:group>
06.                 <xs:element name="request" type="requestType"></xs:element>
07.             </xs:sequence>
08.         </xs:complexType>
09.     </xs:element>
10.     <xs:group name="loginDetailsGroup">
11.         <xs:sequence>
12.             <xs:element name="username" type="xs:string"></xs:element>
13.             <xs:element name="password" type="passwordType"></xs:element>
14.             <xs:element name="id" type="xs:nonNegativeInteger"></xs:element>
15.             <xs:element name="source" type="sourceType"></xs:element>
16.         </xs:sequence>
17.     </xs:group>
18.     <!-- ##### -->
19.     <xs:simpleType name="passwordType">
20.         <xs:restriction base="xs:string">
21.             <xs:length value="32"></xs:length>
22.         </xs:restriction>
23.     </xs:simpleType>
24.     <!-- ##### -->
25.     <xs:simpleType name="sourceType">
26.         <xs:restriction base="xs:string">
27.             <xs:enumeration value="1"></xs:enumeration>
28.         </xs:restriction>
29.     </xs:simpleType>
30.     <!-- ##### -->
31.     <xs:complexType name="requestType">
32.         <xs:attribute name="command" type="xs:string" use="required" fixed="gethotelchainsids"></xs:attribute>
33.     </xs:complexType>
34. </xs:schema>

```

## General Response

```

01.     <result command="getchainids" date="">
02.         <chains>
03.             <option runno="" value=""></option>
04.         </chains>
05.         <successful>TRUE</successful>
06.     </result>

```

## General Response XSD

gethotelchainsids\_response.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="result" type="resultType"></xs:element>
03.   <xs:complexType name="resultType">
04.     <xs:sequence>
05.       <xs:element name="chains" type="chainsType"></xs:element>
06.       <xs:element name="successful" type="TrueOrFalse"></xs:element>
07.     </xs:sequence>
08.     <xs:attribute name="command" type="xs:string" use="required" fixed="gethotelchainsids"></xs:attribute>
09.     <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
10.     <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
11.     <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
12.     <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
13.   </xs:complexType>
14.   <xs:simpleType name="dotwIP">
15.     <xs:restriction base="xs:string">
16.       <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[ 1][0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(</xs:pattern>
17.     </xs:restriction>
18.   </xs:simpleType>
19.   <xs:simpleType name="dotwDateType">
20.     <xs:restriction base="xs:string">
21.       <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*|[0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*"></xs:pattern>
22.     </xs:restriction>
23.   </xs:simpleType>
24.   <xs:simpleType name="versionType">
25.     <xs:restriction base="xs:string">
26.       <xs:pattern value="[1-9]{1}([0-9])*"(</xs:pattern>
27.     </xs:restriction>
28.   </xs:simpleType>
29.   <xs:complexType name="chainsType">
30.     <xs:sequence>
31.       <xs:element name="option" type="optionType" minOccurs="0" maxOccurs="unbounded"></xs:element>
32.     </xs:sequence>
33.     <xs:attribute name="count" type="xs:integer" use="required"></xs:attribute>
34.   </xs:complexType>
35.   <xs:simpleType name="TrueOrFalse">
36.     <xs:restriction base="xs:string">
37.       <xs:pattern value="true|false|TRUE|FALSE"></xs:pattern>
38.     </xs:restriction>
39.   </xs:simpleType>
40.   <xs:complexType name="optionType">
41.     <xs:attribute name="runno" type="xs:integer" use="required"></xs:attribute>
42.     <xs:attribute name="value" type="xs:unsignedInt" use="required"></xs:attribute>
43.   </xs:complexType>
44. </xs:schema>

```

Use this command to get a list with all hotel classification available for the system.

## General Request

```

01. <customer>
02.   <username></username>
03.   <password></password>
04.   <id></id>
05.   <source>1</source>
06.   <request command="gethotelclassificationids"></request>
07. </customer>

```

## General Request XSD

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="customer">
03.     <xs:complexType>
04.       <xs:sequence>
05.         <xs:group ref="loginDetailsGroup">
06.           <xs:element name="request" type="requestType"></xs:element>
07.         </xs:group>
08.       </xs:sequence>
09.     </xs:complexType>
10.   </xs:element>
11.   <!-- ##### -->
12.   <xs:group name="loginDetailsGroup">
13.     <xs:sequence>
14.       <xs:element name="username" type="xs:string"></xs:element>
15.       <xs:element name="password" type="passwordType"></xs:element>
16.       <xs:element name="id" type="xs:nonNegativeInteger"></xs:element>
17.       <xs:element name="source" type="sourceType"></xs:element>
18.     </xs:sequence>
19.   </xs:group>
20.   <!-- ##### -->
21.   <xs:simpleType name="passwordType">

```

```

22.         <xs:restriction base="xs:string">
23.             <xs:length value="32"></xs:length>
24.         </xs:restriction>
25.     </xs:simpletype>
26.     <!-- ##### -->
27.     <xs:simpletype name="sourceType">
28.         <xs:restriction base="xs:string">
29.             <xs:enumeration value="1"></xs:enumeration>
30.         </xs:restriction>
31.     </xs:simpletype>
32.     <!-- ##### -->
33.     <xs:complexType name="requestType">
34.         <xs:attribute fixed="gethotelclassificationids" name="command" type="xs:string" use="required">
35.         </xs:complexType>
36. </xs:schema>

```

## General Response

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="customer">
03.     <xs:complexType>
04.       <xs:sequence>
05.         <xs:group ref="loginDetailsGroup">
06.           <xs:element name="request" type="requestType"></xs:element>
07.         </xs:group>
08.       </xs:sequence>
09.     </xs:complexType>
10.   </xs:element>
11.   <!-- ##### -->
12.   <xs:group name="loginDetailsGroup">
13.     <xs:sequence>
14.       <xs:element name="username" type="xs:string"></xs:element>
15.       <xs:element name="password" type="passwordType"></xs:element>
16.       <xs:element name="id" type="xs:nonNegativeInteger"></xs:element>
17.       <xs:element name="source" type="sourceType"></xs:element>
18.     </xs:sequence>
19.   </xs:group>
20.   <!-- ##### -->
21.   <xs:simpletype name="passwordType">
22.     <xs:restriction base="xs:string">
23.       <xs:length value="32"></xs:length>
24.     </xs:restriction>
25.   </xs:simpletype>
26.   <!-- ##### -->
27.   <xs:simpletype name="sourceType">
28.     <xs:restriction base="xs:string">
29.       <xs:enumeration value="1"></xs:enumeration>
30.     </xs:restriction>
31.   </xs:simpletype>
32.   <!-- ##### -->
33.   <xs:complexType name="requestType">
34.     <xs:attribute fixed="gethotelclassificationids" name="command" type="xs:string" use="required">
35.   </xs:attribute>
36.   </xs:complexType>
37. </xs:schema>

```

## General Response XSD

gethotelclassificationids\_response.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="result" type="resultType"></xs:element>
03.   <xs:complexType name="resultType">
04.     <xs:sequence>
05.       <xs:element name="classification" type="classificationType"></xs:element>
06.       <xs:element name="successful" type="TrueOrFalse"></xs:element>
07.     </xs:sequence>
08.     <xs:attribute name="command" type="xs:string" use="required" fixed="gethotelclassification">
09. </xs:attribute>
10.     <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
11.     <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
12.     <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
13.     <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
14.   </xs:complexType>
15.   <xs:simpleType name="dotwIP">
16.     <xs:restriction base="xs:string">
17.       <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[ 1][0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-
18. 4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[0-9])" >
19. </xs:pattern>
20.     </xs:restriction>
21.   </xs:simpleType>
22.   <xs:simpleType name="dotwDateType">
23.     <xs:restriction base="xs:string">
24.       <xs:pattern value="(0-9){10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*| [0-9]
25. {4,4}/[0-9]{1,2}/[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*" ></xs:pattern>
26.     </xs:restriction>
27.   </xs:simpleType>
28.   <xs:simpleType name="versionType">
29.     <xs:restriction base="xs:string">
30.       <xs:pattern value="[1-9]{1}([0-9])*.([0-9])*" ></xs:pattern>

```



```

27.         </xs:restriction>
28.     </xs:simpleType>
29.     <xs:complexType name="classificationType">
30.         <xs:sequence>
31.             <xs:element name="option" type="optionType" minOccurs="0" maxOccurs="unbounded"></xs:element>
32.         </xs:sequence>
33.         <xs:attribute name="count" type="xs:integer" use="required"></xs:attribute>
34.     </xs:complexType>
35.     <xs:simpleType name="TrueOrFalse">
36.         <xs:restriction base="xs:string">
37.             <xs:pattern value="true|false|TRUE|FALSE"></xs:pattern>
38.         </xs:restriction>
39.     </xs:simpleType>
40.     <xs:complexType name="optionType">
41.         <xs:attribute name="runno" type="xs:integer" use="required"></xs:attribute>
42.         <xs:attribute name="value" type="xs:unsignedInt" use="required"></xs:attribute>
43.     </xs:complexType>
44. </xs:schema>

```

Use this command to get a list with all apartment classification available for the system.

## General Request

```

01. <customer>
02.   <username></username>
03.   <password></password>
04.   <id></id>
05.   <source>1</source>
06.   <request command="getapartmentclassificationids"></request>
07. </customer>

```

## General Request XSD

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="customer">
03.     <xs:complexType>
04.       <xs:sequence>
05.         <xs:group ref="loginDetailsGroup"></xs:group>
06.         <xs:element name="request" type="requestType"></xs:element>
07.       </xs:sequence>
08.     </xs:complexType>
09.   </xs:element>
10.   <!-- ##### -->
11.   <xs:group name="loginDetailsGroup">
12.     <xs:sequence>
13.       <xs:element name="username" type="xs:string"></xs:element>
14.       <xs:element name="password" type="passwordType"></xs:element>
15.       <xs:element name="id" type="xs:nonNegativeInteger"></xs:element>
16.       <xs:element name="source" type="sourceType"></xs:element>
17.     </xs:sequence>
18.   </xs:group>
19.   <!-- ##### -->
20.   <xs:simpleType name="passwordType">
21.     <xs:restriction base="xs:string">
22.       <xs:length value="32"></xs:length>
23.     </xs:restriction>
24.   </xs:simpleType>
25.   <!-- ##### -->
26.   <xs:simpleType name="sourceType">
27.     <xs:restriction base="xs:string">
28.       <xs:enumeration value="1"></xs:enumeration>
29.     </xs:restriction>
30.   </xs:simpleType>
31.   <!-- ##### -->
32.   <xs:complexType name="requestType">
33.     <xs:attribute name="command" type="xs:string" use="required" fixed="getapartmentclasificationids">
34.   </xs:attribute>
35.   </xs:complexType>
36. </xs:schema>

```

## General Response

```

01. <result command="getapartmentclassificationids" date="">
02.   <classification>
03.     <option runno="" value=""></option>
04.   </classification>
05.   <successful>TRUE</successful>
06. </result>

```

## General Response XSD

## getapartmentclassificationids\_response.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="result" type="resultType"></xs:element>
03.   <xs:complexType name="resultType">
04.     <xs:sequence>
05.       <xs:element name="classification" type="classificationType"></xs:element>
06.       <xs:element name="successful" type="TrueOrFalse"></xs:element>
07.     </xs:sequence>
08.     <xs:attribute name="command" type="xs:string" use="required" fixed="getapartmentclassificationids">
</xs:attribute>
09.     <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
10.     <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
11.     <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
12.     <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
13.   </xs:complexType>
14.   <xs:simpleType name="dotwIP">
15.     <xs:restriction base="xs:string">
16.       <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[ 1][0-9]{2}|1[0-9]{1}[0-9]{1}|1[0-9]{0}).(25[0-5]|2[0-
4][0-9]|[0-1]{1}[0-9]{2}|1[0-9]{1}[0-9]{1}|1[0-9]{0}).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|1[0-9]{1}[0-9]{1}|[0-9])" >
</xs:pattern>
17.     </xs:restriction>
18.   </xs:simpleType>
19.   <xs:simpleType name="dotwDateType">
20.     <xs:restriction base="xs:string">
21.       <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*[0-9]
{4,4}/[0-9]{1,2}/[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*"></xs:pattern>
22.     </xs:restriction>
23.   </xs:simpleType>
24.   <xs:simpleType name="versionType">
25.     <xs:restriction base="xs:string">
26.       <xs:pattern value="[1-9]{1}([0-9])*.([0-9])*"></xs:pattern>
27.     </xs:restriction>
28.   </xs:simpleType>
29.   <xs:complexType name="classificationType">
30.     <xs:sequence>
31.       <xs:element name="option" type="optionType" minOccurs="0" maxOccurs="unbounded"></xs:element>
32.     </xs:sequence>
33.     <xs:attribute name="count" type="xs:integer" use="required"></xs:attribute>
34.   </xs:complexType>
35.   <xs:simpleType name="TrueOrFalse">
36.     <xs:restriction base="xs:string">
37.       <xs:pattern value="true|false|TRUE|FALSE"></xs:pattern>
38.     </xs:restriction>
39.   </xs:simpleType>
40.   <xs:complexType name="optionType">
41.     <xs:attribute name="runno" type="xs:integer" use="required"></xs:attribute>
42.     <xs:attribute name="value" type="xs:unsignedInt" use="required"></xs:attribute>
43.   </xs:complexType>
44. </xs:schema>

```

Use this command to get a list with all the rate bases available in the system. These are needed in the search, block rooms and confirm booking processes.

## General Request

```

01. <customer>
02.   <username></username>
03.   <password></password>
04.   <id></id>
05.   <source>1</source>
06.   <request command="getratebasisids"></request>
07. </customer>

```

## General Request XSD

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="customer">
03.     <xs:complexType>
04.       <xs:sequence>
05.         <xs:group ref="loginDetailsGroup"></xs:group>
06.         <xs:element name="request" type="requestType"></xs:element>
07.       </xs:sequence>
08.     </xs:complexType>
09.   </xs:element>
10.   <!-- ##### -->
11.   <xs:group name="loginDetailsGroup">
12.     <xs:sequence>
13.       <xs:element name="username" type="xs:string"></xs:element>
14.       <xs:element name="password" type="passwordType"></xs:element>
15.       <xs:element name="id" type="xs:nonNegativeInteger"></xs:element>
16.       <xs:element name="source" type="sourceType"></xs:element>

```

```

17.         </xs:sequence>
18.     </xs:group>
19.     <!-- ##### -->
20.     <xs:simpleType name="passwordType">
21.         <xs:restriction base="xs:string">
22.             <xs:length value="32"/></xs:length>
23.         </xs:restriction>
24.     </xs:simpleType>
25.     <!-- ##### -->
26.     <xs:simpleType name="sourceType">
27.         <xs:restriction base="xs:string">
28.             <xs:enumeration value="1"/></xs:enumeration>
29.         </xs:restriction>
30.     </xs:simpleType>
31.     <!-- ##### -->
32.     <xs:complexType name="requestType">
33.         <xs:attribute name="command" type="xs:string" use="required" fixed="getratebasisids"/></xs:attribute>
34.     </xs:complexType>
35. </xs:schema>

```

## General Response

```

01. <result command="getratebasisids" date="">
02.     <ratebasis>
03.         <option runno="" value=""></option>
04.     </ratebasis>
05.     <successful>TRUE</successful>
06. </result>

```

## General Response XSD

getratebasisids\_response.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.     <xs:element name="result" type="resultType"/></xs:element>
03.     <xs:complexType name="resultType">
04.         <xs:sequence>
05.             <xs:element name="ratebasis" type="ratebasisType"/></xs:element>
06.             <xs:element name="successful" type="TrueOrFalse"/></xs:element>
07.         </xs:sequence>
08.         <xs:attribute name="command" type="xs:string" use="required" fixed="getratebasisids"/></xs:attribute>
09.         <xs:attribute name="tID" type="xs:integer" use="required"/></xs:attribute>
10.         <xs:attribute name="ip" type="dotwIP" use="required"/></xs:attribute>
11.         <xs:attribute name="date" type="dotwDateType" use="required"/></xs:attribute>
12.         <xs:attribute name="version" type="versionType" use="required"/></xs:attribute>
13.     </xs:complexType>
14.     <xs:simpleType name="dotwIP">
15.         <xs:restriction base="xs:string">
16.             <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9][0-9]{2}|1[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[0-9])" />
17.         </xs:restriction>
18.     </xs:simpleType>
19.     <xs:simpleType name="dotwDateType">
20.         <xs:restriction base="xs:string">
21.             <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*|[0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*|[0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*" /></xs:pattern>
22.         </xs:restriction>
23.     </xs:simpleType>
24.     <xs:simpleType name="versionType">
25.         <xs:restriction base="xs:string">
26.             <xs:pattern value="[1-9]{1}([0-9])*.([0-9])*" /></xs:pattern>
27.         </xs:restriction>
28.     </xs:simpleType>
29.     <xs:complexType name="ratebasisType">
30.         <xs:sequence>
31.             <xs:element name="option" type="optionType" minOccurs="0" maxOccurs="unbounded"/></xs:element>
32.         </xs:sequence>
33.         <xs:attribute name="count" type="xs:integer" use="required"/></xs:attribute>
34.     </xs:complexType>
35.     <xs:simpleType name="TrueOrFalse">
36.         <xs:restriction base="xs:string">
37.             <xs:pattern value="true|false|TRUE|FALSE" /></xs:pattern>
38.         </xs:restriction>
39.     </xs:simpleType>
40.     <xs:complexType name="optionType">
41.         <xs:attribute name="runno" type="xs:integer" use="required"/></xs:attribute>
42.         <xs:attribute name="value" type="xs:integer" use="required"/></xs:attribute>
43.     </xs:complexType>
44. </xs:schema>

```

Use this command to get a list with all transfer starting times available for the system.

### General Request

```
01. <customer>
02.   <username></username>
03.   <password></password>
04.   <id></id>
05.   <source>1</source>
06.   <request command="gettransferstartingtimeids"></request>
07. </customer>
```

General Response

```
01. <result command="gettransferstartingtimeids" date="">
02.   <startingTime>
03.     <option runno="" value=""></option>
04.   </startingTime>
05.   <successful>TRUE</successful>
06. </result>
```

Item	Type	Parent	Description
result	Element	root	The root element.
@date	Attribute	result	The unix timestamp date and time when the result has been provided.
@command	Attribute	result	The command for which the result is shown.
startingTime	Element	result	Contains a list with the starting times.
option	Element	startingTime	Starting time.
@runno	Attribute	option	Running number starting from 0.
@value	Attribute	option	Internal starting time code.
successful	Element	result	Specifies if the request was successfully processed. Possible values: <ul style="list-style-type: none"><li>• TRUE</li><li>• FALSE</li></ul>

Use this command to get a list with all transfer pick-up/drop-off locations.

General Request

```
01. <customer>
02.   <username></username>
03.   <password></password>
04.   <id></id>
05.   <source>1</source>
06.   <request command="gettransferpickupdropofflocationsids"></request>
07. </customer>
```

General Response

```
01. <result command="gettransferpickupdropofflocationsids" date="">
02.   <pickUpDropOffLocations>
03.     <option runno="" value=""></option>
04.   </pickUpDropOffLocations>
05.   <successful>TRUE</successful>
06. </result>
```

Item	Type	Parent	Description
result	Element	root	The root element.
@date	Attribute	result	The unix timestamp date and time when the result has been provided.
@command	Attribute	result	The command for which the result is shown.

<b>pickUpDropOffLocations</b>	Element	result	Contains a list with pick-up/drop-off locations.
<b>option</b>	Element	pickUpDropOffLocations	Pick-up/drop-off location.
@runno	Attribute	option	Running number starting from 0.
@value	Attribute	option	Internal pick-up/drop-off location code.
<b>successful</b>	Element	result	Specifies if the request was successfully processed. Possible values: <ul style="list-style-type: none"> <li>• TRUE</li> <li>• FALSE</li> </ul>

This command is used to get a complete list with all the locations in a certain city. You can use the location internal code to filter the hotels you want to be returned by the system.

## General Request

```

01. <customer>
02.   <username>username</username>
03.   <password>md5(password)</password>
04.   <id>company code</id>
05.   <source>1</source>
06.   <product>hotel</product>
07.   <request command="getLocationids">
08.     <return>
09.       <filters>
10.         <citycode></citycode>
11.       </filters>
12.     </return>
13.   </request>
14. </customer>

```

Item	Type	Parent	Description	Required
<b>return</b>	Element	root	Groups elements that control the response.	Yes.
<b>filters</b>	Element	result	Groups the filter that will be applied.	Yes.
<b>cityCode</b>	Element	filters	For filtering and returning only location in the specified city. This should be a city internal code.	Yes.

## General Request XSD

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="customer">
03.     <xs:complexType>
04.       <xs:sequence>
05.         <xs:group ref="loginDetailsGroup"></xs:group>
06.         <xs:element name="product" type="productType"></xs:element>
07.         <xs:element name="request" type="requestType"></xs:element>
08.       </xs:sequence>
09.     </xs:complexType>
10.   </xs:element>
11.   <!-- ##### -->
12.   <xs:group name="loginDetailsGroup">
13.     <xs:sequence>
14.       <xs:element name="username" type="xs:string"></xs:element>
15.       <xs:element name="password" type="passwordType"></xs:element>
16.       <xs:element name="id" type="xs:nonNegativeInteger"></xs:element>
17.       <xs:element name="source" type="sourceType"></xs:element>
18.     </xs:sequence>
19.   </xs:group>
20.   <!-- ##### -->
21.   <xs:simpleType name="passwordType">
22.     <xs:restriction base="xs:string">
23.       <xs:length value="32"></xs:length>
24.     </xs:restriction>
25.   </xs:simpleType>
26.   <!-- ##### -->
27.   <xs:simpleType name="sourceType">
28.     <xs:restriction base="xs:string">

```

```

29.         <xs:enumeration value="1"></xs:enumeration>
30.     </xs:restriction>
31. </xs:simpleType>
32. <!-- ##### -->
33. <xs:simpleType name="productType">
34.     <xs:restriction base="xs:string">
35.         <xs:pattern value="hotel|apartment"></xs:pattern>
36.     </xs:restriction>
37. </xs:simpleType>
38. <!-- ##### -->
39. <xs:complexType name="requestType">
40.     <xs:sequence>
41.         <xs:element name="return" type="returnType" minOccurs="0"></xs:element>
42.     </xs:sequence>
43.     <xs:attribute name="command" type="xs:string" use="required" fixed="getlocationids"></xs:attribute>
44. </xs:complexType>
45. <!-- ##### -->
46. <xs:complexType name="returnType">
47.     <xs:sequence>
48.         <xs:element name="filters" type="filtersType"></xs:element>
49.     </xs:sequence>
50. </xs:complexType>
51. <!-- ##### -->
52. <xs:complexType name="filtersType">
53.     <xs:sequence>
54.         <xs:element name="cityCode">
55.             <xs:simpleType>
56.                 <xs:restriction base="xs:nonNegativeInteger">
57.                     <xs:pattern value="([0-9])+"></xs:pattern>
58.                 </xs:restriction>
59.             </xs:simpleType>
60.         </xs:element>
61.     </xs:sequence>
62. </xs:complexType>
63. </xs:schema>

```

## General Response

```

01. <result date="" command="getlocationids" ip="">
02.     <locations count="" cityid="" cityname="">
03.         <location runno="" id=""></location>
04.     </locations>
05. </result>

```

Item	Type	Parent	Description
<b>result</b>	Element	root	The root element.
@date	Attribute	result	The unix timestamp date and time when the result has been provided.
@command	Attribute	result	The command for which the result is shown.
<b>locations</b>	Element	result	Contains a list with all the locations.
@count	Attribute	locations	Total number of locations.
@cityid	Attribute	locations	City internal code for the locations
@cityname	Attribute	locations	City name for the locations
<b>location</b>	Element	locations	Location name.
@runno	Attribute	location	Running number starting from 0.
@id	Attribute	location	Internal code for this location.

## General Response XSD

getlocationids\_response.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.     <xs:element name="result" type="resultType"></xs:element>
03.     <xs:complexType name="resultType">
04.         <xs:sequence>
05.             <xs:element name="locations" type="locationsType"></xs:element>
06.             <xs:element name="successful" type="TrueOrFalse"></xs:element>
07.         </xs:sequence>
08.         <xs:attribute name="command" type="xs:string" use="required" fixed="getlocationids"></xs:attribute>
09.         <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
10.         <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
11.         <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
12.         <xs:attribute name="version" type="versionType" use="required"></xs:attribute>

```

```

13.     </xs:complexType>
14.     <xs:simpleType name="dotwIP">
15.         <xs:restriction base="xs:string">
16.             <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[ 1][0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[0-9])" />
17.         </xs:restriction>
18.     </xs:simpleType>
19.     <xs:simpleType name="dotwDateType">
20.         <xs:restriction base="xs:string">
21.             <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*|([0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2})(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*"></xs:pattern>
22.         </xs:restriction>
23.     </xs:simpleType>
24.     <xs:simpleType name="versionType">
25.         <xs:restriction base="xs:string">
26.             <xs:pattern value="[1-9]{1}([0-9])*" /></xs:pattern>
27.         </xs:restriction>
28.     </xs:simpleType>
29.     <xs:complexType name="locationsType">
30.         <xs:sequence>
31.             <xs:element name="location" type="locationType" minOccurs="0" maxOccurs="unbounded"></xs:element>
32.         </xs:sequence>
33.         <xs:attribute name="count" type="xs:integer" use="required"></xs:attribute>
34.         <xs:attribute name="cityId" type="xs:integer" use="required"></xs:attribute>
35.         <xs:attribute name="cityName" type="xs:string" use="required"></xs:attribute>
36.     </xs:complexType>
37.     <xs:simpleType name="TrueOrFalse">
38.         <xs:restriction base="xs:string">
39.             <xs:pattern value="true|false|TRUE|FALSE"></xs:pattern>
40.         </xs:restriction>
41.     </xs:simpleType>
42.     <xs:complexType name="locationType">
43.         <xs:attribute name="runno" type="xs:integer" use="required"></xs:attribute>
44.         <xs:attribute name="id" type="xs:integer" use="required"></xs:attribute>
45.     </xs:complexType>
46. </xs:schema>

```

This command is used to get a complete list with all details regarding the info types required to book hotels with additional services.

### General Request

```

01. <customer>
02.   <username></username>
03.   <password></password>
04.   <id></id>
05.   <source>1</source>
06.   <request command="getrelatedinfotypeids"></request>
07. </customer>

```

### General Request XSD

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:include schemaLocation="loginDetails.xsd"></xs:include>
03.   <xs:element name="customer">
04.     <xs:complexType>
05.       <xs:sequence>
06.         <xs:group ref="loginDetailsGroup"></xs:group>
07.         <xs:element name="request" type="requestType"></xs:element>
08.       </xs:sequence>
09.     </xs:complexType>
10.   </xs:element>
11.   <!-- ##### -->
12.   <xs:complexType name="requestType">
13.     <xs:attribute name="command" type="xs:string" use="required" fixed="getrelatedinfotypeids"></xs:attribute>
14.   </xs:complexType>
15.   <!-- ##### -->
16.   <xs:group name="loginDetailsGroup">
17.     <xs:sequence>
18.       <xs:element name="username" type="xs:string"></xs:element>
19.       <xs:element name="password" type="passwordType"></xs:element>
20.       <xs:element name="id" type="xs:nonNegativeInteger"></xs:element>
21.       <xs:element name="source" type="sourceType"></xs:element>
22.     </xs:sequence>
23.   </xs:group>
24.   <!-- ##### -->
25.   <xs:simpleType name="passwordType">
26.     <xs:restriction base="xs:string">
27.       <xs:length value="32"></xs:length>
28.     </xs:restriction>
29.   </xs:simpleType>
30.   <!-- ##### -->
31.   <xs:simpleType name="sourceType">
32.     <xs:restriction base="xs:string">
33.       <xs:enumeration value="1"></xs:enumeration>
34.     </xs:restriction>
35.   </xs:simpleType>

```

36. `</xs:schema>`

## General Response

```

01. <result command="getrelatedinfotypeids" date="">
02.   <infoTypes count="">
03.     <option runno="" value=""></option>
04.   </infoTypes>
05.   <successful>TRUE</successful>
06. </result>

```

Item	Type	Parent	Description
<b>result</b>	Element	root	The root element.
@date	Attribute	result	The unix timestamp date and time when the result has been provided.
@command	Attribute	result	The command for which the result is shown.
<b>infoTypes</b>	Element	result	Contains a list with all the possible answer types (related info types).
<b>option</b>	Element	infoTypes	Contains the full name of the answer type.
@runno	Attribute	option	Running number starting from 0.
@value	Attribute	option	Internal code for this answer type (related info type).
<b>successful</b>	Element	result	Specifies if the request was successfully processed. Possible values: <ul style="list-style-type: none"> <li>• TRUE</li> <li>• FALSE</li> </ul>

## General Response XSD

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="result" type="resultType"></xs:element>
03.   <xs:complexType name="resultType">
04.     <xs:sequence>
05.       <xs:element name="infoTypes" type="infoTypesType"></xs:element>
06.       <xs:element name="successful" type="TrueOrFalse"></xs:element>
07.     </xs:sequence>
08.     <xs:attribute name="command" type="xs:string" use="required" fixed="getrelatedinfotypeids"></xs:attribute>
09.     <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
10.     <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
11.     <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
12.     <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
13.   </xs:complexType>
14.   <xs:simpleType name="dotwIP">
15.     <xs:restriction base="xs:string">
16.       <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[ ]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[0-9])" ></xs:pattern>
17.     </xs:restriction>
18.   </xs:simpleType>
19.   <xs:simpleType name="dotwDateType">
20.     <xs:restriction base="xs:string">
21.       <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}([0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*|[0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2}([0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*" ></xs:pattern>
22.     </xs:restriction>
23.   </xs:simpleType>
24.   <xs:simpleType name="versionType">
25.     <xs:restriction base="xs:string">
26.       <xs:pattern value="[1-9]{1}([0-9])*" ></xs:pattern>
27.     </xs:restriction>
28.   </xs:simpleType>
29.   <xs:complexType name="infoTypesType">
30.     <xs:sequence>
31.       <xs:element name="option" type="optionType" minOccurs="0" maxOccurs="unbounded"></xs:element>
32.     </xs:sequence>
33.     <xs:attribute name="count" type="xs:integer" use="required"></xs:attribute>
34.   </xs:complexType>
35.   <xs:simpleType name="TrueOrFalse">
36.     <xs:restriction base="xs:string">
37.       <xs:pattern value="true|false|TRUE|FALSE"></xs:pattern>
38.     </xs:restriction>
39.   </xs:simpleType>
40.   <xs:complexType name="optionType">
41.     <xs:attribute name="runno" type="xs:integer" use="required"></xs:attribute>
42.     <xs:attribute name="value" type="xs:unsignedInt" use="required"></xs:attribute>
43.   </xs:complexType>
44. </xs:schema>

```



Use this command to get a list with all airlines ids available in the system. General Request

```
01. <customer>
02.   <username></username>
03.   <password></password>
04.   <id></id>
05.   <source>1</source>
06.   <request command="getairlinesids"></request>
07. </customer>
```

### General Request XSD

```
01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="customer">
03.     <xs:complexType>
04.       <xs:sequence>
05.         <xs:group ref="loginDetailsGroup"></xs:group>
06.         <xs:element name="request" type="requestType"></xs:element>
07.       </xs:sequence>
08.     </xs:complexType>
09.   </xs:element>
10.   <xs:group name="loginDetailsGroup">
11.     <xs:sequence>
12.       <xs:element name="username" type="xs:string"></xs:element>
13.       <xs:element name="password" type="passwordType"></xs:element>
14.       <xs:element name="id" type="xs:nonNegativeInteger"></xs:element>
15.       <xs:element name="source" type="sourceType"></xs:element>
16.     </xs:sequence>
17.   </xs:group>
18.   <!-- ##### -->
19.   <xs:simpleType name="passwordType">
20.     <xs:restriction base="xs:string">
21.       <xs:length value="32"></xs:length>
22.     </xs:restriction>
23.   </xs:simpleType>
24.   <!-- ##### -->
25.   <xs:simpleType name="sourceType">
26.     <xs:restriction base="xs:string">
27.       <xs:enumeration value="1"></xs:enumeration>
28.     </xs:restriction>
29.   </xs:simpleType>
30.   <!-- ##### -->
31.   <xs:complexType name="requestType">
32.     <xs:attribute name="command" type="xs:string" use="required" fixed="getairlinesids"></xs:attribute>
33.     <xs:attribute name="debug" type="xs:integer" use="optional"></xs:attribute>
34.   </xs:complexType>
35. </xs:schema>
```

### General Response

```
01. <p>
02.   <result command="getairlinesids" date="">
03.     <successful>
04.       <result command="getairlinesids" date="">
05.         <br></br>
06.         <chains>
07.           <br></br>
08.           <option runno="" value=""></option>
09.         <br></br>
10.         </chains>
11.         <br></br>
12.         <successful>TRUE</successful>
13.         <br></br>
14.       </result>
15.     </successful>
16.   </result>
17. </p>
```

### General Response XSD

```
01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="result" type="resultType"></xs:element>
03.   <xs:complexType name="resultType">
04.     <xs:sequence>
05.       <xs:element name="airlines" type="airlinesType"></xs:element>
06.       <xs:element name="successful" type="TrueOrFalse"></xs:element>
07.     </xs:sequence>
08.     <xs:attribute name="command" type="xs:string" use="required" fixed="getairlinesids"></xs:attribute>
09.     <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
10.     <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
11.     <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
12.     <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
13.   </xs:complexType>
14.   <xs:simpleType name="dotwIP">
```

```

15.         <xs:restriction base="xs:string">
16.             <xs:pattern value="(25[0-5]|2[0-4][0-9]|0-1){1}[0-9]{2}|[ -5]|2[0-4][0-9]|0-1){1}[0-9]{2}|[1-9]{1}[0-
9] {1}|[1-9]|0)\.(25[0-5]|2[0-4][0-9]|0-1){1}[0-9]{2}|[1-9]{1}[0-9]{1}|[0-9])" ></xs:pattern>
17.         </xs:restriction>
18.     </xs:simpleType>
19.     <xs:simpleType name="dotwDateType">
20.         <xs:restriction base="xs:string">
21.             <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}(\s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*|[0-9]
{4,4}/[0-9]{1,2}/[0-9]{1,2}(\s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*" ></xs:pattern>
22.         </xs:restriction>
23.     </xs:simpleType>
24.     <xs:simpleType name="versionType">
25.         <xs:restriction base="xs:string">
26.             <xs:pattern value="[1-9]{1}([0-9])*\.([0-9])*" ></xs:pattern>
27.         </xs:restriction>
28.     </xs:simpleType>
29.     <xs:complexType name="airlinesType">
30.         <xs:sequence>
31.             <xs:element name="option" type="optionType" minOccurs="0" maxOccurs="unbounded" ></xs:element>
32.         </xs:sequence>
33.         <xs:attribute name="count" type="xs:integer" use="required" ></xs:attribute>
34.     </xs:complexType>
35.     <xs:simpleType name="TrueOrFalse">
36.         <xs:restriction base="xs:string">
37.             <xs:pattern value="true|false|TRUE|FALSE" ></xs:pattern>
38.         </xs:restriction>
39.     </xs:simpleType>
40.     <xs:complexType name="optionType">
41.         <xs:simpleContent>
42.             <xs:extension base="xs:string">
43.                 <xs:attribute name="runno" type="xs:integer" use="required" ></xs:attribute>
44.                 <xs:attribute name="value" type="xs:unsignedInt" use="required" ></xs:attribute>
45.             </xs:extension>
46.         </xs:simpleContent>
47.     </xs:complexType>
48. </xs:schema>

```

## Transfers Comm. Structure:

This section provides you with details of all methods for communication with DOTWconnect server to process your Transfers Reservations. The section has the following methods and each method is explained in detail with their corresponding request and response formats. **Process flow diagram**

## Transfers Comm. Structure:

This section provides you with details of all methods for communication with DOTWconnect server to process your Transfers Reservations. The section has the following methods and each method is explained in detail with their corresponding request and response formats.

### Process flow diagram

DOTWconnect server has the following XML requests commands for Transfers:

- searchtransfers
- gettransfers
- getlefttosell
- savebooking
- confirmbooking
- getbookingdetails
- cancelbooking
- bookitinerary
- deleteitinerary

## General Request

Based on the search criteria provided in the XML request, this method returns the Transfer details which includes starting price per Transfer and availability based on the Transfer date, city, passenger and luggage capacity. In addition to the Authentication data the elements required to be passed for this method are defined in the following table. The method also has provisions to sort and filter the response data based on specific criteria. The request is composed of two separate sections which are **bookingdetails** and **return**. The **bookingdetails** element data contains the transfer date, starting time, pickup drop off points, number of passengers including adult and child along with the ages, currency code in which the prices are returned. The

**return** parameter contains details about sorting, filtering and Transfer information that the DOTWconnect system returns for each Transfer in the response list.

```

01. <p>
02.   <customer>
03.     <username>username</username>
04.     <password>password</password>
05.     <id>company Code</id>
06.     <source></source>
07.     <product>transfer</product>
08.     <request command="searchtransfers">
09.       <bookingDetails>
10.         <fromDate></fromDate>
11.         <startingTime></startingTime>
12.         <pickUpFrom></pickUpFrom>
13.         <dropOffTo></dropOffTo>
14.         <currency></currency>
15.         <transfers>
16.           <adults>adults</adults>
17.           <children no="">
18.             <child runno="">child age</child>
19.           </children>
20.         </transfers>
21.       </bookingDetails>
22.     </request>
23.     <filters xmlns:a="http://us.dotwconnect.com/xsd/atomicCondition_transfers" xmlns:c="http://us.dotwconnect
.com/xsd/complexCondition_transfers">
24.       <city></city>
25.       <c:condition></c:condition>
26.       <showFilters>true</showFilters>
27.     </filters>
28.     <fields>
29.       <field>description</field>
30.       <field>transferName</field>
31.       <field>images</field>
32.       <field>language</field>
33.       <field>optionalLanguages</field>
34.       <field>meetingPoint</field>
35.       <field>duration</field>
36.       <field>supplierPolicy</field>
37.       <field>pickUp</field>
38.       <field>dropOff</field>
39.       <field>cityName</field>
40.       <field>cityCode</field>
41.       <field>stateName</field>
42.       <field>stateCode</field>
43.       <field>countryName</field>
44.       <field>countryCode</field>
45.       <field>transferType</field>
46.       <field>ac</field>
47.       <field>language</field>
48.     </fields>
49.     <resultsPerPage></resultsPerPage>
50.     <page></page>
51.   </customer>
52. </p>
53.
54.

```

Item	Type	Parent	Description	Required
<b>bookingDetails</b>	Element	request	Contains transfer date, time, pickup dropoff points, passenger details and the currency code in which the prices are returned.	Yes
<b>fromDate</b>	element	bookingDetails	The Date for which transfer is required	Yes
<b>Currency Check the order of this element this should be after drop off</b>	Element	bookingDetails	Internal code of the currency in which the customer will see the prices.	Yes
<b>startingTime</b>	Element	bookingDetails	The time of the transfer.	Yes
<b>pickUpFrom</b>	Element	bookingDetails	Specifies the location from where the guest needs to be picked up from	Yes
<b>dropOffTo</b>	Element	bookingDetails	Specifies the location where the guest needs to be dropped off	Yes
<b>transfers</b>	Element	bookingDetails	Contains details about the passengers for this transfer.	Yes
<b>adults</b>	Element	transfers	Specifies the number of adults for this transfer.	Yes

<b>children</b>	Element	transfers	Specifies the details of children accompanying	Yes
@no	Attribute	children	Specifies the total number of children. If the search does not include any children then the value should be 0.	Yes
<b>child</b>	Element	children	Specifies the child age.	Yes, if children@no > 0.
@runno	Attribute	child	Specifies for which child the age is applicable.	Yes, if parent present.
<b>return</b>	Element	request	Contains details about sorting, filtering and transfer information that needs to be returned for each transfer in the response list.	Yes
<b>filters</b>	Element	return	Groups filtering criteria.	Yes
<b>city</b>	Element	filters	For filtering by city you have to specify the city internal code. You can receive city internal codes using <b>getservicingities</b> request. This filter is available only when you do not apply a country filter.	No
<b>c:condition</b>	Element	filters	This element encapsulates advanced filtering techniques. It can contain as many <b>c:condition</b> (complex condition) elements and <b>a:condition</b> (atomic condition) elements as it may be necessary along with the operators you want to be applied for those conditions.	No
<b>a:condition</b>	Element	c:condition	Groups details for a specific elementary condition. Each filter is made up by 3 elements	Yes, if parent present.
<b>fieldName</b>	Element	a:condition	<p>The field you want to evaluate. Possible values are:</p> <ul style="list-style-type: none"> <li>• <b>description</b> - return the transfer description</li> <li>• <b>transferName</b> - returns the transfer name</li> <li>• <b>pickUp</b> - returns the pick up location</li> <li>• <b>dropOff</b> - returns the drop off location</li> <li>• <b>cityName</b> - returns city name where the transfer is located</li> <li>• <b>cityCode</b> - returns the internal city code for the city where the transfer is located</li> <li>• <b>stateName</b> returns the state name where the transfer is located</li> <li>• <b>stateCode</b> - returns the internal state code for the state where the transfer is located</li> <li>• <b>countryName</b> - return the country name where the transfer is located</li> <li>• <b>countryCode</b> - returns the internal country code for the country where the transfer is located</li> <li>• <b>images</b> - returns a list of URL pointing to the images of the transfers.</li> <li>• <b>optionalLangauges</b> - return a list of languages that can be used during the transfer.</li> <li>• <b>supplierPolicy</b> - returns the supplier policy applicable for this transfer.</li> <li>• <b>meetingPoint</b> - Location from where the guest will be picked up for the transfer</li> <li>• <b>duration</b> - the duration of the transfer</li> <li>• <b>transferType</b> - specifies the type of the transfer. Possible values are <b>private</b> or <b>scheduled</b></li> <li>• <b>ac</b> - specifies if the transfer vehicle is Air Conditioned or not.</li> <li>• <b>language</b> - specifies the language in which the driver can communicate</li> </ul>	Yes, if parent present.

<b>operator</b>	element	c:condition	Specifies the logical operator that will be applied for the conditions. Possible values: <ul style="list-style-type: none"> <li>• AND</li> <li>• OR</li> <li>• NOT</li> </ul>	Yes
<b>fields</b>	element	return	Encapsulates a list of transfer information that the DOTWconnect system returns for each transfer in the response list	Yes
<b>field</b>	element	fields	<p>You can specify all or any of the items from the list below:</p> <ul style="list-style-type: none"> <li>• <b>description</b> - return the transfer description</li> <li>• <b>transferName</b> - returns the transfer name</li> <li>• <b>pickUp</b> - returns the pick up location</li> <li>• <b>dropOff</b> - returns the drop off location</li> <li>• <b>cityName</b> - returns city name where the transfer is located</li> <li>• <b>cityCode</b> - returns the internal city code for the city where the transfer is located</li> <li>• <b>stateName</b> returns the state name where the transfer is located</li> <li>• <b>stateCode</b> - returns the internal state code for the state where the transfer is located</li> <li>• <b>countryName</b> - return the country name where the transfer is located</li> <li>• <b>countryCode</b> - returns the internal country code for the country where the transfer is located</li> <li>• <b>images</b> - returns a list of URL pointing to the images of the transfers.</li> <li>• <b>optionalLangauges</b> - return a list of languages that can be used during the transfer.</li> <li>• <b>supplierPolicy</b> - returns the supplier policy applicable for this transfer.</li> <li>• <b>meetingPoint</b> - Location from where the guest will be picked up for the transfer</li> <li>• <b>duration</b> - the duration of the transfer</li> <li>• <b>transferType</b> - specifies the type of the transfer. Possible values are private or scheduled</li> <li>• <b>ac</b> - specifies if the transfer vehicle is Air Conditioned or not</li> <li>• <b>language</b> - specifies the language in which the driver can communicate</li> </ul> <p>Please note that all the above items are optional and if none of them are passed along with the request, by default DOTWconnect server will return the following items for each transfer meeting the search criteria:</p> <ul style="list-style-type: none"> <li>• optional languages</li> <li>• supplier policy</li> <li>• meeting point</li> <li>• duration</li> <li>• drop off</li> <li>• pick up</li> <li>• transfer type</li> <li>• ac</li> <li>• description</li> <li>• transfer name</li> <li>• language</li> <li>• city name</li> <li>• country name</li> </ul>	Yes
<b>resultPerPage</b>	element	return	Indicates how many transfers you would like the DOTWconnect system to return	Yes

page	Element	return	The combination of <b>resultsPerPage</b> and <b>page</b> indicates the DOTWconnect system to return transfers within a specific range from the total number of transfers according to the specified filter and sort criteria. eg: if you have specified the <b>resultsPerPage</b> as 10 and you want to receive the set of transfers in 3rd page, the value for <b>page</b> element must be specified as 2. Please note the numbering starts from 0.	yes
------	---------	--------	--	-----

### atomicCondition\_transfers.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns="http://us.dotwconnect.com/xsd/atomicCondition" targetNamesp
ace="http://us.dotwconnect.com/xsd/atomicCondition">
02.   <xs:element name="condition">
03.     <xs:complexType>
04.       <xs:sequence>
05.         <xs:element name="fieldName" type="fieldNameType"/></xs:element>
06.         <xs:element name="fieldTest" type="fieldTestType"/></xs:element>
07.         <xs:element name="fieldValues" type="fieldValuesType"/></xs:element>
08.       </xs:sequence>
09.     </xs:complexType>
10.   </xs:element>
11.   <!-- ##### -->
12.   <xs:simpleType name="fieldNameType">
13.     <xs:restriction base="xs:string">
14.       <xs:enumeration value="transferName"/></xs:enumeration>
15.       <xs:enumeration value="language"/></xs:enumeration>
16.       <xs:enumeration value="optionalLanguages"/></xs:enumeration>
17.       <xs:enumeration value="transferType"/></xs:enumeration>
18.     </xs:restriction>
19.   </xs:simpleType>
20.   <!-- ##### -->
21.   <xs:simpleType name="fieldTestType">
22.     <xs:restriction base="xs:string">
23.       <xs:enumeration value="equals"/></xs:enumeration>
24.       <xs:enumeration value="in"/></xs:enumeration>
25.       <xs:enumeration value="notin"/></xs:enumeration>
26.       <xs:enumeration value="between"/></xs:enumeration>
27.       <xs:enumeration value="regex"/></xs:enumeration>
28.       <xs:enumeration value="like"/></xs:enumeration>
29.     </xs:restriction>
30.   </xs:simpleType>
31.   <!-- ##### -->
32.   <xs:complexType name="fieldValuesType">
33.     <xs:sequence>
34.       <xs:element name="fieldValue" type="xs:string" maxOccurs="unbounded"/></xs:element>
35.     </xs:sequence>
36.   </xs:complexType>
37.   <!-- ##### -->
38.   <xs:simpleType name="fieldValueType">
39.     <xs:restriction base="xs:string">
40.       <xs:pattern value="[0-9]{1,5}|true|false"/></xs:pattern>
41.     </xs:restriction>
42.   </xs:simpleType>
43.   <!-- ##### -->
44.   <xs:group name="atomics">
45.     <xs:sequence>
46.       <xs:element ref="condition"/></xs:element>
47.       <xs:sequence minOccurs="0" maxOccurs="unbounded">
48.         <xs:element name="operator" type="xs:string"/></xs:element>
49.         <xs:element ref="condition"/></xs:element>
50.       </xs:sequence>
51.     </xs:sequence>
52.   </xs:group>
53.   <!-- ##### -->
54. </xs:schema>

```

### complexCondition\_transfers.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns="http://us.dotwconnect.com/xsd/complexCondition" xmlns:a="ht
tp://us.dotwconnect.com/xsd/atomicCondition" targetNamespace="http://us.dotwconnect.com/xsd/complexCondition">
02.   <xs:import namespace="http://us.dotwconnect.com/xsd/atomicCondition" schemaLocation="atomicCondition_transfers.xsd">
</xs:import>
03.   <xs:element name="condition">
04.     <xs:complexType>
05.       <xs:sequence>
06.         <xs:element name="operator" minOccurs="0" fixed="NOT"/></xs:element>
07.         <xs:choice minOccurs="0">
08.           <xs:group ref="complexis"/></xs:group>
09.           <xs:group ref="a:atomics"/></xs:group>
10.         </xs:choice>
11.       </xs:sequence>
12.     </xs:complexType>
13.   </xs:element>
14.   <xs:group name="complexis">

```

```

15.         <xs:sequence>
16.             <xs:element ref="condition"></xs:element>
17.             <xs:sequence minOccurs="0" maxOccurs="unbounded">
18.                 <xs:element name="operator" type="xs:string"></xs:element>
19.                 <xs:element ref="condition"></xs:element>
20.             </xs:sequence>
21.         </xs:sequence>
22.     </xs:group>
23. </xs:schema>

```

## searchtransfers.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns:a="http://us.dotwconnect.com/xsd/atomicCondition" xmlns:c="h
    http://us.dotwconnect.com/xsd/complexCondition">
02.     <xs:import namespace="http://us.dotwconnect.com/xsd/atomicCondition" schemaLocation="atomicCondition_transfers.xsd">
</xs:import>
03.     <xs:import namespace="http://us.dotwconnect.com/xsd/complexCondition" schemaLocation="complexCondition_transfers.xsd"
></xs:import>
04.     <!-- ##### -->
05.     <xs:element name="customer">
06.         <xs:complexType>
07.             <xs:sequence>
08.                 <xs:group ref="loginDetailsGroup"></xs:group>
09.                 <xs:element name="product" type="xs:string" fixed="transfer"></xs:element>
10.                 <xs:element name="request" type="requestType"></xs:element>
11.             </xs:sequence>
12.         </xs:complexType>
13.     </xs:element>
14.     <!-- ##### -->
15.     <xs:complexType name="requestType">
16.         <xs:sequence>
17.             <xs:element name="bookingDetails" type="searchTransfersBookingDetailsType"></xs:element>
18.             <xs:element name="return" type="transferReturntype" minOccurs="1"></xs:element>
19.         </xs:sequence>
20.         <xs:attribute name="command" type="xs:string" use="required" fixed="searchtransfers"></xs:attribute>
21.         <xs:attribute name="debug" type="xs:boolean" use="optional"></xs:attribute>
22.         <xs:attribute name="defaultnamespace" type="xs:string" use="optional" fixed="true"></xs:attribute>
23.     </xs:complexType>
24.     <!-- ##### -->
25.     <xs:complexType name="searchTransfersBookingDetailsType">
26.         <xs:sequence>
27.             <xs:group ref="searchTransfersBookingDetailsDefaultGroup"></xs:group>
28.         </xs:sequence>
29.     </xs:complexType>
30.     <!-- ##### -->
31.     <xs:group name="searchTransfersBookingDetailsDefaultGroup">
32.         <xs:sequence>
33.             <xs:element name="fromDate" type="dotwDateType"></xs:element>
34.             <xs:element name="startingTime" type="xs:nonNegativeInteger"></xs:element>
35.             <xs:element name="pickUpFrom" type="xs:nonNegativeInteger"></xs:element>
36.             <xs:element name="dropOffTo" type="xs:nonNegativeInteger"></xs:element>
37.             <xs:element name="currency" type="xs:nonNegativeInteger"></xs:element>
38.             <xs:element name="transfers">
39.                 <xs:complexType>
40.                     <xs:sequence>
41.                         <xs:group ref="transferOccupancyType"></xs:group>
42.                     </xs:sequence>
43.                 </xs:complexType>
44.             </xs:element>
45.         </xs:sequence>
46.     </xs:group>
47.     <!-- ##### -->
48.     <xs:simpleType name="dotwDateType">
49.         <xs:restriction base="xs:string">
50.             <xs:pattern value="[0-9]{10,11}|2[0-9]{3,3}-(0[1-9]|[1][0-2])-(0[1-9]|[1-2][0-9]|3[0-1])"></xs:pattern>
51.         </xs:restriction>
52.     </xs:simpleType>
53.     <!-- ##### -->
54.     <xs:group name="transferOccupancyType">
55.         <xs:sequence>
56.             <xs:element name="adults" type="adultsCodeType"></xs:element>
57.             <xs:element name="children" type="childrenType"></xs:element>
58.         </xs:sequence>
59.     </xs:group>
60.     <!-- ##### -->
61.     <xs:simpleType name="adultsCodeType">
62.         <xs:restriction base="xs:string">
63.             <xs:enumeration value="2t"></xs:enumeration>
64.             <xs:enumeration value="1"></xs:enumeration>
65.             <xs:enumeration value="2"></xs:enumeration>
66.             <xs:enumeration value="3"></xs:enumeration>
67.             <xs:enumeration value="4"></xs:enumeration>
68.         </xs:restriction>
69.     </xs:simpleType>
70.     <!-- ##### -->
71.     <xs:complexType name="childrenType">
72.         <xs:sequence>
73.             <xs:element minOccurs="0" maxOccurs="4" name="child" type="childType"></xs:element>
74.         </xs:sequence>
75.         <xs:attribute name="no" type="xs:integer" use="required"></xs:attribute>
76.     </xs:complexType>
77.     <!-- ##### -->
78.     <xs:complexType name="childType">
79.         <xs:simpleContent>
80.             <xs:extension base="childAge">

```

```
81.         <xs:attribute name="runno" type="xs:integer" use="required"/></xs:attribute>
82.     </xs:extension>
83. </xs:simpleContent>
84. </xs:complexType>
85. <!-- ##### -->
86. <xs:complexType name="transferReturnType">
87.     <xs:sequence>
88.         <xs:element name="filters" type="filtersType"/></xs:element>
89.         <xs:element name="fields" minOccurs="0">
90.             <xs:complexType>
91.                 <xs:sequence>
92.                     <xs:element maxOccurs="unbounded" name="field" type="fieldValue"/></xs:element>
93.                 </xs:sequence>
94.             </xs:complexType>
95.             <xs:unique name="differentFieldValue">
96.                 <xs:selector xpath="field"/></xs:selector>
97.                 <xs:field xpath="field"/></xs:field>
98.             </xs:unique>
99.         </xs:element>
100.        <xs:group ref="resultsPerPageGroup" minOccurs="0"/></xs:group>
101.    </xs:sequence>
102. </xs:complexType>
103. <!-- ##### -->
104. <xs:complexType name="filtersType">
105.     <xs:sequence>
106.         <xs:group ref="cityOrCountryFilter" minOccurs="0"/></xs:group>
107.         <xs:element ref="c:condition" minOccurs="0"/></xs:element>
108.         <xs:element name="showFilters" type="xs:string" minOccurs="0"/></xs:element>
109.     </xs:sequence>
110. </xs:complexType>
111. <!-- ##### -->
112. <xs:group name="cityOrCountryFilter">
113.     <xs:choice>
114.         <xs:group ref="groupOfCity"/></xs:group>
115.         <xs:element name="country" type="xs:integer"/></xs:element>
116.     </xs:choice>
117. </xs:group>
118. <!-- ##### -->
119. <xs:group name="groupOfCity">
120.     <xs:sequence>
121.         <xs:element name="city" type="xs:positiveInteger"/></xs:element>
122.     </xs:sequence>
123. </xs:group>
124. <!-- ##### -->
125. <xs:group name="loginDetailsGroup">
126.     <xs:sequence>
127.         <xs:element name="username" type="xs:string"/></xs:element>
128.         <xs:element name="password" type="passwordType"/></xs:element>
129.         <xs:element name="id" type="xs:nonNegativeInteger"/></xs:element>
130.         <xs:element name="source" type="sourceType"/></xs:element>
131.     </xs:sequence>
132. </xs:group>
133. <!-- ##### -->
134. <xs:simpleType name="passwordType">
135.     <xs:restriction base="xs:string">
136.         <xs:length value="32"/></xs:length>
137.     </xs:restriction>
138. </xs:simpleType>
139. <!-- ##### -->
140. <xs:simpleType name="sourceType">
141.     <xs:restriction base="xs:string">
142.         <xs:enumeration value="0"/></xs:enumeration>
143.         <xs:enumeration value="1"/></xs:enumeration>
144.         <xs:enumeration value="2"/></xs:enumeration>
145.     </xs:restriction>
146. </xs:simpleType>
147. <!-- ##### -->
148. <xs:simpleType name="childAge">
149.     <xs:restriction base="xs:integer">
150.         <xs:minInclusive value="1"/></xs:minInclusive>
151.         <xs:maxInclusive value="12"/></xs:maxInclusive>
152.     </xs:restriction>
153. </xs:simpleType>
154. <!-- ##### -->
155. <xs:group name="resultsPerPageGroup">
156.     <xs:sequence>
157.         <xs:element name="resultsPerPage" type="xs:nonNegativeInteger" minOccurs="0"/></xs:element>
158.         <xs:element name="page" type="xs:nonNegativeInteger" minOccurs="0"/></xs:element>
159.     </xs:sequence>
160. </xs:group>
161. <!-- ##### -->
162. <xs:simpleType name="fieldValue">
163.     <xs:restriction base="xs:string">
164.         <xs:enumeration value="description"/></xs:enumeration>
165.         <xs:enumeration value="transferName"/></xs:enumeration>
166.         <xs:enumeration value="images"/></xs:enumeration>
167.         <xs:enumeration value="language"/></xs:enumeration>
168.         <xs:enumeration value="optionalLanguages"/></xs:enumeration>
169.     </xs:restriction>
170. </xs:simpleType>
171. <!-- ##### -->
172. <!-- ##### -->
173. <!-- ##### -->
174. </xs:schema>
```



## General Response

After you initiate the searchtransfers command, the system will process the request for availability according to the search criteria, calculate starting prices if you have not requested otherwise, check the availability and will return you a list with transfers that match the search criteria. The general format of the response is shown below:

```

01. <result command="searchtransfers" ip="" date="">
02.   <currencyShort></currencyShort>
03.   <transfers count="">
04.     <transfer runno="" preferred="" cityname="" type="" order="" transferid="">
05.       <description>
06.         <language id="EN" name="English"></language>
07.       </description>
08.       <supplierPolicy></supplierPolicy>
09.       <meetingPoint></meetingPoint>
10.       <transferType></transferType>
11.       <transferName></transferName>
12.       <ac></ac>
13.       <countryCode></countryCode>
14.       <cityCode></cityCode>
15.       <countryName></countryName>
16.       <cityName></cityName>
17.       <pickUp></pickUp>
18.       <dropOff></dropOff>
19.       <images>
20.         <transferImages count="">
21.           <image runno=""></image>
22.         </transferImages>
23.       </images>
24.       <duration></duration>
25.       <language></language>
26.       <optionalLanguages>
27.         <language id="" runno=""></language>
28.       </optionalLanguages>
29.       <stateCode></stateCode>
30.       <stateName></stateName>
31.       <from>price <formatted></formatted>
32.     </from>
33.     <availability></availability>
34.   </transfer>
35. </transfers>
36. <filters>
37.   <languageList count="">
38.     <language id=""></language>
39.   </languageList>
40.   <typelist count=""></typelist>
41. </filters>
42. <successful>TRUE</successful>
43. </result>

```

Item	Type	Parent	Description
result	Element	root	The root element.
@date	Attribute	result	The date and time when the result was provided in unix timestamp.
@command	Attribute	result	The request command which returned this result.
@ip	Attribute	result	The Ipv4 address the request was made from.
currencyShort	Element	result	The 3 letter code which identifies the currency in which the prices are returned.
sort	Element	result	Specifies how the transfers are sorted in the response list. Blank content means the result is ordered by default DOTWconnect default sort order. The sort values are: <ul style="list-style-type: none"> <li>sortByPrice - order by price;</li> </ul>
@order	Attribute	sort	Specifies whether the sorting order is ascending or descending. The values are: <ul style="list-style-type: none"> <li>asc - for ascending order;</li> <li>desc - for descending order.</li> </ul>
transfers	Element	return	The transfers response list. Contains a <b>transfer</b> element for each transfers returned by DOTWconnect system.
@count	Attribute	transfers	The @count attribute value indicates the total number of transfers that meet the search criteria; However the number of transfers returned in this response will not exceed the <b>resultperpage</b> value specified in the request.

<b>transfer</b>	Element	transfers	Contains information about one transfer.
@runno	Attribute	transfer	Indicates the transfer number in the response list. It is a running serial number starting from 0.
@preferred	Attribute	transfer	Indicates if the transfer is marked preferred in the DOTWconnect system or not. The possible values are: <ul style="list-style-type: none"> <li>• yes</li> <li>• no</li> </ul>
@cityname	Attribute	transfer	City name where the transfer is located.
@transferid	Attribute	transfer	Contains the transfer internal code.
<b>description</b>	Element	transfer	Encapsulates the transfer description in different languages. DOTWconnect system will not include this in the response list unless this is request explicitly. If you want this in the response list then it must be specified in the <b>fields</b> element in your request.
<b>language</b>	Element	description	The transfer description. The language for the description will be identified by this elements attributes.
@id	Attribute	language	Two character code indicating the language in which the transfer description will be provided.
@name	Attribute	language	The actual name of the language in which the transfer description will be provided.
<b>supplierPolicy</b>	Element	transfer	Specifies the supplier policy applicable for this Transfer
<b>meetingPoint</b>	Element	transfer	Specifies the meeting point.
<b>transferType</b>	Element	transfer	Specifies the type of transfer. Possible values: <ul style="list-style-type: none"> <li>• private</li> <li>• scheduled</li> </ul>
<b>transferName</b>	Element	transfer	The name of the transfer. DOTWconnect system returns this element by default.
<b>ac</b>	Element	transfer	Specifies if the transfer vehicle is Airconditioned or not
<b>countryCode</b>	Element	transfer	Internal country code for the country where the transfer is located. DOTWconnect system returns this element by default.
<b>countryName</b>	Element	transfer	The country name where the transfer is located. DOTWconnect system will not include this in the response list unless this is request explicitly. If you want this in the response list then it must be specified in the <b>fields</b> element in your request
<b>cityName</b>	Element	transfer	The city name where the transfer is located. DOTWconnect system will not include this in the response list unless this is request explicitly. If you want this in the response list then it must be specified in the <b>fields</b> element in your request.
<b>cityCode</b>	Element	transfer	Internal city code for the city where the transfer is located. DOTWconnect system returns this element by default.
<b>stateName</b>	Element	transfer	The state name where the transfer is located. DOTWconnect system will not include this in the response list unless this is request explicitly. If you want this in the response list then it must be specified in the <b>fields</b> element in your request.
<b>stateCode</b>	Element	transfer	Internal state code for the state where the transfer is located.
<b>images</b>	Element	transfer	Encapsulates the list of URLs pointing to the images of the transfers. DOTWconnect system will not include this in the response list unless this is request explicitly. If you want this in the response list then it must be specified in the <b>fields</b> element in your request

<b>thumb</b>	Element	images	Contains an URL poiting to thumbnail image of the transfer.
<b>transferImages</b>	Element	images	Encapsulates a list of all the URLs pointing to the images of the transfer.
@count	Attribute	transferImages	Total number of images.
<b>image</b>	Element	transferImages	Contains details about one image.
@runno	Attribute	image	Running number of the image in the image list starting from 0.
<b>alt</b>	Element	image	Alternative description for the image.
<b>url</b>	Element	image	URL poiting to the image.
<b>from</b>	Element	transfer	This element contains the starting price in two formats one without any formatting and the other one properly formatted. Starting price is the cheapest price per day per room. DOTWconnect system returns this element by default. However you can restrict the return of this element by including the <b>noprice</b> element with true as value as a child of the <b>filters</b> element in the request command.
<b>formatted</b>	Element	from	This element contains the starting price formatted as per the customer preference (decimal places, thousand separator, decimal separator)
<b>availability</b>	Element	transfer	Indicates if the transfer is available. Possible values: <ul style="list-style-type: none"> <li>• available</li> <li>• request</li> </ul>
<b>duration</b>	Element	transfer	Specifies the duration of the transfer
<b>optionalLanguage</b>	Element	transfer	Specifies which are the languages that can be used during the transfer.
<b>language</b>	Element	description	The transfer description. The language for the description will be identified by this elements attributes.
@id	Attribute	language	Two character code indicating the language in which the transfer description will be provided.
@runno	Attribute	image	Running number of the language in the language list starting from 0.
<b>filters</b>	Element	result	Groups filtering criteria.
<b>languagelist</b>	Element	filters	Specifies the list of languages specified in the initial request.
count	Attribute	languagelist	Total number of specified languages.
<b>language</b>	Element	languagelist	Contains one of the specified languages.
id	Attribute	language	The id of the specified language.
<b>typelist</b>	Element	filters	Specifies the transfer type. Possible values: <ul style="list-style-type: none"> <li>• s (scheduled)</li> <li>• p (private)</li> </ul>
count	Attribute	typelist	Total number of transfer types.
<b>successful</b>	Element	result	Specifies if the request was successful. Possible values: <ul style="list-style-type: none"> <li>• TRUE</li> <li>• FALSE</li> </ul>

## searchtransfers.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="result" type="resultType"></xs:element>
03.   <xs:complexType name="resultType">
04.     <xs:sequence>
05.       <xs:element name="bookingDetails" type="bookingDetailsType"></xs:element>

```

```

06.      <xs:element name="currencyShort" type="currencyShortType"></xs:element>
07.      <xs:element name="transfers" type="transfersType"></xs:element>
08.      <xs:element name="filters" type="filtersType" minOccurs="0"></xs:element>
09.      <xs:element name="successful" type="trueOrFalse"></xs:element>
10.    </xs:sequence>
11.    <xs:attribute name="command" type="xs:string" use="required" fixed="searchtransfers"></xs:attribute>
12.    <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
13.    <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
14.    <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
15.    <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
16.    <xs:attribute name="elapsedTime" type="xs:string" use="required"></xs:attribute>
17.  </xs:complexType>
18.  <xs:simpleType name="currencyShortType">
19.    <xs:restriction base="xs:string">
20.      <xs:pattern value="[A-Z]{3}"></xs:pattern>
21.    </xs:restriction>
22.  </xs:simpleType>
23.  <xs:simpleType name="trueOrFalse">
24.    <xs:restriction base="xs:string">
25.      <xs:pattern value="true|false|TRUE|FALSE"></xs:pattern>
26.    </xs:restriction>
27.  </xs:simpleType>
28.  <xs:complexType name="stringWithRunnoAttribute">
29.    <xs:simpleContent>
30.      <xs:extension base="xs:string">
31.        <xs:attribute name="runno" type="xs:unsignedInt"></xs:attribute>
32.      </xs:extension>
33.    </xs:simpleContent>
34.  </xs:complexType>
35.  <xs:simpleType name="oneOrZero">
36.    <xs:restriction base="xs:integer">
37.      <xs:pattern value="1|0"></xs:pattern>
38.    </xs:restriction>
39.  </xs:simpleType>
40.  <xs:simpleType name="dotwIP">
41.    <xs:restriction base="xs:string">
42.      <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[ 1][0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[0-9])" >
43.    </xs:restriction>
44.  </xs:simpleType>
45.  <xs:simpleType name="dotwDateType">
46.    <xs:restriction base="xs:string">
47.      <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}([0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})?|[0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2}([0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})?|[0-9]{4,4}([0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})?"></xs:pattern>
48.    </xs:restriction>
49.  </xs:simpleType>
50.  <xs:simpleType name="versionType">
51.    <xs:restriction base="xs:string">
52.      <xs:pattern value="[1-9]{1}([0-9])?\.([0-9])?"></xs:pattern>
53.    </xs:restriction>
54.  </xs:simpleType>
55.  <xs:simpleType name="yesOrNo">
56.    <xs:restriction base="xs:string">
57.      <xs:pattern value="yes|no"></xs:pattern>
58.    </xs:restriction>
59.  </xs:simpleType>
60.  <xs:simpleType name="statusType">
61.    <xs:restriction base="xs:string">
62.      <xs:pattern value="checked|unchecked"></xs:pattern>
63.    </xs:restriction>
64.  </xs:simpleType>
65.  <xs:complexType name="servicePriceType" mixed="true">
66.    <xs:sequence>
67.      <xs:element name="formatted" type="xs:string"></xs:element>
68.    </xs:sequence>
69.  </xs:complexType>
70.  <xs:simpleType name="adultsCodeType">
71.    <xs:restriction base="xs:string">
72.      <xs:enumeration value="2t"></xs:enumeration>
73.      <xs:enumeration value="1"></xs:enumeration>
74.      <xs:enumeration value="2"></xs:enumeration>
75.      <xs:enumeration value="3"></xs:enumeration>
76.      <xs:enumeration value="4"></xs:enumeration>
77.    </xs:restriction>
78.  </xs:simpleType>
79.  <xs:simpleType name="availableType">
80.    <xs:restriction base="xs:string">
81.      <xs:pattern value="available|request"></xs:pattern>
82.    </xs:restriction>
83.  </xs:simpleType>
84.  <xs:simpleType name="orderType">
85.    <xs:restriction base="xs:string">
86.      <xs:pattern value="asc|desc"></xs:pattern>
87.    </xs:restriction>
88.  </xs:simpleType>
89.  <xs:simpleType name="transferTypeType">
90.    <xs:restriction base="xs:string">
91.      <xs:pattern value="private|scheduled|Private|Scheduled"></xs:pattern>
92.    </xs:restriction>
93.  </xs:simpleType>
94.  <xs:simpleType name="shortTransferTypeType">
95.    <xs:restriction base="xs:string">
96.      <xs:pattern value="p|s"></xs:pattern>
97.    </xs:restriction>
98.  </xs:simpleType>
99.  <xs:simpleType name="empty">

```

```

100.     <xs:restriction base="xs:string">
101.         <xs:maxLength value="0"></xs:maxLength>
102.     </xs:restriction>
103. </xs:simpleType>
104. <xs:simpleType name="hourType">
105.     <xs:restriction base="xs:string">
106.         <xs:pattern value="([0-1][0-9]|2[0-3]):[0-5][0-9]"></xs:pattern>
107.     </xs:restriction>
108. </xs:simpleType>
109. <xs:simpleType name="availabilityType">
110.     <xs:restriction base="xs:string">
111.         <xs:pattern value="available|request"></xs:pattern>
112.     </xs:restriction>
113. </xs:simpleType>
114. <xs:complexType name="sortType">
115.     <xs:simpleContent>
116.         <xs:extension base="xs:string">
117.             <xs:attribute name="order" type="orderType"></xs:attribute>
118.         </xs:extension>
119.     </xs:simpleContent>
120. </xs:complexType>
121. <xs:complexType name="transfersType">
122.     <xs:sequence>
123.         <xs:element name="transfer" type="transferType" minOccurs="0" maxOccurs="unbounded"></xs:element>
124.     </xs:sequence>
125.     <xs:attribute name="count" type="xs:nonNegativeInteger" use="required"></xs:attribute>
126. </xs:complexType>
127. <xs:complexType name="transferType">
128.     <xs:all>
129.         <xs:element name="description" type="descriptionType" minOccurs="0"></xs:element>
130.         <xs:element name="transferName" type="xs:string" minOccurs="1"></xs:element>
131.         <xs:element name="images" type="imagesType" minOccurs="0"></xs:element>
132.         <xs:element name="language" type="xs:string" minOccurs="0"></xs:element>
133.         <xs:element name="optionalLanguages" type="xs:anyType" minOccurs="0"></xs:element>
134.         <xs:element name="from" type="servicePriceType" minOccurs="0"></xs:element>
135.         <xs:element name="availability" type="availabilityType" minOccurs="0"></xs:element>
136.     </xs:all>
137.     <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"></xs:attribute>
138.     <xs:attribute name="preferred" type="yesOrNo" use="required"></xs:attribute>
139.     <xs:attribute name="cityname" type="xs:string" use="required"></xs:attribute>
140.     <xs:attribute name="type" type="transferTypeType" use="required"></xs:attribute>
141.     <xs:attribute name="order" type="xs:nonNegativeInteger" use="required"></xs:attribute>
142.     <xs:attribute name="transferid" type="xs:nonNegativeInteger" use="required"></xs:attribute>
143. </xs:complexType>
144. <xs:complexType name="bookingDetailsType">
145.     <xs:sequence>
146.         <xs:element name="fromDate" type="dotwDateType" minOccurs="1"></xs:element>
147.         <xs:element name="startingTime" type="xs:nonNegativeInteger" minOccurs="1"></xs:element>
148.         <xs:element name="pickUpFrom" type="xs:nonNegativeInteger" minOccurs="1"></xs:element>
149.         <xs:element name="dropOffTo" type="xs:nonNegativeInteger" minOccurs="1"></xs:element>
150.         <xs:element name="currency" type="xs:nonNegativeInteger" minOccurs="1"></xs:element>
151.         <xs:element name="commission" type="xs:nonNegativeInteger" minOccurs="1"></xs:element>
152.         <xs:element name="transfers" type="transfersOccupancyType" minOccurs="1"></xs:element>
153.     </xs:sequence>
154. </xs:complexType>
155. <xs:complexType name="languageType">
156.     <xs:simpleContent>
157.         <xs:extension base="xs:string">
158.             <xs:attribute name="id" type="xs:string" use="required" fixed="EN"></xs:attribute>
159.             <xs:attribute name="name" type="xs:string" use="optional" fixed="English"></xs:attribute>
160.         </xs:extension>
161.     </xs:simpleContent>
162. </xs:complexType>
163. <xs:complexType name="transfersOccupancyType">
164.     <xs:sequence>
165.         <xs:element name="adults" type="adultsCodeType" minOccurs="1"></xs:element>
166.         <xs:element name="children" type="childrenType"></xs:element>
167.     </xs:sequence>
168. </xs:complexType>
169. <xs:complexType name="childrenType">
170.     <xs:sequence>
171.         <xs:element minOccurs="0" maxOccurs="4" name="child" type="childType"></xs:element>
172.     </xs:sequence>
173.     <xs:attribute name="no" type="xs:integer" use="required"></xs:attribute>
174. </xs:complexType>
175. <xs:complexType name="childType">
176.     <xs:simpleContent>
177.         <xs:extension base="childAge">
178.             <xs:attribute name="runno" type="xs:integer" use="required"></xs:attribute>
179.         </xs:extension>
180.     </xs:simpleContent>
181. </xs:complexType>
182. <xs:simpleType name="childAge">
183.     <xs:restriction base="xs:integer">
184.         <xs:minInclusive value="1"></xs:minInclusive>
185.         <xs:maxInclusive value="12"></xs:maxInclusive>
186.     </xs:restriction>
187. </xs:simpleType>
188. <xs:simpleType name="emptyOrPositiveInteger">
189.     <xs:union memberTypes="empty xs:positiveInteger"></xs:union>
190. </xs:simpleType>
191. <xs:complexType name="descriptionType">
192.     <xs:sequence>
193.         <xs:element name="language" minOccurs="0">
194.             <xs:complexType>
195.                 <xs:simpleContent>
196.                     <xs:extension base="xs:string">

```

```

197.         <xs:attribute name="id" type="xs:string" use="required" fixed="EN"></xs:attribute>
198.         <xs:attribute name="name" type="xs:string" use="optional" fixed="English"></xs:attribute>
199.     </xs:extension>
200. </xs:simpleContent>
201. </xs:complexType>
202. </xs:element>
203. </xs:sequence>
204. </xs:complexType>
205. <xs:complexType name="imagesType">
206.     <xs:sequence>
207.         <xs:element name="transferImages" type="imageListType"></xs:element>
208.     </xs:sequence>
209. </xs:complexType>
210. <xs:complexType name="imageListType">
211.     <xs:sequence>
212.         <xs:element name="image" type="stringWithRunnoAttribute" minOccurs="0" maxOccurs="unbounded">
213.     </xs:sequence>
214.     <xs:attribute name="count" type="xs:nonNegativeInteger" use="required"></xs:attribute>
215. </xs:complexType>
216. <xs:complexType name="filtersType">
217.     <xs:all>
218.         <xs:element name="languageList" type="languageListType"></xs:element>
219.         <xs:element name="typelist" type="typelistType"></xs:element>
220.     </xs:all>
221. </xs:complexType>
222. <xs:complexType name="languageListType">
223.     <xs:sequence>
224.         <xs:element name="language" type="stringWithIdAttribute" minOccurs="0" maxOccurs="unbounded">
225.     </xs:sequence>
226.     <xs:attribute name="count" type="xs:nonNegativeInteger" use="required"></xs:attribute>
227. </xs:complexType>
228. <xs:complexType name="stringWithIdAttribute">
229.     <xs:simpleContent>
230.         <xs:extension base="xs:string">
231.             <xs:attribute name="id" type="xs:unsignedInt" use="required"></xs:attribute>
232.         </xs:extension>
233.     </xs:simpleContent>
234. </xs:complexType>
235. <xs:complexType name="typelistType">
236.     <xs:sequence>
237.         <xs:element name="type" type="transferTypelistType" minOccurs="0" maxOccurs="unbounded"></xs:element>
238.     </xs:sequence>
239.     <xs:attribute name="count" type="xs:nonNegativeInteger" use="required"></xs:attribute>
240. </xs:complexType>
241. <xs:complexType name="transferTypelistType">
242.     <xs:simpleContent>
243.         <xs:extension base="xs:string">
244.             <xs:attribute name="id" type="shortTransferTypeType" use="required"></xs:attribute>
245.         </xs:extension>
246.     </xs:simpleContent>
247. </xs:complexType>
248. </xs:schema>

```

## Scenario T1

The customer would like to book a transfer using the following search criteria:

- City: Dubai
- Transfer Date: 20.11.2015
- PickUp Time: 05:00
- Occupany: 2 Adults, 3 Children (Age 5, 6, 6)
- Pickup: Airport
- DropOff: Accomodation

### XML Request:

```

01. <p>
02.     <customer>
03.         <username>***</username>
04.         <password>***</password>
05.         <id>***</id>
06.         <source></source>
07.         <product>transfer</product>
08.         <request command="searchtransfers" debug="0">
09.             <bookingDetails>
10.                 <fromDate>2015-11-20</fromDate>
11.                 <startingTime>1428</startingTime>
12.                 <pickUpFrom>746</pickUpFrom>
13.                 <dropOffTo>747</dropOffTo>
14.                 <currency>520</currency>
15.                 <transfers>
16.                     <adults>2</adults>
17.                     <children no="3">
18.                         <child runno="0">5</child>
19.                         <child runno="1">6</child>
20.                         <child runno="2">6</child>

```

```
21.         </children>
22.     </transfers>
23. </bookingDetails>
24. <return>
25.     <filters xmlns:a="http://us.dotwconnect.com/xsd/atomicCondition" xmlns:c="http://us.dotwconnect.com/xsd/c
omplexCondition">
26.         <city>364</city>
27.         <showFilters>true</showFilters>
28.     </filters>
29.     <fields>
30.         <field>description</field>
31.         <field>transferName</field>
32.         <field>images</field>
33.         <field>language</field>
34.         <field>optionalLanguages</field>
35.     </fields>
36.     <resultsPerPage></resultsPerPage>
37.     <page></page>
38. </return>
39. </request>
40. </customer>
41. </p>
```

XML Response:

```
01. <p>
02.     <result command="searchtransfers" tID="2189" ip="" xmlns:dotw="http:// " date="2009-11-
09 11:48:44" version="2.0"> <bookingDetails> <fromDate></fromDate> <startingTime></startingTime> <pickUpFrom>
</pickUpFrom> <dropOffTo></dropOffTo> <currency></currency> <commission>
</commission> <transfers> <adults>adults</adults> <children no=""> <child runno="">
</child> </children> </transfers> </bookingDetails> <currencyShort>
</currencyShort> <transfers count=""> <transfer runno="" preferred="" cityname=""
type="" order="" transferid=""> <description> <language id="" name=""></language> </description> <transferName>
</transferName> <images> <transferImages count="1"> <image runno="0">http://www.traveltech.ro/dotw/suppliers/uploads/3282
_54131_55373.e-class.jpg</image> </transferImages> </images> <language>
</language> <optionalLanguages> <language id="" runno=""></language> </optionalLanguages> <from> <formatted>
</formatted> </from> <availability>
</availability> </transfer> </transfers> <filters> <languageList count=""> <language id="">
</language> </languageList> <typelist count=""></typelist> </filters> <successful>TRUE</successful> </result></p>
```

# Get Transfers

## General Request

This request is used to get a list of all transfers with rates, availability details for each transfer.

General Request

```
01. <customer>
02.     <username>username</username>
03.     <password>password</password>
04.     <id>company Code</id>
05.     <source></source>
06.     <product>transfer</product>
07.     <request command="gettransfers">
08.         <bookingDetails>
09.             <fromDate></fromDate>
10.             <pickUpFrom></pickUpFrom>
11.             <dropOffTo></dropOffTo>
12.             <currency></currency>
13.             <startingTime></startingTime>
14.             <transfers>
15.                 <adults>adults</adults>
16.                 <children no=""></children>
17.             </transfers>
18.             <productId></productId>
19.         </bookingDetails>
20.     </request>
21. </customer>
```

Item	Type	Parent	Description	Required
bookingDetails	Element	request	Contains transfer date, time, pickup dropoff points, passenger details and the currency code in which the prices are returned.	Yes
currency	Element	bookingDetails	Internal code of the currency in which the customer will see the prices.	Yes

<b>fromDate</b>	element	bookingDetails	The Date for which transfer is required.	Yes
<b>startingTime</b>	Element	bookingDetails	The time of the transfer.	Yes
<b>pickUpFrom</b>	Element	bookingDetails	Specifies the location from where the guest needs to be picked up from	Yes
<b>dropOffTo</b>	Element	bookingDetails	Specifies the location where the guest needs to be dropped off	Yes
<b>transfers</b>	Element	bookingDetails	Contains details about the passengers for this transfer.	Yes
<b>adults</b>	Element	transfers	Specifies the number of adults for this transfer.	Yes
<b>children</b>	Element	transfers	Specifies the details of children accompanying	Yes
<b>@no</b>	Attribute	children	Specifies the total number of children. If the search does not include any children then the value should be 0.	Yes
<b>child</b>	Element	children	Specifies the child age.	Yes, if children@no > 0.
<b>@runno</b>	Attribute	child	Specifies for which child the age is applicable.	Yes, if parent present.
<b>productId</b>	Element	bookingDetails	Specifies the internal code of the product for which the quantity is requested and has to be populated with the value of the corresponding @transferid attribute returned in the searchhotels response.	Yes.

## gettransfers.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <!-- ##### -->
03.   <xs:element name="customer">
04.     <xs:complexType>
05.       <xs:sequence>
06.         <xs:group ref="loginDetailsGroup"/></xs:group>
07.         <xs:element name="product" type="xs:string" fixed="transfer"/></xs:element>
08.         <xs:element name="request" type="requestType"/></xs:element>
09.       </xs:sequence>
10.     </xs:complexType>
11.   </xs:element>
12.   <!-- ##### -->
13.   <xs:complexType name="requestType">
14.     <xs:sequence>
15.       <xs:element name="bookingDetails" type="getTransfersBookingDetailsType"/></xs:element>
16.     </xs:sequence>
17.     <xs:attribute name="command" type="xs:string" use="required" fixed="gettransfers"/></xs:attribute>
18.     <xs:attribute name="debug" type="xs:integer" use="optional"/></xs:attribute>
19.     <xs:attribute name="defaultnamespace" type="xs:string" use="optional" fixed="true"/></xs:attribute>
20.   </xs:complexType>
21.   <!-- ##### -->
22.   <xs:group name="loginDetailsGroup">
23.     <xs:sequence>
24.       <xs:element name="username" type="xs:string"/></xs:element>
25.       <xs:element name="password" type="passwordType"/></xs:element>
26.       <xs:element name="id" type="xs:nonNegativeInteger"/></xs:element>
27.       <xs:element name="source" type="sourceType"/></xs:element>
28.     </xs:sequence>
29.   </xs:group>
30.   <!-- ##### -->
31.   <xs:simpleType name="passwordType">
32.     <xs:restriction base="xs:string">
33.       <xs:length value="32"/></xs:length>
34.     </xs:restriction>
35.   </xs:simpleType>
36.   <!-- ##### -->
37.   <xs:simpleType name="sourceType">
38.     <xs:restriction base="xs:string">
39.       <xs:enumeration value="0"/></xs:enumeration>
40.       <xs:enumeration value="1"/></xs:enumeration>
41.       <xs:enumeration value="2"/></xs:enumeration>
42.     </xs:restriction>
43.   </xs:simpleType>
44.   <!-- ##### -->
45.   <xs:complexType name="getTransfersBookingDetailsType">

```



```

46.         <xs:sequence>
47.             <xs:group ref="getTransfersBookingDetailsDefaultGroup"></xs:group>
48.         </xs:sequence>
49.     </xs:complexType>
50. <!-- ##### -->
51. <xs:group name="getTransfersBookingDetailsDefaultGroup">
52.     <xs:sequence>
53.         <xs:element name="fromDate" type="dotwDateType"></xs:element>
54.         <xs:element name="pickUpFrom" type="xs:nonNegativeInteger"></xs:element>
55.         <xs:element name="dropOffTo" type="xs:nonNegativeInteger"></xs:element>
56.         <xs:element name="currency" type="xs:nonNegativeInteger"></xs:element>
57.         <xs:element name="startingTime" type="xs:nonNegativeInteger"></xs:element>
58.         <xs:element name="transfers">
59.             <xs:complexType>
60.                 <xs:sequence>
61.                     <xs:group ref="transferOccupancyType"></xs:group>
62.                 </xs:sequence>
63.             </xs:complexType>
64.         </xs:element>
65.         <xs:element name="productId" type="xs:nonNegativeInteger" minOccurs="1"></xs:element>
66.     </xs:sequence>
67. </xs:group>
68. <!-- ##### -->
69. <xs:simpleType name="dotwDateType">
70.     <xs:restriction base="xs:string">
71.         <xs:pattern value="[0-9]{10,11}|2[0-9]{3,3}-(0[1-9]|[1][0-2])-(0[1-9]|[1-2][0-9]|3[0-1])"></xs:pattern>
72.     </xs:restriction>
73. </xs:simpleType>
74. <!-- ##### -->
75. <xs:group name="transferOccupancyType">
76.     <xs:sequence>
77.         <xs:element name="adults" type="adultsCodeType"></xs:element>
78.         <xs:element name="children" type="childrenType"></xs:element>
79.     </xs:sequence>
80. </xs:group>
81. <!-- ##### -->
82. <xs:simpleType name="adultsCodeType">
83.     <xs:restriction base="xs:string">
84.         <xs:enumeration value="2t"></xs:enumeration>
85.         <xs:enumeration value="1"></xs:enumeration>
86.         <xs:enumeration value="2"></xs:enumeration>
87.         <xs:enumeration value="3"></xs:enumeration>
88.         <xs:enumeration value="4"></xs:enumeration>
89.     </xs:restriction>
90. </xs:simpleType>
91. <!-- ##### -->
92. <xs:complexType name="childrenType">
93.     <xs:sequence>
94.         <xs:element minOccurs="0" maxOccurs="4" name="child" type="childType"></xs:element>
95.     </xs:sequence>
96.     <xs:attribute name="no" type="xs:integer" use="required"></xs:attribute>
97. </xs:complexType>
98. <!-- ##### -->
99. <xs:complexType name="childType">
100.     <xs:simpleContent>
101.         <xs:extension base="childAge">
102.             <xs:attribute name="runno" type="xs:integer" use="required"></xs:attribute>
103.         </xs:extension>
104.     </xs:simpleContent>
105. </xs:complexType>
106. <!-- ##### -->
107. <xs:simpleType name="childAge">
108.     <xs:restriction base="xs:integer">
109.         <xs:minInclusive value="1"></xs:minInclusive>
110.         <xs:maxInclusive value="12"></xs:maxInclusive>
111.     </xs:restriction>
112. </xs:simpleType>
113. <!-- ##### -->
114. <!-- ##### -->
115. <!-- ##### -->
116. <!-- ##### -->
117. <!-- ##### -->
118. <!-- ##### -->
119. <!-- ##### -->
120. <!-- ##### -->
121. <!-- ##### -->
122. <!-- ##### -->
123. <!-- ##### -->
124. <!-- ##### -->
125. </xs:schema>

```

## General Response

```

01. <result command="gettransfers" ip="" date="">
02.     <currencyShort></currencyShort>
03.     <transfers count="">
04.         <transfer runno="" transfercode="">
05.             <name></name>
06.             < type></ type>
07.             <ac></ac>
08.             <vehicleType></vehicleType>

```

```

09.         <vehicleBrand></vehicleBrand>
10.         <optionValue></optionValue>
11.         <luggageCapacity></luggageCapacity>
12.         <paxCapacity></paxCapacity>
13.         <cancellationRules count="">
14.             <rule runno="">
15.                 <toDate></toDate>
16.                 <toDateDetails></toDateDetails>
17.                 <charge>
18.                     <formatted></formatted>
19.                 </charge>
20.             </rule>
21.         </cancellationRules>
22.         <cancellation></cancellation>
23.         <tariffNotes></tariffNotes>
24.         <onRequest></onRequest>
25.         <isBookable></isBookable>
26.         <total>
27.             <formatted></formatted>
28.         </total>
29.     </transfer>
30.     <from>
31.         <formatted></formatted>
32.     </from>
33.     <lookedForText></lookedForText>
34.     <allowBook></allowBook>
35. </transfers>
36. <successful>TRUE</successful>
37. </result>

```

Item	Type	Parent	Description
<b>result</b>	Element	root	The root element.
@date	Attribute	result	The date and time when the result was provided in unix timestamp.
@command	Attribute	result	The request command which returned this result.
@ip	Attribute	result	The Ipv4 address the request was made from.
<b>currencyShort</b>	Element	result	The 3 letter code which identifies the currency in which the prices are returned.
<b>transfers</b>	Element	return	The transfers response list. Contains a <b>transfer</b> element for each transfers returned by DOTWconnect system.
@count	Attribute	transfers	The @count attribute value indicates the total number of transfers that meet the search criteria.
<b>transfer</b>	Element	transfers	Contains information about one transfer.
@runno	Attribute	transfer	Indicates the transfer number in the response list. It is a running serial number starting from 0.
@transfercode	Attribute	transfer	Contains the transfer internal code.
<b>name</b>	Element	transfer	Transfer's name.
<b>type</b>	Element	transfer	Transfer's type.
<b>ac</b>	Element	transfer	Specifies if the transfer vehicle is Airconditioned or not.
<b>vehicleType</b>	Element	transfer	Specifies the type of vehicle used for this transfer.
<b>vehicleBrand</b>	Element	transfer	Specifiest the brand of the vehicle used for this transfer.
<b>optionValue</b>	Element	transfer	Allocation details received after the first request for the service specified in service@id attribute.
<b>luggageCapacity</b>	Element	transfer	Specifies the number of luggage the transfer vehicle can transport.
<b>paxCapacity</b>	Element	transfer	Specifies the maximum number of adults the transfer vehicle can transport. The customer should calculate the number of needed vehicles (for larger groups) having in mind the total number of adults and the capacity of each vehicle.
<b>cancellationRules</b>	Element	transfer	Encapsulates details about the cancellation policy applicable for this room type and rate basis.

@count	Attribute	cancellationRules	Specifies the number of cancellation policies.
rule	Element	cancellationRules	Contains details about a specific cancellation policy.
@runno	Attribute	rule	Running serial number starting from 0.
fromDate	Element	rule	Starting date of the rule. From this date forward until toDate (if present), the specified charge will be applied for any cancellations or amendments. If this element is not present then the charge will be applied from date the booking was made until toDate. Date format is: YYYY-MM-DD HH:MM:SS
fromDateDetails	Element	rule	From Date in Weekday Month Day, Year HH:MM:SS format.
toDate	Element	rule	Ending date of the rule. The specified charge will be applied for any cancellations or amendments until this date. If this element is not present then the charge from fromDate onwards. Date format is: YYYY-MM-DD HH:MM:SS
toDateDetails	Element	rule	To Date in Weekday Month Day, Year HH:MM:SS format.
charge	Element	rule	Cancellation/Amendment charge that will be applied if booking cancelled following this rule.
formatted	Element	charge	Cancellation/Amendments charge formatted as per the customer preference (decimal places, thousand separator, decimal separator).
cancellation	Element	transfer	Cancellation description.
tariffNotes	Element	transfer	Tariff notes.
onRequest	Element	transfer	Specifies if the transfer is on request. Possible values: <ul style="list-style-type: none"> <li>0 (the transfer is not on request)</li> <li>1 (the transfer is on request)</li> </ul>
isBookable	Element	transfer	Specifies if this transfer can be booked. Possible values: <ul style="list-style-type: none"> <li>yes</li> <li>no</li> </ul>
total	Element	transfer	This element contains the total price for the transfer in two formats one without any formatting and the other one properly formatted. The price will be in the currency specified in the request.
formatted	Element	total	Total cost formatted as per customer preference (decimal places, thousand separator, decimal separator).
from	Element	transfers	The starting price for this transfer. This will be the cheapest price for the transfer on any day. The price will be returned in two formats one without any formatting and the other one properly formatted.
formatted	Element	from	Starting price formatted as per the customer preference (decimal places, thousand separator, decimal separator).
lookedForText	Element	transfers	The text on which the search is based.
allowBook	Element	transfers	Specifies if the customer is allowed to make a booking for this transfer.
successful	Element	result	Specifies if the request was successful. Possible values: <ul style="list-style-type: none"> <li>TRUE</li> <li>FALSE</li> </ul>

## gettransfers.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="result" type="resultType"></xs:element>
03.   <xs:complexType name="resultType">

```

```

04.     <xs:sequence>
05.         <xs:element name="bookingDetails" type="bookingDetailsType"/></xs:element>
06.         <xs:element name="currencyShort" type="currencyShortType"/></xs:element>
07.         <xs:element name="transfers" type="transfersType"/></xs:element>
08.         <xs:element name="successful" type="trueOrFalse"/></xs:element>
09.     </xs:sequence>
10.     <xs:attribute name="command" type="xs:string" use="required" fixed="gettransfers"/></xs:attribute>
11.     <xs:attribute name="tID" type="xs:integer" use="required"/></xs:attribute>
12.     <xs:attribute name="ip" type="dotwIP" use="required"/></xs:attribute>
13.     <xs:attribute name="date" type="dotwDateType" use="required"/></xs:attribute>
14.     <xs:attribute name="version" type="versionType" use="required"/></xs:attribute>
15.     <xs:attribute name="elapsedTime" type="xs:string" use="required"/></xs:attribute>
16. </xs:complexType>
17. <xs:simpleType name="currencyShortType">
18.     <xs:restriction base="xs:string">
19.         <xs:pattern value="[A-Z]{3}"></xs:pattern>
20.     </xs:restriction>
21. </xs:simpleType>
22. <xs:simpleType name="trueOrFalse">
23.     <xs:restriction base="xs:string">
24.         <xs:pattern value="true|false|TRUE|FALSE"></xs:pattern>
25.     </xs:restriction>
26. </xs:simpleType>
27. <xs:simpleType name="trueOrFalseShort">
28.     <xs:restriction base="xs:string">
29.         <xs:pattern value="t|f"></xs:pattern>
30.     </xs:restriction>
31. </xs:simpleType>
32. <xs:simpleType name="dotwIP">
33.     <xs:restriction base="xs:string">
34.         <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[ 1][0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[0-9])" >
35.     </xs:restriction>
36. </xs:simpleType>
37. <xs:simpleType name="dotwDateType">
38.     <xs:restriction base="xs:string">
39.         <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*|([0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2})(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*"></xs:pattern>
40.     </xs:restriction>
41. </xs:simpleType>
42. <xs:simpleType name="versionType">
43.     <xs:restriction base="xs:string">
44.         <xs:pattern value="[1-9]{1}([0-9])*.([0-9])*"></xs:pattern>
45.     </xs:restriction>
46. </xs:simpleType>
47. <xs:simpleType name="yesOrNo">
48.     <xs:restriction base="xs:string">
49.         <xs:pattern value="yes|no"></xs:pattern>
50.     </xs:restriction>
51. </xs:simpleType>
52. <xs:complexType name="servicePriceType" mixed="true">
53.     <xs:sequence>
54.         <xs:element name="formatted" type="xs:string"/></xs:element>
55.     </xs:sequence>
56. </xs:complexType>
57. <xs:simpleType name="adultsCodeType">
58.     <xs:restriction base="xs:string">
59.         <xs:enumeration value="2t"/></xs:enumeration>
60.         <xs:enumeration value="1"/></xs:enumeration>
61.         <xs:enumeration value="2"/></xs:enumeration>
62.         <xs:enumeration value="3"/></xs:enumeration>
63.         <xs:enumeration value="4"/></xs:enumeration>
64.     </xs:restriction>
65. </xs:simpleType>
66. <xs:simpleType name="availableType">
67.     <xs:restriction base="xs:string">
68.         <xs:pattern value="available|request"></xs:pattern>
69.     </xs:restriction>
70. </xs:simpleType>
71. <xs:simpleType name="transferTypeType">
72.     <xs:restriction base="xs:string">
73.         <xs:pattern value="private|scheduled"></xs:pattern>
74.     </xs:restriction>
75. </xs:simpleType>
76. <xs:simpleType name="shortTransferTypeType">
77.     <xs:restriction base="xs:string">
78.         <xs:pattern value="p|s"></xs:pattern>
79.     </xs:restriction>
80. </xs:simpleType>
81. <xs:simpleType name="empty">
82.     <xs:restriction base="xs:string">
83.         <xs:maxLength value="0"></xs:maxLength>
84.     </xs:restriction>
85. </xs:simpleType>
86. <xs:simpleType name="hourType">
87.     <xs:restriction base="xs:string">
88.         <xs:pattern value="([0-1][0-9]|2[0-3]):[0-5][0-9]"></xs:pattern>
89.     </xs:restriction>
90. </xs:simpleType>
91. <xs:complexType name="transfersType">
92.     <xs:sequence>
93.         <xs:element name="transfer" type="transferType" minOccurs="0" maxOccurs="unbounded"/></xs:element>
94.         <xs:element name="from" type="servicePriceType" minOccurs="1" maxOccurs="unbounded"/></xs:element>
95.         <xs:element name="lookedForText" type="xs:string" minOccurs="1" maxOccurs="unbounded"/></xs:element>
96.         <xs:element name="allowBook" type="yesOrNo" minOccurs="1" maxOccurs="unbounded"/></xs:element>
97.     </xs:sequence>

```

```

98.     <xs:attribute name="count" type="xs:nonNegativeInteger" use="required"></xs:attribute>
99. </xs:complexType>
100. <xs:complexType name="transferType">
101.   <xs:all>
102.     <xs:element name="name" type="xs:string" minOccurs="1"></xs:element>
103.     <xs:element name="type" type="shortTransferTypeType" minOccurs="1"></xs:element>
104.     <xs:element name="ac" type="trueOrFalseShort" minOccurs="1"></xs:element>
105.     <xs:element name="vehicleType" type="xs:nonNegativeInteger" minOccurs="1"></xs:element>
106.     <xs:element name="vehicleBrand" type="xs:string" minOccurs="1"></xs:element>
107.     <xs:element name="optionValue" type="xs:string" minOccurs="1"></xs:element>
108.     <xs:element name="luggageCapacity" type="xs:nonNegativeInteger" minOccurs="1"></xs:element>
109.     <xs:element name="paxCapacity" type="xs:nonNegativeInteger" minOccurs="1"></xs:element>
110.     <xs:element name="cancellationRules" type="cancellationRulesType" minOccurs="1"></xs:element>
111.     <xs:element name="cancellation" type="xs:string" minOccurs="1"></xs:element>
112.     <xs:element name="tariffNotes" type="xs:anyType" minOccurs="1"></xs:element>
113.     <xs:element name="onRequest" type="xs:nonNegativeInteger" minOccurs="1"></xs:element>
114.     <xs:element name="isBookable" type="yesOrNo" minOccurs="1"></xs:element>
115.     <xs:element name="total" type="servicePriceType" minOccurs="0"></xs:element>
116.   </xs:all>
117.   <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"></xs:attribute>
118.   <xs:attribute name="transfercode" type="xs:nonNegativeInteger" use="required"></xs:attribute>
119. </xs:complexType>
120. <xs:complexType name="cancellationRulesType">
121.   <xs:sequence>
122.     <xs:element name="rule" type="ruleType" maxOccurs="unbounded"></xs:element>
123.   </xs:sequence>
124.   <xs:attribute name="count" type="xs:unsignedInt" use="required"></xs:attribute>
125. </xs:complexType>
126. <xs:complexType name="ruleType">
127.   <xs:sequence>
128.     <xs:element name="fromDate" type="dotwDateType" minOccurs="0"></xs:element>
129.     <xs:element name="fromDateDetails" type="xs:string" minOccurs="0"></xs:element>
130.     <xs:element name="toDate" type="dotwDateType" minOccurs="0"></xs:element>
131.     <xs:element name="toDateDetails" type="xs:string" minOccurs="0"></xs:element>
132.     <xs:element name="charge" type="servicePriceType"></xs:element>
133.   </xs:sequence>
134.   <xs:attribute name="runno" type="xs:unsignedInt" use="required"></xs:attribute>
135. </xs:complexType>
136. <xs:complexType name="bookingDetailsType">
137.   <xs:sequence>
138.     <xs:element name="fromDate" type="dotwDateType" minOccurs="1"></xs:element>
139.     <xs:element name="pickUpFrom" type="xs:nonNegativeInteger" minOccurs="1"></xs:element>
140.     <xs:element name="dropOffTo" type="xs:nonNegativeInteger" minOccurs="1"></xs:element>
141.     <xs:element name="currency" type="xs:nonNegativeInteger" minOccurs="1"></xs:element>
142.     <xs:element name="startingTime" type="xs:nonNegativeInteger" minOccurs="1"></xs:element>
143.     <xs:element name="transfers" type="transfersOccupancyType" minOccurs="1"></xs:element>
144.     <xs:element name="productId" type="xs:nonNegativeInteger" minOccurs="1"></xs:element>
145.   </xs:sequence>
146. </xs:complexType>
147. <xs:complexType name="transfersOccupancyType">
148.   <xs:sequence>
149.     <xs:element name="adults" type="adultsCodeType" minOccurs="1"></xs:element>
150.     <xs:element name="children" type="childrenType"></xs:element>
151.   </xs:sequence>
152. </xs:complexType>
153. <xs:complexType name="childrenType">
154.   <xs:sequence>
155.     <xs:element minOccurs="0" maxOccurs="4" name="child" type="childType"></xs:element>
156.   </xs:sequence>
157.   <xs:attribute name="no" type="xs:integer" use="required"></xs:attribute>
158. </xs:complexType>
159. <xs:complexType name="childType">
160.   <xs:simpleContent>
161.     <xs:extension base="childAge">
162.       <xs:attribute name="runno" type="xs:integer" use="required"></xs:attribute>
163.     </xs:extension>
164.   </xs:simpleContent>
165. </xs:complexType>
166. <xs:simpleType name="childAge">
167.   <xs:restriction base="xs:integer">
168.     <xs:minInclusive value="1"></xs:minInclusive>
169.     <xs:maxInclusive value="12"></xs:maxInclusive>
170.   </xs:restriction>
171. </xs:simpleType>
172. </xs:schema>

```

## General Request

```

01. <customer>
02.   <username>username</username>
03.   <password>password</password>
04.   <id>company Code</id>
05.   <source></source>
06.   <product>transfer</product>
07.   <request command="getlefttosell">
08.     <bookingDetails>
09.       <fromDate></fromDate>

```

```

10.         <startingTime></startingTime>
11.         <pickUpFrom></pickUpFrom>
12.         <dropOffTo></dropOffTo>
13.         <transfers>
14.             <transfer>
15.                 <transferCode></transferCode>
16.                 <adults>adults</adults>
17.                 <children no=""></children>
18.             </transfer>
19.         </transfers>
20.         <productId></productId>
21.     </bookingDetails>
22. </request>
23. </customer>

```

Item	Type	Parent	Description	Required
<b>bookingDetails</b>	Element	request	Contains transfer date, time, pickup dropoff points, passenger details and the currency code in which the prices are returned.	Yes
<b>fromDate</b>	Element	bookingDetails	The Date for which transfer is required.	Yes
<b>startingTime</b>	Element	bookingDetails	The time of the transfer.	Yes
<b>pickUpFrom</b>	Element	bookingDetails	Specifies the location from where the guest needs to be picked up from	Yes
<b>dropOffTo</b>	Element	bookingDetails	Specifies the location where the guest needs to be dropped off	Yes
<b>transfers</b>	Element	bookingDetails	Contains details about the passengers for this transfer.	Yes
<b>transferCode</b>	Element	transfers	Specifies the transfer's internal code and it must be populated with the returned string of the optionValue element from our getTransfers response of the desired transfer.	Yes
<b>adults</b>	Element	transfers	Specifies the number of adults for this transfer.	Yes
<b>children</b>	Element	transfers	Specifies the details of children accompanying	Yes
@no	Attribute	children	Specifies the total number of children. If the search does not include any children then the value should be 0.	Yes
<b>child</b>	Element	children	Specifies the child age.	Yes, if children@no > 0.
@runno	Attribute	child	Specifies for which child the age is applicable.	Yes, if parent present.
<b>productId</b>	Element	bookingDetails	Specifies the ID of the product for which the quantity is requested.	Yes.

#### getlefttosell\_transfer.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.     <!-- ##### -->
03.     <xs:element name="customer">
04.         <xs:complexType>
05.             <xs:sequence>
06.                 <xs:group ref="loginDetailsGroup"/></xs:group>
07.                 <xs:element name="product" type="xs:string" fixed="transfer"/></xs:element>
08.                 <xs:element name="request" type="requestType"/></xs:element>
09.             </xs:sequence>
10.         </xs:complexType>
11.     </xs:element>
12.     <!-- ##### -->
13.     <xs:complexType name="requestType">
14.         <xs:sequence>
15.             <xs:element name="bookingDetails" type="getLeftToSellBookingDetailsType"/></xs:element>
16.         </xs:sequence>
17.         <xs:attribute name="command" type="xs:string" use="required" fixed="getlefttosell"/></xs:attribute>
18.         <xs:attribute name="debug" type="xs:integer" use="optional"/></xs:attribute>

```

```
19.     <xs:attribute name="defaultnamespace" type="xs:string" use="optional" fixed="true"></xs:attribute>
20. </xs:complexType>
21. <!-- ##### -->
22. <xs:group name="loginDetailsGroup">
23.     <xs:sequence>
24.         <xs:element name="username" type="xs:string"></xs:element>
25.         <xs:element name="password" type="passwordType"></xs:element>
26.         <xs:element name="id" type="xs:nonNegativeInteger"></xs:element>
27.         <xs:element name="source" type="sourceType"></xs:element>
28.     </xs:sequence>
29. </xs:group>
30. <!-- ##### -->
31. <xs:simpleType name="passwordType">
32.     <xs:restriction base="xs:string">
33.         <xs:length value="32"></xs:length>
34.     </xs:restriction>
35. </xs:simpleType>
36. <!-- ##### -->
37. <xs:simpleType name="sourceType">
38.     <xs:restriction base="xs:string">
39.         <xs:enumeration value="0"></xs:enumeration>
40.         <xs:enumeration value="1"></xs:enumeration>
41.         <xs:enumeration value="2"></xs:enumeration>
42.     </xs:restriction>
43. </xs:simpleType>
44. <!-- ##### -->
45. <xs:complexType name="getLeftToSellBookingDetailsType">
46.     <xs:sequence>
47.         <xs:group ref="getLeftToSellTransfersBookingDetailsDefaultGroup"></xs:group>
48.     </xs:sequence>
49. </xs:complexType>
50. <!-- ##### -->
51. <xs:group name="getLeftToSellTransfersBookingDetailsDefaultGroup">
52.     <xs:sequence>
53.         <xs:element name="fromDate" type="dotwDateType"></xs:element>
54.         <xs:element name="startingTime" type="xs:nonNegativeInteger"></xs:element>
55.         <xs:element name="pickUpFrom" type="xs:nonNegativeInteger"></xs:element>
56.         <xs:element name="dropOffTo" type="xs:nonNegativeInteger"></xs:element>
57.         <xs:element name="transfers">
58.             <xs:complexType>
59.                 <xs:sequence>
60.                     <xs:element name="transfer" type="getLeftToSellTransfers"></xs:element>
61.                 </xs:sequence>
62.             </xs:complexType>
63.         </xs:element>
64.         <xs:element name="productId" type="xs:nonNegativeInteger" minOccurs="1"></xs:element>
65.     </xs:sequence>
66. </xs:group>
67. <!-- ##### -->
68. <xs:simpleType name="dotwDateType">
69.     <xs:restriction base="xs:string">
70.         <xs:pattern value="[0-9]{10,11}|2[0-9]{3,3}-(0[1-9]|[1][0-2])-(0[1-9]|[1-2][0-9]|3[0-1])"></xs:pattern>
71.     </xs:restriction>
72. </xs:simpleType>
73. <!-- ##### -->
74. <xs:complexType name="getLeftToSellTransfers">
75.     <xs:sequence>
76.         <xs:element name="transferCode" type="xs:string"></xs:element>
77.         <xs:group ref="transferOccupancyType"></xs:group>
78.     </xs:sequence>
79. </xs:complexType>
80. <!-- ##### -->
81. <xs:group name="transferOccupancyType">
82.     <xs:sequence>
83.         <xs:element name="adults" type="adultsCodeType"></xs:element>
84.         <xs:element name="children" type="childrenType"></xs:element>
85.     </xs:sequence>
86. </xs:group>
87. <!-- ##### -->
88. <xs:simpleType name="adultsCodeType">
89.     <xs:restriction base="xs:string">
90.         <xs:enumeration value="2t"></xs:enumeration>
91.         <xs:enumeration value="1"></xs:enumeration>
92.         <xs:enumeration value="2"></xs:enumeration>
93.         <xs:enumeration value="3"></xs:enumeration>
94.         <xs:enumeration value="4"></xs:enumeration>
95.     </xs:restriction>
96. </xs:simpleType>
97. <!-- ##### -->
98. <xs:complexType name="childrenType">
99.     <xs:sequence>
100.         <xs:element minOccurs="0" maxOccurs="4" name="child" type="childType"></xs:element>
101.     </xs:sequence>
102.     <xs:attribute name="no" type="xs:integer" use="required"></xs:attribute>
103. </xs:complexType>
104. <!-- ##### -->
105. <xs:complexType name="childType">
106.     <xs:simpleContent>
107.         <xs:extension base="childAge">
108.             <xs:attribute name="runno" type="xs:integer" use="required"></xs:attribute>
109.         </xs:extension>
110.     </xs:simpleContent>
111. </xs:complexType>
112. <!-- ##### -->
113. <xs:simpleType name="childAge">
114.     <xs:restriction base="xs:integer">
115.         <xs:minInclusive value="1"></xs:minInclusive>
```



```

116.         <xs:maxInclusive value="12"></xs:maxInclusive>
117.     </xs:restriction>
118. </xs:simpleType>
119. <!-- ##### -->
120. <!-- ##### -->
121. <!-- ##### -->
122. <!-- ##### -->
123. <!-- ##### -->
124. <!-- ##### -->
125. <!-- ##### -->
126. </xs:schema>

```

## General Response

```

01. <result command="getlefttosell" ip="" date="">
02.   <leftToSell></leftToSell>
03.   <successful>TRUE</successful>
04. </result>

```

Item	Type	Parent	Description
result	Element	root	The root element.
@date	Attribute	result	The date and time when the result was provided in unix timestamp.
@command	Attribute	result	The request command which returned this result.
@ip	Attribute	result	The Ipv4 address the request was made from.
leftToSell	Element	result	Contains the number of available transfers.
successful	Element	result	Specifies if the request was successful. Possible values: <ul style="list-style-type: none"> <li>TRUE</li> <li>FALSE</li> </ul>

## getlefttosell\_transfers.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="result" type="resultType"></xs:element>
03.   <xs:complexType name="resultType">
04.     <xs:all>
05.       <xs:element name="bookingDetails" type="bookingDetailsType"></xs:element>
06.       <xs:element name="leftToSell" type="xs:nonNegativeInteger"></xs:element>
07.       <xs:element name="successful" type="trueOrFalse"></xs:element>
08.     </xs:all>
09.     <xs:attribute name="command" type="xs:string" use="required" fixed="getlefttosell"></xs:attribute>
10.     <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
11.     <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
12.     <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
13.     <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
14.     <xs:attribute name="elapsedTime" type="xs:string" use="required"></xs:attribute>
15.   </xs:complexType>
16.   <xs:complexType name="bookingDetailsType">
17.     <xs:sequence>
18.       <xs:element name="fromDate" type="dotwDateType" minOccurs="1" maxOccurs="1"></xs:element>
19.       <xs:element name="startingTime" type="xs:integer" minOccurs="1" maxOccurs="1"></xs:element>
20.       <xs:element name="pickUpFrom" type="xs:integer" minOccurs="1" maxOccurs="1"></xs:element>
21.       <xs:element name="dropOffTo" type="xs:integer" minOccurs="1" maxOccurs="1"></xs:element>
22.       <xs:element name="transfers" type="transfersType" minOccurs="1" maxOccurs="1"></xs:element>
23.       <xs:element name="productId" type="xs:integer" minOccurs="1" maxOccurs="1"></xs:element>
24.     </xs:sequence>
25.   </xs:complexType>
26.   <xs:complexType name="transfersType">
27.     <xs:sequence>
28.       <xs:element name="transfer" type="transferType" minOccurs="1" maxOccurs="1"></xs:element>
29.     </xs:sequence>
30.   </xs:complexType>
31.   <xs:complexType name="transferType">
32.     <xs:sequence>
33.       <xs:element name="transferCode" type="xs:string" minOccurs="1" maxOccurs="1"></xs:element>
34.       <xs:element name="adults" type="adultsCodeType"></xs:element>
35.       <xs:element name="children" type="childrenType"></xs:element>
36.     </xs:sequence>
37.   </xs:complexType>
38.   <xs:simpleType name="adultsCodeType">
39.     <xs:restriction base="xs:string">
40.       <xs:enumeration value="2t"></xs:enumeration>

```



```

41.         <xs:enumeration value="1"></xs:enumeration>
42.         <xs:enumeration value="2"></xs:enumeration>
43.         <xs:enumeration value="3"></xs:enumeration>
44.         <xs:enumeration value="4"></xs:enumeration>
45.     </xs:restriction>
46. </xs:simpleType>
47. <xs:complexType name="childrenType">
48.     <xs:sequence>
49.         <xs:element name="child" type="childType" minOccurs="0" maxOccurs="unbounded"></xs:element>
50.     </xs:sequence>
51.     <xs:attribute name="no" type="xs:unsignedShort" use="required"></xs:attribute>
52.     <xs:attribute name="child" type="xs:unsignedShort" use="required"></xs:attribute>
53. </xs:complexType>
54. <xs:complexType name="childType" mixed="true">
55.     <xs:attribute name="runno" type="xs:unsignedShort" use="required"></xs:attribute>
56. </xs:complexType>
57. <xs:simpleType name="currencyShortType">
58.     <xs:restriction base="xs:string">
59.         <xs:pattern value="[A-Z]{3}"></xs:pattern>
60.     </xs:restriction>
61. </xs:simpleType>
62. <xs:simpleType name="trueOrFalse">
63.     <xs:restriction base="xs:string">
64.         <xs:pattern value="true|false|TRUE|FALSE"></xs:pattern>
65.     </xs:restriction>
66. </xs:simpleType>
67. <xs:simpleType name="dotwIP">
68.     <xs:restriction base="xs:string">
69.         <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9][0-9]{2}|1[0-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|1[0-9]{1}[0-9]{1}|[1-9]|0).(<
4>[0-9]|[0-1]{1}[0-9]{2}|1[0-9]{1}[0-9]{1}|1[0-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|1[0-9]{1}[0-9]{1}|[1-9]|0)">
</xs:pattern>
70.     </xs:restriction>
71. </xs:simpleType>
72. <xs:simpleType name="dotwDateType">
73.     <xs:restriction base="xs:string">
74.         <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*[0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*"></xs:pattern>
75.     </xs:restriction>
76. </xs:simpleType>
77. <xs:simpleType name="versionType">
78.     <xs:restriction base="xs:string">
79.         <xs:pattern value="[1-9]{1}([0-9])*.([0-9])*"></xs:pattern>
80.     </xs:restriction>
81. </xs:simpleType>
82. <xs:complexType name="bookingsType">
83.     <xs:sequence>
84.         <xs:element name="booking" type="bookingType" minOccurs="1" maxOccurs="unbounded"></xs:element>
85.     </xs:sequence>
86. </xs:complexType>
87. <xs:complexType name="bookingType">
88.     <xs:sequence>
89.         <xs:element name="bookingCode" type="xs:nonNegativeInteger"></xs:element>
90.         <xs:element name="bookingReferenceNumber" type="xs:string"></xs:element>
91.         <xs:element name="bookingStatus" type="xs:nonNegativeInteger"></xs:element>
92.         <xs:element name="servicePrice" type="servicePriceType"></xs:element>
93.         <xs:element name="mealsPrice" type="servicePriceType"></xs:element>
94.         <xs:element name="price" type="servicePriceType"></xs:element>
95.         <xs:element name="currency" type="xs:nonNegativeInteger"></xs:element>
96.         <xs:element name="type" type="xs:string"></xs:element>
97.         <xs:element name="voucher" type="xs:string"></xs:element>
98.         <xs:element name="paymentGuaranteedBy" type="xs:string"></xs:element>
99.         <xs:element name="emergencyContacts" type="emergencyContactsType"></xs:element>
100.     </xs:sequence>
101.     <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"></xs:attribute>
102. </xs:complexType>
103. <xs:complexType name="servicePriceType" mixed="true">
104.     <xs:sequence>
105.         <xs:element name="formatted" type="xs:string"></xs:element>
106.     </xs:sequence>
107. </xs:complexType>
108. <xs:complexType name="emergencyContactsType">
109.     <xs:sequence>
110.         <xs:element name="emergencyContact" type="emergencyContactType" minOccurs="0" maxOccurs="unbounded">
</xs:element>
111.     </xs:sequence>
112.     <xs:attribute name="count" type="xs:nonNegativeInteger" use="required"></xs:attribute>
113. </xs:complexType>
114. <xs:complexType name="emergencyContactType">
115.     <xs:sequence>
116.         <xs:element name="salutation">
117.             <xs:complexType>
118.                 <xs:simpleContent>
119.                     <xs:extension base="xs:string">
120.                         <xs:attribute name="id" type="xs:nonNegativeInteger" use="required"></xs:attribute>
121.                     </xs:extension>
122.                 </xs:simpleContent>
123.             </xs:complexType>
124.         </xs:element>
125.         <xs:element name="fullName" type="xs:string"></xs:element>
126.         <xs:element name="phone" type="xs:string"></xs:element>
127.     </xs:sequence>
128.     <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"></xs:attribute>
129. </xs:complexType>
130. </xs:schema>

```

# Save Booking

## General Request

The **confirmbooking** method of DOTWconnect is used to generate an Itinerary which contains one or more rooms or services booked. Each room or service booked will have a unique reference number which could be individually amended or cancelled. Multiple rooms or services booked in the same booking will be grouped together by a unique Itinerary Number. The functionality of **confirmbooking** is similar to the **savebooking** method (section c) except for the difference that when the **confirmbooking** is used the booking is guaranteed in terms of availability and rates where as **savebooking** only saves the booking data. Using confirmbooking you have an option of creating a new Itinerary or adding services to an existing Itinerary. The format of the request and response for this method is explained in the following sections.

```

01.  <customer>
02.    <username>username</username>
03.    <password>password</password>
04.    <id>company code</id>
05.    <source>0</source>
06.    <product>transfer</product>
07.    <request command="savebooking">
08.      <bookingDetails>
09.        <fromDate></fromDate>
10.        <toDate></toDate>
11.        <currency></currency>
12.        <commission></commission>
13.        <productId></productId>
14.        <customerReference></customerReference>
15.        <cars></cars>
16.        <carsOnReq></carsOnReq>
17.        <knownLeftToSell></knownLeftToSell>
18.        <transfers no="1">
19.          <transfer>
20.            <pickUpFrom></pickUpFrom>
21.            <dropOffTo></dropOffTo>
22.            <transferCode></transferCode>
23.            <startingTime></startingTime>
24.            <adults></adults>
25.            <children no="0"></children>
26.            <passengersDetails>
27.              <passenger leading="yes">
28.                <salutation></salutation>
29.                <firstName></firstName>
30.                <lastName></lastName>
31.              </passenger>
32.            </passengersDetails>
33.            <specialRequests count="0"></specialRequests>
34.            <pickUpLocation></pickUpLocation>
35.            <dropOffLocation></dropOffLocation>
36.          </transfer>
37.        </transfers>
38.      </bookingDetails>
39.    </request>
40.  </customer>

```

Item	Type	Parent	Description	Required
bookingDetails	Element	request	Contains travel dates, detailed room occupancy, currency code in which the prices are returned and also the internal code for the transfer you want to receive rates and allocation details.	Yes.
fromDate	Element	bookingDetails	Arrival date in dotw date format.	Yes.
toDate	Element	bookingDetails	Departure date in dotw date format.	Yes.
currency	Element	bookingDetails	Internal code of the currency in which the customer will see the prices.	Yes.
productId	Element	bookingDetails	Internal code of the transfer you wish to receive rates and allocation details for.	Yes.
customerReference	Element	bookingDetails	Agent Reference. Free text that will be assigned to this booking Maximum 50 characters.	No.

<b>cars</b>	Element	bookingDetails	Used as a confirmation mechanism. It specifies the number of transfers (vehicles) the customer agrees to be confirmed directly from allotment. If at the time confirming the booking the system is not able to confirm this number (because some other customer has priorly booked them) an error will be thrown	Yes.
<b>carsOnRequest</b>	Element	bookingDetails	Used as a confirmation mechanism. If at the time of confirming the booking the system is not able to confirm this number (because some other customer has priorly booked them) an error will be thrown	Yes.
<b>knownLeftToSell</b>	Element	bookingDetails	This value is pasted from the anteriour request „lefttosell”	Yes.
<b>transfers</b>	Element	bookingDetails	Contains a <b>transfer</b> element for each transfer the customer wishes to book	Yes.
@no	Attribute	transfers	Specifies the total number of transfers.	Yes.
<b>transfer</b>	element	transfers	Encapsulates details about one transfer.	Yes.
<b>pickUpFrom</b>	Element	transfer	Specifies the pickup location.	Yes.
<b>dropOffTo</b>	Element	transfer	Specifies the drop off location.	Yes.
<b>transferCode</b>	Element	transfer	Specifies the transfer internal code	Yes.
<b>startingTime</b>	Element	transfer	Specifies the starting time for the transfer.	Yes.
<b>adults</b>	Element	transfer	Specifies the number of adults that will be transfered.	Yes.
<b>children</b>	Element	transfer	Specifies the details about the accompanying children in this transfer.	Yes.
@no	Attribute	children	Specifies the total number of. If the booking does not involve any children then the value should be 0.	Yes.
<b>child</b>	Element	children	Specifies the child age.	No.
@runno	Attribute	child	Specifies for which child the age is applicable.	Yes, if <b>children@no</b> > 0.
<b>passengersDetails</b>	Element	transfer	Encapsulates details about passengers in the booking. Please note for each transfer booked at least one <b>passenger</b> element with @leading value yes should be present.	Yes.
<b>passenger</b>	Element	passengersDetails	Encapsulates details about one passenger in the booking. Please note for each transfer booked the room will be blocked under the leading passenger.	Yes, at least one occurrence.
@leading	Attribute	passenger	Specifies if the passenger is the leading passenger for this transfer. You can skip this attrbiute if the passenger is not the leaading one. Possible values: <ul style="list-style-type: none"> <li>• yes</li> <li>• no</li> </ul>	Yes, at least one occurrence with value `yes`.
<b>salutation</b>	Element	passenger	The internal code for Salutations (Mr, Mrs etc). This code can be obtained by calling the <b>getsalutations</b> method.	Yes.
<b>firstName</b>	Element	passenger	First name of the leading passenger	Yes.
<b>lastName</b>	Element	passenger	Last name of the leading passenger.	Yes.
<b>specialRequests</b>	Element	transfer	Encapsulates the details containing the special requests the customers has requested for this room.	Yes.

<b>pickUpLocation</b>	Element	transfer	Specifies the pick up location	Yes.
<b>dropOffLocation</b>	Element	transfer	Specifies the drop off location.	Yes.

## General Response

For every **confirmbooking** request to the DOTWconnect Server the response format will be as follows. Details of every return element are given in the table below. The element **successful** identifies whether the **confirmbooking** method was successful or not.

```

01. <result command="savebooking" ip="172.0.0.1" date="2009-11-11 06:58:28">
02.   <currencyShort></currencyShort>
03.   <confirmationText></confirmationText>
04.   <returnedCode></returnedCode>
05.   <bookings>
06.     <booking runno="0">
07.       <bookingCode></bookingCode>
08.       <bookingReferenceNumber></bookingReferenceNumber>
09.       <bookingStatus></bookingStatus>
10.       <servicePrice>
11.         <formatted></formatted>
12.       </servicePrice>
13.       <mealsPrice>
14.         <formatted></formatted>
15.       </mealsPrice>
16.       <price>
17.         <formatted></formatted>
18.       </price>
19.       <currency></currency>
20.       < type></ type>
21.       <voucher></voucher>
22.       <paymentGuaranteedBy></paymentGuaranteedBy>
23.       <emergencyContacts count="0"></emergencyContacts>
24.     </booking>
25.   </bookings>
26.   <successful>TRUE</successful>
27. </result>

```

Item	Type	Parent	Description
<b>result</b>	Element	root	The root element.
@command	Attribute	result	The request command which returned this result.
@date	Attribute	result	The date and time when the result was provided in unix timestamp.
@ip	Attribute	result	The IPv4 address the request was made from.
<b>currencyShort</b>	Element	result	The currency that will be used for paying the booking.
<b>confirmationText</b>	Element	result	Itinerary Confirmation Text in HTML format.
<b>returnedCode</b>	Element	product	Internal itinerary code. This will have to be passed to all other operations regarding this booking and accepts itinerary codes.
<b>bookings</b>	Element	product	Encapsulates information about all bookings.
<b>booking</b>	Element	bookings	Information about one booking
@runno	Attribute	booking	Running number starting from 0.
<b>bookingCode</b>	Element	booking	Internal booking code. This will have to be passed to all other operations regarding this booking.

<b>bookingReferenceNumber</b>	Element	booking	Confirmation number for this booking. The unique confirmation number generated by DOTWconnect. This number is provided to the Customers and Suppliers and is a key to identify this booking. The confirmation number is the internal booking code prefixed with the service and booking office details.
<b>bookingStatus</b>	Element	booking	Specifies if the booking is confirmed from allotment or on request. Possible values: <ul style="list-style-type: none"> <li>• 1 - on request</li> <li>• 2 - confirmed</li> </ul>
<b>servicePrice</b>	Element	booking	Payable amount for this booking. Extra meals price is not included.
<b>formatted</b>	Element	servicePrice	This element contains the payable amount for this booking formatted as per the customer preference (decimal places, thousand separator, decimal separator)
<b>price</b>	Element	booking	Total payable amount for this booking.
<b>formatted</b>	Element	price	This element contains the total payable amount for this booking, including extra meals. formatted as per the customer preference (decimal places, thousand separator, decimal separator)
<b>currency</b>	Element	booking	Internal code for the currency in which the prices are calculated
<b>type</b>	Element	booking	Service type. Possible values: <ul style="list-style-type: none"> <li>• Hotel</li> <li>• Apartment</li> <li>• Transfer</li> </ul>
<b>voucher</b>	Element	booking	Booking voucher in HTML format.
<b>paymentGuaranteedBy</b>	Element	booking	Specifies who guarantees for the booking. This information needs to be present on the voucher.
<b>emergencyContacts</b>	Element	booking	Groups relevant contacts in case of emergency. These contact numbers need to be present on the voucher.
@count	Attribute	emergencyContacts	Specifies how many contacts are available for this booking.
<b>emergencyContact</b>	Element	emergencyContacts	Groups information about an emergency contact.
@runno	Attribute	emergencyContacts	Serial number starting from 0.
<b>salutation</b>	Element	emergencyContact	Contact Person Salutation
@id	Attribute	salutation	Internal code for the salutation
<b>fullName</b>	Element	emergencyContact	Contact Person full name
<b>phone</b>	Element	emergencyContact	Contact phone number
<b>successful</b>	Element	result	Specifies if the request was successfully processed. Possible values: <ul style="list-style-type: none"> <li>• TRUE</li> <li>• FALSE</li> </ul>

#### savebooking\_transfer.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="result" type="resultType"></xs:element>
03.   <xs:complexType name="resultType">

```

```

04.      <xs:all>
05.          <xs:element name="currencyShort" type="currencyShortType" minOccurs="0"></xs:element>
06.          <xs:element name="returnedCode" type="xs:nonNegativeInteger"></xs:element>
07.          <xs:element name="returnedServiceCodes" type="returnedServiceCodesType"></xs:element>
08.          <xs:element name="successful" type="trueOrFalse"></xs:element>
09.      </xs:all>
10.      <xs:attribute name="command" type="xs:string" use="required" fixed="savebooking"></xs:attribute>
11.      <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
12.      <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
13.      <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
14.      <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
15.      <xs:attribute name="elapsedTime" type="xs:string" use="required"></xs:attribute>
16.  </xs:complexType>
17.  <xs:simpleType name="dotwIP">
18.      <xs:restriction base="xs:string">
19.          <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9][0-9]{2}|1[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|1[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|1[0-9]{1}|[1-9]|0).([0-9]{1,3})" />
20.      </xs:restriction>
21.  </xs:simpleType>
22.  <xs:simpleType name="dotwDateType">
23.      <xs:restriction base="xs:string">
24.          <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}([0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})?|[0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2}([0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})?|[0-9]{4,4}T[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2}([0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})?" />
25.      </xs:restriction>
26.  </xs:simpleType>
27.  <xs:simpleType name="versionType">
28.      <xs:restriction base="xs:string">
29.          <xs:pattern value="[1-9]{1}([0-9])?."([0-9])?" />
30.      </xs:restriction>
31.  </xs:simpleType>
32.  <xs:simpleType name="trueOrFalse">
33.      <xs:restriction base="xs:string">
34.          <xs:pattern value="true|false|TRUE|FALSE" />
35.      </xs:restriction>
36.  </xs:simpleType>
37.  <xs:simpleType name="currencyShortType">
38.      <xs:restriction base="xs:string">
39.          <xs:pattern value="[A-Z]{3}" />
40.      </xs:restriction>
41.  </xs:simpleType>
42.  <xs:complexType name="returnedServiceCodesType">
43.      <xs:sequence>
44.          <xs:element name="returnedServiceCode" type="returnedServiceCodeType" maxOccurs="unbounded"></xs:element>
45.      </xs:sequence>
46.      <xs:attribute name="count" type="xs:nonNegativeInteger" use="required"></xs:attribute>
47.  </xs:complexType>
48.  <xs:complexType name="returnedServiceCodeType">
49.      <xs:simpleContent>
50.          <xs:extension base="xs:nonNegativeInteger">
51.              <xs:attribute name="runno" type="xs:unsignedInt"></xs:attribute>
52.          </xs:extension>
53.      </xs:simpleContent>
54.  </xs:complexType>
55. </xs:schema>

```

## Confirm Booking

### General Request

The **confirmbooking** method of DOTWconnect is used to generate an Itinerary which contains one or more successfully booked rooms or successfully booked services. Each booked room or service will have a unique reference number (booking code) which can be individually amended or cancelled.

The format of the request and response for this method is explained in the following section.

```

01.  <p>
02.      <customer>
03.          <username>username</username>
04.          <password>password</password>
05.          <id>comapny code</id>
06.          <source>1</source>
07.          <product>transfer</product>
08.          <request command="confirmbooking">
09.              <bookingDetails>
10.                  <fromDate></fromDate>
11.                  <toDate></toDate>
12.                  <currency></currency>
13.                  <productId></productId>
14.                  <customerReference></customerReference>
15.                  <commission></commission>
16.                  <cars></cars>
17.                  <knownLeftToSell></knownLeftToSell>
18.                  <transfers no="1">

```

```

19.         <transfer>
20.             <transferCode></transferCode>
21.             <pickUpFrom></pickUpFrom>
22.             <dropOffTo></dropOffTo>
23.             <startingTime></startingTime>
24.             <adults></adults>
25.             <children no="0"></children>
26.             <passengersDetails>
27.                 <passenger leading="yes">
28.                     <salutation></salutation>
29.                     <firstName></firstName>
30.                     <lastName></lastName>
31.                 </passenger>
32.             </passengersDetails>
33.             <specialRequests count="0"></specialRequests>
34.             <pickUpLocation></pickUpLocation>
35.             <dropOffLocation></dropOffLocation>
36.             <arrivalAirline></arrivalAirline>
37.             <arrivingFromCity></arrivingFromCity>
38.             <flightNo></flightNo>
39.             <arrivalHour></arrivalHour>
40.             <arrivalMinute></arrivalMinute>
41.             <departingAirline></departingAirline>
42.             <departingToCity></departingToCity>
43.             <departingFlightNo></departingFlightNo>
44.             <departingHour></departingHour>
45.             <departingMinute></departingMinute>
46.         </transfer>
47.     </transfers>
48. </bookingDetails>
49. </request>
50. </customer>
51. </p>

```

Item	Type	Parent	Description	Required
<b>bookingDetails</b>	Element	request	Contains travel dates, detailed room occupancy, currency code in which the prices are returned and also the internal code for the transfer you want to receive rates and allocation details.	Yes.
<b>fromDate</b>	Element	bookingDetails	Arrival date in dotw date format.	Yes.
<b>toDate</b>	Element	bookingDetails	Departure date in dotw date format.	Yes.
<b>currency</b>	Element	bookingDetails	Internal code of the currency in which the customer will see the prices.	Yes.
<b>productId</b>	Element	bookingDetails	Internal code of the transfer you wish to receive rates and allocation details for.	Yes.
<b>customerReference</b>	Element	bookingDetails	Agent Reference. Free text that will be assigned to this booking Maximum 50 characters.	No.
<b>cars</b>	Element	bookingDetails	Used as a confirmation mechanism. It specifies the number of transfers (vehicles) the customer agrees to be confirmed directly from allotment. If at the time confirming the booking the system is not able to confirm this number (because some other customer has priorly booked them) an error will be thrown.	Yes.
<b>knownLeftToSell</b>	Element	bookingDetails	This value is pasted from the anteriour request &#x2013; &#x2013; lefttosell&#x2013; &#x2013;	Yes.
<b>transfers</b>	Element	bookingDetails	Contains a <b>transfer</b> element for each transfer the customer wishes to book	Yes.
<b>@no</b>	Attribute	transfers	Specifies the total number of transfers.	Yes.
<b>transfer</b>	element	transfers	Encapsulates details about one transfer.	Yes.
<b>pickUpFrom</b>	Element	transfer	Specifies the pickup location and it must be populated with our internal DOTW code (gettransferpickupdropofflocationsids method).	Yes.
<b>dropOffTo</b>	Element	transfer	Specifies the drop off location and it must be populated with our internal DOTW code (gettransferpickupdropofflocationsids method).	Yes.

<b>transferCode</b>	Element	transfer	Specifies the transfer's internal code and it must be populated with the returned string of the optionValue element from our getTransfers response of the desired transfer.	Yes.
<b>startingTime</b>	Element	transfer	Specifies the starting time for the transfer and should be populated with the corresponding DOTW internal code (gettransferstartingtimeids method).	Yes.
<b>adults</b>	Element	transfer	Specifies the number of adults that will be transferred.	Yes.
<b>children</b>	Element	transfer	Specifies the details about the accompanying children in this transfer.	Yes.
@no	Attribute	children	Specifies the total number of. If the booking does not involve any children then the value should be 0.	Yes.
<b>child</b>	Element	children	Specifies the child age.	No.
@runno	Attribute	child	Specifies for which child the age is applicable.	Yes, if <b>children@no</b> > 0.
<b>passengersDetails</b>	Element	transfer	Encapsulates details about passengers in the booking. Please note for each transfer booked at least one <b>passenger</b> element with @leading value yes should be present.	Yes.
<b>passenger</b>	Element	passengersDetails	Encapsulates details about one passenger in the booking. Please note for each transfer booked the room will be blocked under the leading passenger.	Yes, at least one occurrence.
@leading	Attribute	passenger	Specifies if the passenger is the leading passenger for this transfer. You can skip this attribute if the passenger is not the leading one. Possible values: <ul style="list-style-type: none"> <li>• yes</li> <li>• no</li> </ul>	Yes, at least one occurrence with value `yes`.
<b>salutation</b>	Element	passenger	The internal code for Salutations (Mr, Mrs etc). This code can be obtained by calling the <b>getsalutations</b> method.	Yes.
<b>firstName</b>	Element	passenger	First name of the leading passenger	Yes.
<b>lastName</b>	Element	passenger	Last name of the leading passenger.	Yes.
<b>specialRequests</b>	Element	transfer	Encapsulates the details containing the special requests the customers has requested for this room.	Yes.
<b>pickUpLocation</b>	Element	transfer	Specifies the pick up location (free text entered by the user).	Yes.
<b>dropOffLocation</b>	Element	transfer	Specifies the drop off location (free text entered by the user).	Yes.
<b>arrivalAirline</b>	Element	transfer	Must be populated with the corresponding internal code (getairlinesids method).	Yes, if the pickUpFrom element is the Airport.
<b>arrivingFromCity</b>	Element	transfer	Must be populated with the corresponding internal code (getallcities method).	Yes, if the pickUpFrom element is the Airport.
<b>flightNo</b>	Element	transfer	Free text.	Yes, if the pickUpFrom element is the Airport.



arrivalHour	Element	transfer	Free text.	Yes, if the pickUpFrom element is the Airport.
arrivalMinute	Element	transfer	Free text.	Yes, if the pickUpFrom element is the Airport.
departingAirline	Element	transfer	Must be populated with the corresponding internal code (getairlinesids method).	Yes, if the dropOffTo element is the Airport.
departingMinute	Element	transfer	Must be populated with the corresponding internal code (getallcities method).	Yes, if the dropOffTo element is the Airport.
departingFlightNo	Element	transfer	Free text.	Yes, if the dropOffTo element is the Airport.
departingHour	Element	transfer	Free text.	Yes, if the dropOffTo element is the Airport.
departingMinute	Element	transfer	Free text.	Yes, if the dropOffTo element is the Airport.

## confirmBooking\_transfers.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <!-- ##### -->
03.   <xs:element name="customer">
04.     <xs:complexType>
05.       <xs:sequence>
06.         <xs:group ref="loginDetailsGroup"/></xs:group>
07.         <xs:element name="product" type="xs:string" fixed="transfer"/></xs:element>
08.         <xs:element name="request" type="requestType"/></xs:element>
09.       </xs:sequence>
10.     </xs:complexType>
11.   </xs:element>
12.   <!-- ##### -->
13.   <xs:complexType name="requestType">
14.     <xs:sequence>
15.       <xs:element name="bookingDetails" type="confirmTransfersBookingDetailsType"/></xs:element>
16.     </xs:sequence>
17.     <xs:attribute name="command" type="xs:string" use="required" fixed="confirmbooking"/></xs:attribute>
18.     <xs:attribute name="debug" type="xs:integer" use="optional"/></xs:attribute>
19.     <xs:attribute name="defaultnamespace" type="xs:string" use="optional" fixed="true"/></xs:attribute>
20.   </xs:complexType>
21.   <!-- ##### -->
22.   <xs:complexType name="confirmTransfersBookingDetailsType">
23.     <xs:sequence>
24.       <xs:group ref="confirmTransfersBookingDetailsDefaultGroup"/></xs:group>
25.     </xs:sequence>
26.   </xs:complexType>
27.   <!-- ##### -->
28.   <xs:group name="confirmTransfersBookingDetailsDefaultGroup">
29.     <xs:sequence>
30.       <xs:element name="fromDate" type="dotwDateType"/></xs:element>
31.       <xs:element name="toDate" type="dotwDateType"/></xs:element>
32.       <xs:element name="currency" type="xs:nonNegativeInteger"/></xs:element>
33.       <xs:element name="productId" type="xs:nonNegativeInteger"/></xs:element>
34.       <xs:element name="customerReference" type="xs:nonNegativeInteger"/></xs:element>
35.       <xs:element name="cars" type="xs:nonNegativeInteger"/></xs:element>
36.       <xs:element name="carsOnReq" type="xs:nonNegativeInteger"/></xs:element>
37.       <xs:element name="knownLeftToSell" type="xs:nonNegativeInteger"/></xs:element>

```

```

38.         <xs:element name="transfers" type="transfersType"/></xs:element>
39.     </xs:sequence>
40. </xs:group>
41. <!-- ##### -->
42. <xs:simpleType name="dotwDateType">
43.     <xs:restriction base="xs:string">
44.         <xs:pattern value="[0-9]{10,11}|2[0-9]{3,3}-(0[1-9]|[1][0-2])-(0[1-9]|[1-2][0-9]|3[0-1])"/></xs:pattern>
45.     </xs:restriction>
46. </xs:simpleType>
47. <!-- ##### -->
48. <xs:complexType name="transfersType">
49.     <xs:sequence>
50.         <xs:element name="transfer" type="transferType" minOccurs="0" maxOccurs="unbounded"/></xs:element>
51.     </xs:sequence>
52.     <xs:attribute name="no" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
53. </xs:complexType>
54. <!-- ##### -->
55. <xs:complexType name="transferType">
56.     <xs:all>
57.         <xs:element name="pickUpFrom" type="xs:nonNegativeInteger" minOccurs="1"/></xs:element>
58.         <xs:element name="dropOffTo" type="xs:nonNegativeInteger" minOccurs="1"/></xs:element>
59.         <xs:element name="transferCode" type="xs:string" minOccurs="1"/></xs:element>
60.         <xs:element name="startingTime" type="xs:nonNegativeInteger" minOccurs="1"/></xs:element>
61.         <xs:element name="adults" type="adultsCodeType" minOccurs="1"/></xs:element>
62.         <xs:element name="children" type="childrenType" minOccurs="1"/></xs:element>
63.         <xs:element name="passengersDetails" type="passengersDetailsType" minOccurs="1"/></xs:element>
64.         <xs:element name="specialRequests" type="specialRequestsType" minOccurs="1"/></xs:element>
65.         <xs:element name="pickUpLocation" type="xs:string" minOccurs="1"/></xs:element>
66.         <xs:element name="dropOffLocation" type="xs:string" minOccurs="1"/></xs:element>
67.         <xs:element name="arrivalAirline" type="xs:string" minOccurs="0"/></xs:element>
68.         <xs:element name="arrivingFromCity" type="xs:string" minOccurs="0"/></xs:element>
69.         <xs:element name="flightNo" type="xs:string" minOccurs="0"/></xs:element>
70.         <xs:element name="arrivalHour" type="xs:string" minOccurs="0"/></xs:element>
71.         <xs:element name="arrivalMinute" type="xs:string" minOccurs="0"/></xs:element>
72.     </xs:all>
73. </xs:complexType>
74. <!-- ##### -->
75. <xs:simpleType name="adultsCodeType">
76.     <xs:restriction base="xs:string">
77.         <xs:enumeration value="2t"/></xs:enumeration>
78.         <xs:enumeration value="1"/></xs:enumeration>
79.         <xs:enumeration value="2"/></xs:enumeration>
80.         <xs:enumeration value="3"/></xs:enumeration>
81.         <xs:enumeration value="4"/></xs:enumeration>
82.     </xs:restriction>
83. </xs:simpleType>
84. <!-- ##### -->
85. <xs:complexType name="childrenType">
86.     <xs:sequence>
87.         <xs:element minOccurs="0" maxOccurs="4" name="child" type="childType"/></xs:element>
88.     </xs:sequence>
89.     <xs:attribute name="no" type="xs:integer" use="required"/></xs:attribute>
90. </xs:complexType>
91. <!-- ##### -->
92. <xs:complexType name="childType">
93.     <xs:simpleContent>
94.         <xs:extension base="childAge">
95.             <xs:attribute name="runno" type="xs:integer" use="required"/></xs:attribute>
96.         </xs:extension>
97.     </xs:simpleContent>
98. </xs:complexType>
99. <!-- ##### -->
100. <xs:simpleType name="childAge">
101.     <xs:restriction base="xs:integer">
102.         <xs:minInclusive value="1"/></xs:minInclusive>
103.         <xs:maxInclusive value="12"/></xs:maxInclusive>
104.     </xs:restriction>
105. </xs:simpleType>
106. <!-- ##### -->
107. <xs:complexType name="passengersDetailsType">
108.     <xs:sequence>
109.         <xs:element name="passenger" type="leadingPassengerType"/></xs:element>
110.         <xs:element name="passenger" type="passengerType" minOccurs="0" maxOccurs="unbounded"/></xs:element>
111.     </xs:sequence>
112. </xs:complexType>
113. <!-- ##### -->
114. <xs:complexType name="leadingPassengerType">
115.     <xs:sequence>
116.         <xs:element name="salutation" type="xs:integer"/></xs:element>
117.         <xs:element name="firstName" type="xs:string"/></xs:element>
118.         <xs:element name="lastName" type="xs:string"/></xs:element>
119.     </xs:sequence>
120.     <xs:attribute name="leading" type="xs:string" fixed="yes" use="required"/></xs:attribute>
121. </xs:complexType>
122. <!-- ##### -->
123. <xs:complexType name="specialRequestsType">
124.     <xs:sequence>
125.         <xs:element name="req" maxOccurs="unbounded" minOccurs="0">
126.             <xs:complexType>
127.                 <xs:simpleContent>
128.                     <xs:extension base="xs:nonNegativeInteger">
129.                         <xs:attribute name="runno" type="xs:nonNegativeInteger"/></xs:attribute>
130.                     </xs:extension>
131.                 </xs:simpleContent>
132.             </xs:complexType>
133.         </xs:element>
134.     </xs:sequence>

```

```

135.     <xs:attribute name="count" type="xs:nonNegativeInteger"></xs:attribute>
136. </xs:complexType>
137. <!-- ##### -->
138. <xs:group name="loginDetailsGroup">
139.     <xs:sequence>
140.         <xs:element name="username" type="xs:string"></xs:element>
141.         <xs:element name="password" type="passwordType"></xs:element>
142.         <xs:element name="id" type="xs:nonNegativeInteger"></xs:element>
143.         <xs:element name="source" type="sourceType"></xs:element>
144.     </xs:sequence>
145. </xs:group>
146. <!-- ##### -->
147. <xs:simpleType name="passwordType">
148.     <xs:restriction base="xs:string">
149.         <xs:length value="32"></xs:length>
150.     </xs:restriction>
151. </xs:simpleType>
152. <!-- ##### -->
153. <xs:simpleType name="sourceType">
154.     <xs:restriction base="xs:string">
155.         <xs:enumeration value="0"></xs:enumeration>
156.         <xs:enumeration value="1"></xs:enumeration>
157.         <xs:enumeration value="2"></xs:enumeration>
158.     </xs:restriction>
159. </xs:simpleType>
160. <!-- ##### -->
161. <xs:complexType name="passengerType">
162.     <xs:sequence>
163.         <xs:element name="salutation" type="xs:integer"></xs:element>
164.         <xs:element name="firstName" type="xs:string"></xs:element>
165.         <xs:element name="lastName" type="xs:string"></xs:element>
166.     </xs:sequence>
167.     <xs:attribute name="leading" type="xs:string" fixed="no" use="optional"></xs:attribute>
168. </xs:complexType>
169. <!-- ##### -->
170. </xs:schema>

```

## General Response

For every **confirmbooking** request to the DOTWconnect Server the response format will be as follows. Details of every return element are given in the table below. The element **successful** identifies whether the **confirmbooking** method was successful or not.

```

01. <result command="confirmbooking" ip="172.0.0.1" date="2009-11-11 06:58:28">
02.     <currencyShort></currencyShort>
03.     <confirmationText></confirmationText>
04.     <returnedCode></returnedCode>
05.     <bookings>
06.         <booking runno="0">
07.             <bookingCode></bookingCode>
08.             <bookingReferenceNumber></bookingReferenceNumber>
09.             <bookingStatus></bookingStatus>
10.             <servicePrice>
11.                 <formatted></formatted>
12.             </servicePrice>
13.             <mealsPrice>
14.                 <formatted></formatted>
15.             </mealsPrice>
16.             <price>
17.                 <formatted></formatted>
18.             </price>
19.             <currency></currency>
20.             < type></ type>
21.             <voucher></voucher>
22.             <paymentGuaranteedBy></paymentGuaranteedBy>
23.             <emergencyContacts count="0"></emergencyContacts>
24.         </booking>
25.     </bookings>
26.     <successful>TRUE</successful>
27. </result>

```

Item	Type	Parent	Description
<b>result</b>	Element	root	The root element.
@command	Attribute	result	The request command which returned this result.
@date	Attribute	result	The date and time when the result was provided in unix timestamp.
@ip	Attribute	result	The IPv4 address the request was made from.
<b>currencyShort</b>	Element	result	The currency that will be used for paying the booking.

<b>confirmationText</b>	Element	result	Itinerary Confirmation Text in HTML format.
<b>returnedCode</b>	Element	product	Internal itinerary code. This will have to be passed to all other operations regarding this booking and accepts itinerary codes.
<b>bookings</b>	Element	product	Encapsulates information about all bookings.
<b>booking</b>	Element	bookings	Information about one booking
@runno	Attribute	booking	Running number starting from 0.
<b>bookingCode</b>	Element	booking	Internal booking code. This will have to be passed to all other operations regarding this booking.
<b>bookingReferenceNumber</b>	Element	booking	Confirmation number for this booking. The unique confirmation number generated by DOTWconnect. This number is provided to the Customers and Suppliers and is a key to identify this booking. The confirmation number is the internal booking code prefixed with the service and booking office details.
<b>bookingStatus</b>	Element	booking	Specifies if the booking is confirmed from allotment or on request. Possible values: <ul style="list-style-type: none"> <li>• 1 - on request</li> <li>• 2 - confirmed</li> </ul>
<b>servicePrice</b>	Element	booking	Payable amount for this booking. Extra meals price is not included.
<b>formatted</b>	Element	servicePrice	This element contains the payable amount for this booking formatted as per the customer preference (decimal places, thousand separator, decimal separator)
<b>price</b>	Element	booking	Total payable amount for this booking.
<b>formatted</b>	Element	price	This element contains the total payable amount for this booking, including extra meals. formatted as per the customer preference (decimal places, thousand separator, decimal separator)
<b>currency</b>	Element	booking	Internal code for the currency in which the prices are calculated
<b>type</b>	Element	booking	Service type. Possible values: <ul style="list-style-type: none"> <li>• Hotel</li> <li>• Apartment</li> <li>• Transfer</li> </ul>
<b>voucher</b>	Element	booking	Booking voucher in HTML format.
<b>paymentGuaranteedBy</b>	Element	booking	Specifies who guarantees for the booking. This information needs to be present on the voucher.
<b>emergencyContacts</b>	Element	booking	Groups relevant contacts in case of emergency. These contact numbers need to be present on the voucher.
@count	Attribute	emergencyContacts	Specifies how many contacts are available for this booking.
<b>emergencyContact</b>	Element	emergencyContacts	Groups information about an emergency contact.
@runno	Attribute	emergencyContacts	Serial number starting from 0.
<b>salutation</b>	Element	emergencyContact	Contact Person Salutation
@id	Attribute	salutation	Internal code for the salutation
<b>fullName</b>	Element	emergencyContact	Contact Person full name
<b>phone</b>	Element	emergencyContact	Contact phone number

successful	Element	result	Specifies if the request was successfully processed. Possible values: <ul style="list-style-type: none"> <li>• TRUE</li> <li>• FALSE</li> </ul>
------------	---------	--------	---

## confirmbooking\_transfer.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="result" type="resultType"></xs:element>
03.   <xs:complexType name="resultType">
04.     <xs:all>
05.       <xs:element name="product" type="productType"></xs:element>
06.       <xs:element name="currencyShort" type="currencyShortType"></xs:element>
07.       <xs:element name="confirmationText" type="xs:string"></xs:element>
08.       <xs:element name="returnedCode" type="xs:nonNegativeInteger"></xs:element>
09.       <xs:element name="bookings" type="bookingsType"></xs:element>
10.       <xs:element name="successful" type="trueOrFalse"></xs:element>
11.     </xs:all>
12.     <xs:attribute name="command" type="xs:string" use="required" fixed="confirmbooking"></xs:attribute>
13.     <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
14.     <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
15.     <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
16.     <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
17.     <xs:attribute name="elapsedTime" type="xs:string" use="required"></xs:attribute>
18.   </xs:complexType>
19.   <xs:complexType name="productType">
20.     <xs:sequence>
21.       <xs:element name="available" type="trueOrFalse"></xs:element>
22.       <xs:element name="price" type="servicePriceType"></xs:element>
23.       <xs:element name="currencyShort" type="currencyShortType"></xs:element>
24.       <xs:element name="fromShort" type="xs:string"></xs:element>
25.       <xs:element name="toShort" type="xs:string"></xs:element>
26.       <xs:element name="onRequest" type="oneOrZero"></xs:element>
27.       <xs:element name="details" type="xs:string"></xs:element>
28.       <xs:element name="extraDetails" type="xs:string"></xs:element>
29.     </xs:sequence>
30.     <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"></xs:attribute>
31.     <xs:attribute name="code" type="xs:nonNegativeInteger" use="required"></xs:attribute>
32.     <xs:attribute name="type" type="xs:string" use="required"></xs:attribute>
33.     <xs:attribute name="servicename" type="shortTransferTypeType" use="required"></xs:attribute>
34.   </xs:complexType>
35.   <xs:simpleType name="shortTransferTypeType">
36.     <xs:restriction base="xs:string">
37.       <xs:pattern value="p|s"></xs:pattern>
38.     </xs:restriction>
39.   </xs:simpleType>
40.   <xs:simpleType name="currencyShortType">
41.     <xs:restriction base="xs:string">
42.       <xs:pattern value="[A-Z]{3}"></xs:pattern>
43.     </xs:restriction>
44.   </xs:simpleType>
45.   <xs:simpleType name="trueOrFalse">
46.     <xs:restriction base="xs:string">
47.       <xs:pattern value="true|false|TRUE|FALSE"></xs:pattern>
48.     </xs:restriction>
49.   </xs:simpleType>
50.   <xs:simpleType name="oneOrZero">
51.     <xs:restriction base="xs:string">
52.       <xs:pattern value="0|1"></xs:pattern>
53.     </xs:restriction>
54.   </xs:simpleType>
55.   <xs:simpleType name="dotwIP">
56.     <xs:restriction base="xs:string">
57.       <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[ 1][0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0)"></xs:pattern>
58.     </xs:restriction>
59.   </xs:simpleType>
60.   <xs:simpleType name="dotwDateType">
61.     <xs:restriction base="xs:string">
62.       <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*|([0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2})(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*"></xs:pattern>
63.     </xs:restriction>
64.   </xs:simpleType>
65.   <xs:simpleType name="versionType">
66.     <xs:restriction base="xs:string">
67.       <xs:pattern value="[1-9]{1}([0-9])*"></xs:pattern>
68.     </xs:restriction>
69.   </xs:simpleType>
70.   <xs:complexType name="bookingsType">
71.     <xs:sequence>
72.       <xs:element name="booking" type="bookingType" minOccurs="1" maxOccurs="unbounded"></xs:element>
73.     </xs:sequence>
74.   </xs:complexType>
75.   <xs:complexType name="bookingType">
76.     <xs:sequence>
77.       <xs:element name="bookingCode" type="xs:nonNegativeInteger"></xs:element>

```

```

78.         <xs:element name="bookingReferenceNumber" type="xs:string"></xs:element>
79.         <xs:element name="bookingStatus" type="xs:nonNegativeInteger"></xs:element>
80.         <xs:element name="servicePrice" type="servicePriceType"></xs:element>
81.         <xs:element name="mealsPrice" type="servicePriceType"></xs:element>
82.         <xs:element name="price" type="servicePriceType"></xs:element>
83.         <xs:element name="currency" type="xs:nonNegativeInteger"></xs:element>
84.         <xs:element name="type" type="xs:string"></xs:element>
85.         <xs:element name="voucher" type="xs:string"></xs:element>
86.         <xs:element name="paymentGuaranteedBy" type="xs:string"></xs:element>
87.         <xs:element name="emergencyContacts" type="emergencyContactsType"></xs:element>
88.     </xs:sequence>
89.     <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"></xs:attribute>
90. </xs:complexType>
91. <xs:complexType name="servicePriceType" mixed="true">
92.     <xs:sequence>
93.         <xs:element name="formatted" type="xs:string"></xs:element>
94.     </xs:sequence>
95. </xs:complexType>
96. <xs:complexType name="emergencyContactsType">
97.     <xs:sequence>
98.         <xs:element name="emergencyContact" type="emergencyContactType" minOccurs="0" maxOccurs="unbounded">
99.         </xs:sequence>
100.         <xs:attribute name="count" type="xs:nonNegativeInteger" use="required"></xs:attribute>
101.     </xs:complexType>
102. <xs:complexType name="emergencyContactType">
103.     <xs:sequence>
104.         <xs:element name="salutation">
105.             <xs:complexType>
106.                 <xs:simpleContent>
107.                     <xs:extension base="xs:string">
108.                         <xs:attribute name="id" type="xs:nonNegativeInteger" use="required"></xs:attribute>
109.                     </xs:extension>
110.                 </xs:simpleContent>
111.             </xs:complexType>
112.         </xs:element>
113.         <xs:element name="fullName" type="xs:string"></xs:element>
114.         <xs:element name="phone" type="xs:string"></xs:element>
115.     </xs:sequence>
116.     <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"></xs:attribute>
117. </xs:complexType>
118. </xs:schema>

```

## Get Booking Details

### General Request

This request is used to get the details pertaining to an already existing booking which is either saved (using **savebooking** method) or confirmed (using **confirmbooking** method). The request for **getbookingdetail** is common for all services but the response varies from service to service (hotel booking, apartment, transfer etc.)

```

01. <customer>
02.     <username></username>
03.     <password></password>
04.     <id></id>
05.     <source>0</source>
06.     <request command="getbookingdetails">
07.         <bookingDetails>
08.             <bookingType></bookingType>
09.             <bookingCode></bookingCode>
10.         </bookingDetails>
11.     </request>
12. </customer>

```

Item	Type	Parent	Description	Required
<b>bookingDetails</b>	Element	request	Encapsulates the detail of the booking for which the details are requested for	Yes.
<b>bookingType</b>	Element	bookingDetails	Specifies at what stage the booking is currently. A booking can be either in Saved stage or Confirmed stage. Possible values: <ul style="list-style-type: none"> <li>1 - Confirmed</li> <li>2 - Saved</li> </ul>	Yes.
<b>bookingCode</b>	Element	bookingDetails	Internal code for the Booking which was returned by DOTWconnect when the booking was Saved or Confirmed.	Yes.

## getbookingdetails\_transfers.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <!-- ##### -->
03.   <xs:element name="customer">
04.     <xs:complexType>
05.       <xs:sequence>
06.         <xs:group ref="loginDetailsGroup"/></xs:group>
07.         <xs:element name="request" type="requestType"/></xs:element>
08.       </xs:sequence>
09.     </xs:complexType>
10.   </xs:element>
11.   <!-- ##### -->
12.   <xs:complexType name="requestType">
13.     <xs:all>
14.       <xs:element name="bookingDetails">
15.         <xs:complexType>
16.           <xs:sequence>
17.             <xs:group ref="bookingTypeAndCode"/></xs:group>
18.           </xs:sequence>
19.         </xs:complexType>
20.       </xs:element>
21.     </xs:all>
22.     <xs:attribute name="command" type="xs:string" use="required" fixed="getbookingdetails"/></xs:attribute>
23.     <xs:attribute name="debug" type="xs:integer"/></xs:attribute>
24.     <xs:attribute name="defaultnamespace" type="xs:string" use="optional" fixed="true"/></xs:attribute>
25.   </xs:complexType>
26.   <!-- ##### -->
27.   <xs:group name="loginDetailsGroup">
28.     <xs:sequence>
29.       <xs:element name="username" type="xs:string"/></xs:element>
30.       <xs:element name="password" type="passwordType"/></xs:element>
31.       <xs:element name="id" type="xs:nonNegativeInteger"/></xs:element>
32.       <xs:element name="source" type="sourceType"/></xs:element>
33.     </xs:sequence>
34.   </xs:group>
35.   <!-- ##### -->
36.   <xs:simpleType name="passwordType">
37.     <xs:restriction base="xs:string">
38.       <xs:length value="32"/></xs:length>
39.     </xs:restriction>
40.   </xs:simpleType>
41.   <!-- ##### -->
42.   <xs:simpleType name="sourceType">
43.     <xs:restriction base="xs:string">
44.       <xs:enumeration value="0"/></xs:enumeration>
45.       <xs:enumeration value="1"/></xs:enumeration>
46.       <xs:enumeration value="2"/></xs:enumeration>
47.     </xs:restriction>
48.   </xs:simpleType>
49.   <!-- ##### -->
50.   <xs:group name="bookingTypeAndCode">
51.     <xs:sequence>
52.       <xs:element name="bookingType" type="bookingTypeType"/></xs:element>
53.       <xs:element name="bookingCode" type="xs:nonNegativeInteger"/></xs:element>
54.     </xs:sequence>
55.   </xs:group>
56.   <!-- ##### -->
57.   <xs:simpleType name="bookingTypeType">
58.     <xs:restriction base="xs:nonNegativeInteger">
59.       <xs:enumeration value="1"/></xs:enumeration>
60.       <xs:enumeration value="2"/></xs:enumeration>
61.     </xs:restriction>
62.   </xs:simpleType>
63.   <!-- ##### -->
64. </xs:schema>

```

## General Response (Transfers)

For a Transfer Service which is booked in DOTWconnect server the format of response is as follows. The response will contain all details pertaining to the booking ie, room details, passenger details including adults and children, meals requests, special request if any etc.

```

01. <result command="getbookingdetails" date="2009-11-11 08:58:05">
02.   <product runno="0" customeracceptance="t">
03.     <specialRequests count="2">
04.       <option runno="0" value="2279">Child Seat</option>
05.       <option runno="1" value="2280">child seat 1</option>
06.     </specialRequests>
07.     <salutations count="9">
08.       <option runno="0" value="147">Mr.</option>
09.       <option runno="1" value="148">Ms.</option>
10.       <option runno="2" value="149">Mrs.</option>
11.       <option runno="3" value="9234">Messrs.</option>
12.       <option runno="4" value="558">Dr.</option>

```

```

13.         <option runno="5" value="1671">Madam</option>
14.         <option runno="6" value="1328">Sir</option>
15.         <option runno="7" value="3801">Sir/Madam</option>
16.         <option runno="8" value="14632">Child</option>
17.     </salutations>
18.     <booked></booked>
19.     <code></code>
20.     <bookingReferenceNumber></bookingReferenceNumber>
21.     <supplierConfirmation></supplierConfirmation>
22.     <servicePrice>
23.         <formatted></formatted>
24.     </servicePrice>
25.     <currency></currency>
26.     <currencyShort></currencyShort>
27.     <paymentGuaranteedBy></paymentGuaranteedBy>
28.     <emergencyContacts count="0"></emergencyContacts>
29.     <invoiced></invoiced>
30.     <status></status>
31.     <service></service>
32.     <serviceId></serviceId>
33.     <serviceName></serviceName>
34.     <adults></adults>
35.     <children no="0"></children>
36.     <productSpecialRequests count="0"></productSpecialRequests>
37.     <cancellationRules count="2">
38.         <rule runno="0">
39.             <toDate></toDate>
40.             <toDateDetails></toDateDetails>
41.             <charge>
42.                 <formatted></formatted>
43.             </charge>
44.         </rule>
45.         <rule runno="1">
46.             <fromDate></fromDate>
47.             <fromDateDetails></fromDateDetails>
48.             <charge>
49.                 <formatted></formatted>
50.             </charge>
51.         </rule>
52.     </cancellationRules>
53.     <serviceLocation></serviceLocation>
54.     <cancel></cancel>
55.     <allowAmend></allowAmend>
56.     <onRequest></onRequest>
57.     <customerReference></customerReference>
58.     <passengersDetails>
59.         <passenger runno="0" leading="yes">
60.             <code></code>
61.             <salutation></salutation>
62.             <firstName></firstName>
63.             <lastName></lastName>
64.         </passenger>
65.     </passengersDetails>
66.     <from></from>
67.     <fromShort></fromShort>
68.     <to></to>
69.     <toShort></toShort>
70.     <pickUpFrom></pickUpFrom>
71.     <dropOffTo></dropOffTo>
72.     <pickUpFromId></pickUpFromId>
73.     <dropOffToId></dropOffToId>
74.     <pickUpLocation></pickUpLocation>
75.     <dropOffLocation></dropOffLocation>
76.     <arrivalAirline></arrivalAirline>
77.     <arrivalAirlineText></arrivalAirlineText>
78.     <arrivingFromCity></arrivingFromCity>
79.     <arrivingFromCityText></arrivingFromCityText>
80.     <flightNo></flightNo>
81.     <arrivalHour></arrivalHour>
82.     <arrivalMinute></arrivalMinute>
83.     <departingAirlineText></departingAirlineText>
84.     <departingAirline></departingAirline>
85.     <departingToCityText></departingToCityText>
86.     <departingToCity></departingToCity>
87.     <departingFlightNo></departingFlightNo>
88.     <departingHour></departingHour>
89.     <departingMinute></departingMinute>
90.     <transferType></transferType>
91.     <vehicleType></vehicleType>
92.     <vehicleTypeText></vehicleTypeText>
93.     <vehicleBrand></vehicleBrand>
94.     <startingHour></startingHour>
95.     <startingHourText></startingHourText>
96.     <paxCapacity></paxCapacity>
97.     <luggageCapacity></luggageCapacity>
98. </product>
99. <successful>TRUE</successful>
100.</result>

```

Item	Type	Parent	Description
result	Element	root	The root element.
@command	Attribute	result	The request command which returned this result.



@date	Attribute	result	The date and time when the result was provided in unix timestamp.
@ip	Attribute	result	The IPv4 address the request was made from.
<b>product</b>	Element	result	Contains information about a specific booked service.
<b>productSpecialRequests</b>	Element	product	Encapsulates a list with all the special requests made for this booking.
@count	Attribute	specialRequests	Total number of special requests that can be requested while making a booking for Transfers
<b>specialRequest</b>	Element	specialRequests	Internal code for the special request
@runno	Attribute	specialRequest	Running number starting from 0
<b>salutations</b>	Element	product	Encapsulates a list with all the salutations.
@count	Attribute	salutations	Total number of salutations that can be requested while making a booking for Transfers
<b>options</b>	Element	salutations	Internal code for the salutation
@runno	Attribute	option	Running number starting from 0
<b>booked</b>	Element	product	Indicates whether the booking is a saved booking or confirmed booking. Possible values: <ul style="list-style-type: none"> <li>• yes</li> <li>• no</li> </ul>
<b>code</b>	Element	product	Internal Code generated by DOTWconnect for this booking.
<b>bookingReferenceNumber</b>	Element	product	Confirmation number for this booking. The unique confirmation number generated by DOTWconnect. This number is provided to the Customers and Suppliers and is a key to identify this booking. The confirmation number is the internal booking code prefixed with the service and booking office details.
<b>supplierConfirmation</b>	Element	product	The confirmation response
<b>servicePrice</b>	Element	product	Total payable amount for this booking.
<b>formatted</b>	Element	servicePrice	This element contains the total price payable for this booking formatted as per the customer preference (decimal places, thousand separator, decimal separator)
<b>currency</b>	Element	product	Internal code for the currency in which the prices are calculated
<b>currencyShort</b>	Element	product	Three letter code for the currency
<b>paymentGuaranteedBy</b>	Element	product	The payment guaranty information.
<b>emergencyContacts</b>	Element	product	Groups information about the emergency contacts.
<b>emergencyContact</b>	Element	emergencyContacts	Encapsulates emergency contact data.
@runno	Attribute	emergencyContact	Running number starting from 0.
<b>salutation</b>	Element	emergencyContact	Salutation text
@id	Attribute	salutation	Salutation ID
<b>fullName</b>	Element	emergencyContact	Full name.
<b>phone</b>	Element	emergencyContact	Phone number

<b>invoiced</b>	Element	product	This element indicates if the booking is invoiced or not. Possible values: <ul style="list-style-type: none"> <li>• true</li> <li>• false</li> </ul>
<b>status</b>	Element	product	This element indicates the status of the booking. Possible values: <ul style="list-style-type: none"> <li>• 1665 - On Request</li> <li>• 1666 - Confirmed</li> <li>• 1667 - Canceled</li> <li>• 1668 - Amended On Request</li> <li>• 1669 - Amended Confirmed</li> <li>• 1707 - Denied</li> <li>• 1708 - Saved</li> </ul>
<b>service</b>	Element	product	This element indicates the service involved in this booking. For Transfer bookings this will have a value <b>transfer</b> .
<b>serviceId</b>	Element	product	Internal Code for the Transfer booked
<b>serviceName</b>	Element	product	Name of the Transfer
<b>adults</b>	Element	product	Number of adults for this booking.
<b>children</b>	Element	product	Contains info about the children for this booking.
<b>@no</b>	Attribute	children	Total number of children for this booking.
<b>child</b>	Element	children	Specifies child age.
<b>@runno</b>	Attribute	child	Specifies for which child the age applies.
<b>productSpecialRequests</b>	Element	product	Selected special requests.
<b>cancellationRules</b>	Element	product	Encapsulates details about the cancellation policy applicable for this room type and rate basis.
<b>@count</b>	Attribute	cancellationRules	Specifies the number of cancellation policies.
<b>rule</b>	Element	cancellationRules	Contains details about a specific cancellation policy.
<b>@runno</b>	Attribute	rule	Running serial number starting from 0.
<b>fromDate</b>	Element	rule	Starting date of the rule. From this date forward until toDate (if present), the specified charge will be applied for any cancellations or amendments. If this element is not present then the charge will be applied from date the booking was made until toDate. Date format is: YYYY-MM-DD HH:MM:SS
<b>fromDateDetails</b>	Element	rule	From Date in Weekday Month Day, Year HH:MM:SS format.
<b>toDate</b>	Element	rule	Ending date of the rule. The specified charge will be applied for any cancellations or amendments until this date. If this element is not present then the charge from fromDate onwards. Date format is: YYYY-MM-DD HH:MM:SS
<b>toDateDetails</b>	Element	rule	To Date in Weekday Month Day, Year HH:MM:SS format.
<b>charge</b>	Element	rule	Cancellation/Amendment charge that will be applied if booking cancelled following this rule.
<b>formatted</b>	Element	charge	Cancellation/Amendments charge formatted as per the customer preference (decimal places, thousand separator, decimal separator).
<b>serviceLocation</b>	Element	product	Transfer location in <i>City, Country</i> format

<b>cancel</b>	Element	product	Specifies if this booking can be cancelled. Possible values: <ul style="list-style-type: none"> <li>• yes</li> <li>• no</li> </ul>
<b>allowAmmend</b>	Element	product	Specifies if this booking can be amended. Possible values: <ul style="list-style-type: none"> <li>• yes</li> <li>• no</li> </ul>
<b>onRequest</b>	Element	product	Specifies if this booking is on request. Possible values: <ul style="list-style-type: none"> <li>• yes</li> <li>• no</li> </ul>
<b>customerReference</b>	Element	product	Internal reference provided by the customer.
<b>passengersDetails</b>	Element	product	Groups information about the passengers.
<b>passenger</b>	Element	passengersDetails	Encapsulates details about one passenger in the booking.
@leading	Attribute	passenger	Specifies if the passenger is the leading passenger for this room.
@runno	Attribute	passenger	Running number starting from 0.
<b>code</b>	Element	passenger	Passenger code.
<b>salutation</b>	Element	passenger	Salutation for the leading person.
<b>firstName</b>	Element	passenger	First Name of the leading Person
<b>lastName</b>	Element	passenger	Last Name of the leading Person
<b>from</b>	Element	product	Arrival date in the YYYY-MM-DD format.
<b>to</b>	Element	product	Departure date in the YYYY-MM-DD format.
<b>fromShort</b>	Element	product	Arrival date in a formatted text showing weekday and name of the month.
<b>toShort</b>	Element	product	Departure date in a formatted text showing weekday and name of the month.
<b>pickUpFrom</b>	Element	product	Specifies the pick up location (airport, acomodation).
<b>dropOffTo</b>	Element	product	Specifies the drop off location (airport, acomodation).
<b>pickUpFromId</b>	Element	product	Specifies the pick up location internal code.
<b>dropOffToId</b>	Element	product	Specifies the drop off location internal code.
<b>pickUpLocation</b>	Element Element	product	Specifies the exact location where from the customer should be picked up (terminal 3 inside an airport).
<b>dropOffLocation</b>	Element	product	Specifies the exact location where from the customer should be dropped up (terminal 3 inside an airport).
<b>arrivalAirline</b>	Element	product	Specifies the arrival airline internal code.
<b>arrivalAirlineText</b>	Element	product	Specifies the arrival airline name.
<b>arrivingFromCity</b>	Element	product	Specifies the arrival city code.
<b>arrivingFromCityText</b>	Element	product	Specifies the arrival city name
<b>flightNo</b>	Element	product	Specifies the flight number.
<b>arrivalHour</b>	Element	product	Specifies the exact hour of the arrival.
<b>arrivalMinute</b>	Element	product	Specifies the exact minute of the arrival.
<b>departingAirlineText</b>	Element	product	Specifies the departing airline name.

<b>departingAirline</b>	Element	product	Specifies the departing airline internal code.
<b>departingToCityText</b>	Element	product	Specifies the destination city name.
<b>departingToCity</b>	Element	product	Specifies the destination city internal code.
<b>departingFlightNo</b>	Element	product	Specifies the departure flight number.
<b>departingHour</b>	Element	product	Specifies the exact departing hour.
<b>departingMinute</b>	Element	product	Specifies the exact departing minute.
<b>transferType</b>	Element	product	Specifies the transfer type. The possible values are s (scheduled) and p (private)
<b>vehicleType</b>	Element	product	Specifies the vehicle type internal code.
<b>vehicleTypeText</b>	Element	product	Specifies the vehicle type name.
<b>vehicleBrand</b>	Element	product	Specifies the brand of the vehicle.
<b>startingHour</b>	Element	product	Specifies the internal code for the starting hour.
<b>startingHourText</b>	Element	product	Specifies the starting hour for the tour.
<b>paxCapacity</b>	Element		Specifies the max number of the passengers that can fit into the vehicle.
<b>luggageCapacity</b>	Element	product	Specifies the max number of the luggages that can fit into the vehicle.
<b>successful</b>	Element	product	Specifies if the request was successfully processed. Possible values: <ul style="list-style-type: none"> <li>• TRUE</li> <li>• FALSE</li> </ul>

## getbookingdetails\_transfers.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="result" type="resultType"></xs:element>
03.   <xs:complexType name="resultType">
04.     <xs:sequence>
05.       <xs:element name="product" type="productType" minOccurs="0" maxOccurs="unbounded"></xs:element>
06.       <xs:element name="successful" type="trueOrFalse"></xs:element>
07.     </xs:sequence>
08.     <xs:attribute name="command" type="xs:string" use="required" fixed="getbookingdetails"></xs:attribute>
09.     <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
10.     <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
11.     <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
12.     <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
13.     <xs:attribute name="elapsedTime" type="xs:string" use="required"></xs:attribute>
14.   </xs:complexType>
15.   <xs:simpleType name="dotwIP">
16.     <xs:restriction base="xs:string">
17.       <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9][0-9]{2}|1[0-9]{1}[0-9]{1}|1[0-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9][0-9]{2}|1[0-9]{1}[0-9]{1}|1[0-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9][0-9]{2}|1[0-9]{1}[0-9]{1}|[0-9])" />
18.     </xs:restriction>
19.   </xs:simpleType>
20.   <xs:simpleType name="dotwDateType">
21.     <xs:restriction base="xs:string">
22.       <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}([0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*|[0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2}([0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*|[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2}([0-9]{1,2})*" />
23.     </xs:restriction>
24.   </xs:simpleType>
25.   <xs:simpleType name="versionType">
26.     <xs:restriction base="xs:string">
27.       <xs:pattern value="[1-9]{1}([0-9])*.([0-9])*" />
28.     </xs:restriction>
29.   </xs:simpleType>
30.   <xs:complexType name="productType">
31.     <xs:all>
32.       <xs:element name="specialRequests" type="specialRequestsType"></xs:element>
33.       <xs:element name="salutations" type="salutationsType"></xs:element>
34.       <xs:element name="booked" type="yesOrNo" maxOccurs="1"></xs:element>
35.       <xs:element name="code" type="xs:integer" maxOccurs="1"></xs:element>
36.       <xs:element name="bookingReferenceNumber" type="xs:string"></xs:element>

```

```

37. <xs:element name="supplierConfirmation" type="xs:string"/></xs:element>
38. <xs:element name="servicePrice" type="servicePriceType"/></xs:element>
39. <xs:element name="currency" type="xs:unsignedInt"/></xs:element>
40. <xs:element name="currencyShort" type="currencyShortType"/></xs:element>
41. <xs:element name="paymentGuaranteedBy" type="xs:string"/></xs:element>
42. <xs:element name="emergencyContacts" type="emergencyContactsType"/></xs:element>
43. <xs:element name="invoiced" type="xs:boolean"/></xs:element>
44. <xs:element name="status" type="statusType"/></xs:element>
45. <xs:element name="service" type="xs:string"/></xs:element>
46. <xs:element name="serviceId" type="xs:unsignedInt"/></xs:element>
47. <xs:element name="serviceName" type="xs:string"/></xs:element>
48. <xs:element name="adults" type="adultsCodeType"/></xs:element>
49. <xs:element name="children" type="childrenType"/></xs:element>
50. <xs:element name="productSpecialRequests" type="productSpecialRequestsType"/></xs:element>
51. <xs:element name="serviceLocation" type="xs:string"/></xs:element>
52. <xs:element name="cancel" type="yesOrNo" maxOccurs="1"/></xs:element>
53. <xs:element name="allowAmend" type="yesOrNo" maxOccurs="1"/></xs:element>
54. <xs:element name="onRequest" type="yesOrNo" maxOccurs="1"/></xs:element>
55. <xs:element name="customerReference" type="xs:string" maxOccurs="1"/></xs:element>
56. <xs:element name="passengersDetails" type="passengersDetailsType"/></xs:element>
57. <xs:element name="from" type="xs:date"/></xs:element>
58. <xs:element name="to" type="xs:date"/></xs:element>
59. <xs:element name="fromShort" type="xs:string"/></xs:element>
60. <xs:element name="toShort" type="xs:string"/></xs:element>
61. <xs:element name="pickUpFrom" type="xs:string"/></xs:element>
62. <xs:element name="dropOffTo" type="xs:string"/></xs:element>
63. <xs:element name="pickUpFromId" type="xs:unsignedInt"/></xs:element>
64. <xs:element name="dropOffToId" type="xs:unsignedInt"/></xs:element>
65. <xs:element name="pickUpLocation" type="xs:string"/></xs:element>
66. <xs:element name="dropOffLocation" type="xs:string"/></xs:element>
67. <xs:element name="arrivalAirline" type="xs:unsignedInt"/></xs:element>
68. <xs:element name="arrivalAirlineText" type="xs:string"/></xs:element>
69. <xs:element name="arrivingFromCity" type="xs:unsignedInt"/></xs:element>
70. <xs:element name="arrivingFromCityText" type="xs:string"/></xs:element>
71. <xs:element name="flightNo" type="xs:string"/></xs:element>
72. <xs:element name="arrivalHour" type="xs:string"/></xs:element>
73. <xs:element name="arrivalMinute" type="xs:string"/></xs:element>
74. <xs:element name="departingAirlineText" type="xs:string"/></xs:element>
75. <xs:element name="departingAirline" type="xs:unsignedInt"/></xs:element>
76. <xs:element name="departingToCityText" type="xs:string"/></xs:element>
77. <xs:element name="departingToCity" type="xs:unsignedInt"/></xs:element>
78. <xs:element name="departingFlightNo" type="xs:string"/></xs:element>
79. <xs:element name="departingHour" type="xs:string"/></xs:element>
80. <xs:element name="departingMinute" type="xs:string"/></xs:element>
81. <xs:element name="transferType" type="xs:string"/></xs:element>
82. <xs:element name="vehicleType" type="xs:unsignedInt"/></xs:element>
83. <xs:element name="vehicleTypeText" type="xs:string"/></xs:element>
84. <xs:element name="vehicleBrand" type="xs:string"/></xs:element>
85. <xs:element name="startingHour" type="xs:unsignedInt"/></xs:element>
86. <xs:element name="startingHourText" type="xs:string"/></xs:element>
87. <xs:element name="paxCapacity" type="xs:unsignedInt"/></xs:element>
88. <xs:element name="luggageCapacity" type="xs:unsignedInt"/></xs:element>
89. <xs:element name="voucher" type="xs:string"/></xs:element>
90. </xs:all>
91. <xs:attribute name="runno" type="xs:integer" use="required"/></xs:attribute>
92. <xs:attribute name="customeracceptance" type="tOrF" use="required"/></xs:attribute>
93. </xs:complexType>
94. <xs:simpleType name="trueOrFalse">
95. <xs:restriction base="xs:string">
96. <xs:pattern value="true|false|TRUE|FALSE"/></xs:pattern>
97. </xs:restriction>
98. </xs:simpleType>
99. <xs:simpleType name="tOrF">
100. <xs:restriction base="xs:string">
101. <xs:pattern value="t|f"/></xs:pattern>
102. </xs:restriction>
103. </xs:simpleType>
104. <xs:simpleType name="yesOrNo">
105. <xs:restriction base="xs:string">
106. <xs:pattern value="yes|no"/></xs:pattern>
107. </xs:restriction>
108. </xs:simpleType>
109. <xs:complexType name="servicePriceType" mixed="true">
110. <xs:sequence>
111. <xs:element name="formatted" type="xs:string"/></xs:element>
112. </xs:sequence>
113. </xs:complexType>
114. <xs:simpleType name="currencyShortType">
115. <xs:restriction base="xs:string">
116. <xs:pattern value="[A-Z]{3}"/></xs:pattern>
117. </xs:restriction>
118. </xs:simpleType>
119. <xs:complexType name="emergencyContactsType">
120. <xs:sequence>
121. <xs:element name="emergencyContact" type="emergencyContactType" minOccurs="0" maxOccurs="unbounded"/>
122. </xs:sequence>
123. <xs:attribute name="count" type="xs:unsignedInt" use="required"/></xs:attribute>
124. </xs:complexType>
125. <xs:complexType name="emergencyContactType">
126. <xs:sequence>
127. <xs:element name="salutation" type="salutationType"/></xs:element>
128. <xs:element name="fullName" type="xs:string"/></xs:element>
129. <xs:element name="phone" type="phoneType"/></xs:element>
130. </xs:sequence>
131. <xs:attribute name="runno" type="xs:unsignedShort" use="required"/></xs:attribute>
132. </xs:complexType>

```

```

133.     <xs:simpleType name="statusType">
134.         <xs:restriction base="xs:integer">
135.             <xs:pattern value="1665|1666|1667|1668|1669|1707|1708"/></xs:pattern>
136.         </xs:restriction>
137.     </xs:simpleType>
138.     <xs:complexType name="salutationType">
139.         <xs:simpleContent>
140.             <xs:extension base="xs:string">
141.                 <xs:attribute name="id" type="xs:unsignedInt" use="required"/></xs:attribute>
142.             </xs:extension>
143.         </xs:simpleContent>
144.     </xs:complexType>
145.     <xs:complexType name="childrenType">
146.         <xs:sequence>
147.             <xs:element name="child" type="childType" minOccurs="0" maxOccurs="unbounded"/></xs:element>
148.         </xs:sequence>
149.         <xs:attribute name="no" type="xs:unsignedShort" use="required"/></xs:attribute>
150.     </xs:complexType>
151.     <xs:complexType name="childType" mixed="true">
152.         <xs:attribute name="runno" type="xs:unsignedShort" use="required"/></xs:attribute>
153.     </xs:complexType>
154.     <xs:complexType name="rateBasesType">
155.         <xs:sequence>
156.             <xs:element name="option" type="selectedOptionType" maxOccurs="unbounded"/></xs:element>
157.         </xs:sequence>
158.         <xs:attribute name="count" type="xs:unsignedInt" use="required"/></xs:attribute>
159.     </xs:complexType>
160.     <xs:complexType name="selectedOptionType" mixed="true">
161.         <xs:attribute name="runno" type="xs:unsignedInt" use="required"/></xs:attribute>
162.         <xs:attribute name="value" type="xs:unsignedInt" use="required"/></xs:attribute>
163.         <xs:attribute name="selected" type="xs:string" fixed="selected"/></xs:attribute>
164.     </xs:complexType>
165.     <xs:complexType name="specialRequestsType">
166.         <xs:sequence>
167.             <xs:element name="option" type="selectedOptionType" maxOccurs="unbounded"/></xs:element>
168.         </xs:sequence>
169.         <xs:attribute name="count" type="xs:unsignedInt" use="required"/></xs:attribute>
170.     </xs:complexType>
171.     <xs:complexType name="optionType" mixed="true">
172.         <xs:attribute name="runno" type="xs:unsignedInt" use="required"/></xs:attribute>
173.         <xs:attribute name="value" type="xs:unsignedInt" use="required"/></xs:attribute>
174.     </xs:complexType>
175.     <xs:complexType name="salutationsType">
176.         <xs:sequence>
177.             <xs:element name="option" type="optionType" maxOccurs="unbounded"/></xs:element>
178.         </xs:sequence>
179.         <xs:attribute name="count" type="xs:unsignedInt" use="required"/></xs:attribute>
180.     </xs:complexType>
181.     <xs:complexType name="productSpecialRequestsType">
182.         <xs:sequence>
183.             <xs:element name="specialRequest" type="specialRequestType" minOccurs="0" maxOccurs="unbounded"/>
184.         </xs:sequence>
185.         <xs:attribute name="count" type="xs:unsignedInt" use="required"/></xs:attribute>
186.     </xs:complexType>
187.     <xs:complexType name="specialRequestType" mixed="true">
188.         <xs:attribute name="runno" type="xs:unsignedInt" use="required"/></xs:attribute>
189.     </xs:complexType>
190.     <xs:complexType name="cancellationRulesType">
191.         <xs:sequence>
192.             <xs:element name="rule" type="ruleType" maxOccurs="unbounded"/></xs:element>
193.         </xs:sequence>
194.         <xs:attribute name="count" type="xs:unsignedInt" use="required"/></xs:attribute>
195.     </xs:complexType>
196.     <xs:complexType name="ruleType">
197.         <xs:sequence>
198.             <xs:element name="fromDate" type="dotwDateType" minOccurs="0"/></xs:element>
199.             <xs:element name="fromDateDetails" type="xs:string" minOccurs="0"/></xs:element>
200.             <xs:element name="toDate" type="dotwDateType" minOccurs="0"/></xs:element>
201.             <xs:element name="toDateDetails" type="xs:string" minOccurs="0"/></xs:element>
202.             <xs:element name="charge" type="servicePriceType"/></xs:element>
203.         </xs:sequence>
204.         <xs:attribute name="runno" type="xs:unsignedInt" use="required"/></xs:attribute>
205.     </xs:complexType>
206.     <xs:complexType name="passengersDetailsType">
207.         <xs:sequence>
208.             <xs:element name="passenger" type="passengerType" maxOccurs="unbounded"/></xs:element>
209.         </xs:sequence>
210.     </xs:complexType>
211.     <xs:complexType name="passengerType">
212.         <xs:sequence>
213.             <xs:element name="code" type="xs:unsignedInt"/></xs:element>
214.             <xs:element name="salutation" type="xs:unsignedInt"/></xs:element>
215.             <xs:element name="firstName" type="xs:string"/></xs:element>
216.             <xs:element name="lastName" type="xs:string"/></xs:element>
217.         </xs:sequence>
218.         <xs:attribute name="runno" type="xs:unsignedInt" use="required"/></xs:attribute>
219.         <xs:attribute name="leading" type="yesOrNo"/></xs:attribute>
220.     </xs:complexType>
221.     <xs:complexType name="extraMealsType">
222.         <xs:sequence>
223.             <xs:element name="mealDate" type="mealDateType" minOccurs="0" maxOccurs="unbounded"/></xs:element>
224.         </xs:sequence>
225.         <xs:attribute name="count" type="xs:unsignedInt" use="required"/></xs:attribute>
226.     </xs:complexType>
227.     <xs:complexType name="mealDateType">
228.         <xs:sequence>

```

```

229.         <xs:element name="mealType" type="mealTypeType" maxOccurs="unbounded"/></xs:element>
230.     </xs:sequence>
231.     <xs:attribute name="runno" type="xs:unsignedInt" use="required"/></xs:attribute>
232.     <xs:attribute name="wday" type="wdayType" use="required"/></xs:attribute>
233.     <xs:attribute name="day" type="xs:string" use="required"/></xs:attribute>
234.     <xs:attribute name="datetime" type="dotwDateType" use="required"/></xs:attribute>
235. </xs:complexType>
236. <xs:simpleType name="wdayType">
237.     <xs:restriction base="xs:integer">
238.         <xs:pattern value="[0-6]{1}"/></xs:pattern>
239.     </xs:restriction>
240. </xs:simpleType>
241. <xs:complexType name="mealTypeType">
242.     <xs:sequence>
243.         <xs:element name="meal" type="mealComplexType" maxOccurs="unbounded"/></xs:element>
244.     </xs:sequence>
245.     <xs:attribute name="mealtypeName" type="xs:string" use="required"/></xs:attribute>
246.     <xs:attribute name="mealtypecode" type="xs:unsignedInt" use="required"/></xs:attribute>
247. </xs:complexType>
248. <xs:complexType name="mealComplexType">
249.     <xs:sequence>
250.         <xs:element name="mealCode" type="xs:unsignedInt"/></xs:element>
251.         <xs:element name="mealName" type="xs:string"/></xs:element>
252.         <xs:element name="mealPrice" type="servicePriceType"/></xs:element>
253.     </xs:sequence>
254.     <xs:attribute name="runno" type="xs:unsignedInt" use="required"/></xs:attribute>
255.     <xs:attribute name="applicablefor" type="applicableforType" use="required"/></xs:attribute>
256.     <xs:attribute name="startage" type="xs:unsignedShort"/></xs:attribute>
257.     <xs:attribute name="endage" type="xs:unsignedShort"/></xs:attribute>
258. </xs:complexType>
259. <xs:simpleType name="applicableforType">
260.     <xs:restriction base="xs:string">
261.         <xs:pattern value="adult|child"/></xs:pattern>
262.     </xs:restriction>
263. </xs:simpleType>
264. <xs:complexType name="selectedExtraMealsType">
265.     <xs:sequence>
266.         <xs:element name="mealPlanDate" type="mealPlanDateType" minOccurs="0" maxOccurs="unbounded"/></xs:element>
267.     </xs:sequence>
268. </xs:complexType>
269. <xs:complexType name="mealPlanDateType">
270.     <xs:sequence>
271.         <xs:element name="mealPlan" type="mealPlanType" maxOccurs="unbounded"/></xs:element>
272.     </xs:sequence>
273.     <xs:attribute name="mealplandatetime" type="xs:date" use="required"/></xs:attribute>
274. </xs:complexType>
275. <xs:complexType name="mealPlanType">
276.     <xs:sequence>
277.         <xs:element name="meal" type="mealType" minOccurs="0" maxOccurs="unbounded"/></xs:element>
278.     </xs:sequence>
279.     <xs:attribute name="runno" type="xs:unsignedShort" use="required"/></xs:attribute>
280.     <xs:attribute name="mealscount" type="xs:unsignedShort" use="required"/></xs:attribute>
281.     <xs:attribute name="applicablefor" type="applicableforType" use="required"/></xs:attribute>
282.     <xs:attribute name="childage" type="xs:unsignedShort"/></xs:attribute>
283.     <xs:attribute name="ispassenger" type="xs:integer" fixed="1"/></xs:attribute>
284.     <xs:attribute name="passengernumber" type="xs:unsignedShort" use="required"/></xs:attribute>
285. </xs:complexType>
286. <xs:complexType name="mealType">
287.     <xs:all>
288.         <xs:element name="code" type="xs:unsignedInt"/></xs:element>
289.         <xs:element name="units" type="xs:unsignedInt"/></xs:element>
290.         <xs:element name="mealTypeCode" type="xs:unsignedInt"/></xs:element>
291.         <xs:element name="mealPrice" type="servicePriceType"/></xs:element>
292.         <xs:element name="mealTypeName" type="xs:string"/></xs:element>
293.         <xs:element name="mealName" type="xs:string"/></xs:element>
294.         <xs:element name="bookedMealCode" type="xs:string"/></xs:element>
295.     </xs:all>
296.     <xs:attribute name="runno" type="xs:unsignedInt" use="required"/></xs:attribute>
297. </xs:complexType>
298. <xs:complexType name="roomInfoType">
299.     <xs:sequence>
300.         <xs:element name="maxAdult" type="xs:unsignedShort"/></xs:element>
301.         <xs:element name="maxExtraBed" type="xs:unsignedShort"/></xs:element>
302.         <xs:element name="allowTwin" type="oneOrZero"/></xs:element>
303.         <xs:element name="maxChildren" type="xs:unsignedShort"/></xs:element>
304.     </xs:sequence>
305. </xs:complexType>
306. <xs:simpleType name="oneOrZero">
307.     <xs:restriction base="xs:integer">
308.         <xs:pattern value="0|1"/></xs:pattern>
309.     </xs:restriction>
310. </xs:simpleType>
311. <xs:simpleType name="phoneType">
312.     <xs:restriction base="xs:string">
313.         <xs:pattern value="[ ]?[0-9]*[/]?[0-9]*"/></xs:pattern>
314.     </xs:restriction>
315. </xs:simpleType>
316. <xs:simpleType name="adultsCodeType">
317.     <xs:restriction base="xs:string">
318.         <xs:enumeration value="2t"/></xs:enumeration>
319.         <xs:enumeration value="1"/></xs:enumeration>
320.         <xs:enumeration value="2"/></xs:enumeration>
321.         <xs:enumeration value="3"/></xs:enumeration>
322.         <xs:enumeration value="4"/></xs:enumeration>
323.     </xs:restriction>
324. </xs:simpleType>
325. </xs:schema>

```

# Amend Bookings

## Transfer Amend

### General Request

The updatebooking method is used for amending an existing booking. Amending a booking is a two step process, the first step to calculate the booking values as per the current availability and rates and the second step to confirm the changes. This gives an option to the customer to revert back to the original booking request if they are not satisfied with the change.

```

01.  <customer>
02.    <username></username>
03.    <password></password>
04.    <id></id>
05.    <source></source>
06.    <request command="updatebooking">
07.      <bookingDetails>
08.        <bookingType></bookingType>
09.        <bookingCode></bookingCode>
10.        <confirm></confirm>
11.        <customerReference></customerReference>
12.        <fromDate></fromDate>
13.        <toDate></toDate>
14.        <passengersDetails>
15.          <passenger leading="yes">
16.            <salutation></salutation>
17.            <firstName></firstName>
18.            <lastName></lastName>
19.          </passenger>
20.        </passengersDetails>
21.        <adultsCode></adultsCode>
22.        <children no=""></children>
23.        <specialRequests count=""></specialRequests>
24.        <startingHour></startingHour>
25.        <arrivingAirline></arrivingAirline>
26.        <arrivingCity></arrivingCity>
27.        <arrivingHour></arrivingHour>
28.        <arrivingMin></arrivingMin>
29.        <arrivingFlight></arrivingFlight>
30.        <departureAirline></departureAirline>
31.        <departureCity></departureCity>
32.        <departureHour></departureHour>
33.        <departureMin></departureMin>
34.        <departureFlight></departureFlight>
35.        <pickUpLocation></pickUpLocation>
36.        <dropOffLocation></dropOffLocation>
37.      </bookingDetails>
38.    </request>
39.  </customer>

```

Item	Type	Parent	Description	Required
<b>bookingDetails</b>	Element	request	Used to specify details about the request: dates, pax.	Yes.
<b>bookingType</b>	Element	bookingDetails	Specifies if the booking is confirmed or saved. Possible values: <ul style="list-style-type: none"> <li>1</li> <li>2</li> </ul>	Yes.
<b>bookingCode</b>	Element	bookingDetails	Internal booking code.	Yes.
<b>confirm</b>	Element	bookingDetails	While amending an existing booking, system will recalculate prices and availability which may differ from the original booking request. Inorder to proceed with the amendment, the customer will have to confirm these changes. This element specifies the Customer accepted the new prices and he confirms the amending. Possible values: <ul style="list-style-type: none"> <li>No</li> <li>Yes</li> </ul>	Yes.
<b>customerReference</b>	Element	bookingDetails	Internal reference provided by the customer. If you do not want to provide an internal reference you may pass an empty element.	Yes.



<b>fromDate</b>	Element	bookingDetails	Arrival date in the unix timestamp format.	Yes.
<b>toDate</b>	Element	bookingDetails	Departure date in the unix timestamp format.	Yes.
<b>startingHour</b>	Element	bookingDetails	The starting hour of the transfer.	Yes.
<b>arrivingAirline</b>	Element	bookingDetails	The arriving airline	Yes.
<b>arrivingCity</b>	Element	bookingDetails	The arriving city	Yes.
<b>arrivingHour</b>	Element	bookingDetails	The arriving hour	Yes.
<b>arrivingMin</b>	Element	bookingDetails	The arriving minute	Yes.
<b>arrivingFlight</b>	Element	bookingDetails	The arriving flight	Yes.
<b>departureAirline</b>	Element	bookingDetails	The departure airline	Yes.
<b>departureCity</b>	Element	bookingDetails	The departure city	Yes.
<b>departureHour</b>	Element	bookingDetails	The departure hour	Yes.
<b>departureMin</b>	Element	bookingDetails	The departure minute	Yes.
<b>pickUpLocation</b>	Element	bookingDetails	The pick-up location	Yes.
<b>dropOffLocation</b>	Element	bookingDetails	The drop-off location	Yes.
<b>adultsCode</b>	Element	bookingDetails	Number of adults for the transfer; The possible codes are: <ul style="list-style-type: none"> <li>• 1</li> <li>• 2</li> <li>• 3</li> <li>• 4</li> </ul>	Yes.
<b>children</b>	Element	bookingDetails	Specifies the details about the children in this room.	Yes.
@no	Attribute	children	Specifies the number of children. If the booking does not include any child then the no attribute should contain the value 0.	Yes.
<b>child</b>	Element	children	Specifies the child age.	No.
@runno	Attribute	child	Specifies for which child the age is applicable.	Yes, if parent present.
<b>passengersDetails</b>	Element	room	Encapsulates details about passengers in the booking.	Yes.
<b>passenger</b>	Element	passengersDetails	Encapsulates details about one passenger in the booking.	Yes, at least one occurrence.
@leading	Attribute	passenger	Specifies if the passenger is the leading passenger for this transfer. Possible values: <ol style="list-style-type: none"> <li>1. yes</li> <li>2. no</li> </ol>	Yes, at least one occurrence with value `yes`.
<b>salutation</b>	Element	passenger	The internal code for Salutations (Mr, Mrs etc). This code can be obtained by calling the <b>getsalutations</b> method.	Yes.
<b>firstName</b>	Element	passenger	First name of the leading passenger	Yes.
<b>lastName</b>	Element	passenger	Last name of the leading passenger.	Yes.
<b>specialRequests</b>	Element	bookingDetails	Contains a list with all the special requests the customer has for this room.	Yes.
@count	Attribute	specialRequests	Total number of special requests for the room.	Yes.

req	Element	specialRequests	Specifies the special requests` code. This code can be obtained using the `getspecialrequests` command.	No.
@runno	Attribute	req	Running number starting from 0.	Yes, if parent present.

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="customer">
03.     <xs:complexType>
04.       <xs:sequence>
05.         <xs:group ref="loginDetailsGroup"/></xs:group>
06.         <xs:element name="request" type="requestType"/></xs:element>
07.       </xs:sequence>
08.     </xs:complexType>
09.   </xs:element>
10.   <xs:group name="loginDetailsGroup">
11.     <xs:sequence>
12.       <xs:element name="username" type="xs:string"/></xs:element>
13.       <xs:element name="password" type="passwordType"/></xs:element>
14.       <xs:element name="id" type="xs:nonNegativeInteger"/></xs:element>
15.       <xs:element name="source" type="sourceType"/></xs:element>
16.     </xs:sequence>
17.   </xs:group>
18.   <xs:simpleType name="passwordType">
19.     <xs:restriction base="xs:string">
20.       <xs:length value="32"/></xs:length>
21.     </xs:restriction>
22.   </xs:simpleType>
23.   <xs:simpleType name="sourceType">
24.     <xs:restriction base="xs:string">
25.       <xs:enumeration value="0"/></xs:enumeration>
26.       <xs:enumeration value="1"/></xs:enumeration>
27.       <xs:enumeration value="2"/></xs:enumeration>
28.     </xs:restriction>
29.   </xs:simpleType>
30.   <xs:complexType name="requestType">
31.     <xs:sequence>
32.       <xs:element name="bookingDetails" type="updateBookingBookingDetails"/></xs:element>
33.     </xs:sequence>
34.     <xs:attribute name="command" type="xs:string" use="required" fixed="updatebooking"/></xs:attribute>
35.     <xs:attribute name="debug" type="xs:integer"/></xs:attribute>
36.     <xs:attribute name="defaultnamespace" type="xs:string" use="optional" fixed="true"/></xs:attribute>
37.   </xs:complexType>
38.   <xs:complexType name="updateBookingBookingDetails">
39.     <xs:sequence>
40.       <xs:group ref="bookingTypeAndCode"/></xs:group>
41.       <xs:group ref="confirmForUpdateGroup"/></xs:group>
42.       <xs:element name="customerReference" type="xs:string"/></xs:element>
43.       <xs:element name="fromDate" type="dotwDateType"/></xs:element>
44.       <xs:element name="toDate" type="dotwDateType"/></xs:element>
45.       <xs:element name="passengersDetails" type="passengersDetailsType"/></xs:element>
46.       <xs:group ref="roomOccupancy"/></xs:group>
47.       <xs:element name="specialRequests" type="specialRequestsType" minOccurs="0"/></xs:element>
48.       <xs:element name="startingHour" type="xs:nonNegativeInteger" minOccurs="0"/></xs:element>
49.       <xs:element name="arrivingAirline" type="xs:nonNegativeInteger" minOccurs="0"/></xs:element>
50.       <xs:element name="arrivingCity" type="xs:nonNegativeInteger" minOccurs="0"/></xs:element>
51.       <xs:element name="arrivingHour" type="xs:nonNegativeInteger" minOccurs="0"/></xs:element>
52.       <xs:element name="arrivingMin" type="xs:nonNegativeInteger" minOccurs="0"/></xs:element>
53.       <xs:element name="arrivingFlight" type="xs:string" minOccurs="0"/></xs:element>
54.       <xs:element name="departureAirline" type="xs:nonNegativeInteger" minOccurs="0"/></xs:element>
55.       <xs:element name="departureCity" type="xs:nonNegativeInteger" minOccurs="0"/></xs:element>
56.       <xs:element name="departureHour" type="xs:nonNegativeInteger" minOccurs="0"/></xs:element>
57.       <xs:element name="departureMin" type="xs:nonNegativeInteger" minOccurs="0"/></xs:element>
58.       <xs:element name="departureFlight" type="xs:string" minOccurs="0"/></xs:element>
59.       <xs:element name="pickUpLocation" type="xs:string" minOccurs="0"/></xs:element>
60.       <xs:element name="dropOffLocation" type="xs:string" minOccurs="0"/></xs:element>
61.     </xs:sequence>
62.     <xs:attribute name="runno" type="xs:nonNegativeInteger"/></xs:attribute>
63.   </xs:complexType>
64.   <xs:group name="bookingTypeAndCode">
65.     <xs:sequence>
66.       <xs:element name="bookingType" type="bookingTypeType"/></xs:element>
67.       <xs:element name="bookingCode" type="xs:nonNegativeInteger"/></xs:element>
68.     </xs:sequence>
69.   </xs:group>
70.   <xs:simpleType name="bookingTypeType">
71.     <xs:restriction base="xs:nonNegativeInteger">
72.       <xs:enumeration value="1"/></xs:enumeration>
73.       <xs:enumeration value="2"/></xs:enumeration>
74.     </xs:restriction>
75.   </xs:simpleType>
76.   <xs:group name="confirmForUpdateGroup">
77.     <xs:sequence>
78.       <xs:element name="confirm" type="confirmType"/></xs:element>

```

```

79.         </xs:sequence>
80.     </xs:group>
81.     <xs:simpleType name="confirmType">
82.         <xs:restriction base="xs:string">
83.             <xs:enumeration value="no"></xs:enumeration>
84.             <xs:enumeration value="yes"></xs:enumeration>
85.         </xs:restriction>
86.     </xs:simpleType>
87.     <xs:simpleType name="dotwDateType">
88.         <xs:restriction base="xs:string">
89.             <xs:pattern value="[0-9]{10,11}|2[0-9]{3,3}-(0[1-9]|[1][0-2])-(0[1-9]|[1-2][0-9]|3[0-1])"></xs:pattern>
90.         </xs:restriction>
91.     </xs:simpleType>
92.     <xs:complexType name="passengersDetailsType">
93.         <xs:sequence>
94.             <xs:element name="passenger" type="leadingPassengerType"></xs:element>
95.             <xs:element name="passenger" type="passengerType" minOccurs="0" maxOccurs="unbounded"></xs:element>
96.         </xs:sequence>
97.     </xs:complexType>
98.     <xs:complexType name="leadingPassengerType">
99.         <xs:sequence>
100.             <xs:element name="salutation" type="xs:integer"></xs:element>
101.             <xs:element name="firstName" type="xs:string"></xs:element>
102.             <xs:element name="lastName" type="xs:string"></xs:element>
103.         </xs:sequence>
104.         <xs:attribute name="leading" type="xs:string" fixed="yes" use="required"></xs:attribute>
105.     </xs:complexType>
106.     <xs:complexType name="passengerType">
107.         <xs:sequence>
108.             <xs:element name="salutation" type="xs:integer"></xs:element>
109.             <xs:element name="firstName" type="xs:string"></xs:element>
110.             <xs:element name="lastName" type="xs:string"></xs:element>
111.         </xs:sequence>
112.         <xs:attribute name="leading" type="xs:string" fixed="no" use="optional"></xs:attribute>
113.     </xs:complexType>
114.     <xs:group name="roomOccupancy">
115.         <xs:sequence>
116.             <xs:element name="adultsCode" type="adultsCodeType"></xs:element>
117.             <xs:element name="children" type="childrenType"></xs:element>
118.         </xs:sequence>
119.     </xs:group>
120.     <xs:simpleType name="adultsCodeType">
121.         <xs:restriction base="xs:unsignedByte">
122.             <xs:minInclusive value="1"></xs:minInclusive>
123.             <xs:maxInclusive value="15"></xs:maxInclusive>
124.         </xs:restriction>
125.     </xs:simpleType>
126.     <xs:complexType name="childrenType">
127.         <xs:sequence>
128.             <xs:element minOccurs="0" maxOccurs="4" name="child" type="childType"></xs:element>
129.         </xs:sequence>
130.         <xs:attribute name="no" type="xs:integer" use="required"></xs:attribute>
131.     </xs:complexType>
132.     <xs:complexType name="childType">
133.         <xs:simpleContent>
134.             <xs:extension base="childAge">
135.                 <xs:attribute name="runno" type="xs:integer" use="required"></xs:attribute>
136.             </xs:extension>
137.         </xs:simpleContent>
138.     </xs:complexType>
139.     <xs:simpleType name="childAge">
140.         <xs:restriction base="xs:integer">
141.             <xs:minInclusive value="1"></xs:minInclusive>
142.             <xs:maxInclusive value="12"></xs:maxInclusive>
143.         </xs:restriction>
144.     </xs:simpleType>
145.     <xs:complexType name="specialRequestsType">
146.         <xs:sequence>
147.             <xs:element name="req" maxOccurs="unbounded" minOccurs="0">
148.                 <xs:complexType>
149.                     <xs:simpleContent>
150.                         <xs:extension base="xs:nonNegativeInteger">
151.                             <xs:attribute name="runno" type="xs:nonNegativeInteger"></xs:attribute>
152.                         </xs:extension>
153.                     </xs:simpleContent>
154.                 </xs:complexType>
155.             </xs:element>
156.         </xs:sequence>
157.         <xs:attribute name="count" type="xs:nonNegativeInteger"></xs:attribute>
158.     </xs:complexType>
159. </xs:schema>

```

## General Response

```

01. <result command="updatebooking" tID="9038712" ip="" date="2011-11-
23 12:13:53" version="2.2" elapsedTime="1.1390149593353">
02.     <bookingDetails>
03.         <bookingType></bookingType>
04.         <bookingCode></bookingCode>
05.         <confirm></confirm>
06.         <testPricesAndAllocation>

```

```

07.         <service referencenumber="">
08.             <testPrice></testPrice>
09.         </service>
10.     </testPricesAndAllocation>
11.     <customerReference></customerReference>
12.     <fromDate></fromDate>
13.     <toDate></toDate>
14.     <passengersDetails>
15.         <passenger leading="yes">
16.             <salutation></salutation>
17.             <firstName></firstName>
18.             <lastName></lastName>
19.         </passenger>
20.     </passengersDetails>
21.     <adultsCode></adultsCode>
22.     <children no="0"></children>
23.     <specialRequests count="0"></specialRequests>
24.     <startingHour></startingHour>
25.     <arrivingAirline></arrivingAirline>
26.     <arrivingCity></arrivingCity>
27.     <arrivingHour></arrivingHour>
28.     <arrivingMin></arrivingMin>
29.     <arrivingFlight></arrivingFlight>
30.     <departureAirline></departureAirline>
31.     <departureCity></departureCity>
32.     <departureHour></departureHour>
33.     <departureMin></departureMin>
34.     <departureFlight></departureFlight>
35.     <pickUpLocation></pickUpLocation>
36.     <dropOffLocation></dropOffLocation>
37. </bookingDetails>
38. <currencyShort></currencyShort>
39. <available></available>
40. <price>
41.     <formatted></formatted>
42. </price>
43. <currencyShort></currencyShort>
44. <fromShort></fromShort>
45. <toShort></toShort>
46. <onRequest></onRequest>
47. <successful></successful>
48. </result>

```

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.     <xs:element name="result" type="resultType"></xs:element>
03.     <xs:complexType name="resultType">
04.         <xs:all>
05.             <xs:element name="bookingDetails" type="bookingDetailsType"></xs:element>
06.             <xs:element name="currencyShort" type="currencyShortType"></xs:element>
07.             <xs:element name="available" type="trueOrFalse"></xs:element>
08.             <xs:element name="price" type="servicePriceType"></xs:element>
09.             <xs:element name="fromShort" type="xs:string"></xs:element>
10.             <xs:element name="toShort" type="xs:string"></xs:element>
11.             <xs:element name="onRequest" type="oneOrZero"></xs:element>
12.             <xs:element name="successful" type="trueOrFalse"></xs:element>
13.         </xs:all>
14.         <xs:attribute name="command" type="xs:string" use="required" fixed="updatebooking"></xs:attribute>
15.         <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
16.         <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
17.         <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
18.         <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
19.         <xs:attribute name="elapsedTime" type="xs:string"></xs:attribute>
20.     </xs:complexType>
21.     <xs:complexType name="bookingDetailsType">
22.         <xs:sequence>
23.             <xs:group ref="bookingTypeAndCode"></xs:group>
24.             <xs:group ref="confirmForUpdateGroup"></xs:group>
25.             <xs:element name="customerReference" type="xs:string"></xs:element>
26.             <xs:element name="fromDate" type="dotwDateType"></xs:element>
27.             <xs:element name="toDate" type="dotwDateType"></xs:element>
28.             <xs:element name="passengersDetails" type="passengersDetailsType"></xs:element>
29.             <xs:group ref="roomOccupancy"></xs:group>
30.             <xs:element name="specialRequests" type="specialRequestsType" minOccurs="0"></xs:element>
31.             <xs:element name="startingHour" type="xs:nonNegativeInteger" minOccurs="0"></xs:element>
32.             <xs:element name="arrivingAirline" type="xs:nonNegativeInteger" minOccurs="0"></xs:element>
33.             <xs:element name="arrivingCity" type="xs:nonNegativeInteger" minOccurs="0"></xs:element>
34.             <xs:element name="arrivingHour" type="xs:nonNegativeInteger" minOccurs="0"></xs:element>
35.             <xs:element name="arrivingMin" type="xs:nonNegativeInteger" minOccurs="0"></xs:element>
36.             <xs:element name="arrivingFlight" type="xs:string" minOccurs="0"></xs:element>
37.             <xs:element name="departureAirline" type="xs:nonNegativeInteger" minOccurs="0"></xs:element>
38.             <xs:element name="departureCity" type="xs:nonNegativeInteger" minOccurs="0"></xs:element>
39.             <xs:element name="departureHour" type="xs:nonNegativeInteger" minOccurs="0"></xs:element>
40.             <xs:element name="departureMin" type="xs:nonNegativeInteger" minOccurs="0"></xs:element>
41.             <xs:element name="departureFlight" type="xs:string" minOccurs="0"></xs:element>
42.             <xs:element name="pickUpLocation" type="xs:string" minOccurs="0"></xs:element>
43.             <xs:element name="dropOffLocation" type="xs:string" minOccurs="0"></xs:element>
44.         </xs:sequence>
45.         <xs:attribute name="runno" type="xs:nonNegativeInteger"></xs:attribute>
46.     </xs:complexType>
47.     <xs:complexType name="passengersDetailsType">
48.         <xs:sequence>
49.             <xs:element name="passenger" type="leadingPassengerType"></xs:element>

```

```
50.         <xs:element name="passenger" type="passengerType" minOccurs="0" maxOccurs="unbounded"/></xs:element>
51.     </xs:sequence>
52. </xs:complexType>
53. <xs:complexType name="leadingPassengerType">
54.     <xs:sequence>
55.         <xs:element name="salutation" type="xs:integer"/></xs:element>
56.         <xs:element name="firstName" type="xs:string"/></xs:element>
57.         <xs:element name="lastName" type="xs:string"/></xs:element>
58.     </xs:sequence>
59.     <xs:attribute name="leading" type="xs:string" fixed="yes" use="required"/></xs:attribute>
60. </xs:complexType>
61. <xs:complexType name="passengerType">
62.     <xs:sequence>
63.         <xs:element name="salutation" type="xs:integer"/></xs:element>
64.         <xs:element name="firstName" type="xs:string"/></xs:element>
65.         <xs:element name="lastName" type="xs:string"/></xs:element>
66.     </xs:sequence>
67.     <xs:attribute name="leading" type="xs:string" fixed="no" use="optional"/></xs:attribute>
68. </xs:complexType>
69. <xs:group name="roomOccupancy">
70.     <xs:sequence>
71.         <xs:element name="adultsCode" type="adultsCodeType"/></xs:element>
72.         <xs:element name="children" type="childrenType"/></xs:element>
73.     </xs:sequence>
74. </xs:group>
75. <xs:simpleType name="adultsCodeType">
76.     <xs:restriction base="xs:unsignedByte">
77.         <xs:minInclusive value="1"/></xs:minInclusive>
78.         <xs:maxInclusive value="15"/></xs:maxInclusive>
79.     </xs:restriction>
80. </xs:simpleType>
81. <xs:complexType name="childrenType">
82.     <xs:sequence>
83.         <xs:element minOccurs="0" maxOccurs="4" name="child" type="childType"/></xs:element>
84.     </xs:sequence>
85.     <xs:attribute name="no" type="xs:integer" use="required"/></xs:attribute>
86. </xs:complexType>
87. <xs:complexType name="childType">
88.     <xs:simpleContent>
89.         <xs:extension base="childAge">
90.             <xs:attribute name="runno" type="xs:integer" use="required"/></xs:attribute>
91.         </xs:extension>
92.     </xs:simpleContent>
93. </xs:complexType>
94. <xs:simpleType name="childAge">
95.     <xs:restriction base="xs:integer">
96.         <xs:minInclusive value="1"/></xs:minInclusive>
97.         <xs:maxInclusive value="12"/></xs:maxInclusive>
98.     </xs:restriction>
99. </xs:simpleType>
100. <xs:complexType name="specialRequestsType">
101.     <xs:sequence>
102.         <xs:element name="req" maxOccurs="unbounded" minOccurs="0">
103.             <xs:complexType>
104.                 <xs:simpleContent>
105.                     <xs:extension base="xs:nonNegativeInteger">
106.                         <xs:attribute name="runno" type="xs:nonNegativeInteger"/></xs:attribute>
107.                     </xs:extension>
108.                 </xs:simpleContent>
109.             </xs:complexType>
110.         </xs:element>
111.     </xs:sequence>
112.     <xs:attribute name="count" type="xs:nonNegativeInteger"/></xs:attribute>
113. </xs:complexType>
114. <xs:complexType name="testPricesAndAllocationType">
115.     <xs:sequence>
116.         <xs:element name="service" type="serviceType"/></xs:element>
117.     </xs:sequence>
118. </xs:complexType>
119. <xs:complexType name="serviceType">
120.     <xs:sequence>
121.         <xs:element name="testPrice" type="xs:decimal"/></xs:element>
122.     </xs:sequence>
123.     <xs:attribute name="referencenumber" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
124. </xs:complexType>
125. <xs:group name="confirmForUpdateGroup">
126.     <xs:sequence>
127.         <xs:element name="confirm" type="confirmType"/></xs:element>
128.         <xs:element name="testPricesAndAllocation" type="testPricesAndAllocationType" minOccurs="0"/></xs:element>
129.     </xs:sequence>
130. </xs:group>
131. <xs:simpleType name="confirmType">
132.     <xs:restriction base="xs:string">
133.         <xs:enumeration value="no"/></xs:enumeration>
134.         <xs:enumeration value="yes"/></xs:enumeration>
135.     </xs:restriction>
136. </xs:simpleType>
137. <xs:group name="bookingTypeAndCode">
138.     <xs:sequence>
139.         <xs:element name="bookingType" type="bookingTypeType"/></xs:element>
140.         <xs:element name="bookingCode" type="xs:nonNegativeInteger"/></xs:element>
141.     </xs:sequence>
142. </xs:group>
143. <xs:simpleType name="bookingTypeType">
144.     <xs:restriction base="xs:nonNegativeInteger">
145.         <xs:enumeration value="1"/></xs:enumeration>
146.         <xs:enumeration value="2"/></xs:enumeration>
```

```

147.     </xs:restriction>
148. </xs:simpleType>
149. <xs:simpleType name="dotwIP">
150.   <xs:restriction base="xs:string">
151.     <xs:pattern value="(25[0-5]|2[0-4][0-9]||[0-1]{1}[0-9]{2}|[ ]|2[0-4][0-9]||[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]||[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[0-9])" ></xs:pattern>
152.   </xs:restriction>
153. </xs:simpleType>
154. <xs:simpleType name="dotwDateType">
155.   <xs:restriction base="xs:string">
156.     <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*|{0-9}{4,4}/[0-9]{1,2}/[0-9]{1,2}(s[0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*"></xs:pattern>
157.   </xs:restriction>
158. </xs:simpleType>
159. <xs:simpleType name="versionType">
160.   <xs:restriction base="xs:string">
161.     <xs:pattern value="[1-9]{1}([0-9])*" ></xs:pattern>
162.   </xs:restriction>
163. </xs:simpleType>
164. <xs:simpleType name="trueOrFalse">
165.   <xs:restriction base="xs:string">
166.     <xs:pattern value="true|false|TRUE|FALSE"></xs:pattern>
167.   </xs:restriction>
168. </xs:simpleType>
169. <xs:simpleType name="currencyShortType">
170.   <xs:restriction base="xs:string">
171.     <xs:pattern value="[A-Z]{3}"></xs:pattern>
172.   </xs:restriction>
173. </xs:simpleType>
174. <xs:simpleType name="yesOrNo">
175.   <xs:restriction base="xs:string">
176.     <xs:pattern value="yes|no"></xs:pattern>
177.   </xs:restriction>
178. </xs:simpleType>
179. <xs:complexType name="servicePriceType" mixed="true">
180.   <xs:sequence>
181.     <xs:element name="formatted" type="xs:string"/></xs:element>
182.   </xs:sequence>
183. </xs:complexType>
184. <xs:simpleType name="oneOrZero">
185.   <xs:restriction base="xs:integer">
186.     <xs:pattern value="0|1"></xs:pattern>
187.   </xs:restriction>
188. </xs:simpleType>
189. <xs:complexType name="cancellationRulesType">
190.   <xs:sequence>
191.     <xs:element name="rule" type="ruleType" maxOccurs="unbounded"/></xs:element>
192.   </xs:sequence>
193.   <xs:attribute name="count" type="xs:unsignedInt" use="required"/></xs:attribute>
194. </xs:complexType>
195. <xs:complexType name="ruleType">
196.   <xs:sequence>
197.     <xs:element name="fromDate" type="dotwDateType" minOccurs="0"/></xs:element>
198.     <xs:element name="fromDateDetails" type="xs:string" minOccurs="0"/></xs:element>
199.     <xs:element name="toDate" type="dotwDateType" minOccurs="0"/></xs:element>
200.     <xs:element name="toDateDetails" type="xs:string" minOccurs="0"/></xs:element>
201.     <xs:element name="charge" type="servicePriceType"/></xs:element>
202.   </xs:sequence>
203.   <xs:attribute name="runno" type="xs:unsignedInt" use="required"/></xs:attribute>
204. </xs:complexType>
205. </xs:schema>

```

## Cancel Booking

The following request can be used to cancel a booking that is confirmed or delete a booking that is saved.

## General Request

```

01. <customer>
02.   <username>username</username>
03.   <password>md5(password)</password>
04.   <id>company code</id>
05.   <source>1</source>
06.   <request command="cancelbooking">
07.     <bookingDetails>
08.       <bookingType></bookingType>
09.       <bookingCode>internal booking code</bookingCode>
10.       <confirm></confirm>
11.       <testPricesAndAllocation>
12.         <service referencenumber="">
13.           <penaltyApplied></penaltyApplied>
14.         </service>
15.       </testPricesAndAllocation>
16.     </bookingDetails>
17.   </request>

```

18. &lt;/customer&gt;

## cancelbooking\_transfers.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <!-- ##### -->
03.   <xs:element name="customer">
04.     <xs:complexType>
05.       <xs:sequence>
06.         <xs:group ref="loginDetailsGroup"/></xs:group>
07.         <xs:element name="request" type="requestType"/></xs:element>
08.       </xs:sequence>
09.     </xs:complexType>
10.   </xs:element>
11.   <!-- ##### -->
12.   <xs:complexType name="requestType">
13.     <xs:all>
14.       <xs:element name="bookingDetails">
15.         <xs:complexType>
16.           <xs:sequence>
17.             <xs:group ref="bookingTypeAndCode"/></xs:group>
18.             <xs:element name="confirm" type="confirmType"/></xs:element>
19.             <xs:element name="testPricesAndAllocation" type="bookTestPricesAndAllocationType" minOccurs="0"/>
20.           </xs:sequence>
21.         </xs:complexType>
22.       </xs:element>
23.     </xs:all>
24.     <xs:attribute name="command" type="xs:string" use="required" fixed="bookitinerary"/></xs:attribute>
25.     <xs:attribute name="debug" type="xs:integer"/></xs:attribute>
26.     <xs:attribute name="defaultnamespace" type="xs:string" use="optional" fixed="true"/></xs:attribute>
27.   </xs:complexType>
28.   <!-- ##### -->
29.   <xs:group name="loginDetailsGroup">
30.     <xs:sequence>
31.       <xs:element name="username" type="xs:string"/></xs:element>
32.       <xs:element name="password" type="passwordType"/></xs:element>
33.       <xs:element name="id" type="xs:nonNegativeInteger"/></xs:element>
34.       <xs:element name="source" type="sourceType"/></xs:element>
35.     </xs:sequence>
36.   </xs:group>
37.   <!-- ##### -->
38.   <xs:simpleType name="passwordType">
39.     <xs:restriction base="xs:string">
40.       <xs:length value="32"/></xs:length>
41.     </xs:restriction>
42.   </xs:simpleType>
43.   <!-- ##### -->
44.   <xs:simpleType name="sourceType">
45.     <xs:restriction base="xs:string">
46.       <xs:enumeration value="0"/></xs:enumeration>
47.       <xs:enumeration value="1"/></xs:enumeration>
48.       <xs:enumeration value="2"/></xs:enumeration>
49.     </xs:restriction>
50.   </xs:simpleType>
51.   <!-- ##### -->
52.   <xs:group name="bookingTypeAndCode">
53.     <xs:sequence>
54.       <xs:element name="bookingType" type="bookingTypeType"/></xs:element>
55.       <xs:element name="bookingCode" type="xs:nonNegativeInteger"/></xs:element>
56.     </xs:sequence>
57.   </xs:group>
58.   <!-- ##### -->
59.   <xs:simpleType name="bookingTypeType">
60.     <xs:restriction base="xs:nonNegativeInteger">
61.       <xs:enumeration value="1"/></xs:enumeration>
62.       <xs:enumeration value="2"/></xs:enumeration>
63.     </xs:restriction>
64.   </xs:simpleType>
65.   <!-- ##### -->
66.   <xs:simpleType name="confirmType">
67.     <xs:restriction base="xs:string">
68.       <xs:enumeration value="no"/></xs:enumeration>
69.       <xs:enumeration value="yes"/></xs:enumeration>
70.     </xs:restriction>
71.   </xs:simpleType>
72.   <!-- ##### -->
73.   <xs:complexType name="bookTestPricesAndAllocationType">
74.     <xs:sequence>
75.       <xs:element name="service" type="serviceType" maxOccurs="unbounded"/></xs:element>
76.     </xs:sequence>
77.   </xs:complexType>
78.   <!-- ##### -->
79.   <xs:complexType name="serviceType">
80.     <xs:sequence>
81.       <xs:element name="testPrice" type="xs:decimal"/></xs:element>
82.       <xs:element name="penaltyApplied" type="xs:decimal" minOccurs="0"/></xs:element>
83.       <xs:element name="allocationDetails" type="xs:string"/></xs:element>
84.     </xs:sequence>
85.     <xs:attribute name="referencenumber" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
86.   </xs:complexType>

```



```

87.      <!-- ##### -->
88.      <!-- ##### -->
89.      <!-- ##### -->
90.    </xs:schema>

```

## General Response

Item	Type	Parent	Description	Required
<b>bookingDetails</b>	Element	request	Used to specify details about the request.	Yes.
<b>bookingType</b>	Element	bookingDetails	Specifies if the booking is confirmed or saved. Possible values: <ul style="list-style-type: none"> <li>1 - confirmed</li> <li>2 - saved</li> </ul>	Yes.
<b>bookingCode</b>	Element	bookingDetails	Booking internal code.	Yes.
<b>confirm</b>	Element	bookingDetails	For confirmed bookings the cancellation process takes place in two steps to ensure the customer is agreeing to any cancellation penalty that should be applied. In the first step, the request is indicating which booking the customer wishes to cancel - confirm value: no. The second step also provides details about cancellation penalty (by mentioning this, the customer is in fact agreeing to that cancellation penalty.) - confirm value: yes. Possible values: <ul style="list-style-type: none"> <li>yes</li> <li>no</li> </ul>	Yes.
<b>testPricesAndAllocation</b>	Element	bookingDetails	Groups information about prices, allocation and penalties for each service.	Yes, if confirm nodevalue is yes.
<b>service</b>	Element	testPricesAndAllocation	Specifies for which service the details are about.	Yes.
@referencenumber	Attribute	service	Booking Internal Code - same value as bookingCode	Yes.
<b>penaltyApplied</b>	Element	service	Specifies the penalty charge for canceling this booking, the customer agrees to. This should be the exact value received from the system and not the formatted one.	Yes.

```

01.    <result command="cancelbooking" date="">
02.      <productsLeftOnItinerary></productsLeftOnItinerary>
03.      <services>
04.        <service runno="" code="">
05.          <cancellationPenalty>
06.            <penaltyApplied>
07.              <formatted></formatted>
08.            </penaltyApplied>
09.            <currency></currency>
10.            <currencyShort></currencyShort>
11.          </cancellationPenalty>
12.        </service>
13.      </services>
14.      <successful>TRUE</successful>
15.    </result>

```

Item	Type	Parent	Description
<b>result</b>	Element	root	The root element.



@date	Attribute	result	The Unix timestamp date and time when the result has been provided.
@command	Attribute	result	The command for which the result is shown.
productsLeftOnItinerary	Element	result	Specifies how many services are part of the itinerary after the booking was canceled.
services	Element	result	Groups information about the services that were canceled.
service	Element	services	Encapsulates information about the penalty that was applied for this booking.
@runno	Element	service	Serial running number starting from 0.
@code	Element	service	Internal code for the booking that was canceled.
cancellationPenalty	Element	result	Encapsulates details about the cancellation policy applied for this booking.
penaltyApplied	Element	cancellationPenalty	Cancellation charge applied for this booking.
formatted	Element	penaltyApplied	Cancellation charge formatted as per the customer preference (decimal places, thousand separator, decimal separator).
currency	Element	cancellationPenalty	Internal code of the currency in which the cancellation charge is provided.
currencyShort	Element	cancellationPenalty	The 3 letter code which identify the currency in which the cancellation charge is provided.
successful	Element	result	Specifies if the request was successfully processed.

## cancel\_booking.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="result" type="resultType"></xs:element>
03.   <xs:complexType name="resultType">
04.     <xs:all>
05.       <xs:element name="productsLeftOnItinerary" type="xs:unsignedShort" minOccurs="0"></xs:element>
06.       <xs:element name="services" type="servicesType"></xs:element>
07.       <xs:element name="successful" type="trueOrFalse"></xs:element>
08.     </xs:all>
09.     <xs:attribute name="command" type="xs:string" use="required" fixed="cancelbooking"></xs:attribute>
10.     <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
11.     <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
12.     <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
13.     <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
14.     <xs:attribute name="elapsedTime" type="xs:string" use="required"></xs:attribute>
15.   </xs:complexType>
16.   <xs:simpleType name="dotwIP">
17.     <xs:restriction base="xs:string">
18.       <xs:pattern value="(25[0-5]|2[0-4][0-9]|0[0-1]{1}[0-9]{2}|[ 1][0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|0[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|0[0-1]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[0-9])" />
19.     </xs:restriction>
20.   </xs:simpleType>
21.   <xs:simpleType name="dotwDateType">
22.     <xs:restriction base="xs:string">
23.       <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}([0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*|[0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2}([0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*|[0-9]{4,4}"/>
24.     </xs:restriction>
25.   </xs:simpleType>
26.   <xs:simpleType name="trueOrFalse">
27.     <xs:restriction base="xs:string">
28.       <xs:pattern value="true|false|TRUE|FALSE"></xs:pattern>
29.     </xs:restriction>
30.   </xs:simpleType>
31.   <xs:simpleType name="versionType">
32.     <xs:restriction base="xs:string">
33.       <xs:pattern value="[1-9]{1}([0-9])*.([0-9])*" />
34.     </xs:restriction>
35.   </xs:simpleType>
36.   <xs:simpleType name="currencyShortType">
37.     <xs:restriction base="xs:string">
38.       <xs:pattern value="[A-Z]{3}" />
39.     </xs:restriction>
40.   </xs:simpleType>
41.   <xs:complexType name="servicesType">

```

```

42.         <xs:sequence>
43.             <xs:element name="service" type="serviceType"></xs:element>
44.         </xs:sequence>
45.     </xs:complexType>
46. <xs:complexType name="serviceType">
47.     <xs:sequence>
48.         <xs:element name="cancellationPenalty" type="cancellationPenaltyType" maxOccurs="unbounded"></xs:element>
49.     </xs:sequence>
50.     <xs:attribute name="runno" type="xs:unsignedByte" use="required"></xs:attribute>
51.     <xs:attribute name="code" type="xs:nonNegativeInteger" use="required"></xs:attribute>
52. </xs:complexType>
53. <xs:complexType name="cancellationPenaltyType">
54.     <xs:sequence>
55.         <xs:choice>
56.             <xs:element name="penaltyApplied" type="formattedPriceType"></xs:element>
57.             <xs:element name="charge" type="formattedPriceType"></xs:element>
58.         </xs:choice>
59.         <xs:element name="currency" type="xs:unsignedShort"></xs:element>
60.         <xs:element name="currencyShort" type="currencyShortType"></xs:element>
61.     </xs:sequence>
62. </xs:complexType>
63. <xs:complexType name="formattedPriceType" mixed="true">
64.     <xs:sequence>
65.         <xs:element name="formatted" type="xs:string"></xs:element>
66.     </xs:sequence>
67. </xs:complexType>
68. </xs:schema>

```

## General Request

```

01. <customer>
02.     <username>username</username>
03.     <password>password</password>
04.     <id>company code</id>
05.     <source>0</source>
06.     <request command="bookitinerary">
07.         <bookingDetails>
08.             <bookingType></bookingType>
09.             <bookingCode></bookingCode>
10.             <confirm></confirm>
11.         </bookingDetails>
12.     </request>
13. </customer>

```

Item	Type	Parent	Description	Required
<b>bookingDetails</b>	Element	request	Used to specify details about the request.	Yes.
<b>bookingType</b>	Element	bookingDetails	Value 2 specifies that the itinerary is a saved one.	Yes.
<b>bookingCode</b>	Element	bookingDetails	Internal itinerary code.	Yes.
<b>confirm</b>	Element	bookingDetails	This element specifies if the customer saw the new prices and he wants to confirm the booking or if he wants to just see new prices. Possible values: <ul style="list-style-type: none"> <li>no</li> <li>yes</li> </ul>	Yes.
<b>testPricesAndAllocation</b>	Element	bookingDetails	Only present in the second request. Contains a list with all prices and allocation details received after the first response for each service of the itinerary.	Yes, if confirm value is yes
<b>service</b>	Element	testPricesAndAllocation	Groups the price and allocation details for each service of the itinerary.	Yes, if parent present.
@referencenumber	Attribute	service	Specifies for which service the price and allocation details are applicable. This is the internal saved service code.	Yes, if parent present.

testPrice	Element	service	The price received after the first request for the service specified in service@id attribute.	Yes, if parent present.
allocationDetails	Element	service	Allocation details received after the first request for the service specified in service@id attribute.	Yes, if parent present.

## bookitinerary\_transfers.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <!-- ##### -->
03.   <xs:element name="customer">
04.     <xs:complexType>
05.       <xs:sequence>
06.         <xs:group ref="loginDetailsGroup"/></xs:group>
07.         <xs:element name="request" type="requestType"/></xs:element>
08.       </xs:sequence>
09.     </xs:complexType>
10.   </xs:element>
11.   <!-- ##### -->
12.   <xs:complexType name="requestType">
13.     <xs:all>
14.       <xs:element name="bookingDetails">
15.         <xs:complexType>
16.           <xs:sequence>
17.             <xs:group ref="bookingTypeAndCode"/></xs:group>
18.             <xs:element name="confirm" type="confirmType"/></xs:element>
19.             <xs:element name="testPricesAndAllocation" type="bookTestPricesAndAllocationType" minOccurs="0">
20.               </xs:sequence>
21.             </xs:complexType>
22.           </xs:element>
23.         </xs:all>
24.         <xs:attribute name="command" type="xs:string" use="required" fixed="bookitinerary"/></xs:attribute>
25.         <xs:attribute name="debug" type="xs:integer"/></xs:attribute>
26.         <xs:attribute name="defaultnamespace" type="xs:string" use="optional" fixed="true"/></xs:attribute>
27.       </xs:complexType>
28.       <!-- ##### -->
29.       <xs:group name="loginDetailsGroup">
30.         <xs:sequence>
31.           <xs:element name="username" type="xs:string"/></xs:element>
32.           <xs:element name="password" type="passwordType"/></xs:element>
33.           <xs:element name="id" type="xs:nonNegativeInteger"/></xs:element>
34.           <xs:element name="source" type="sourceType"/></xs:element>
35.         </xs:sequence>
36.       </xs:group>
37.       <!-- ##### -->
38.       <xs:simpleType name="passwordType">
39.         <xs:restriction base="xs:string">
40.           <xs:length value="32"/></xs:length>
41.         </xs:restriction>
42.       </xs:simpleType>
43.       <!-- ##### -->
44.       <xs:simpleType name="sourceType">
45.         <xs:restriction base="xs:string">
46.           <xs:enumeration value="0"/></xs:enumeration>
47.           <xs:enumeration value="1"/></xs:enumeration>
48.           <xs:enumeration value="2"/></xs:enumeration>
49.         </xs:restriction>
50.       </xs:simpleType>
51.       <!-- ##### -->
52.       <xs:group name="bookingTypeAndCode">
53.         <xs:sequence>
54.           <xs:element name="bookingType" type="bookingTypeType"/></xs:element>
55.           <xs:element name="bookingCode" type="xs:nonNegativeInteger"/></xs:element>
56.         </xs:sequence>
57.       </xs:group>
58.       <!-- ##### -->
59.       <xs:simpleType name="bookingTypeType">
60.         <xs:restriction base="xs:nonNegativeInteger">
61.           <xs:enumeration value="1"/></xs:enumeration>
62.           <xs:enumeration value="2"/></xs:enumeration>
63.         </xs:restriction>
64.       </xs:simpleType>
65.       <!-- ##### -->
66.       <xs:simpleType name="confirmType">
67.         <xs:restriction base="xs:string">
68.           <xs:enumeration value="no"/></xs:enumeration>
69.           <xs:enumeration value="yes"/></xs:enumeration>
70.         </xs:restriction>
71.       </xs:simpleType>
72.       <!-- ##### -->
73.       <xs:complexType name="bookTestPricesAndAllocationType">
74.         <xs:sequence>
75.           <xs:element name="service" type="serviceType" maxOccurs="unbounded"/></xs:element>
76.         </xs:sequence>

```

```

77.     </xs:complexType>
78.     <!-- ##### -->
79.     <xs:complexType name="serviceType">
80.         <xs:sequence>
81.             <xs:element name="testPrice" type="xs:decimal"/></xs:element>
82.             <xs:element name="penaltyApplied" type="xs:decimal" minOccurs="0"/></xs:element>
83.             <xs:element name="allocationDetails" type="xs:string"/></xs:element>
84.         </xs:sequence>
85.         <xs:attribute name="referencenumber" type="xs:nonNegativeInteger" use="required"/></xs:attribute>
86.     </xs:complexType>
87.     <!-- ##### -->
88.     <!-- ##### -->
89.     <!-- ##### -->
90. </xs:schema>

```

## General Response

```

01. <result command="bookitinerary" ip="" date="">
02.     <currencyShort></currencyShort>
03.     <product runno="" code="" type="" servicename="">
04.         <cancellationRules count="">
05.             <rule runno="">
06.                 <toDate></toDate>
07.                 <toDateDetails></toDateDetails>
08.                 <charge>
09.                     <formatted></formatted>
10.                 </charge>
11.             </rule>
12.             <rule runno="">
13.                 <fromDate></fromDate>
14.                 <fromDateDetails></fromDateDetails>
15.                 <charge>
16.                     <formatted></formatted>
17.                 </charge>
18.             </rule>
19.         </cancellationRules>
20.         <available></available>
21.         <price>
22.             <formatted></formatted>
23.         </price>
24.         <fromShort></fromShort>
25.         <toShort></toShort>
26.         <onRequest></onRequest>
27.     </product>
28.     <successful>TRUE</successful>
29. </result>

```

Item	Type	Parent	Description
<b>result</b>	Element	root	The root element.
<b>@date</b>	Attribute	result	The unix timestamp date and time when the result has been provided.
<b>@command</b>	Element	result	The command for which the result is shown.
<b>product</b>	Element	result	Contains details about a service of the itinerary. For each service in the itinerary one product element will be returned.
<b>@runno</b>	Attribute	product	Running number starting from 0.
<b>@code</b>	Attribute	product	Internal service code.
<b>@type</b>	Attribute	product	Service type. Possible values: <ul style="list-style-type: none"> <li>Hotel</li> <li>Apartment</li> <li>Transfer</li> </ul>
<b>@servicename</b>	Attribute	product	Service name.
<b>available</b>	Element	product	Specifies if the service is available and can be booked.
<b>servicePrice</b>	Element	booking	ServicePrice indicates the breakup in price for Room (excluded meal supplements)

<b>formatted</b>	Element	servicePrice	This element contains the service price formatted as per the customer preference (decimal places, thousand separator, decimal separator).
<b>mealsPrice</b>	Element	booking	MealsPrice indicates the breakup in price for meals (excluded Room rate)
<b>formatted</b>	Element	mealsPrice	This element contains the meals price formatted as per the customer preference (decimal places, thousand separator, decimal separator).
<b>price</b>	Element	booking	Total payable for this booking (including rooms and meals).
<b>formatted</b>	Element	price	This element contains the total price formatted as per the customer preference (decimal places, thousand separator, decimal separator)
<b>currency</b>	Element	product	Internal code for the currency in which the prices are displayed.
<b>currencyShort</b>	Element	product	Specifies the shortening for the currency used to display the price.
<b>fromShort</b>	Element	product	Starting date of the service in <i>DOTW format</i> .
<b>toShort</b>	Element	product	Ending date of the service in <i>DOTW format</i> .
<b>onRequest</b>	Element	product	Specifies if the service is on request or not. Possible values: <ul style="list-style-type: none"> <li>• 0</li> <li>• 1</li> </ul>
<b>minStay</b>	Element	product	Used for hotels and apartments to specify if the service requires a minimum staying for the period it will be booked for.
<b>min</b>	Element	minStay	Specifies the minimum staying.
<b>from</b>	Element	minStay	Specifies the starting date of the min stay.in DOTW format.
<b>to</b>	Element	minStay	Specifies the ending date of the min stay in DOTW format.
<b>confirmationText</b>	Element	result	Confirmation text for the itinerary in a HTML format. This element will be returned only if the request was posted with <b>confirm</b> value Yes.
<b>returnedCode</b>	Element	result	Confirmed itinerary code. This element will be returned only if the request was posted with <b>confirm</b> value Yes.
<b>bookings</b>	Element	result	Encapsulates a list with all the services booked under this itinerary. This element and all its siblings will be returned only if the request was posted with <b>confirm</b> value Yes.
<b>booking</b>	Element	bookings	Encapsulates information about a booked services.
@runno	Attribute	booking	Running number starting from 0.
<b>bookingStatus</b>	Element	booking	Specifies the status of the Booking. Indicates whether the booking is confirmed on request. Possible values: <ul style="list-style-type: none"> <li>• confirmed</li> <li>• onrequest</li> </ul>
<b>bookingCode</b>	Element	booking	Specifies the internal code of the booking. This will be different from the internal code of the saved service and it will be the internal code used to further process the booking.
<b>bookingReferenceNumber</b>	Element	booking	The confirmation number generated by DOTWconnect server. This will be a unique number generated by the system under which our service providers will record this booking.
<b>servicePrice</b>	Element	booking	ServicePrice indicates the breakup in price for Room (excluded meal supplements)
<b>formatted</b>	Element	servicePrice	This element contains the service price formatted as per the customer preference (decimal places, thousand separator, decimal separator).

mealsPrice	Element	booking	MealsPrice indicates the breakup in price for meals (excluded Room rate)
formatted	Element	mealsPrice	This element contains the meals price formatted as per the customer preference (decimal places, thousand separator, decimal separator).
price	Element	booking	Total payable for this booking (including rooms and meals).
formatted	Element	price	This element contains the total price formatted as per the customer preference (decimal places, thousand separator, decimal separator)
currency	Element	booking	The internal code for the Currency in which the rates are calculated.
successful	Element	product	Specifies if the request was successfully processed.

## book\_itinerary.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="result" type="resultType"></xs:element>
03.   <xs:complexType name="resultType">
04.     <xs:sequence>
05.       <xs:element name="currencyShort" type="currencyShortType"></xs:element>
06.       <xs:element name="product" type="productType" maxOccurs="unbounded"></xs:element>
07.       <xs:element name="confirmationText" type="xs:string" minOccurs="0"></xs:element>
08.       <xs:element name="returnedCode" type="xs:nonNegativeInteger" minOccurs="0"></xs:element>
09.       <xs:element name="bookings" type="bookingsType" minOccurs="0"></xs:element>
10.       <xs:element name="successful" type="trueOrFalse"></xs:element>
11.     </xs:sequence>
12.     <xs:attribute name="command" type="bookItineraryType" use="required"></xs:attribute>
13.     <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
14.     <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
15.     <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
16.     <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
17.     <xs:attribute name="elapsedTime" type="xs:string" use="required"></xs:attribute>
18.   </xs:complexType>
19.   <xs:simpleType name="dotwIP">
20.     <xs:restriction base="xs:string">
21.       <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9][0-9]{2}|1[0-9]{2}|1[0-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9][0-9]{2}|1[0-9]{2}|1[0-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1-9][0-9]{2}|1[0-9]{2}|1[0-9]{1}[0-9]{1}|[1-9]|0)." />
22.     </xs:restriction>
23.   </xs:simpleType>
24.   <xs:simpleType name="dotwDateType">
25.     <xs:restriction base="xs:string">
26.       <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}([0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*|([0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2})([0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})*|([0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2})" />
27.     </xs:restriction>
28.   </xs:simpleType>
29.   <xs:simpleType name="versionType">
30.     <xs:restriction base="xs:string">
31.       <xs:pattern value="[1-9]{1}([0-9])*.([0-9])*" />
32.     </xs:restriction>
33.   </xs:simpleType>
34.   <xs:complexType name="productType">
35.     <xs:all>
36.       <xs:element name="cancellationRules" type="cancellationRulesType" minOccurs="0"></xs:element>
37.       <xs:element name="available" type="trueOrFalse"></xs:element>
38.       <xs:element name="servicePrice" type="formattedPriceType" minOccurs="0"></xs:element>
39.       <xs:element name="mealsPrice" type="formattedPriceType" minOccurs="0"></xs:element>
40.       <xs:element name="allocationDetails" type="xs:string" minOccurs="0"></xs:element>
41.       <xs:element name="price" type="formattedPriceType"></xs:element>
42.       <xs:element name="currencyShort" type="currencyShortType" minOccurs="0"></xs:element>
43.       <xs:element name="fromShort" type="xs:string"></xs:element>
44.       <xs:element name="toShort" type="xs:string"></xs:element>
45.       <xs:element name="onRequest" type="oneOrZero"></xs:element>
46.       <xs:element name="details" type="xs:string"></xs:element>
47.       <xs:element name="extraDetails" type="xs:string"></xs:element>
48.     </xs:all>
49.     <xs:attribute name="runno" type="xs:integer" use="required"></xs:attribute>
50.     <xs:attribute name="code" type="xs:nonNegativeInteger" use="required"></xs:attribute>
51.     <xs:attribute name="type" type="typeType" use="required"></xs:attribute>
52.     <xs:attribute name="servicename" type="xs:string"></xs:attribute>
53.   </xs:complexType>
54.   <xs:simpleType name="trueOrFalse">
55.     <xs:restriction base="xs:string">
56.       <xs:pattern value="true|false|TRUE|FALSE" />
57.     </xs:restriction>
58.   </xs:simpleType>
59.   <xs:simpleType name="yesOrNo">
60.     <xs:restriction base="xs:string">
61.       <xs:pattern value="yes|no" />
62.     </xs:restriction>
63.   </xs:simpleType>
64.   <xs:complexType name="formattedPriceType" mixed="true">
65.     <xs:sequence>

```

```

66.         <xs:element name="formatted" type="xs:string"></xs:element>
67.     </xs:sequence>
68. </xs:complexType>
69. <xs:complexType name="cancellationRulesType">
70.     <xs:sequence>
71.         <xs:element name="rule" type="ruleType" maxOccurs="unbounded"></xs:element>
72.     </xs:sequence>
73.     <xs:attribute name="count" type="xs:unsignedInt" use="required"></xs:attribute>
74. </xs:complexType>
75. <xs:complexType name="ruleType">
76.     <xs:sequence>
77.         <xs:element name="fromDate" type="dotwDateType" minOccurs="0"></xs:element>
78.         <xs:element name="fromDateDetails" type="xs:string" minOccurs="0"></xs:element>
79.         <xs:element name="toDate" type="dotwDateType" minOccurs="0"></xs:element>
80.         <xs:element name="toDateDetails" type="xs:string" minOccurs="0"></xs:element>
81.         <xs:element name="charge" type="formattedPriceType"></xs:element>
82.     </xs:sequence>
83.     <xs:attribute name="runno" type="xs:unsignedInt" use="required"></xs:attribute>
84. </xs:complexType>
85. <xs:simpleType name="currencyShortType">
86.     <xs:restriction base="xs:string">
87.         <xs:pattern value="[A-Z]{3}"></xs:pattern>
88.     </xs:restriction>
89. </xs:simpleType>
90. <xs:simpleType name="oneOrZero">
91.     <xs:restriction base="xs:integer">
92.         <xs:pattern value="0|1"></xs:pattern>
93.     </xs:restriction>
94. </xs:simpleType>
95. <xs:simpleType name="typeType">
96.     <xs:restriction base="xs:string">
97.         <xs:pattern value="hotel|apartment|tour|transfer"></xs:pattern>
98.     </xs:restriction>
99. </xs:simpleType>
100. <xs:simpleType name="bookItineraryType">
101.     <xs:restriction base="xs:string">
102.         <xs:pattern value="bookitinerary|confirmbooking"></xs:pattern>
103.     </xs:restriction>
104. </xs:simpleType>
105. <xs:complexType name="bookingsType">
106.     <xs:sequence>
107.         <xs:element name="booking" type="bookingType" maxOccurs="unbounded"></xs:element>
108.     </xs:sequence>
109. </xs:complexType>
110. <xs:complexType name="bookingType">
111.     <xs:sequence>
112.         <xs:element name="bookingCode" type="xs:nonNegativeInteger"></xs:element>
113.         <xs:element name="bookingReferenceNumber" type="xs:string"></xs:element>
114.         <xs:element name="bookingStatus" type="xs:nonNegativeInteger"></xs:element>
115.         <xs:element name="servicePrice" type="servicePriceType"></xs:element>
116.         <xs:element name="mealsPrice" type="servicePriceType"></xs:element>
117.         <xs:element name="price" type="servicePriceType"></xs:element>
118.         <xs:element name="currency" type="xs:nonNegativeInteger"></xs:element>
119.         <xs:element name="type" type="xs:string"></xs:element>
120.         <xs:element name="voucher" type="xs:string"></xs:element>
121.         <xs:element name="paymentGuaranteedBy" type="xs:string"></xs:element>
122.         <xs:element name="emergencyContacts" type="emergencyContactsType"></xs:element>
123.     </xs:sequence>
124.     <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"></xs:attribute>
125. </xs:complexType>
126. <xs:complexType name="servicePriceType" mixed="true">
127.     <xs:sequence>
128.         <xs:element name="formatted" type="xs:string"></xs:element>
129.     </xs:sequence>
130. </xs:complexType>
131. <xs:complexType name="emergencyContactsType">
132.     <xs:sequence>
133.         <xs:element name="emergencyContact" type="emergencyContactType" minOccurs="0" maxOccurs="unbounded">
134.     </xs:sequence>
135.     <xs:attribute name="count" type="xs:nonNegativeInteger" use="required"></xs:attribute>
136. </xs:complexType>
137. <xs:complexType name="emergencyContactType">
138.     <xs:sequence>
139.         <xs:element name="salutation">
140.             <xs:complexType>
141.                 <xs:simpleContent>
142.                     <xs:extension base="xs:string">
143.                         <xs:attribute name="id" type="xs:nonNegativeInteger" use="required"></xs:attribute>
144.                     </xs:extension>
145.                 </xs:simpleContent>
146.             </xs:complexType>
147.         </xs:element>
148.         <xs:element name="fullName" type="xs:string"></xs:element>
149.         <xs:element name="phone" type="xs:string"></xs:element>
150.     </xs:sequence>
151.     <xs:attribute name="runno" type="xs:nonNegativeInteger" use="required"></xs:attribute>
152. </xs:complexType>
153. </xs:schema>

```

# Delete Itinerary

An Itinerary contains one or more services. You use this method to Delete all services in a Saved Itinerary or Cancel all services in a Confirmed Itinerary.

## General Request

```

01.  <customer>
02.    <username>username</username>
03.    <password>md5(password)</password>
04.    <id>company code</id>
05.    <source>1</source>
06.    <request command="deleteitinerary">
07.      <bookingDetails>
08.        <bookingType></bookingType>
09.        <bookingCode></bookingCode>
10.        <confirm></confirm>
11.        <testPricesAndAllocation>
12.          <service referencenumber="">
13.            <penaltyApplied></penaltyApplied>
14.          </service>
15.        </testPricesAndAllocation>
16.      </bookingDetails>
17.    </request>
18.  </customer>

```

Item	Type	Parent	Description	Required
<b>bookingDetails</b>	Element	request	Used to specify details about the request.	Yes.
<b>bookingType</b>	Element	bookingdetails	Specifies if the booking is confirmed or saved. Possible values: <ul style="list-style-type: none"> <li>1 - confirmed</li> <li>2 - saved</li> </ul>	Yes.
<b>bookingCode</b>	Element	bookingdetails	Itinerary internal code.	Yes.
<b>confirm</b>	Element	bookingDetails	For confirmed bookings the cancellation process takes place in two steps to ensure the customer is agreeing to any cancellation penalty that should be applied. In the first step, the request is indicating which booking the customer wishes to cancel - confirm value: no. The second step also provides details about cancellation penalty (by mentioning this, the customer is in fact agreeing to that cancellation penalty.) - confirm value: yes. Possible values: <ul style="list-style-type: none"> <li>yes</li> <li>no</li> </ul>	Yes.
<b>testPricesAndAllocation</b>	Element	bookingDetails	Groups information about prices, allocation and penalties for each service.	Yes, if confirm nodevalue is yes.
<b>service</b>	Element	testPricesAndAllocation	Specifies for which service the details are about.	Yes.
@referencenumber	Attribute	service	Booking Internal Code - same value as bookingCode	Yes.
<b>penaltyApplied</b>	Element	service	Specifies the penalty charge for canceling this booking, the customer agrees to. This should be the exact value received from the system and not the formatted one.	Yes.



```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns="http://us.dotwconnect.com/xsd/atomicCondition" targetNamesp
ace="http://us.dotwconnect.com/xsd/atomicCondition">
02.   <xs:element name="condition">
03.     <xs:complexType>
04.       <xs:sequence>
05.         <xs:element name="fieldName" type="fieldNameType"/></xs:element>
06.         <xs:element name="fieldTest" type="fieldTestType"/></xs:element>
07.         <xs:element name="fieldValues" type="fieldValuesType"/></xs:element>
08.       </xs:sequence>
09.     </xs:complexType>
10.   </xs:element>
11.   <!-- ##### -->
12.   <xs:simpleType name="fieldNameType">
13.     <xs:restriction base="xs:string">
14.       <xs:enumeration value="hotelId"/></xs:enumeration>
15.       <xs:enumeration value="price"/></xs:enumeration>
16.       <xs:enumeration value="preferred"/></xs:enumeration>
17.       <xs:enumeration value="onRequest"/></xs:enumeration>
18.       <xs:enumeration value="rating"/></xs:enumeration>
19.       <xs:enumeration value="luxury"/></xs:enumeration>
20.       <xs:enumeration value="topDeals"/></xs:enumeration>
21.       <xs:enumeration value="specialDeals"/></xs:enumeration>
22.       <xs:enumeration value="location"/></xs:enumeration>
23.       <xs:enumeration value="locationId"/></xs:enumeration>
24.       <xs:enumeration value="amenitie"/></xs:enumeration>
25.       <xs:enumeration value="leisure"/></xs:enumeration>
26.       <xs:enumeration value="business"/></xs:enumeration>
27.       <xs:enumeration value="hotelPreference"/></xs:enumeration>
28.       <xs:enumeration value="chain"/></xs:enumeration>
29.       <xs:enumeration value="attraction"/></xs:enumeration>
30.       <xs:enumeration value="hotelName"/></xs:enumeration>
31.       <xs:enumeration value="builtYear"/></xs:enumeration>
32.       <xs:enumeration value="renovationYear"/></xs:enumeration>
33.       <xs:enumeration value="floors"/></xs:enumeration>
34.       <xs:enumeration value="noOfRooms"/></xs:enumeration>
35.       <xs:enumeration value="fireSafety"/></xs:enumeration>
36.       <xs:enumeration value="lastUpdated"/></xs:enumeration>
37.       <xs:enumeration value="roomOnRequest"/></xs:enumeration>
38.       <xs:enumeration value="roomPrice"/></xs:enumeration>
39.       <xs:enumeration value="suite"/></xs:enumeration>
40.       <xs:enumeration value="roomAmentie"/></xs:enumeration>
41.       <xs:enumeration value="roomId"/></xs:enumeration>
42.       <xs:enumeration value="roomRateBasis"/></xs:enumeration>
43.       <xs:enumeration value="roomName"/></xs:enumeration>
44.     </xs:restriction>
45.   </xs:simpleType>
46.   <!-- ##### -->
47.   <xs:simpleType name="fieldTestType">
48.     <xs:restriction base="xs:string">
49.       <xs:enumeration value="equals"/></xs:enumeration>
50.       <xs:enumeration value="in"/></xs:enumeration>
51.       <xs:enumeration value="notin"/></xs:enumeration>
52.       <xs:enumeration value="between"/></xs:enumeration>
53.       <xs:enumeration value="regex"/></xs:enumeration>
54.       <xs:enumeration value="like"/></xs:enumeration>
55.     </xs:restriction>
56.   </xs:simpleType>
57.   <!-- ##### -->
58.   <xs:complexType name="fieldValuesType">
59.     <xs:sequence>
60.       <xs:element name="fieldValue" type="xs:string" maxOccurs="unbounded"/></xs:element>
61.     </xs:sequence>
62.   </xs:complexType>
63.   <!-- ##### -->
64.   <xs:simpleType name="fieldValueType">
65.     <xs:restriction base="xs:string">
66.       <xs:pattern value="[0-9]{1,5}|true|false"/></xs:pattern>
67.     </xs:restriction>
68.   </xs:simpleType>
69.   <!-- ##### -->
70.   <xs:group name="atomics">
71.     <xs:sequence>
72.       <xs:element ref="condition"/></xs:element>
73.       <xs:sequence minOccurs="0" maxOccurs="unbounded">
74.         <xs:element name="operator" type="xs:string"/></xs:element>
75.         <xs:element ref="condition"/></xs:element>
76.       </xs:sequence>
77.     </xs:sequence>
78.   </xs:group>
79.   <!-- ##### -->
80.   <xs:simpleType name="roomFieldNameType">
81.     <xs:restriction base="xs:string">
82.       <xs:enumeration value="roomOnRequest"/></xs:enumeration>
83.       <xs:enumeration value="roomPrice"/></xs:enumeration>
84.       <xs:enumeration value="suite"/></xs:enumeration>
85.       <xs:enumeration value="roomAmentie"/></xs:enumeration>
86.       <xs:enumeration value="roomId"/></xs:enumeration>
87.       <xs:enumeration value="roomRateBasis"/></xs:enumeration>
88.       <xs:enumeration value="roomName"/></xs:enumeration>
89.     </xs:restriction>
90.   </xs:simpleType>
91. </xs:schema>

```

## General Response

```

01. <result command="deleteitinerary" ip="" date="" version="">
02.   <currencyShort></currencyShort>
03.   <productsLeftOnItinerary></productsLeftOnItinerary>
04.   <services>
05.     <service runno="0" code="">
06.       <cancellationPenalty>
07.         <charge>
08.           <formatted></formatted>
09.         </charge>
10.       <currency></currency>
11.       <currencyShort></currencyShort>
12.     </cancellationPenalty>
13.   </service>
14.   <service runno="" code="">
15.     <cancellationPenalty>
16.       <charge>
17.         <formatted></formatted>
18.       </charge>
19.     <currency></currency>
20.     <currencyShort></currencyShort>
21.   </cancellationPenalty>
22. </service>
23. </services>
24. <successful></successful>
25. </result>

```

Item	Type	Parent	Description
<b>result</b>	Element	root	The root element.
@date	Attribute	result	The unix timestamp date and time when the result has been provided.
@command	Attribute	result	The command for which the result is shown.
<b>productsLeftOnItinerary</b>	Element	result	Specifies how many services are part of the itinerary after the booking was canceled.
<b>services</b>	Element	result	Groups information about the services that are to be canceled.
<b>service</b>	Element	services	Encapsulates information about the penalty that was applied for this booking.
@runno	Element	service	Serial running number starting from 0.
@code	Element	service	Internal code for the booking that was canceled.
<b>cancellationPenalty</b>	Element	result	Encapsulates details about the cancellation policy applied for this booking.
<b>penaltyApplied</b>	Element	cancellationPenalty	Cancellation charge applied for this booking.
<b>formatted</b>	Element	penaltyApplied	Cancellation charge formatted as per the customer preference (decimal places, thousand separator, decimal separator).
<b>currency</b>	Element	cancellationPenalty	Internal code of the currency in which the cancellation charge is provided.
<b>currencyShort</b>	Element	cancellationPenalty	The 3 letter code which identify the currency in which the cancellation charge is provided.
<b>successful</b>	Element	result	Specifies if the request was successfully processed.

### delete\_itinerary.xsd

```

01. <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
02.   <xs:element name="result" type="resultType"></xs:element>
03.   <xs:complexType name="resultType">
04.     <xs:all>
05.       <xs:element name="currencyShort" type="currencyShortType" minOccurs="0"></xs:element>
06.       <xs:element name="productsLeftOnItinerary" type="xs:unsignedShort" minOccurs="0"></xs:element>
07.       <xs:element name="services" type="servicesType" minOccurs="0"></xs:element>

```

```

08.         <xs:element name="successful" type="trueOrFalse"></xs:element>
09.     </xs:all>
10.     <xs:attribute name="command" type="xs:string" use="required" fixed="deleteitinerary"></xs:attribute>
11.     <xs:attribute name="tID" type="xs:integer" use="required"></xs:attribute>
12.     <xs:attribute name="ip" type="dotwIP" use="required"></xs:attribute>
13.     <xs:attribute name="date" type="dotwDateType" use="required"></xs:attribute>
14.     <xs:attribute name="version" type="versionType" use="required"></xs:attribute>
15.     <xs:attribute name="elapsedTime" type="xs:string" use="required"></xs:attribute>
16. </xs:complexType>
17. <xs:simpleType name="dotwIP">
18.     <xs:restriction base="xs:string">
19.         <xs:pattern value="(25[0-5]|2[0-4][0-9]|[0-1]{1}[0-9]{2}|[1][0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|2[0-9]{1}[0-9]{2}|[1-9]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0).(25[0-5]|2[0-4][0-9]|2[0-9]{1}[0-9]{2}|[1-9]{1}[0-9]{2}|[1-9]{1}[0-9]{1}|[1-9]|0)" />
20.     </xs:restriction>
21. </xs:simpleType>
22. <xs:simpleType name="dotwDateType">
23.     <xs:restriction base="xs:string">
24.         <xs:pattern value="[0-9]{10}|[0-9]{4,4}-[0-9]{1,2}-[0-9]{1,2}([0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})?|[0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2}([0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})?|[0-9]{4,4}/[0-9]{1,2}/[0-9]{1,2}([0-9]{1,2}:[0-9]{1,2}:[0-9]{1,2})?" />
25.     </xs:restriction>
26. </xs:simpleType>
27. <xs:simpleType name="trueOrFalse">
28.     <xs:restriction base="xs:string">
29.         <xs:pattern value="true|false|TRUE|FALSE"></xs:pattern>
30.     </xs:restriction>
31. </xs:simpleType>
32. <xs:simpleType name="versionType">
33.     <xs:restriction base="xs:string">
34.         <xs:pattern value="[1-9]{1}([0-9])?*" />
35.     </xs:restriction>
36. </xs:simpleType>
37. <xs:simpleType name="currencyShortType">
38.     <xs:restriction base="xs:string">
39.         <xs:pattern value="[A-Z]{3}" />
40.     </xs:restriction>
41. </xs:simpleType>
42. <xs:complexType name="servicesType">
43.     <xs:sequence>
44.         <xs:element name="service" type="serviceType"></xs:element>
45.     </xs:sequence>
46. </xs:complexType>
47. <xs:complexType name="serviceType">
48.     <xs:sequence>
49.         <xs:element name="cancellationPenalty" type="cancellationPenaltyType" maxOccurs="unbounded"></xs:element>
50.     </xs:sequence>
51.     <xs:attribute name="runno" type="xs:unsignedByte" use="required"></xs:attribute>
52.     <xs:attribute name="code" type="xs:nonNegativeInteger" use="required"></xs:attribute>
53. </xs:complexType>
54. <xs:complexType name="cancellationPenaltyType">
55.     <xs:sequence>
56.         <xs:choice>
57.             <xs:element name="penaltyApplied" type="formattedPriceType"></xs:element>
58.             <xs:element name="charge" type="formattedPriceType"></xs:element>
59.         </xs:choice>
60.         <xs:element name="currency" type="xs:unsignedShort"></xs:element>
61.         <xs:element name="currencyShort" type="currencyShortType"></xs:element>
62.     </xs:sequence>
63. </xs:complexType>
64. <xs:complexType name="formattedPriceType" mixed="true">
65.     <xs:sequence>
66.         <xs:element name="formatted" type="xs:string"></xs:element>
67.     </xs:sequence>
68. </xs:complexType>
69. </xs:schema>

```

**Q: Please advise your contact details for technical support on XML connectivity.**

A: Please send your questions to the following email addresses:

XML Web Architect: vlad.diaconu@traveltech.dotw.com

Support Team: xmlsupport@traveltech.dotw.com

**Q. What is your URL for Test Server?**

A. The Test Server address for XML connectivity is <http://xmldev.dotwconnect.com/gatewayV4.dotw>

**Q: Do we need to provide you with a list of IP addresses that will be required to access your system?**

A: You may supply as many IP addresses as you want. Our servers accepts the requests only from the specified IP range.

**Q: Does the test environment contain the same details as the live site? Are there any differences we need to be aware of?**

A: The test environment contains exactly the same details like the live server. If your application functions properly on this environment it will definitely work on the live server as well. The only difference is that the bookings processed on the test servers are not broadcasted to the suppliers and no invoices generated for customers.

**Q: What is the process for making a test booking against the live site? Is there specific criteria we should use, can test bookings be cancelled or are they chargeable, is there a limit to the number of test bookings we can make? Do you have test credit card details we should use?**

A: The only difference between the booking process on the test and live environment is the fact that the bookings are not sent

to the supplier and customers are not invoiced for it. At the moment we do not allow credit card payments, but this will be soon added to our XML interface. All bookings are made and paid for through a credit line established between your customer and Destinations of the World.

**Q: Are there any restrictions on which customers will be allowed access e.g. only certain size/volume, specific markets or specific business types?**

A: Our global product range is available for you via XML, . there are no restrictions on the size/volume.

**Q: Are there Look/book ratios or penalties?**

A: There are no look/book ratios or penalties. However monitor this very closely and reserve the right to take appropriate action if we find that over a period there are only look and no book actions.

**Q: Are there any license costs of using the API and/or any costs for support/certification during the integration phase and afterwards?**

A: There are no cost of using the API or for support/certification.

**Q: Is there any mandatory information that we will need to display e.g. cancellation/amendment details?**

A: The cancellation penalty charges are passed back from our web services. We do not control the display of the same. Please note that you can also customize your requests and retrieve from the server only data that you really need to process. In fact this is recommended as it will improve your performance.

**Q: What is the timezone in which DOTW provides cancellation & amend policy?**

A: DOTW system will always return the cancellation/amendment policies in the agency timezone.

**Q: What is the age range for an adult?**

A: There is no specific age limits/range for adult.

**Q: What is the age range for a child?**

A: The child age policy varies from hotel to hotel and we bracket the age from 1 to 21. The hotels are allowed to provide us with child rates applicable for a varied age bracket. Generally we consider any child below the age of 2 as an infant and up to 12 as child. But as mentioned this can be changed per property per room type and we leave it completely to the discretion of the properties based on their occupancy and child policy.

**Q: Is an infant also considered a child?**

A: The booking engine handles this internally. Depending on the age of the child entered at the time of booking and what rules the hotels provided in their profile the booking engine will allocate the child rate.

**Q: What is the maximum number of children in a room?**

A: This depends on the Hotel and varies, but as a policy we allow upto 4 children per room.

**Q: Can hotels and apartments be searched at the same time, or would this require two searches?**

A: Yes we provide both hotels and Serviced Apartments in the availability response.

**Q: What is the DOTW date format?**

A: The date format we use is in Unix Time Stamp or YYYY-MM-DD format.

**Q: What is the maximum number of rooms in a hotel search?**

A: We allow up to 5 rooms per Booking/Search

**Q: How long is a saved itinerary available?**

A: The Saved Itineraries are not purged, but please note the Saved Itineraries are like draft bookings, no action will be taken by DOTW on Saved Itineraries.

**Q: Is the blocking rooms step mandatory?**

A: Yes, the block rooms procedure is a mandatory one. By blocking the rooms prior to booking, the system guarantees the prices and allocation for 15 minutes. If more than 15 minutes pass before the booking is actually completed, a new blocking request is required.

**Q: Is the hotel rating a star rating, or an internal DOTW rating?**

A: This is very much Internal to DOTW. The classification is based on the information provided to us by our various service providers.

**Q: Are special requests just a request to the hotel, or are they guaranteed to be honored?**

A: Special Requests are subject to availability at the time of Check in and cannot be guaranteed.

**Q: What is Maximum number of adults per room ?**

A: The maximum allowed is 10 but again depends upon how the Hotels have provided the occupancy level. The hotels have an option of setting the maximum occupancy levels for Adults and Children in a Room. Booking engine does the validation against this at the time of a search and returns only properties meeting the search requirements.

**Q: As the currency must be passed to DOTW, you presumably do currency conversion ?**

A: Yes, we do have an internal exchange rate management and conversion is done based on the Exchange rates we hold. The exchange rates are managed regularly.

**Q: What is the process of cutting over from Development environment to Live?**

A: We have a certification process before moving a customer from Development environment to Live. This process is to ensure the communication between the two systems has been built properly and all mandatory requirements are met by the customer. The customers will be granted access to the Live server based on the application submitted for certification. Any changes to the XML integration post certification process will involve another round of certification process.

**Q: Where do I check the bookings done using my XML Booking Engine or do you provide access to an interface to view our Bookings?**

A: Yes, we allow the XML Customers to have a View Only Access to their bookings. You can log on to <http://www.dotw.com> with the same login credentials you use to connect your XML Booking engine.

**Q: Can bookings processed through XML Booking engine be cancelled or amended using the interface?**

A: Yes, but please note that any offline cancellation or amendment, will not reflect in the customer's application.

The Internal Codes section contains a series of commands that can be used to receive the DOTW internal codes required during the booking/amending/cancelling process. (eg. City and country codes, currency codes, rate basis codes, special requests codes, etc). You need to obtain our static codes at regular intervals if you plan to keep this data locally. This is the first step of static download.

Regarding hotel data, this can also be separated into static (hotel name, classification, address, leisure amenities, business amenities, etc) and dynamic data (prices and availability). If you would like to speed up the process of booking through our web services it is recommendable that you download the static data to your server and query our server only for dynamic data. Our web services have the feature to give our clients the ability to control exactly what needs to be returned.

In order to get the static data for hotels you need to use the searchhotels command. In our documentation you will find exact details about all the information we provide for any given hotel. From the list select all the fields that you want to receive information about and pass them into the fields list. **It is also very important that you make the mapping / static download request with the parameter noPrice set to true.** It is recommended that you do this request per city (preferred) or country considering the range of property per city and the time system requires to process this information. If you are searching for an entire country please make sure you request for the Internal city code as well to group the hotels citywise.

**For USA the mapping must be done city wise as due to the large amount of data, the request by country will fail.**

Another important thing to consider while using the searchhotels command is that the bookingDetails element should contain the following data: travel dates and occupancy. For the static download process you can use the current date as the check in date and the next day for the check out date, 1 adult, no children. This will ensure you get all the hotels in the city / country you requested.

**In order to get in the response the static information for rooms you need to add in your request the element set to value "true".**

This way our system will only return you properties that have active rooms. You can choose from the below list of roomFields/rateFields what information you are interested to retrieve using the static data download request

Please take a look at the following scenario to download the static data for Hotels:

You want to receive a complete list of the hotels in Dubai with the static data hotel name, hotel description, full address, hotel rating, leisure and business amenities, number of floors and rooms. Some of this data will be returned as internal codes this is why we recommend you to download the static data as well prior to this request.

The Request will be passed as follows:

(Please note that you need to fill in the login credentials with your login details. Also when posting this request you may need to change the dates depending on the date you are downloading the static data)

If interested to obtain the hotel details in another language than english, please note that you should add in the static data request the element , specifying the language code you wish to retrieve the details in. The languages codes, can be found in the language.xsd file.

Customers have the option to also require information about hotels priority. The priority of the properties is being established based on the number of reservations made by DOTW customers in the last 30 days. Basically top selling hotels from each destination will have priority '1'. The value of **priority** tag will increase as much as the priority of the property will decrease. By downloading and storing this information at hotel level, customers are able to send the availability request, targeting only the top selling properties. In order to retrieve the hotels priority, the static data request must contain below tag:

01. **<fields>**

```

02.     <field>priority</field>
03. </fields>

01. <customer>
02.   <username></username>
03.   <password></password>
04.   <id></id>
05.   <source>1</source>
06.   <product>hotel</product>
07.   <language></language>
08.   <request command="searchhotels">
09.     <bookingDetails>
10.       <fromDate>current date</fromDate>
11.       <toDate>next day</toDate>
12.       <currency>currency internal code</currency>
13.       <rooms no="1">
14.         <room runno="0">
15.           <adultsCode>1</adultsCode>
16.           <children no="0"></children>
17.           <rateBasis>-1</rateBasis>
18.         </room>
19.       </rooms>
20.     </bookingDetails>
21.     <return>
22.       <getRooms>true</getRooms>
23.       <filters xmlns:a="http://us.dotwconnect.com/xsd/atomicCondition/" xmlns:c="http://us.dotwconnect.com/xsd/complexCondition">
24.         <city>364</city>
25.         <noPrice>true</noPrice>
26.       </filters>
27.       <fields>
28.         <field>preferred</field>
29.         <field>builtYear</field>
30.         <field>renovationYear</field>
31.         <field>floors</field>
32.         <field>noOfRooms</field>
33.         <field>preferred</field>
34.         <field>luxury</field>
35.         <field>fullAddress</field>
36.         <field>description1</field>
37.         <field>description2</field>
38.         <field>hotelName</field>
39.         <field>address</field>
40.         <field>zipCode</field>
41.         <field>location</field>
42.         <field>locationId</field>
43.         <field>location1</field>
44.         <field>location2</field>
45.         <field>location3</field>
46.         <field>cityName</field>
47.         <field>cityCode</field>
48.         <field>stateName</field>
49.         <field>stateCode</field>
50.         <field>countryName</field>
51.         <field>countryCode</field>
52.         <field>regionName</field>
53.         <field>regionCode</field>
54.         <field>attraction</field>
55.         <field>amenitie</field>
56.         <field>leisure</field>
57.         <field>business</field>
58.         <field>transportation</field>
59.         <field>hotelPhone</field>
60.         <field>hotelCheckIn</field>
61.         <field>hotelCheckOut</field>
62.         <field>minAge</field>
63.         <field>rating</field>
64.         <field>images</field>
65.         <field>fireSafety</field>
66.         <field>hotelPreference</field>
67.         <field>direct</field>
68.         <field>geoPoint</field>
69.         <field>leftToSell</field>
70.         <field>chain</field>
71.         <field>lastUpdated</field>
72.         <field>priority</field>
73.         <roomField>name</roomField>
74.         <roomField>roomInfo</roomField>
75.         <roomField>roomAmenities</roomField>
76.         <roomField>twin</roomField>
77.       </fields>
78.     </return>
79.   </request>
80. </customer>

```

To continuously be updated with our hotels please find below our suggestions:

- Do the initial mapping country wise.
- You can also have a periodical automatic process to get all NEW hotels. You can do this by making use of the filter notin (more details in the documentation) for the hotelId and ask only for the hotels which you don't have mapped yet. If an empty list is returned this means that you have mapped all hotels for that particular criteria (city or country). This process can be run once a week or two times per month.

- To get the updates of the hotels, make use of the conditional filter **lastUpdate** to ask the system to only return you hotels which have been update between a specific period. The system would return hotels which were modified in the specified interval. To get hotels updated from a certain date, just pass the second parameter as the current timestamp or any date in the future.

Customers wishing to have a facility to generate flat files for rates should create a separate account in DOTWconnect in addition to their XML and Customer Interface accounts. The reason for creating a separate account for the tariff flat file is we internally block some of the functionalities for this account and allow only the Search Rate functions. Since the flat file generation takes up lot of server resources we will provide the access only during off peak hours so that this process does not affect other users on the system.

The request for flat files should be sent city wise. It is recommended that when sending the request for flat files specific hotel codes are passed (which can be obtained from our internal codes methods) instead of all hotels in a city as this can have an effect on the speed. The passenger count for these requests should be set to 2 adults. Each request cannot exceed 30 nights and separate requests can be sent simultaneously to cover a longer period. eg: if the customer wishes to get the tariff for 01 Jan 2010 to 31 Jul 2010 then they have to send a request for 01 Jan 15 Jan and the second one for 16 Jan to 30 Jan, third request 31 Jan - 14 Feb and so on.

Once the customer has developed the search functionality for the flat file tariff, the application needs to be certified by the XML Support team. Post the certification process we will provide access to the Live environment for the tariff generation. Please note that no change should be done by the customer unless these changes are notified to us and certified (if required) by the support team.

To conclude, there is no special functionality to generate flat files, but in fact a different approach (which we call flat files generating) that uses the same functionality provided by the web services. It relies on sending multiple requests to cover a longer period and multiple cities. DOTWConnect would still return XML responses which the application on customer side side is free to interpret / manipulate - maybe into an actual file.

Error Code	Details
0	No XML or invalid/corrupt/not well formatted XML request.
1	The request generated too many result rows. For system safety the process has been halted. Please read the manual to see how you can filter the results.
3	No apartments found for this property.
4	Wrong hotel id.
5	XML request NOT DTD VALID.
6	Wrong or required parameters for this request. Please read the user manual.
7	No Request, Empty or Not Formated Request. Please read the user manual for available commands.
8	Wrong customer username or password.
9	Inexistent Request Command. Please read the user manual for available commands.
12	No rooms found for this hotel.
13	Wrong property id.
18	System error due to database structure changed.
20	Wrong or no customer username or password.
23	Incomplete or bad formatted Booking data
24	The DataBase connection is down.

25	Inactive Customer.
26	XML request NOT XSD VALID.
100	Incorrect or Inexistent Booking Data or the cancellation period has expired.
102	Reservation Error. No data, invalid or corrupted reservation data sent to system.
103	Nothing to change/update.
104	Customer id does not match for this booking.
105	At least one service is out of date. You can't book this itinerary or package.
107	You cannot make a booking starting in the past. Please contact DOTW team in order to do it.
109	Left To Sell error.
115	You do not have Rights to View Rates. Please contact your Supervisor.
116	You do not have Rights to Make/Amend Bookings. Please contact your Supervisor.
117	Please note that your booking session has been exceeded and we cannot complete this booking. Your Itinerary has been saved and you may access this reservation through the link `My Itinerary` on our home page. The booking will be reprocessed based on the current availability and rates. If you would like to edit this service please click on the link `Edit` under Reservation Summary.
210	Wrong booking code, cancellation period expired or this booking is already cancelled.
211	This booking can't be cancelled because the cancellation period expired for one or more booked service/s.
212	You cannot cancel a booking starting in the past. Please contact DOTW team in order to do it.
302	Booking amending failed.
303	No available service for the new booking data.
304	You can't change this booking. The new period doesn't contain any days from the initial booking period.
305	The booking price is not the same.
306	Please note that this booking cannot be processed online as the service is within Cancellation Deadline. Kindly contact our Reservation department who will be able to process this booking provided payment is made in full immediately on receipt of confirmation of the requested services. If you would like to edit this service please click on the link `Edit` under Reservation Summary.
307	You cannot change a booking for a past travel date. Please contact DOTW team in order to do it.

## Unsuccessful Responses

```

01. <result date="">
02.   <request>
03.     <successful>FALSE</successful>
04.     <error>
05.       <code></code>
06.       <details></details>
07.       <extraDetails></extraDetails>
08.     </error>
09.   </request>
10. </result>

```



Item	Type	Parent	Description
<b>result</b>	Element	root	The root element.
@date	Attribute	result	The unix timestamp date and time when the result has been provided.
@command	Attribute	result	The command for which the result is shown.
<b>request</b>	Element	result	Contains specific data for the unsuccessful request command.
<b>successful</b>	Element	request	Indicates that the request was not successfully processed.
<b>error</b>	Element	request	Contains information about the error.
<b>code</b>	Element	error	Internal error code.
<b>details</b>	Element		Details about the error.
<b>extraDetails</b>	Element	error	Extra details regarding the error.

The certification process implies a series of tests to be conducted by the XML Support and integration team, in order to validate that the customer's implementation is following our technical specifications.

The proffered method is for our customers to provide us access to a test environment of their application, where the team is able to conduct the test. This is because there are specific display items which need to be validated during the process.

However, if for some reasons customer is not able to provide a test access, we can validate the integration based on the XML logs provided by customer itself.

This implies that customer will conduct the complete test suite on their side and once finalized, will provide the XML logs and any additional info required by the integration team.

#### Focus points to be considered when implementing DOTW API

##### 1. Minimum Stay Rules

In DOTW system hotels are able to define a minimumStay rule at room level, or even rate level.

We highlight this information in the XML response by the below two elements:

<b>minStay</b>	Element	rateBasis	<b>If the hotel has requested a minimum stay for this room type and rate basis then this element will be returned and its value will be the minimum stay required in days. If no minimum stay applies this element will be returned with no value (empty tag).</b>
<b>dateApplyMinStay</b>	Element	rateBasis	If there is a minimum stay condition this element will specify the starting date when the minimum stay condition applies. If no minimum stay applies this element will be returned with no value (empty tag).

Our requirement is that customer's application somehow inform the user about the fact that the stay period has modified for the selected roomType and rateBasis.

Please note that we can manage this from our side and if you want we can filter out the rates for which a minimum stay policy, higher than the initial number of nights requested for booking, applies.

Please let us know if we should apply this filter from our side or you will manage it from yours.

##### 2. Passenger Nationality and Country of Residence

Since most products are now with specific source markets and nationality, Nationality and Residence check is mandatory for all customers now and it has to be made from the beginning of the booking.

We have two dedicated elements to be used in order to pass this information to DOTW server:

- passengerNationality & passengerCountryOfResidence.

For any further questions you can consult our online documentation, or contact the Integration support team at [xmlsupport@dotw.com](mailto:xmlsupport@dotw.com)

##### 3. Passenger Names Format

It is mandatory to implement the following restrictions in matter of passenger names:

- names should contain minimum 2 characters and maximum 25;
- no white spaces or special characters allowed;
- all the passenger names should be passed in the confirmation request

- We recommend that in case of multiple first / last names to automatically merge the names by removing the white spaces, same as in the following example

Full Name: James Lee Happy Traveler

firstName in XML request:JamesLee

lastName in XML request:HappyTraveler

#### 4.Displaying tariffNotes

Displaying of the content in the **tariffNotes** tag present in the getRooms response is mandatory, because it contains free text information provided by suppliers or notes regarding any specific policy or information of the hotel. e.g.

No show and early departure will be subjected to 100% charge, no name change.

**5. APRs (Advance Purchased Rates)** These rates come with the advantage of high discounts for our customers, but also with several restrictions:

If interested in purchasing APRs (Advance Purchased Rates), then please note that you have to take into consideration that this type of rates requires a specific booking flow as listed below:

SearchHotels -> getRooms-> SaveBooking -> BookItinerary

Also, bookings confirmed for APRs cannot be cancelled nor amended starting with the booking time, meaning that cancellation policy will contain both cancelRestricted and amendRestricted elements, returned with value 'TRUE'

**6. Minimum Selling Price** If your application is using a B2C distribution platform, you must take into consideration the value returned in the totalMinimumSelling

This element returns the minimum selling price that the customer should adhere to while distributing the product directly to the final consumer (B2C). The application must display the MSP or higher if selling directly to the final customer. The MSP cannot be undercut and this is a mandatory requirement from all the hotel chains working on direct connectivity.

This element should only be considered by your customer as you are distributing to a B2C platform.

Please note that you will still be charged by DOTW as per the value returned in the tag.

If you have any doubts about the minimumSellingPrice please contact your DOTW account manager and/or the XML Support & Integration team. (xmlsupport@dotw.com)

#### 7. Searchhotels by Hotel IDs list

For improved performance and lower response rate we suggest to our customers to implement the searchhotels method by hotel IDs list, rather than destination code.

Please note that this is not a mandatory requirement, but we received positive feedback from our customers who chose to integrate this method

Basically grouping the hotels by 50 per request the response time will be generated a lot quicker and you can also target preferred hotels in a certain city or region.

To get all the available hotels for a city you should send the request per hotelId, but you cannot send more than 50 hotelIds per request.

If in the area you are searching the number of hotels you are interested in is higher, your application should send multiple searchHotels requests. So if you want to target all 382 hotels available for Dubai your application should send 7 searchHotels requests each one containing a list of a maximum 50 hotelIds.

Please see below a build example of implementation for the new searchHotels request:

```

01. <customer>
02.   <username>...</username>
03.   <password>...</password>
04.   <id>...</id>
05.   <source>1</source>
06.   <product>hotel</product>
07.   <request command="searchhotels">
08.     <bookingDetails>
09.       <fromDate>2014-11-29</fromDate>
10.       <toDate>2014-11-30</toDate>
11.       <currency>492</currency>
12.       <rooms no="1">
13.         <room runno="0">
14.           <adultsCode>2</adultsCode>
15.           <children no="0"></children>
16.           <extraBed>0</extraBed>
17.           <rateBasis>-1</rateBasis>
18.           <passengerNationality> DOTW internal code</passengerNationality>
19.           <passengerCountryOfResidence> DOTW internal code</passengerCountryOfResidence>
20.         </room>
21.       </rooms>
22.     </bookingDetails>
23.   </request>
24.   <sorting order="asc">sortByPrice</sorting>
25.   <getRooms>true</getRooms>
26.   <filters xmlns:a="http://us.dotwconnect.com/xsd/atomicCondition" xmlns:c="http://us.dotwconnect.com/xsd/comp
exCondition">
27.     <c:condition>

```

```

28.         <a:condition>
29.             <fieldName>hotelId</fieldName>
30.             <fieldTest>in</fieldTest>
31.             <fieldValues>
32.                 <fieldValue>31234</fieldValue>
33.                 <fieldValue>30674</fieldValue>
34.                 <fieldValue>37094</fieldValue>
35.             </fieldValues>
36.         </a:condition>
37.     </c:condition>
38. </filters>
39. </return>
40. </request>
41. </customer>

```

No	Test	Status/Observation
	<b>Occupancy Tests</b>	
1.	Create a booking for 2 Adults Occupancy	
2	Create a booking for 2adults+1child (11 years old)	
3	Create a booking for 2 adults+2children (8,9 years old) (the child runno attribute must start with 0)	
4	Create a booking for 2 rooms. (1 single + 1 double)	
	<b>Cancelbooking process (if this functionality is implemented) using cancelbooking or deleteltinerary method.</b>	
5	Create a booking for a single room outside cancellation deadline and then cancel it (if the application has implemented this functionality) and check that the correct data is passed to DOTW server.	
6	Create a booking for 2 rooms (1 single + 1 triple) within cancellation deadline and then cancel it (if the application has implemented this functionality). Verify if correct penalties and data is passed to DOTW server.	
	<b>Cancelbooking Process using deleteltinerary method</b>	
7	An additional test should be made to verify that in cases when productsLeftOnltinerary element is returned with a value grater than 0, the application should display a message that not all the services have been successfully cancelled.	
	Amend booking process (if this functionality is implemented) – depends on the modifications that the application is supporting.	
8	Create a booking and amend it by changing the occupancy. (add/remove 1 adult, add/remove child, add/remove extrabed)	
9	Create a booking and amend it by changing the meal plan	
10	Create a booking and amend it by changing the stay period. (add an additional night, remove a night from the total stay period) Verify that in case of any penalties are applying correct values are passed to DOTW server.	
11	Create a booking for two or more rooms and run the above tests again. The application should treat each room as a separate booking and handle amend separately, as DOTW does not support amend for multiple rooms.	
	<b>Mandatory elements to be displayed/implemented in the customer's application</b>	
12	Tariff Notes: Verify if in cases when the tariffNotes element is populated the same is displayed in the customer's application. We have no restriction regarding the step where the customer's application should display the tariff Notes.	
13	Cancellation Rules and Policies: Verify that correct cancellation rules are displayed your application. In case your application is adding a buffer to DOTW cancellation rules, please specify the same.	

14	<p>Passenger Names Restrictions It is mandatory to implement the following restrictions in matter of passenger names:</p> <ul style="list-style-type: none"> <li>• <b>names should contain minimum 2 characters and maximum 25;</b></li> <li>• <b>no white spaces or special characters allowed;</b></li> <li>• <b>all the adults passenger names should be passed in the confirmbooking request</b></li> </ul>	
15	<p><b>MinimumSellingPrice (ONLY FOR B2C applications)</b> This element returns the minimum selling price that the customer should adhere to while distributing the product directly to the final consumer (B2C). The application must display the MSP, or higher, if selling directly to the final customer. The MSP cannot be undercut and this is a mandatory requirement from all the hotel chains working on direct connectivity.</p>	
16	<p><b>Gzip Compression</b> It is mandatory to enable the Gzip in the source code of your application so that outgoing requests from your API to add in the header <b>Accept-Encoding gzip, deflate</b></p>	
17	<p><b>Blocking step validation</b> It is mandatory for you to implement a validation in the blocking step (getrooms request) in order to always verify if the selected room/s and rate bases have been successfully blocked (returned with checked)</p>	
18	<p><b>Changed Occupancy Feature *</b> Select to book a rate with changed Occupancy (changedOccupancy element must be present). In order to force the system to return rates with changed occupancy, please make a search for at least 4 passengers (3 Adults+1 child; 4 Adults, etc). Make sure the correct details are passed to DOTW server. Please refer to the separate document, which explains how changed occupancy feature should be implemented.</p>	
19	<p><b>Special Promotions</b> In case of a rate with an applicable special promotion, make sure that you display the same at your end. Please take into consideration that the special promotions are defined per rate and not per room. Please refer to the separate document, which explains how specials should be treated.</p>	
20	<p><b>APRs (If supported)</b> Book an APR and make sure that your application does not allow cancel or amend actions to the user. It is required to use the booking flow: searchhotels-&gt;getRooms-&gt;savebooking-&gt;bookItinerary APRs can be identified in the XML response by the element: • nonRefundable(value=yes)</p>	
21	<p><b>Restricted Cancellation Rules</b> Select to book a rate with strict cancellation rules. This type of rates can be identified in the xml response by the below elements:</p> <ul style="list-style-type: none"> <li>• cancelRestricted (possible value=true);</li> <li>• amendRestricted (possible value=true)</li> </ul> <p><b>When present, this elements indicate that cancel and/or amend is restricted in the period defined by the cancellation policy.</b></p>	
22	<p><b>Minimum Stay Rules. **</b> Create a reservation for a rate with an applicable minimumStay rule and make sure the new stay period is communicated to the user.</p> <p><b>minStay</b> If the hotel has requested a minimum stay for this room type and rate basis then this element will be returned and its value will be the minimum stay required in days. If no minimum stay applies this element will be returned with no value (empty tag).</p> <p><b>dateApplyMinStay</b> If there is a minimum stay condition this element will specify the starting date when the minimum stay condition applies. If no minimum stay applies this element will be returned with no value (empty tag).</p>	
23	<p><b>Special Requests ***</b> Verify that correct DOTW internal code is being sent in XML message, for the selected special request.</p>	

- \*If you are not willing to implement the changed occupancy Feature, it is mandatory for you to filter these rates and not show them to your customers. You can implement a validation based on validForOccupancy/changedOccupancy elements.
- \*\* If you are not willing to receive this type of rates, we can block them from our side, so you will not receive rates which have a minimum stay rule greater than the initial requested stay period.
- \*\*\* Only if customer's application has implemented this functionality.

