30-Day Android Challenge

Senior Android interview prep — Junior → Mid → Senior → Architect

2026 Edition

DAY 29

Scalability & Global Deployment — i18n, RTL, Accessibility, Feature Flags, Rollouts & Compliance



Esmaeeil Moradi
@esmaeeil-moradi700

DAY 29

Why global deployment matters in 2026

Shipping in one language to one country is a product. Shipping to the world is an **engineering discipline**: every string, layout, number format, flag, rollout and data flow must work for people on devices, networks and laws you don't use.


- **Languages & scripts:** plurals, formats and RTL layouts are code, not just translation
- **Accessibility at scale:** built into the design system and CI — and in the EU, a legal requirement for many apps
- **Decouple deploy from release:** feature flags, experiments and staged rollouts per country
- **Policy & privacy:** Play's targetSdk bar rises every year; GDPR-style laws decide what you may collect
- **Emerging markets:** small downloads, low data use, offline-first

Level	Questions
Junior	i18n vs l10n · RTL layouts · Plurals & formatting
Mid	Per-app language · Accessibility at scale · Feature flags · Experiments
Senior	Staged & regional rollouts · Play policies · Privacy & GDPR
Architect	Emerging markets · Multi-region & version skew · Global-ready platform



Esmaeeil Moradi
@esmaeeil-moradi700

Mental model: one binary, three axes

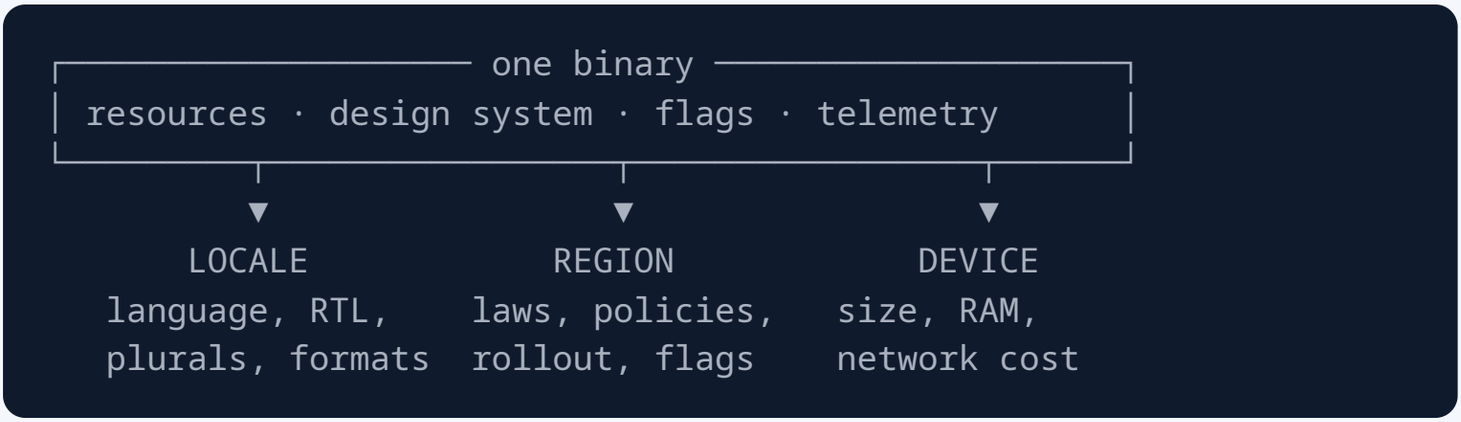

- **Locale** decides words, direction, plurals and formats — resolved by Android's resource system at runtime
- **Region** decides what's legal and what's switched on — server config, flags and Play Console country targeting
- **Device** decides what you can afford — size, memory, data cost (Day 28)

GLOBAL-READY BY DEFAULT

If the design system handles RTL, font scaling and accessibility, every new feature is global-ready for free. If each team handles it alone, most won't.



Esmaeeil Moradi
@esmaeeil-moradi700

DAY 29

Junior

i18n vs l10n · RTL layouts · Plurals & formatting



Esmaeeil Moradi
@esmaeeil-moradi700

Q1. i18n vs l10n — resources done right

- **i18n (internationalization):** engineering the app so it *can* adapt — no hardcoded text, locale-aware formatting, layouts that grow and mirror
- **l10n (localization):** the adaptation itself — translations, images, formats, legal text per locale

```
<!-- res/values/strings.xml: the complete default set -->
<resources xmlns:xliff="urn:oasis:names:tc:xliff:document:1.2">
    <string name="app_name" translatable="false">Acme</string>
    <string name="greeting">Hello, <xliff:g id="name"
        example="Sara">%1$s</xliff:g>!</string>
</resources>

<!-- res/values-es/strings.xml: only translated strings -->
<resources>
    <string name="greeting">¡Hola, %1$s!</string>
</resources>
```

- Since Android 7.0 users can list several languages, and resolution falls back to the closest match (a Mexican-Spanish user gets `values-es`) before the default



Esmaeeil Moradi
@esmaeeil-moradi700

Q1. What interviewers check

INTERVIEW TRAP

"Build the sentence in code: `"Hello " + name`*."* — Word order differs between languages. Use one string with **positional placeholders** (`%1$s`, `%2$d`) so translators can reorder them.

INTERVIEW TRAP

"`drawable-fr` *holds the image for France."* (last year's example) — `fr` is a **language** qualifier: French in Canada, Belgium, Senegal... For a region use `fr-rFR` or the BCP 47 form `b+fr+FR`. Language is not country.

FOLLOW-UP

"What if a string exists in `values-es` *but not in the default* `values/`*?"* — Users whose locale has no matching folder hit `Resources.NotFoundException` — a crash. Lint flags it as `ExtraTranslation`; missing translations show up as `MissingTranslation`.



Esmaeeil Moradi
@esmaeeil-moradi700

Q2. RTL layouts done right

```
Row(Modifier.padding(start = 16.dp, end = 8.dp)) {
    Icon(
        Icons.AutoMirrored.Filled.ArrowBack,
        contentDescription = stringResource(R.string.back),
    )
    Text(
        text = stringResource(R.string.title),
        textAlign = TextAlign.Start,
    )
}

// Rare: a side that must NOT mirror
Modifier.absolutePadding(left = 16.dp)
```

- Manifest: `android:supportsRtl="true"`. Views: `start` / `end`, never `left` / `right`
- Compose mirrors layouts from `LocalLayoutDirection`; `start` / `end` padding is relative
- Directional icons: `Icons.AutoMirrored.*` in Compose, `android:autoMirrored="true"` on vector drawables



Esmaeeil Moradi
@esmaeeil-moradi700

Q2. What not to mirror — and mixed text

Mirror	Don't mirror
Back / forward arrows, chevrons	Media playback controls and media progress
Layout order, text alignment	Clocks, phone numbers, code
Navigation drawer side	Logos and brand marks

```
// User text inside a translated sentence
val bidi = BidiFormatter.getInstance()
val msg = getString(
    R.string.sent_to, bidi.unicodeWrap(userName),
)
```

INTERVIEW TRAP

"`supportsRtl` *is enough.*" — Only relative attributes mirror. `marginLeft`, `Gravity.LEFT`, absolute padding and hand-drawn arrows stay put. And **text** direction comes from the content: a Latin username in a Persian sentence needs isolation, or punctuation lands on the wrong side.

- Test with **Force RTL layout direction** (Developer options) and the pseudolocales `ar-XB` (mirrored) and `en-XA` (accented, longer)



Esmaeeil Moradi
@esmaeeil-moradi700

Q3. Plurals follow the language, not English

```xml
<plurals name="items_in_cart">
    <item quantity="one">%d item</item>
    <item quantity="other">%d items</item>
</plurals>
```

```
val count = cart.items.size
val label = pluralStringResource(
    R.plurals.items_in_cart, count, count,
)
```

- Android picks the category with **CLDR plural rules**: English has `one` and `other`; Polish adds `few` and `many`; Arabic uses all six (`zero`, `one`, `two`, `few`, `many`, `other`)
- The second `count` fills the `%d` placeholder

INTERVIEW TRAP

"Use `quantity="zero"` for 'No items' in English." — English never selects `zero`; 0 maps to `other`. For an empty state, check `count == 0` in code and use a separate string.



Esmaeeil Moradi
@esmaeeil-moradi700

Q3. Numbers, dates and money

```
val locale = LocalConfiguration.current.locales[0]

// Format comes from the locale, currency from the data
val price = NumberFormat.getCurrencyInstance(locale).apply {
    currency = Currency.getInstance(order.currencyCode)
}.format(order.amount)

val date = DateTimeFormatter
    .ofLocalizedDate(FormatStyle.MEDIUM)
    .withLocale(locale)
    .format(order.date)

// Machine formats: never the user's locale
val path = String.format(Locale.ROOT, "/orders/%d", order.id)
```

INTERVIEW TRAP

"`String.format("%d", id)` *for an API path."* — It uses the default locale: on Persian and some Arabic locales the digits come out as ۱۲۳ or ١٢٣ and the request breaks. Anything a **machine** reads uses `Locale.ROOT`.

INTERVIEW TRAP

"Take the currency from the device locale." — A German traveler in Japan still pays in euros. Currency belongs to the **data**; the locale only decides how it's displayed. Non-Gregorian calendars (Persian, Hijri) come from ICU (`android.icu`).



Esmaeeil Moradi
@esmaeeil-moradi700

DAY 29

Mid-Level

Per-app language · Accessibility at scale · Feature flags · Experiments



Esmaeeil Moradi
@esmaeeil-moradi700

Q4. Per-app language preferences

```
// AppCompat 1.6+: API 33+ delegates to the system;
// older versions need AppCompatActivity + autoStoreLocales
fun onLanguagePicked(tag: String) {
    AppCompatDelegate.setApplicationLocales(
        LocaleListCompat.forLanguageTags(tag)
    )
}

// Empty list = follow the system language
val current = AppCompatDelegate.getApplicationLocales()
```

```
// build.gradle.kts: generates the locale config
android {
    androidResources { generateLocaleConfig = true }
}
```

- Android 13 (API 33) added a per-app language setting in system Settings; the app declares its languages via `android:localeConfig` (generated above, with `unqualifiedResLocale` in `res/resources.properties`)
- Framework equivalent: `LocaleManager.applicationLocales` (API 33+)



Esmaeeil Moradi
@esmaeeil-moradi700

Q4. The traps

INTERVIEW TRAP

"Override `Configuration.locale` in `attachBaseContext`." — The old hack: deprecated APIs, lost on some screens (a WebView can reset it), and invisible to the system setting. Use the per-app language API.

INTERVIEW TRAP

"The picker works, but the new language shows English." — With App Bundles, Play installs only the language splits for the device's languages. A language picked in-app may be missing: disable language splits (`bundle { language { enableSplit = false } }`) or download it with Play's SplitInstall API.

FOLLOW-UP

"Where is the choice stored below API 33?" — AppCompat can persist it for you: declare `AppLocalesMetadataHolderService` with `autoStoreLocales` set to `true` in the manifest. On API 33+ the system stores it.



Esmaeeil Moradi
@esmaeeil-moradi700

Q5. Accessibility at scale: the component

```
@Composable
fun OrderRow(order: Order, onOpen: () -> Unit) {
    val label = stringResource(R.string.open_order)
    Row(
        Modifier
            .fillMaxWidth()
            .clickable(onClickLabel = label, onClick = onOpen)
            .heightIn(min = 48.dp)
            .padding(horizontal = 16.dp),
        verticalAlignment = Alignment.CenterVertically,
    ) {
        // Decorative: the text already says it
        Icon(Icons.Default.ShoppingCart, null)
        Text(order.title, Modifier.padding(start = 16.dp))
    }
}
```

- **Semantics:** meaningful labels, `null` for decorative images, `Modifier.semantics { heading() }` for section titles
- **Touch targets** at least 48 × 48 dp · **text in `sp`**, no fixed heights — Android 14 scales fonts up to 200% · **contrast** 4.5:1 for normal text (WCAG AA)



Esmaeeil Moradi
@esmaeeil-moradi700

Q5. Making it scale across teams

Layer	Mechanism
Design system	Accessible components by default: semantics, touch targets, contrast tokens
CI	Lint, Espresso `AccessibilityChecks`, Accessibility Test Framework in Compose tests, screenshots at 200% font
Release	Accessibility suggestions in the Play pre-launch report
People	Regular TalkBack and Switch Access passes; accessibility in the Definition of Done

EUROPEAN ACCESSIBILITY ACT

Since 28 June 2025, many consumer products and services in the EU — e-commerce, banking, transport, e-books — must meet accessibility requirements, apps included.

INTERVIEW TRAP

"Automated checks pass, so we're accessible." — Tools catch missing labels and small targets, not a confusing focus order or a flow that can't be finished with TalkBack. Manual testing with assistive technology is required.



Esmaeeil Moradi
@esmaeeil-moradi700

Q6. Feature flags: typed, safe, frozen

```
enum class Flag(val key: String, val default: Boolean) {
    NEW_CHECKOUT("new_checkout", default = false),
    FEED_PREFETCH("feed_prefetch", default = true),
}

interface FlagSource { fun bool(key: String): Boolean? }

class Flags(source: FlagSource) {
    // Frozen at session start: no UI flipping mid-flow
    private val snapshot = Flag.entries.associateWith {
        source.bool(it.key) ?: it.default
    }
    fun isOn(flag: Flag): Boolean = snapshot.getValue(flag)
}
```

- **Types:** release toggles (short-lived), experiment flags, ops kill switches (long-lived), entitlements
- **Safe defaults compiled in.** Activate cached values at startup and fetch for the next session — never block the first frame on the network (Day 1)
- Firebase Remote Config's default minimum fetch interval is 12 hours; real-time updates exist via `addOnConfigUpdateListener`



Esmaeeil Moradi
@esmaeeil-moradi700

Q6. Flag traps

INTERVIEW TRAP

"Flags are free." — Every flag doubles a code path to test. Give each one an **owner and an expiry date** and delete it after full rollout; stale flags are where dead code and "impossible" bugs live.

INTERVIEW TRAP

"Read the flag live everywhere." — Values can change mid-session; a checkout that switches UI halfway is a bug. Snapshot per session or per flow, and log which values were active.

FOLLOW-UP

"Evaluate flags on the client or the server?" — Server-side when the rule is sensitive (pricing, entitlements) or needs targeting logic you don't want in the APK. Client-side for UI toggles and kill switches that must work offline. Anything in the APK can be read and flipped by a determined user.



Esmaeeil Moradi
@esmaeeil-moradi700

Q7. A/B testing without fooling yourself

- **Hypothesis + one primary metric**, decided before launch (for example, checkout conversion)
- **Guardrail metrics:** crash rate, ANR rate, startup time, uninstalls — winning conversion while losing stability is a loss
- **Randomize by user or install**, not by session, and keep the assignment stable
- **Sample size up front**, from the smallest effect you care about; run full weeks to cover weekly cycles
- **Log exposure at the point of use** — when the variant is actually shown — not at assignment

INTERVIEW TRAP

"We stopped the test on day 3 — it hit significance." — Checking repeatedly and stopping at the first significant result inflates the false-positive rate. Fix the duration up front, or use a sequential method designed for peeking.



Esmaeeil Moradi
@esmaeeil-moradi700

Q7. Experiment pitfalls

Pitfall	What goes wrong	Fix
Peeking	Early stop at $p < 0.05$ inflates false positives	Fixed horizon or sequential tests
Sample ratio mismatch	A 50/50 split shows 52/48: assignment or logging is broken	Check SRM before reading results
Exposure at assignment	Users who never saw the change dilute the effect	Log when the variant renders
Novelty effect	Early lift fades	Run long enough; watch the trend
Too many metrics	Something is always "significant"	One primary metric; correct for the rest

GLOBAL TWIST

Effects differ by market. A win in one country can be neutral or negative in another — segment results by country, language and device tier before rolling out everywhere.



Esmaeeil Moradi
@esmaeeil-moradi700

DAY 29

Senior

Staged & regional rollouts · Play policies · Privacy & GDPR



Esmaeeil Moradi
@esmaeeil-moradi700

Q8. Staged and regional rollouts

Stage	Audience	Gate to move on
Internal testing	Team, QA	Smoke tests pass
Closed / open testing	Beta users	No new top crashes; vitals stable
Production, small %	Random users	Crash, ANR, start time vs previous version
Larger % → 100%	Everyone eligible	Business metrics and support tickets stable

- Play Console lets you **halt**, resume and increase a staged rollout, and choose the countries / regions each track is available in
- **Managed publishing** lets you decide exactly when an approved release goes live
- Start a rollout when on-call is awake for the regions receiving it



Esmaeeil Moradi
@esmaeeil-moradi700

Q8. Deploy is not release

- **Decouple deploy from release:** ship code dark behind a flag, then ramp by country, device tier or percentage — no new binary, instant off switch
- **Adoption is slow:** many users update days or weeks later, so the server supports several app versions at once (Q12)

INTERVIEW TRAP

"100% rollout means everyone runs the new version." — It means everyone *can* get it. Adoption depends on auto-update settings, Wi-Fi and storage. For urgent fixes combine in-app updates (Day 24) with server-side flags.

INTERVIEW TRAP

"Launch globally on day one." — Markets differ in devices, networks and languages. Start with a representative market, watch vitals by country, then expand.



Esmaeeil Moradi
@esmaeeil-moradi700

Q9. Play policies that shape global releases

Requirement	What it means	Where it bites
Target API level	New apps and updates must target a recent API (35+ today); the bar rises every year	Behavior changes: edge-to-edge, predictive back, FGS rules
16 KB page size	Apps targeting Android 15+ that ship native code must support 16 KB pages	Old `.so` files, third-party SDKs
Data safety form	Declare what you collect and share — SDKs included	Must match real behavior
Account deletion	Apps with account creation must offer deletion in the app and on the web	Backend and UX work
Photo & video access	Broad media permissions only for core use; others use the photo picker	Removing `READ_MEDIA_IMAGES`
Foreground services	Declare types and justify them (Day 16)	Play Console declarations



Esmaeeil Moradi
@esmaeeil-moradi700

Q9. Policy traps

DEVELOPER VERIFICATION

Google is rolling out developer verification for apps installed on certified Android devices — including apps distributed outside Play — starting in a few countries in 2026. It matters if you also ship through other stores or direct APKs.

INTERVIEW TRAP

"Bumping targetSdk is a one-line change." — Each new target switches on behavior changes: edge-to-edge enforcement at 35, predictive back, stricter background and FGS rules. Budget a release cycle and test on the new OS.

INTERVIEW TRAP

"Policy is legal's problem." — Most violations are engineering facts: an SDK collecting data you didn't declare, a permission you don't need, a missing deletion flow. Check SDKs in the Play SDK Index before adding them.



Esmaeeil Moradi
@esmaeeil-moradi700

Q10. Privacy and GDPR on Android

- **Lawful basis:** GDPR has six — consent, contract, legal obligation, vital interests, public task, legitimate interests. Consent must be freely given, specific and revocable.
- **Data minimization:** collect only what the feature needs; prefer coarse location, the photo picker, on-device processing
- **User rights:** access, correction, erasure, portability — backend flows, not just a settings screen
- **Transfers:** personal data leaving the EEA needs a legal mechanism (adequacy decision, standard contractual clauses)

```
<!-- Analytics off until the user decides -->
<meta-data
    android:name="firebase_analytics_collection_enabled"
    android:value="false" />
```

```
class ConsentGate(
    private val consent: ConsentRepository,
    private val analytics: FirebaseAnalytics,
) {
    suspend fun apply() {
        val granted = consent.analyticsGranted.first()
        analytics.setAnalyticsCollectionEnabled(granted)
    }
}
```



Esmaeeil Moradi
@esmaeeil-moradi700

Q10. Two myths from last year

INTERVIEW TRAP

"GDPR and CCPA both require explicit consent before collecting any data." — GDPR allows other lawful bases (a contract covers the core service); consent is typically needed for non-essential tracking and ads (GDPR together with ePrivacy rules). CCPA/CPRA is mainly an **opt-out** model. Build a consent layer that can express both.

INTERVIEW TRAP

"Use GPS geo-fencing to decide which law applies." — Requesting location just to pick a privacy regime breaks data minimization and needs a permission users will deny. Use coarse signals (account or store country, server-side IP lookup) and default to the **strictest** regime when unsure.

ADS IN EUROPE

For ads served to users in the EEA and UK, Google requires a certified consent management platform (for example Google's UMP SDK, based on IAB TCF). Other regimes to know: LGPD (Brazil), DPDP Act (India).



Esmaeeil Moradi
@esmaeeil-moradi700

DAY 29

Architect

Emerging markets · Multi-region & version skew · Global-ready platform



Esmaeeil Moradi
@esmaeeil-moradi700

Q11. Build for emerging markets

```
fun imageQuality(cm: ConnectivityManager): Quality {
    val caps = cm.getNetworkCapabilities(cm.activeNetwork)
        ?: return Quality.LOW
    val unmetered = caps.hasCapability(
        NetworkCapabilities.NET_CAPABILITY_NOT_METERED
    )
    val saver = cm.restrictBackgroundStatus ==
        ConnectivityManager.RESTRICT_BACKGROUND_STATUS_ENABLED
    return when {
        unmetered -> Quality.HIGH
        saver -> Quality.LOW // Data Saver is on
        else -> Quality.MEDIUM
    }
}
```

- **Download size is a conversion metric:** App Bundles, R8 and resource shrinking, WebP (AVIF on API 31+), on-demand features and assets (Day 18, Day 25)
- **Data costs money:** respect Data Saver and metered networks; request images sized for the view; use HTTP caching
- **Offline-first:** read from the local database, queue writes with WorkManager (Day 14)



Esmaeeil Moradi
@esmaeeil-moradi700

Q11. Emerging-market traps

INTERVIEW TRAP

"Wi-Fi is free, mobile data is metered." — Hotspots and capped Wi-Fi are metered; some mobile plans aren't. Check `NET_CAPABILITY_NOT_METERED`, not the transport type.

INTERVIEW TRAP

"Build a separate 'lite' app for those markets." — Two codebases drift apart. Prefer one app that adapts: device tier (Day 28), network conditions and on-demand modules.

FOLLOW-UP

"How small is small enough?" — Track download size per release in Play Console and give it a budget in CI (Day 28). Every new dependency has to justify its bytes.

- Also plan for: low storage, shared devices, intermittent connectivity and SMS-based sign-in fallbacks



Esmaeeil Moradi
@esmaeeil-moradi700

Q12. Multi-region backends — the client's side

- **One global hostname;** the edge (GeoDNS, anycast, CDN) routes to the nearest healthy region — no region lists hardcoded in the app
- **Data residency:** if a user's data lives in a home region, the server returns that region's endpoint after login and the client stores it
- **Failover-safe calls:** timeouts, retries with backoff **and jitter**, respect `Retry-After`, **idempotency keys** on writes

```
suspend fun <T> withRetry(
    attempts: Int = 3,
    block: suspend () -> T,
): T {
    repeat(attempts - 1) { n ->
        try {
            return block()
        } catch (e: IOException) {
            val capMs = 1_000L shl n // 1s, 2s, 4s…
            delay(Random.nextLong(capMs)) // full jitter
        }
    }
    return block()
}

// Same key on every retry of one logical operation
val key = UUID.randomUUID().toString()
withRetry { api.pay(order, idempotencyKey = key) }
```



Esmaeeil Moradi
@esmaeeil-moradi700

Q12. Version skew and residency myths

- **Version skew:** old app versions live for months or years. The API is a contract: version it, keep changes additive, gate features by app version on the server, and enforce a minimum supported version (in-app updates, Day 24)

INTERVIEW TRAP

"Store EU users' data in the EU and GDPR is satisfied — the data never leaves." (last year's claim) — GDPR doesn't mandate EU storage; it regulates **transfers**. And "never leaves" is rarely true: support tools, analytics and crash SDKs copy data elsewhere. Some countries do require local storage for certain data — that's data localization, a separate law per country.

INTERVIEW TRAP

"On failover, retry immediately." — Millions of clients retrying in lockstep create a thundering herd that can take down the healthy region too. Jitter spreads them out; `Retry-After` lets the server steer.



Esmaeeil Moradi
@esmaeeil-moradi700

Q13. Design a global-ready platform: strings

1. Developers add the source string **with a context note** for translators
2. A translation management system (Crowdin, Lokalise, Phrase…) syncs it to translators with a glossary and screenshots
3. Translations return as a PR; CI checks them
4. **String freeze** before the release branch is cut

```
android {
    buildTypes {
        debug { isPseudoLocalesEnabled = true } // en-XA, ar-XB
    }
    lint {
        error += setOf(
            "MissingTranslation",
            "StringFormatInvalid",
        )
    }
}
```

INTERVIEW TRAP

"Lint catches hardcoded text." — `HardcodedText` checks XML layouts. `Text("Pay now")` in Compose slips through — add a custom Lint or detekt rule.



Esmaeeil Moradi
@esmaeeil-moradi700

Q13. The platform, not every team, owns "global"

Concern	Platform provides	Enforced by
Text & layout	Design system with RTL, font scaling, semantics	Screenshot tests in RTL and at 200% font
Strings	TMS sync, context notes, string freeze	Lint and CI
Region rules	Config / flag service with country targeting	Reviewed server config
Privacy	Consent SDK; telemetry that respects it	Data safety review per release
Release	Staged rollout per country; dashboards by country and locale	Release checklist

INTERVIEW TRAP

"We'll add RTL and accessibility when we launch in that market." — Retrofitting touches every screen. Global-ready defaults cost little on day one and a lot later.

SENIOR ANSWER IN ONE LINE

"Build one app that adapts: locale-driven resources and formats, a design system that is RTL- and accessibility-ready by default, flags and staged rollouts per region, privacy by design — and an API that respects every client version still in the wild."



Esmaeeil Moradi
@esmaeeil-moradi700

DAY 29 · ARCHITECT

Day 29 — cheat sheet

- i18n = engineering for adaptation; l10n = the adaptation. Complete default `values/`, positional placeholders, no concatenation.
- `fr` is a language, `fr-rFR` a region. Language ≠ country ≠ currency.
- RTL: `supportsRtl`, start/end, auto-mirrored icons, `BidiFormatter` for mixed text — don't mirror media controls or clocks.
- Plurals follow CLDR; English never uses `zero`. Machine-readable formats use `Locale.ROOT`.
- Per-app language: API 33+, backported by AppCompat; watch App Bundle language splits.
- Accessibility at scale lives in the design system and CI — plus manual TalkBack passes.
- Flags: compiled-in defaults, session snapshots, owners and expiry dates. Experiments: guardrails, no peeking.
- Staged rollouts per country, halted on vitals; deploy ≠ release.
- Play: targetSdk bar rises yearly, 16 KB pages for native code, honest Data safety, account deletion.
- GDPR: six lawful bases, minimization, transfers — not "consent for everything", not "data must stay in the EU".

Day 30 is next → System Design & Integration — the finale. Save this post and follow along.



Esmaeeil Moradi
@esmaeeil-moradi700