
Hubei · Mizhuang · 26 Sep 2025

Improved reference segment | initialized 06:15 BJT

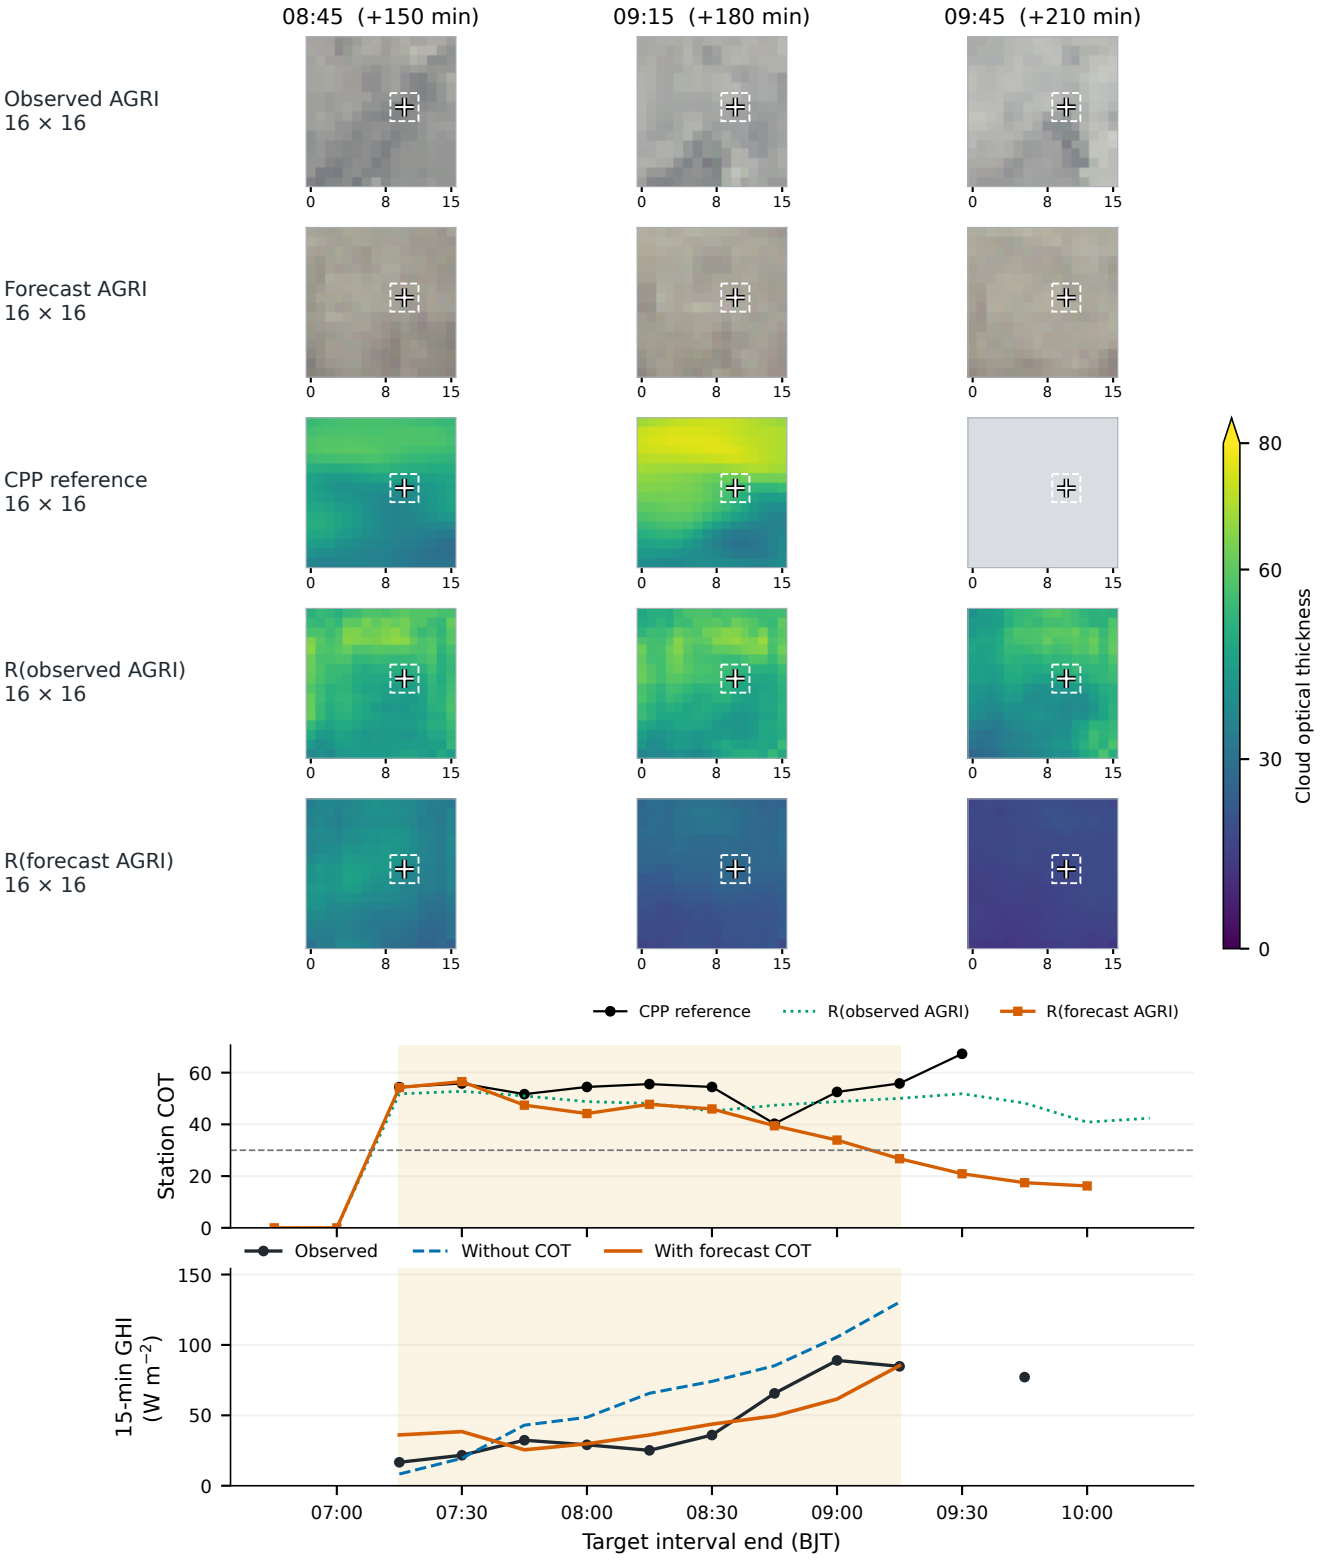


Shown origin, seed 42, thick-target RMSE: 26.7 → 14.5 W m^{-2}

Native pixels; RGB = C03/C02/C01, identical square-root display. Grey = missing reference.
Shading: selected CPP-thick endpoint segment. Future observations are offline diagnostics; GHI lines: seed 42.

Hubei · Niushou · 26 Sep 2025

Degraded reference segment | initialized 09:45 BJT

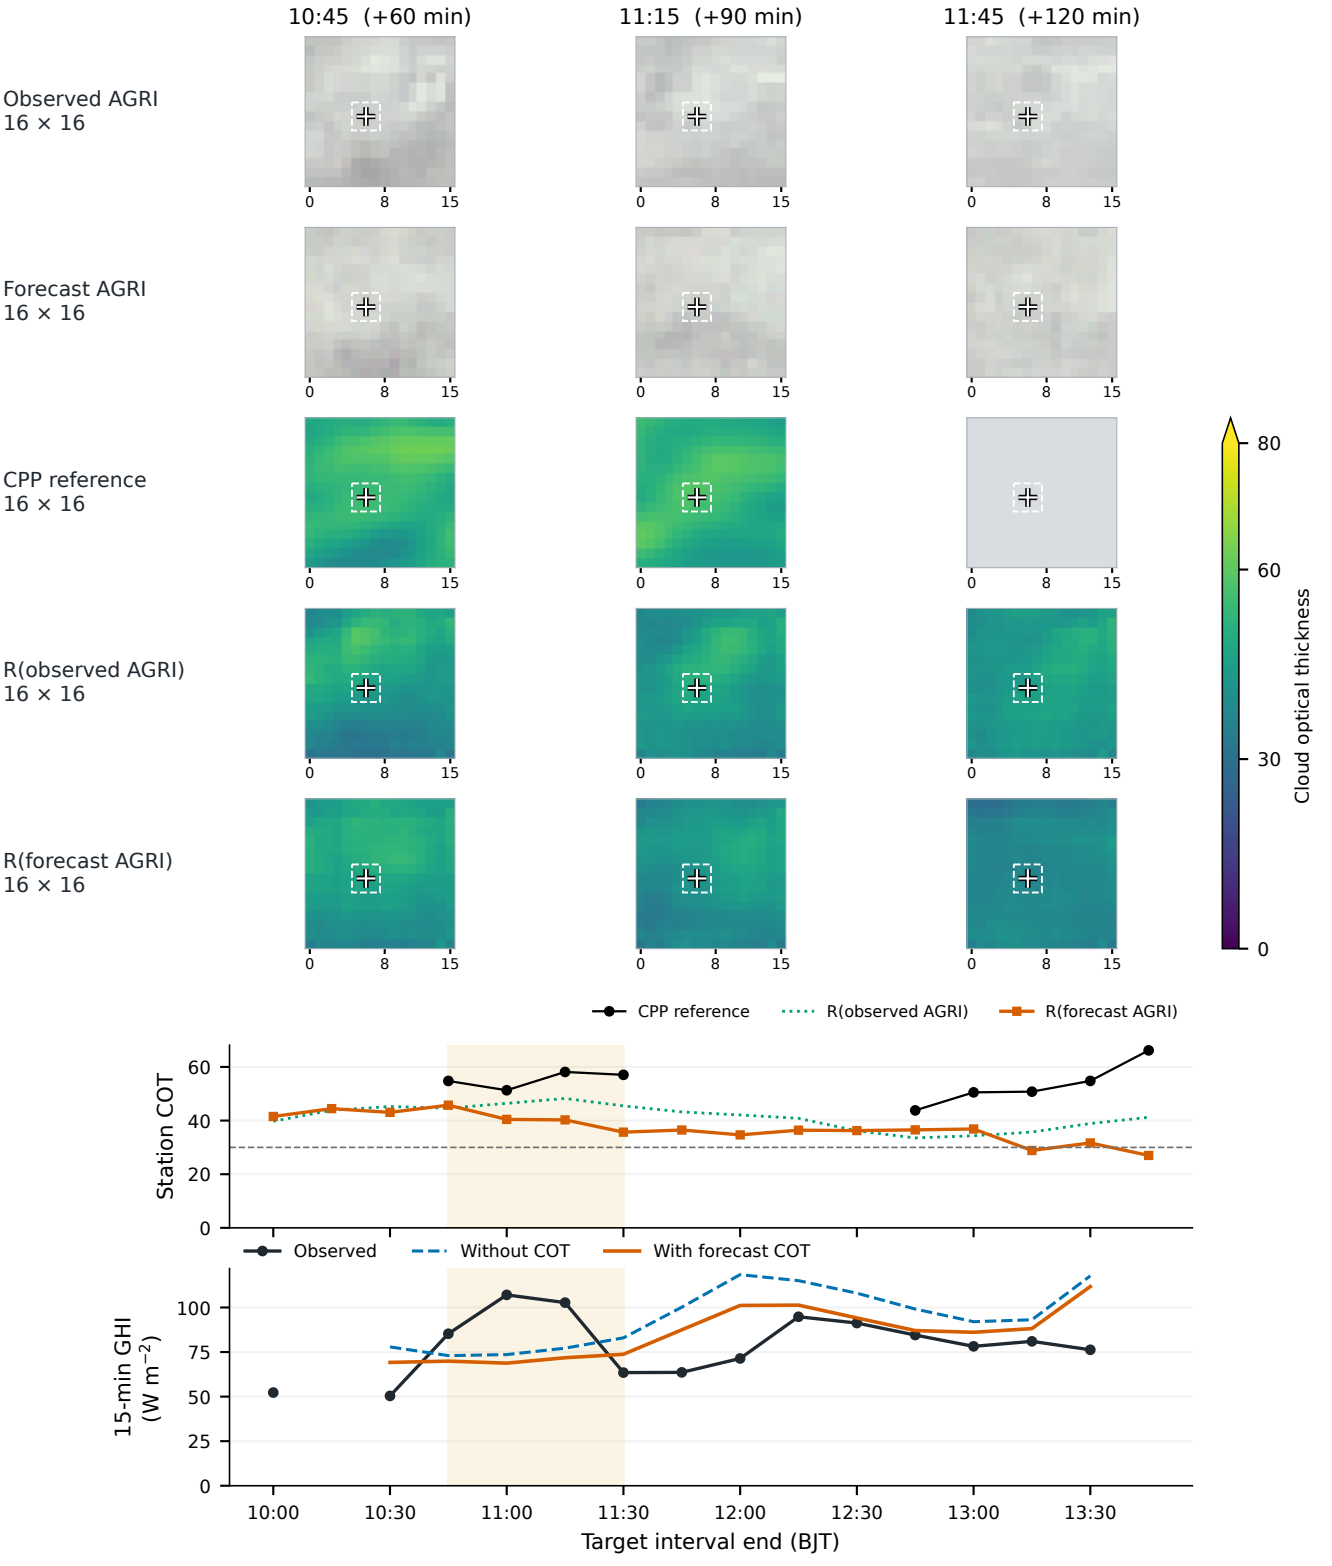


Shown origin, seed 42, thick-target RMSE: 24.0 → 26.3 W m^{-2}

Native pixels; RGB = C03/C02/C01, identical square-root display. Grey = missing reference.
Shading: selected CPP-thick endpoint segment. Future observations are offline diagnostics; GHI lines: seed 42.

Hunan · Zhujia · 04 Jan 2025

Improved reference segment | initialized 10:15 BJT

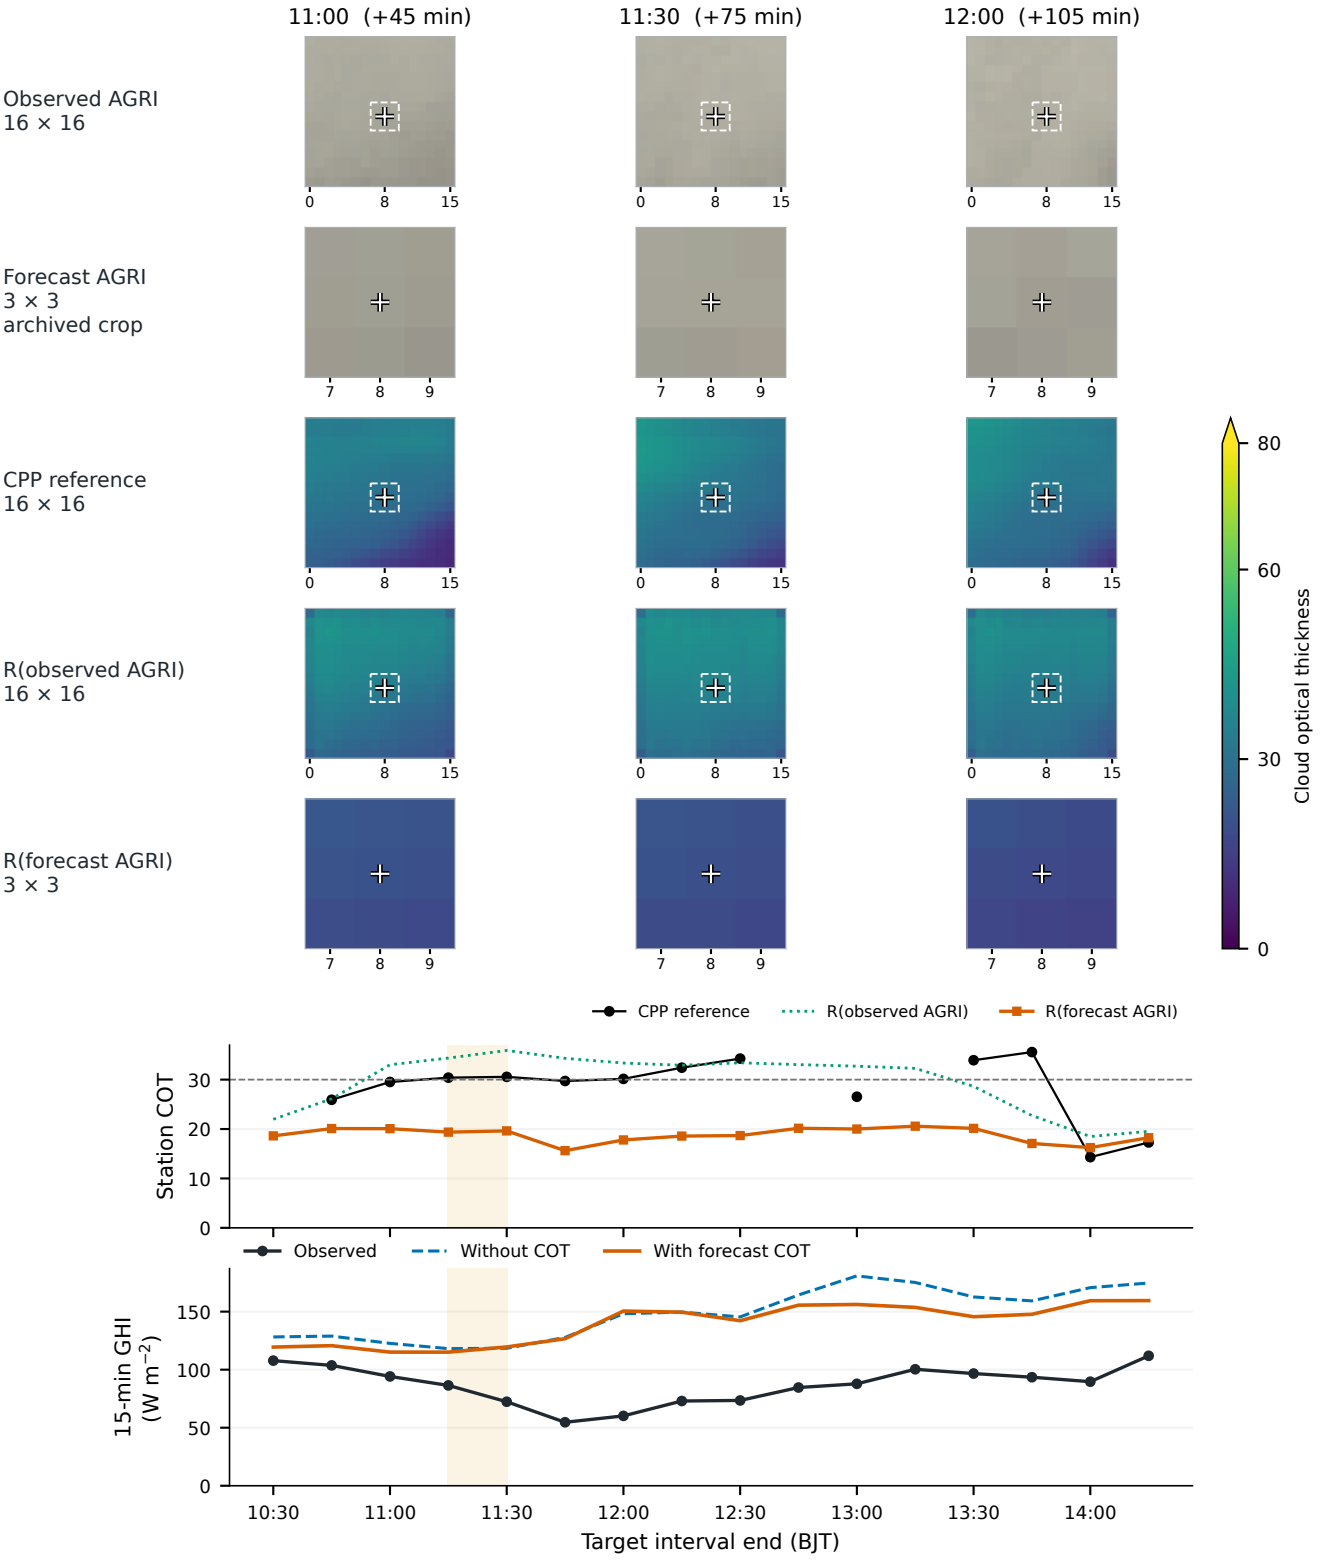


Shown origin, seed 42, thick-target RMSE: 39.5 → 39.0 W m^{-2}

Native pixels; RGB = C03/C02/C01, identical square-root display. Grey = missing reference.
Shading: selected CPP-thick endpoint segment. Future observations are offline diagnostics; GHI lines: seed 42.

Hunan · Sili · 15 Jun 2025

Degraded reference segment | initialized 11:15 BJT

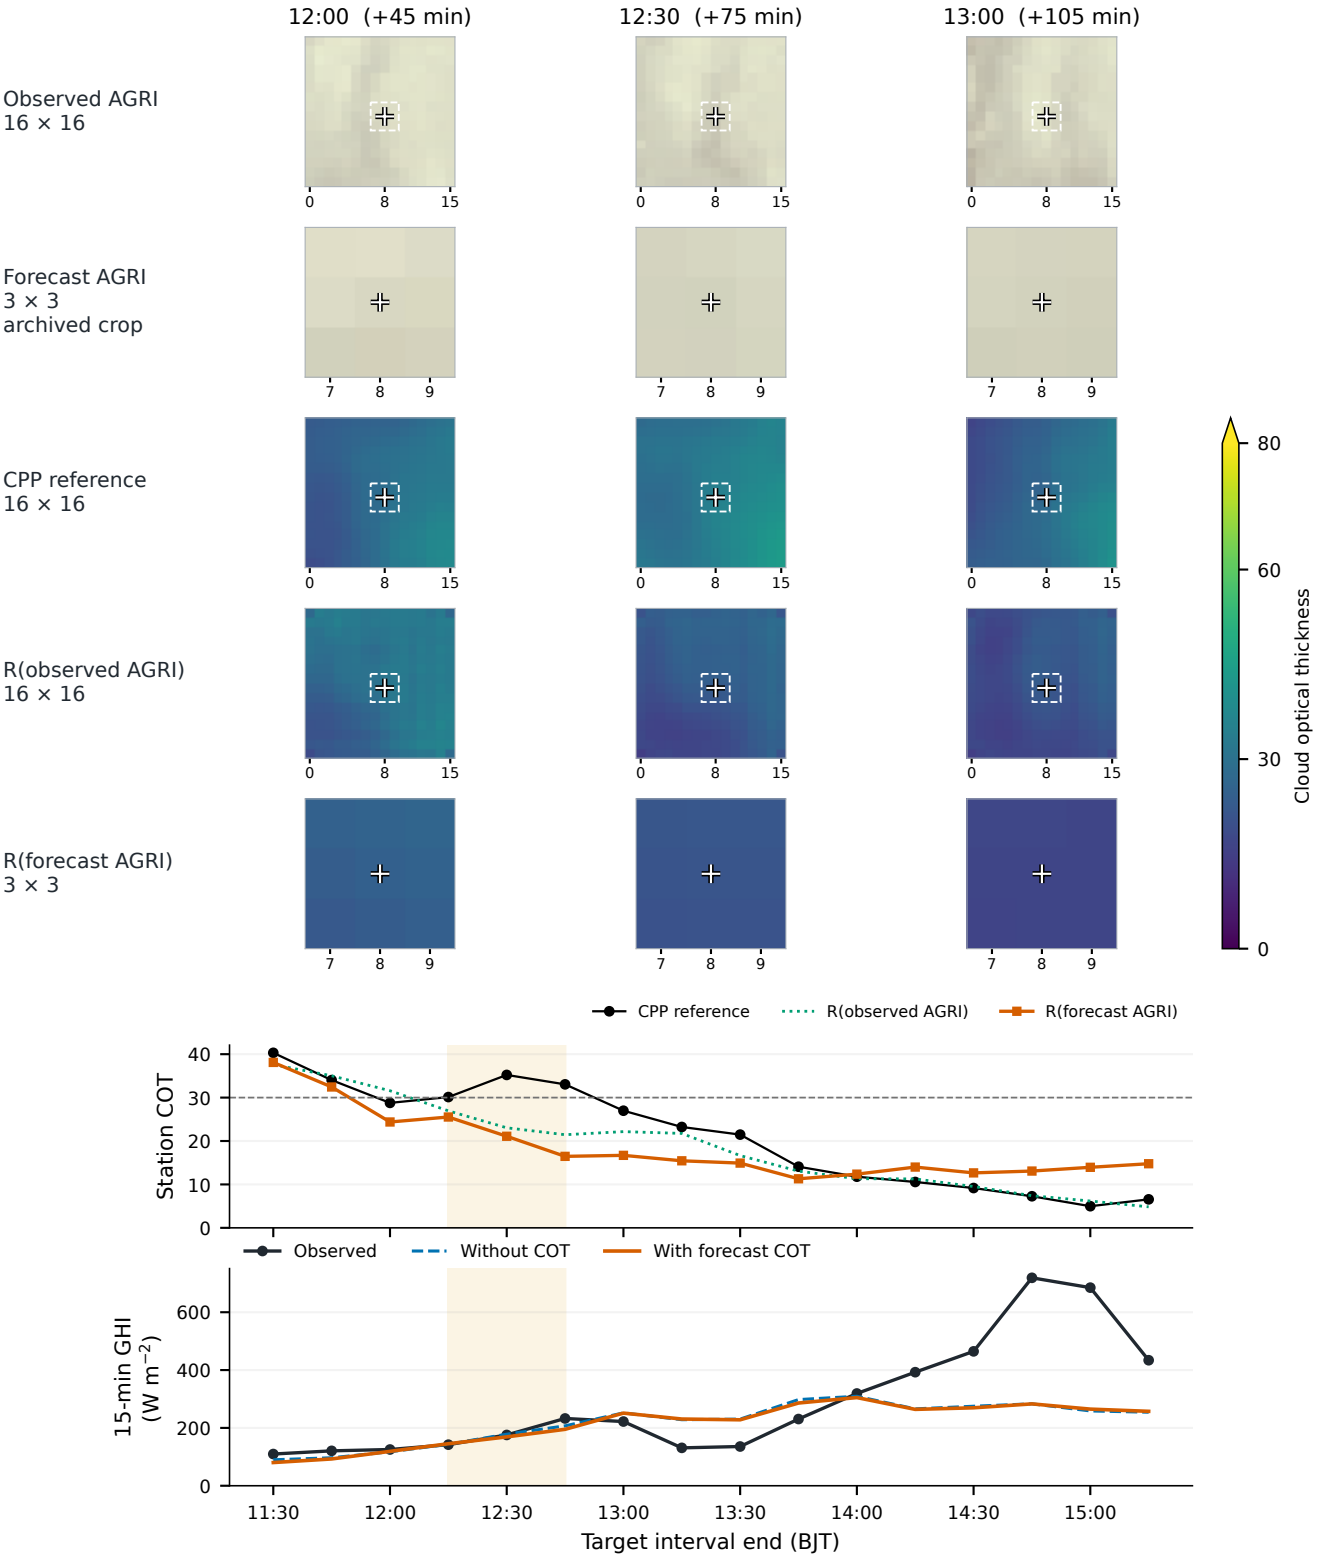

Shown origin, seed 42, thick-target RMSE: 14.9 → 22.1 W m^{-2}

Native pixels; RGB = C03/C02/C01, identical square-root display. Grey = missing reference.
Shading: selected CPP-thick endpoint segment. Future observations are offline diagnostics; GHI lines: seed 42.