

Summary

Dataset: Stack Overflow Data (BigQuery Dataset)

Data range: 2008-07-31 00:00:00 UTC - 2020-05-31 05:19:01.807 UTC


Current Number of Users 12,485,155


Top Three tags android | javascript | java

Total Questions Asked 19,567,903

Most Voted Comment* "I would start with 1000 and descend. Then you just need to print the first one and break."


Users Information (custom SQL queries & Google Sheet)

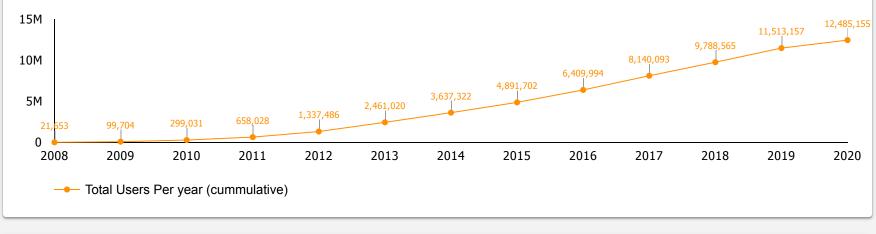

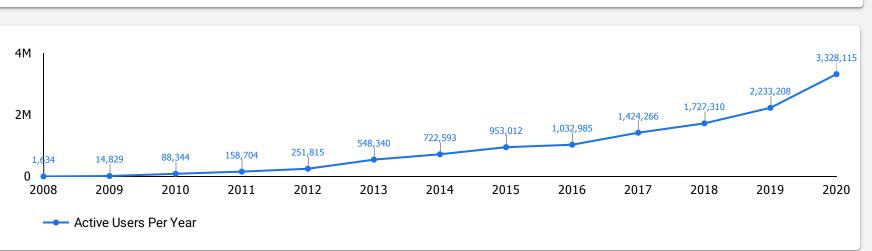


year	Percentage of Active User of Total Users
2020	26.66%
2019	19.4%
2018	17.65%
2017	17.5%
2016	16.12%
2015	19.48%
2014	19.87%
2013	22.28%
2012	18.83%
2011	24.12%
2010	29.54%
2009	14.87%
2008	7.55%

Most Popular Tags (custom SQL query)

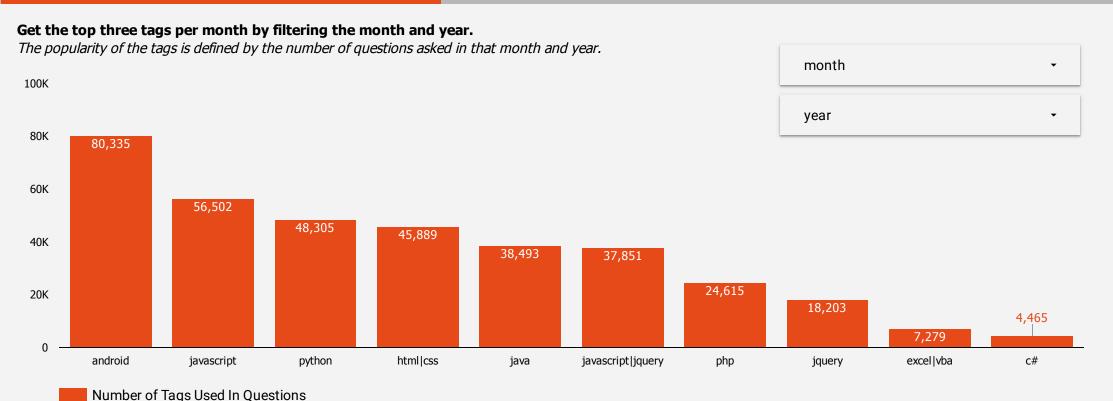





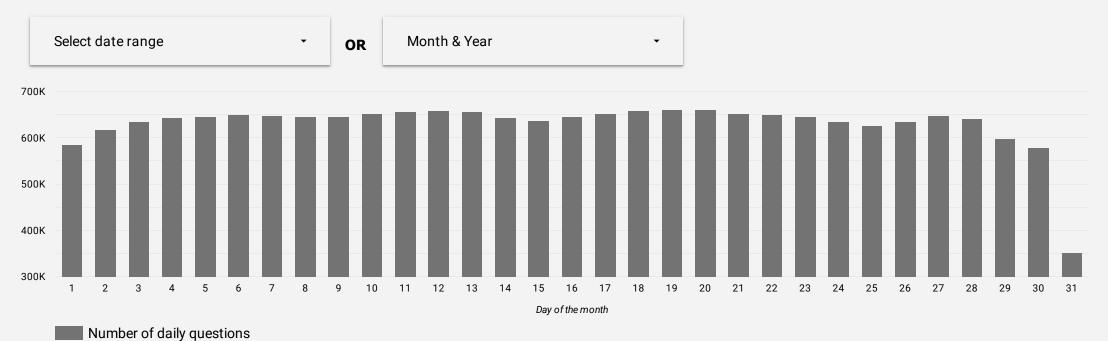

Most Voted Comments (custom Join SQL query)

The top 10 most voted comments in the data range* 2020/05/24 - 2020/05/31

**The vote score is the combined score of up minus downvotes. It could be that the comment with the highest score has the most votes (as it has the highest positive number left). There is no correct way of knowing whether this is true with the current dataset.

Tag Catergpry	Comment	Vote Score** ▼
c#	I would start with 1000 and descend. Then you just need to print the first one and break.	13
haskell conditional-statements predicate io-mon	Not really a Haskell-specific thing, but: I wouldn't bother with `doesFileExist`. Instead catch the exception that `isModified`	11
python list dictionary	You probably assigned something to the name list before that point, because in a clean scope this code works as intended	10
c linux x11 xorg	It's difficult to say with certainty, with only the limited code you've shown, but this: for (i=0; NUMLINES; i++) should *al	10
c++ pointers coding-style conventions	In `K&R C` it was *compulsory* to declare all variables at the top of a function before any other code. This meant that mult	10
http go	248 bytes is not big. When you launch a goroutine, it stats with a bigger stack (~4KB). Don't over- and micro-optimize. Usin	10
c struct tokenize strtok string.h	You nest different `strtok()` "methods" one in `main()` and another in `parceProcess()`. `strtok()` is not reentrant, may	10
python	`list` isn't a **keyword** though it's the name of a builtin type but it's not part of the *grammar* of the language. It's b	10
C++	Pop quiz: what do you think happens when you call `srand(time(NULL))` twice within the same second?	10
python	Please post your code here as text, not as an image.	9