# CSGE602055 Operating Systems CSF2600505 Sistem Operasi

Week 09: Storage, Firmware, Bootloader, & Systemd

Rahmat M. Samik-Ibrahim (ed.)

University of Indonesia

https://os.vlsm.org/
Always check for the latest revision!

REV250 0650-Oct-2020

## Operating Systems $202^3$ ) — **PJJ from HOME** ZOOM: International [Tue 08-10] — A/Matrix [Tue 10-12]

Week	Schedule & Deadline <sup>1</sup> )	Topic	OSC10 <sup>2</sup> )
Week 00	15 Sep - 21 Sep 2020	Overview 1, Virtualization & Scripting	Ch. 1, 2, 18.
Week 01	22 Sep - 28 Sep 2020	Overview 2, Virtualization & Scripting	Ch. 1, 2, 18.
Week 02	29 Sep - 05 Oct 2020	Security, Protection, Privacy, & C-language.	Ch. 16, 17.
Week 03	06 Oct - 12 Oct 2020	File System & FUSE	Ch. 13, 14, 15.
Week 04	13 Oct - 19 Oct 2020	Addressing, Shared Lib, & Pointer	Ch. 9.
Week 05	20 Oct - 26 Oct 2020	Virtual Memory	Ch. 10.
Week 06	27 Oct - 16 Nov 2020	Concurrency: Processes & Threads	Ch. 3, 4.
	29 Oct 2020	Maulid Nabi	
Week 07	17 Nov - 23 Nov 2020	Synchronization & Deadlock	Ch. 6, 7, 8.
Week 08	24 Nov - 30 Nov 2020	Scheduling + W06/W07	Ch. 5.
Week 09	01 Dec - 07 Dec 2020	Storage, Firmware, Bootloader, & Systemd	Ch. 11.
Week 10	08 Dec - 16 Dec 2020	I/O & Programming	Ch. 12.
	09 Dec 2020	Pil Kada	

<sup>&</sup>lt;sup>1</sup>) The **DEADLINE** of Week 00 is 21 Sep 2020, whereas the **DEADLINE** of Week 01 is 28 Sep 2020, and so on...

<sup>&</sup>lt;sup>2</sup>) Silberschatz et. al.: **Operating System Concepts**, 10<sup>th</sup> Edition, 2018.

<sup>&</sup>lt;sup>3</sup>) This information will be on **EVERY** page two (2) of this course material.

### STARTING POINT — https://os.vlsm.org/

- □ **Text Book** Any recent/decent OS book. Eg. (**OSC10**)
  Silberschatz et. al.: **Operating System Concepts**, 10<sup>th</sup> Edition,
  2018. See also http://codex.cs.yale.edu/avi/os-book/OS10/.
  - Resources
    - □ **SCELE** https://scele.cs.ui.ac.id/course/view.php?id=3020. The enrollment key is **XXX**.
    - □ Download Slides and Demos from GitHub.com
      https://github.com/UI-FASILKOM-OS/SistemOperasi/:
      os00.pdf (W00), os01.pdf (W01), os02.pdf (W02), os03.pdf (W03),
      os04.pdf (W04), os05.pdf (W05), os06.pdf (W06), os07.pdf (W07),
      - os08.pdf (W08), os09.pdf (W09), os10.pdf (W10).
    - □ Problems https://rms46.vlsm.org/2/:
      195.pdf (W00), 196.pdf (W01), 197.pdf (W02), 198.pdf (W03),
      199.pdf (W04), 200.pdf (W05), 201.pdf (W06), 202.pdf (W07),
      203.pdf (W08), 204.pdf (W09), 205.pdf (W10).
- ☐ Build your own Virtual Guest https://osp4diss.vlsm.org/

#### Agenda

- Start
- Schedule
- Agenda
- 4 Week 09
- Storage, Firmware, Bootloader, & Systemd
- Storage Management
  - RAID
- 8 Legacy BIOS
- 9 UEFI
- Operating System (Boot) Loader
- GRUB Map
- init (SYSV legacy)
- UpStart Ubuntu
- The All New "systemd"
- systemctl
- 16 Week 09: Check List
- The End

### Week 09 Storage, Firmware, Bootloader, & Systemd: Topics<sup>1</sup>

- Storage
- Storage Arrays
- BIOS
- Loader
- Systemd

<sup>&</sup>lt;sup>1</sup>Source: ACM IEEE CS Curricula 2013

### Week 09 Storage, Firmware, Bootloader, & Systemd: Learning Outcomes<sup>1</sup>

- Storage [Usage]
- Storage Arrays [Usage]
- BIOS [Usage]
- Loader [Usage]
- Systemd [Usage]

<sup>&</sup>lt;sup>1</sup>Source: ACM IEEE CS Curricula 2013

#### Storage, Firmware, Bootloader, & Systemd

- Reference: (OSC10-ch11)
   Storage Capacity (2019)<sup>1</sup>
- - Legacy 3.5" Floppy Disk (1.4MB) obsolete?
    - SuperDisk (up to 240 MB) never took off.
  - 4.7" Compact Disc (700MB) obsolete?
    - 4.7" Digital Versatile Disc (up to 9GB) ?
    - 4.7" Blu Ray (up to 128 GB) ⇒ DVD++.
  - Tape Cartridge (up to 15TB)
    - Robotic System (up to 250 PB per unit)
    - NASA, Google, Microsoft are still using this!
    - Cheap but slow.
  - Hard Disk Drives (up to 16 TB).
    - From Perpendicular Magnetic Recording to Shingled Magnetic Recording technology (+25% – writing problems).
    - Mechanical Disk Arm Scheduling (Until When?).
  - Solid-State Disks (up to 16 TB).
    - SSD Price > HDD Price.
    - Write Speed >> Read Speed.
    - (What is a) Flash Disk?


<sup>&</sup>lt;sup>1</sup>Subject to change

#### Storage Failure Rates

- MTTDL: Mean Time To Data Loss
- MTTF: Mean Time To Failure
- BackBlaze (Cloud Backup Services)

Drives Have 3 Distinct Failure Rates General Predicted Failure Rates

Hard Drive Survival Rates - Chart 1



https://www.extremetech.com/computing/ 170748-how-long-do-hard-drives-actually-live-for



Figure: BackBlaze — Failure Rates of 25000 DISKS

#### Storage Management

- Attached-Storage.
  - Host-Attached Storage: via I/O.
  - Network-Attached Storage (NAS): via distributed FileSystem.
  - Storage Area Network (SAN): dedicated Network.
- Formating
  - Low Level (Physical)
  - High Level (FileSystem)
- Boot Block
- Disk Partition
  - "MBR"-scheme
    - upto 4 primary partition
    - upto 2 TB disk
  - "GPT"-scheme
    - "unlimited" partition
    - "unlimited" disk
    - redundancy
- Swap Space Management: On Partition or FileSystem?

#### RAID: Redundant Array of In\* Disks

- RAID 0, 1, 5, 6, 10, 100
- Note (http://www.commodore.ca/windows/raid5/raid5.htm):
  - RAID was created to enhance data performance, reliability and availability.
  - Striping, parity checking and mirroring are three primary functions of RAID systems.
  - RAID performs its functions transparent to the operating system.
  - Systems are typically defined by ranks consisting of five disks each connected to one or two Disk Array Controllers.
  - Different RAID levels provide varying degrees of speed and data protection.
- Problems with RAID
- Stable-Storage Implementation

#### BIOS, Boot, & Systemd

- Firmware
  - BIOS: Basic Input Output System.
  - UEFI: Unified Extensible Firmware Interface.
  - ACPI: Advanced Configuration and Power Interface.
- Operating System (Boot) Loader
  - BOOTMGT: Windows Bootmanager / Bootloader.
  - LILO: Linux Loader.
  - GRUB: GRand Unified Bootloader.
- Operating System Initialization
  - Init (legacy)
  - UpStart
  - Systemd

#### Legacy BIOS

- Check Settings.
- Initialize CPU & RAM.
- POST: Power-On Self-Test.
- Initialize ports, LANS, etc.
- Load a Boot Loader.
- Handover to the Boot Loader.
- Provides "Native" (obsolete) Drivers only (not loadable).
- Provides "INT" services .
- Limitation.
  - Technology of 1970s.
  - 16 bits software.
  - 20 bits address space (1 MB).
  - 31 bits disk space (2 TB).

#### **BIOS**



Figure: BIOS

#### **UEFI**

- A Firmware Specification, not an Implementation!
- No (INT) service after boot.
- HII: Human Interface Infrastructure.
- Protected Mode.
- Flexible.
  - Technology of 2000s.
  - writen in C.
  - (third party) loadable drivers and tools.
  - Emulate Legacy BIOS transition (MBR block, INT service).
  - UEFI Shell: environment shell for diagnostic (no need for DOS).
- Problems
  - Who controls the Hardware?
  - Is "Secure Boot" a good thing?
  - How about a NASTY/LOCKING/TROJAN UEFI implementation?
  - Different DRIVERS.

#### **UEFI**



Figure: UEFI

#### **UEFI** Boot

#### Platform Initialization (PI) Boot Phases

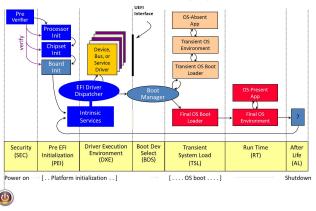


Figure: UEFI Boot Process<sup>1</sup>.

<sup>&</sup>lt;sup>1</sup>Source Jarslstrom - 2014 - www.tianocore.org

#### Operating System (Boot) Loader

- General
  - How/Where to start the operating system?
  - What to do?
  - How many ways to boot?
  - How many types of OS?
- Disk Partition
  - MBR: Master Boot Record (1983).
  - GPT: GUID (Globally Unique Identifiers) Partition Table (2010s).
- GRUB: GRand Unified Boot system
  - Stage 1: a small boot.img inside the MBR.
  - Stage 1.5 (core.img): FileSystem drivers after MBR.
  - Stage 2: Kernel Selection: Windows, Linux, BSD, etc.
- GRUB2
  - More flexible than GRUB legacy.
  - More automated than GRUB legacy.
  - Accept MBR and GPT.
  - Stage 1.5 (core.img): generated from diskboot.img.
  - No 1024 cylinder restriction.

#### **GRUB Map**

#### **GNU GRUB 2**

Locations of boot.img, core.img and the /boot/grub directory

Example 1: an MBR-partitioned harddisc with sector size of 512 or 4096Bytes



Example 2: a GPT-partitioned harddisc with sector size of 512 or 4096Bytes




Figure: GRUB<sup>1</sup>.

<sup>&</sup>lt;sup>1</sup>Source Shmuel Csaba Otto Traian 2013

#### init (SYSV legacy)

- File: /etc/inittab.
- Folders: /etc/rcX.d X = runlevel.
  - Seven (7) different runlevels:
    - 0 (shutdown).
    - 1 (single-user/admin).
    - 2 (multi-user non net).
    - 3 (standard).
    - 4 (N/A).
    - 5 (3+GUI).
    - 6 (reboot).
  - SXX-YYY: Start
  - KXX-YYY: Kill.
- One script at a time in order.
- dependency is set manually.

#### UpStart - Ubuntu

- Developer: Ubuntu.
- Folder: /etc/init/.
- Control: initctl.
  - initctl list listing all processes managed by upstart.
- better support for hotplug devices.
- cleaner service management.
- faster service management.
- asynchronous.

#### The All New "systemd"

- Replaces (SYSV) init and UpStart.
  - better concurency handling: Faster!
  - better dependencies handling: No more "S(tarts)" and "K(ills)".
  - better crash handling: automatic restart option.
  - better security: group protection from anyone including superusers.
  - simpler config files: reliable and clean scripts.
  - hotplug: dynamic start/stop.
  - supports legacy systems (init).
  - overhead reducing.
  - unified management way for all distros.
  - bloated: doing more with more resources.
  - linux specific: NOT portable.

```
for II in
   'systemctl list-unit-files | head -8; echo "(...)";
       systemctl list-unit-files | tail -8' \
   'systemd-analyze blame | wc -1; echo "===";
       systemd-analyze blame | head -15' \
   'systemctl --full | wc -1; echo "===";
       systemctl --full | head -10' \
   'systemctl list-units | wc -1; echo "===";
       systemctl list-units | head -10' \
   'systemctl list-units |grep .service|wc -l;echo "===";
       systemctl list-units|grep .service|head -10' \
   'systemctl list-units | grep ssh.service' \
   'systemctl status ssh.service' \
   'systemctl is-enabled ssh' \
   'journalctl' \
   'journalctl -b' \
dο
```

```
*** Hit Enter Key ***
```

Figure: bash a1-some-systemd-command-lines

```
Biembster: - × rms46@paintiarq. - × rms46@pamulang. - rms46@pamulang. - × rms46@pamula
RUNNING: systemctl list-unit-files | head -8; echo "(...)";systemctl list-unit-files| tail -8
 ___________
UNTT FILE
proc-sys-fs-binfmt misc.automount
dev-hugepages.mount
dev-mqueue.mount
proc-sys-fs-binfmt misc.mount
sys-fs-fuse-connections.mount
sys-kernel-config.mount
sys-kernel-debug.mount
time-sync.target
timers.target
umount.target
mdadm-last-resort@.timer
systemd-readahead-done.timer
systemd-tmpfiles-clean.timer
223 unit files listed.
*** Hit Enter Key ***
```

Figure: systemctl list-unit-files

```
RUNNING: systemd-analyze blame | wc -l; echo "===";systemd-analyze blame |
134
          2.374s keyboard-setup.service
           963ms systemd-logind.service
           957ms rsvslog.service
           954ms ssh.service
           954ms rc-local service
           954ms systemd-user-sessions.service
           928ms postfix.service
           589ms networking.service
           519ms snmpd.service
           322ms systemd-tmpfiles-setup-dev.service
   Hit Enter Key ***
```

Figure: systemd-analyze blame

```
File Edit View Search Terminal Tabs Help
                                                                                                                                                                                                                                                                              rms46/Dernsfarq., × rms46/finamifanq., × rms46/fina
                                                                                                                                                                                                                                                                                                                                                             LOAD ACTIVE SUB
                                                                                                                                                                                                                                                                                                                                                             loaded active waiting
                                                                                                                                                                                                                                                                                                                                                                                                                                                          OEMU HARDDISK 1
sys-devices-pc:0000:00-0000:00:05.0-host0-target0:0:0-0:0:0-block-sda-sda2.device
                                                                                                                                                                                                                                                                                                                                                                                                                                                         QEMU HARDDISK 2
 ys-devices-pc10000:00-0000:00:00:05.0-host0-target0:0:0-0:0-0:0-0lock-sda.device
sys-devices-pci0000:00-0000:00:05.0-host0-target0:0:1-0:0:1:0-block-sdb-sdb1.device
                                                                                                                                                                                                                                                                                                                                                               loaded active plugged GEMU HARDDISK 1
                                                                                                                                                                                                                                                                                                                                                        LOAD ACTIVE SUB
rys davices pri0000;00-0006:00-005.0-host0-trapet0:0-0-0:0-0-block-scd-scd.idevices

rys davices pri0000;00-0000:00-05.0-host0-trapet0:0-0-0:0-0:0-block-scd-scd2.device

rys davices pri0000;00-0000:00-0:0-5.0-host0-trapet0:0-0-0:0-0:0-block-scd-scd.idevice

rys davices pri0000;00-0000:00-05.0-host0-trapet0:0-0-0:0-0:0-0:0-block-scd-scd.idevice
                                                                                                                                                                                                                                                                                                                                                                                                                                                  QEMU HARDDISK 1
QEMU HARDDISK 2
QEMU HARDDISK
QEMU HARDDISK 1
 -6- UNNING: systematl list-units |grep .service|wa -l;echo "====";systematl list-units|grep .service|head
                                                                                                                                                                                                                                                                                                                                                                                          loaded active exited
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              LSB: process and login accounting
```

Figure: systemctl -full; systemctl list-units

```
RUNNING: systematl list-units | grep ssh.service
ssh.service
                        loaded active running OpenBSD Secure Shell server
*** Hit Enter Kev ***
RUNNING: systemctl status ssh.service
 ssh.service - OpenBSD Secure Shell server
  Loaded: loaded (/lib/systemd/system/ssh.service; enabled)
  Active: active (running) since Sun 2020-04-26 03:00:24 WIB; 3h 33min ago
  Process: 653 ExecStartPre=/usr/sbin/sshd -t (code=exited, status=0/SUCCESS)
Main PID: 686 (sshd)
   CGroup: /system.slice/ssh.service

→ 686 /usr/sbin/sshd -D

           —3247 sshd: demo [priv]
           ─3253 sshd: demo@pts/0
           -3254 -bash
           —3391 bash a1-some-systemd-command-lines
           └3550 systemctl status ssh.service
 ** Hit Enter Kev ***
```

Figure: systemctl status ssh.service

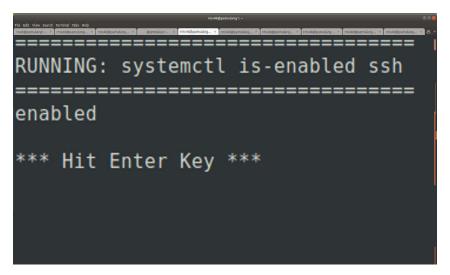


Figure: systemctl is-enabled ssh

#### Week 09: Check List (Deadline: Monday, 07-Dec-2020).

- Starting Point: https://os.vlsm.org/
- ☐ Week 09: Assignment (more details in **os09.pdf**).
  - 1 Read: (OSC10 chapter 11)
  - TBA.
- □ The "Assignment Day" is every Thursday morning.
- ☐ This page is https://os.vlsm.org/Slides/check09.pdf.

#### The End

- $\square$  This is the end of the presentation.
- extstyle ext
- This is the end of the presentation.