


Commands used to build and run


Docker compose up

Console output

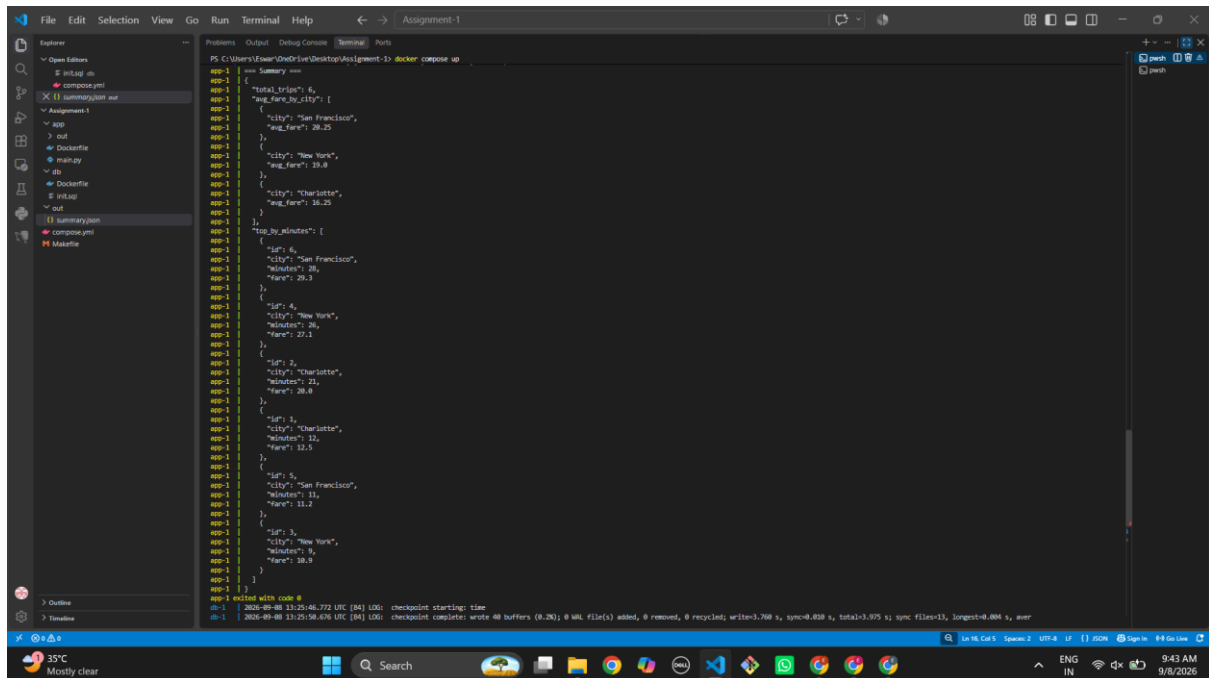

```
PS C:\Users\Esmer\OneDrive\Desktop\Assignment-1> docker compose up
[+] Summary
app-1 | == Summary ==
app-1 | {
app-1 |   "total_trips": 6,
app-1 |   "avg_fare_by_city": [
app-1 |     {
app-1 |       "city": "San Francisco",
app-1 |       "avg_fare": 28.25
app-1 |     },
app-1 |     {
app-1 |       "city": "New York",
app-1 |       "avg_fare": 19.8
app-1 |     },
app-1 |     {
app-1 |       "city": "Charlotte",
app-1 |       "avg_fare": 16.25
app-1 |     }
app-1 |   ],
app-1 |   "top_by_minutes": [
app-1 |     {
app-1 |       "id": 6,
app-1 |       "city": "San Francisco",
app-1 |       "minutes": 28,
app-1 |       "fare": 29.3
app-1 |     },
app-1 |     {
app-1 |       "id": 4,
app-1 |       "city": "New York",
app-1 |       "minutes": 26,
app-1 |       "fare": 27.1
app-1 |     },
app-1 |     {
app-1 |       "id": 2,
app-1 |       "city": "Charlotte",
app-1 |       "minutes": 21,
app-1 |       "fare": 20.8
app-1 |     },
app-1 |     {
app-1 |       "id": 3,
app-1 |       "city": "Charlotte",
app-1 |       "minutes": 12,
app-1 |       "fare": 12.5
app-1 |     },
app-1 |     {
app-1 |       "id": 5,
app-1 |       "city": "San Francisco",
app-1 |       "minutes": 11,
app-1 |       "fare": 11.2
app-1 |     },
app-1 |     {
app-1 |       "id": 1,
app-1 |       "city": "New York",
app-1 |       "minutes": 9,
app-1 |       "fare": 18.9
app-1 |     }
app-1 |   ]
app-1 | }
app-1 exited with code 0
db-1 | 2026-09-08 13:25:46.772 UTC [84] LOG:  checkpoint starting: time
db-1 | 2026-09-08 13:25:56.626 UTC [84] LOG:  checkpoint complete: wrote 48 buffers (0.2%); 0 WAL file(s) added, 0 removed, 0 recycled; write=3.708 s, sync=0.038 s, total=3.975 s; sync files=11, longest=0.004 s, aver
```

Summary.json

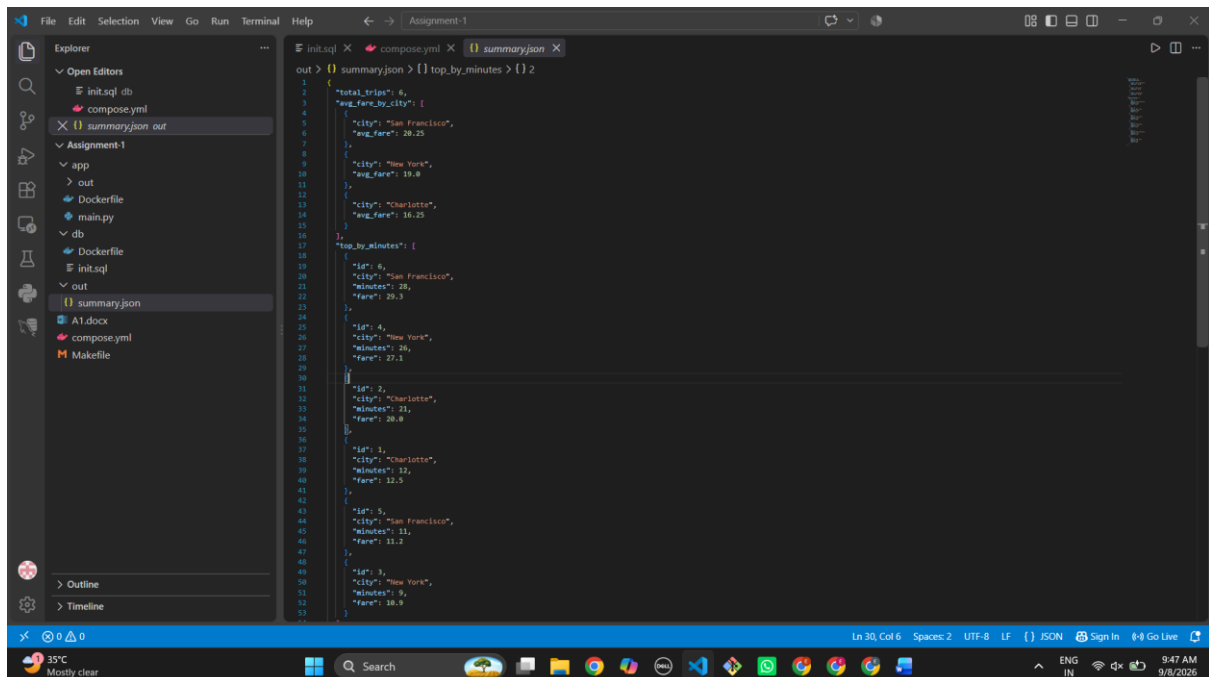

```
out > {} summary.json > {} top_by_minutes > {} 2
1 {
2   "total_trips": 6,
3   "avg_fare_by_city": [
4     {
5       "city": "San Francisco",
6       "avg_fare": 28.25
7     },
8     {
9       "city": "New York",
10      "avg_fare": 19.8
11     },
12     {
13       "city": "Charlotte",
14       "avg_fare": 16.25
15     }
16   ],
17   "top_by_minutes": [
18     {
19       "id": 6,
20       "city": "San Francisco",
21       "minutes": 28,
22       "fare": 29.3
23     },
24     {
25       "id": 4,
26       "city": "New York",
27       "minutes": 26,
28       "fare": 27.1
29     },
30     {
31       "id": 2,
32       "city": "Charlotte",
33       "minutes": 21,
34       "fare": 20.8
35     },
36     {
37       "id": 3,
38       "city": "Charlotte",
39       "minutes": 12,
40       "fare": 12.5
41     },
42     {
43       "id": 5,
44       "city": "San Francisco",
45       "minutes": 11,
46       "fare": 11.2
47     },
48     {
49       "id": 1,
50       "city": "New York",
51       "minutes": 9,
52       "fare": 18.9
53     }
54   ]
55 }
```

Refelection

In this assignment, I learned how to orchestrate multi-container setups using Docker Compose and internal service DNS. I also gained practical experience handling database connection retries during container startup. For a production environment, I would secure the database credentials in a .env file and use multi-stage builds to keep the Docker images lightweight.