
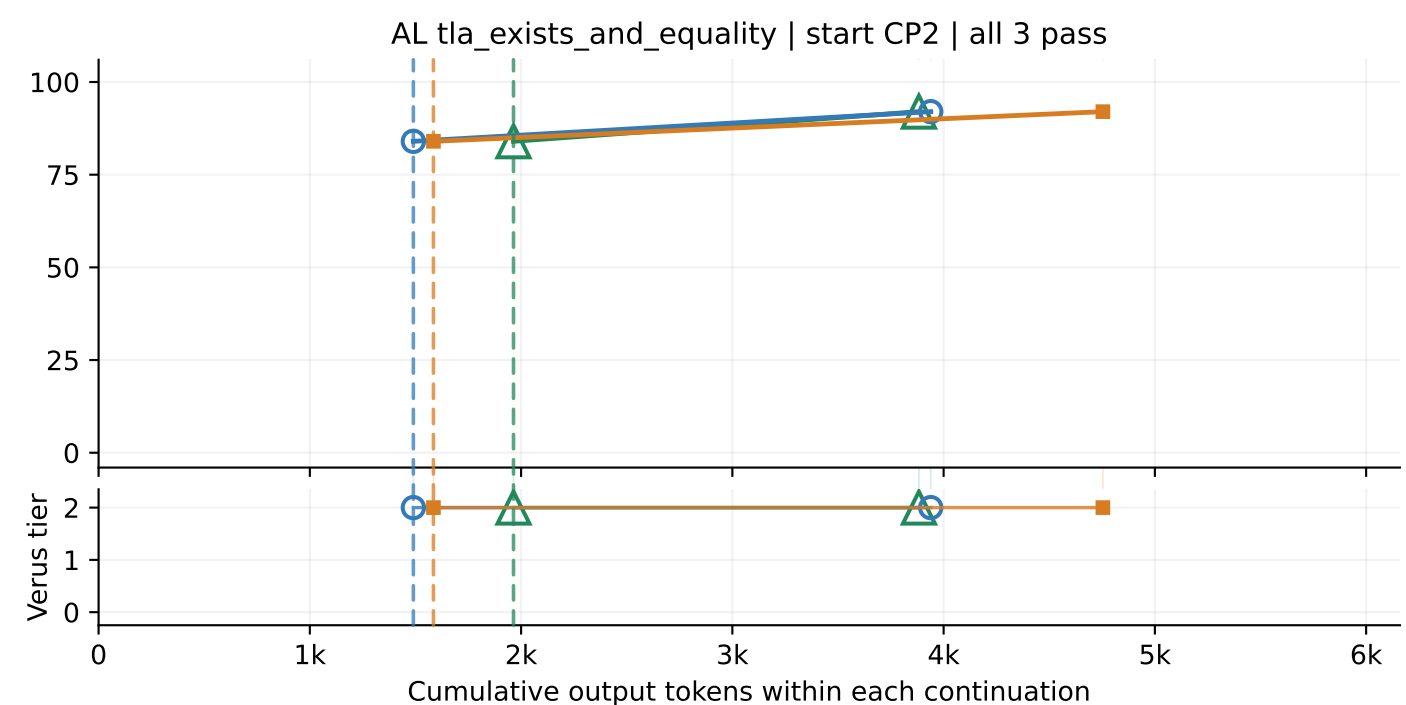
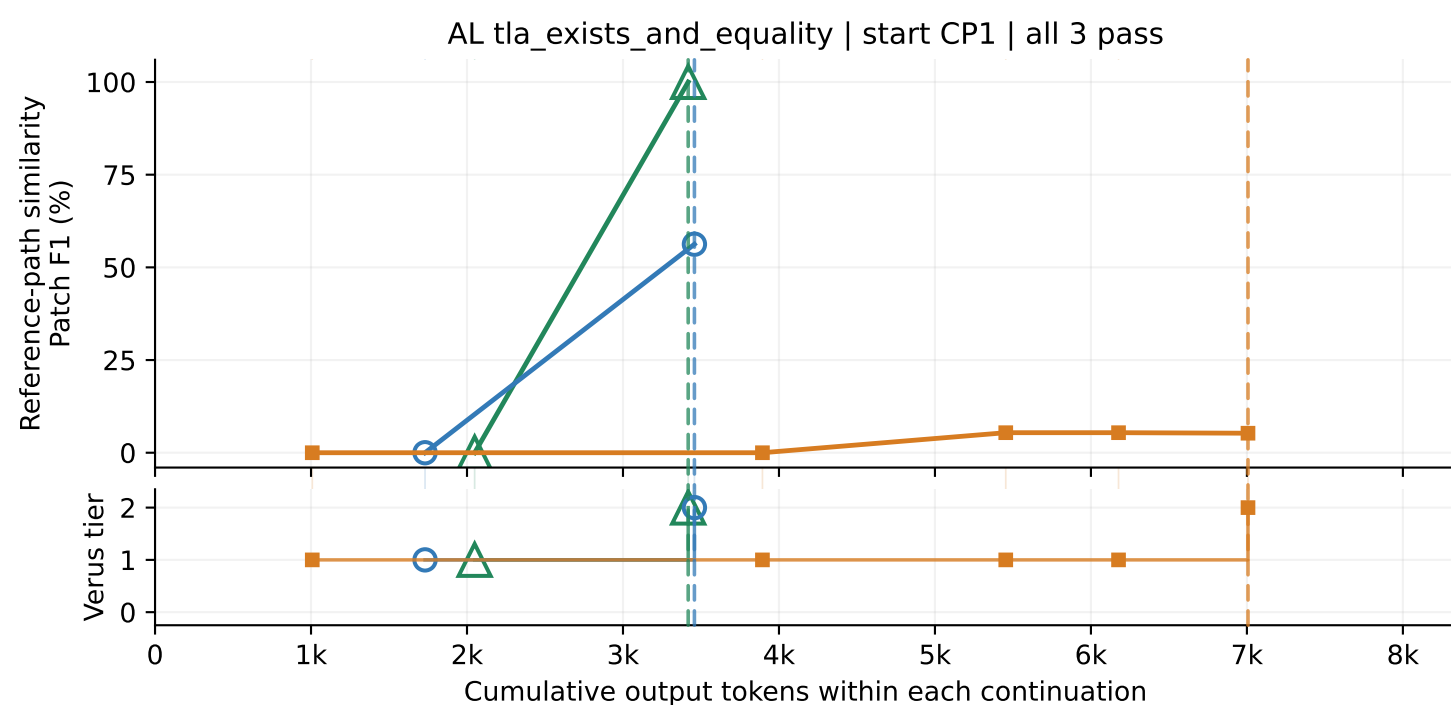
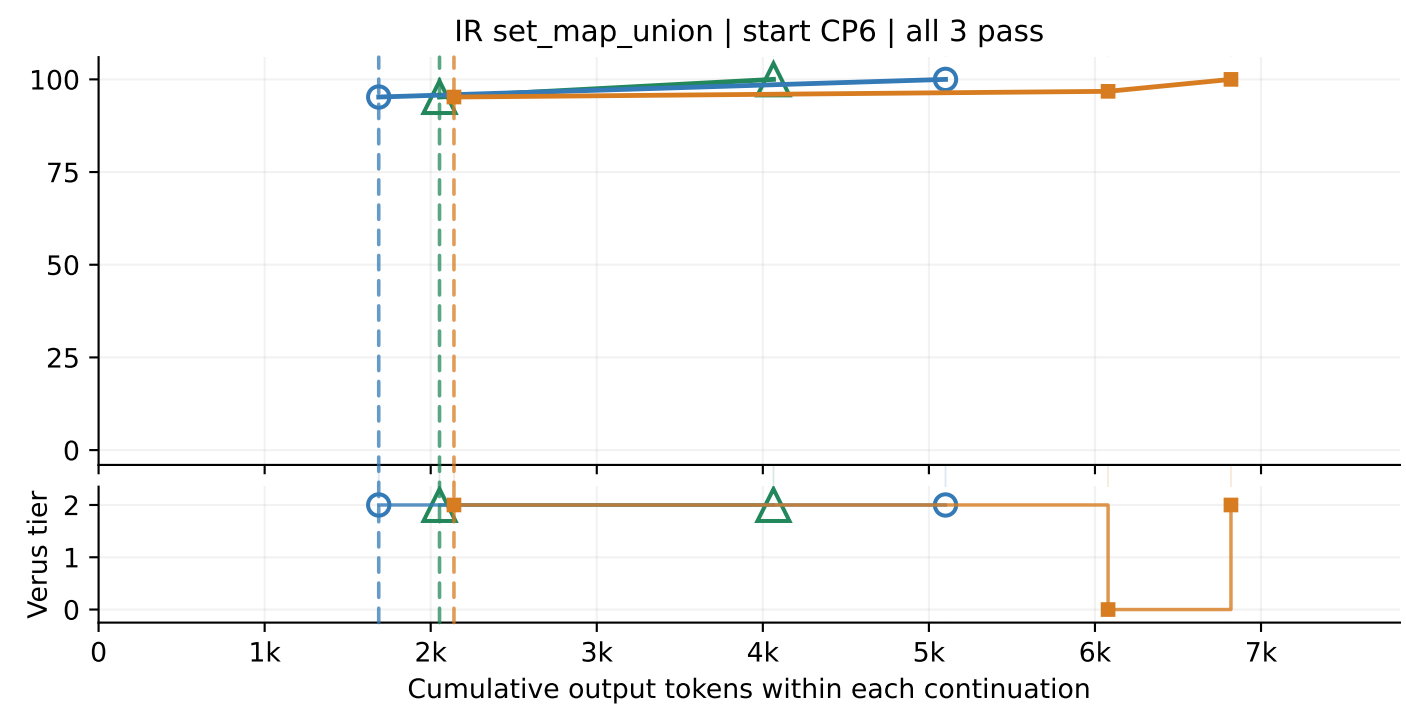
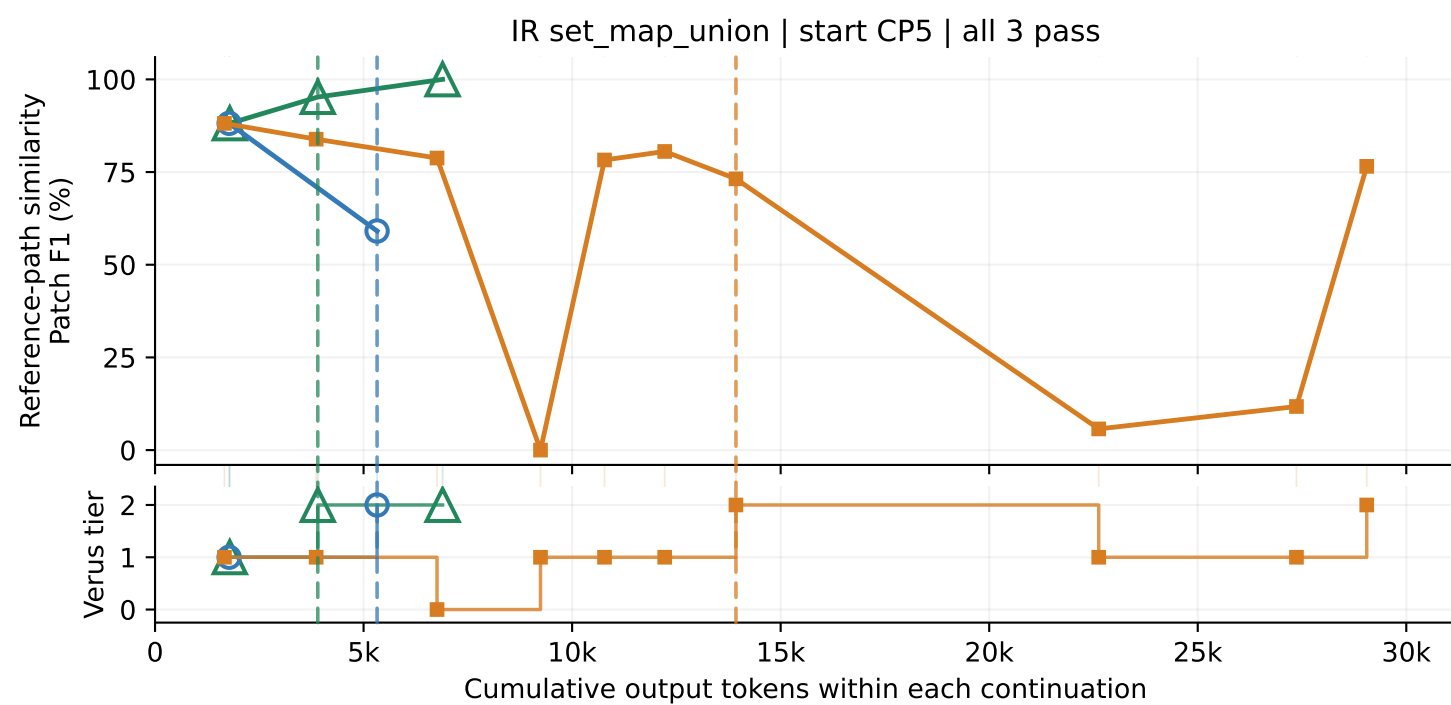
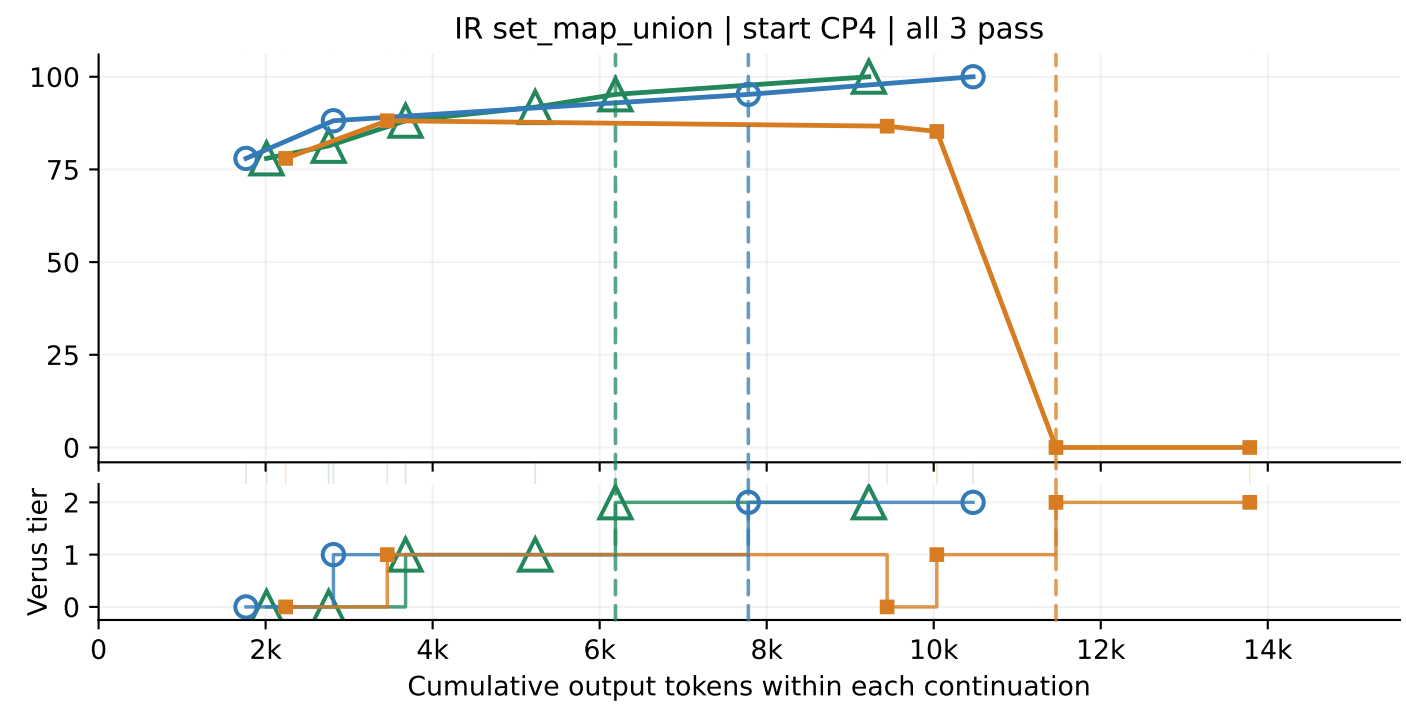
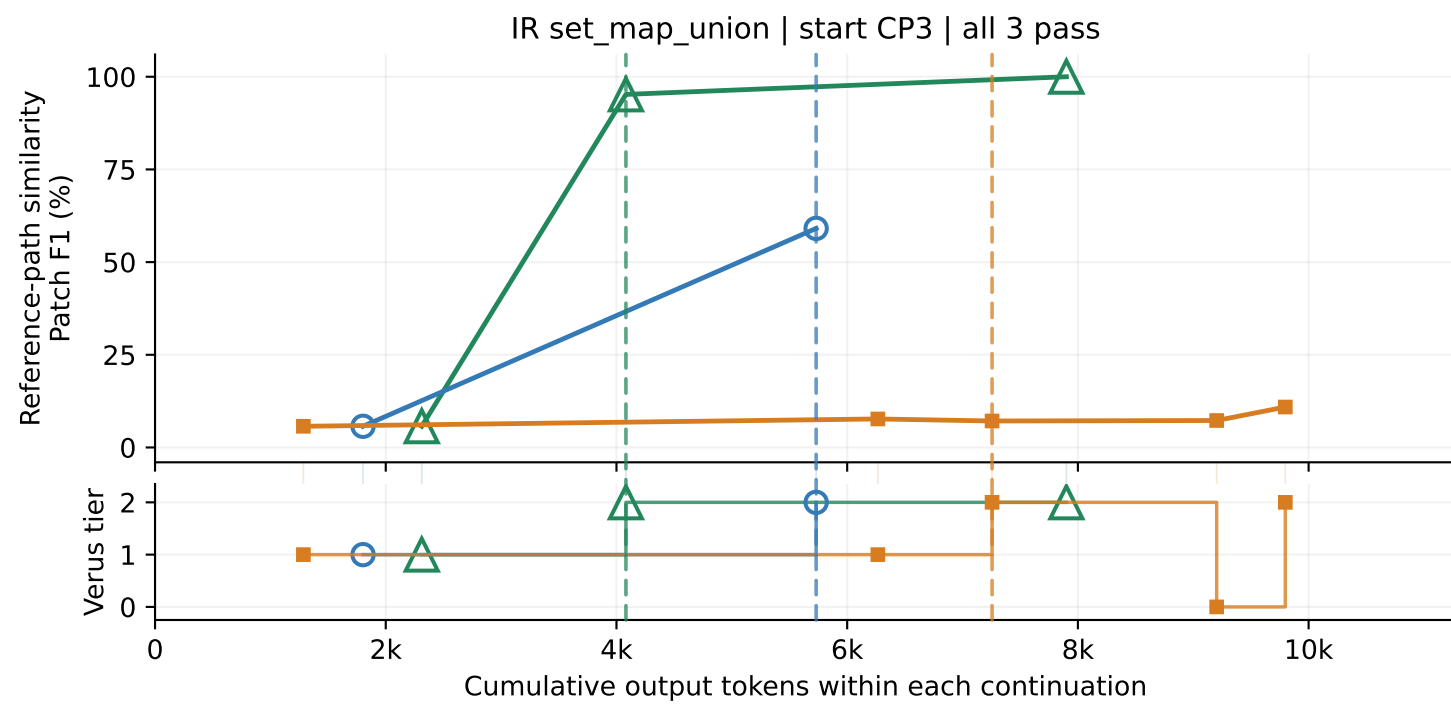
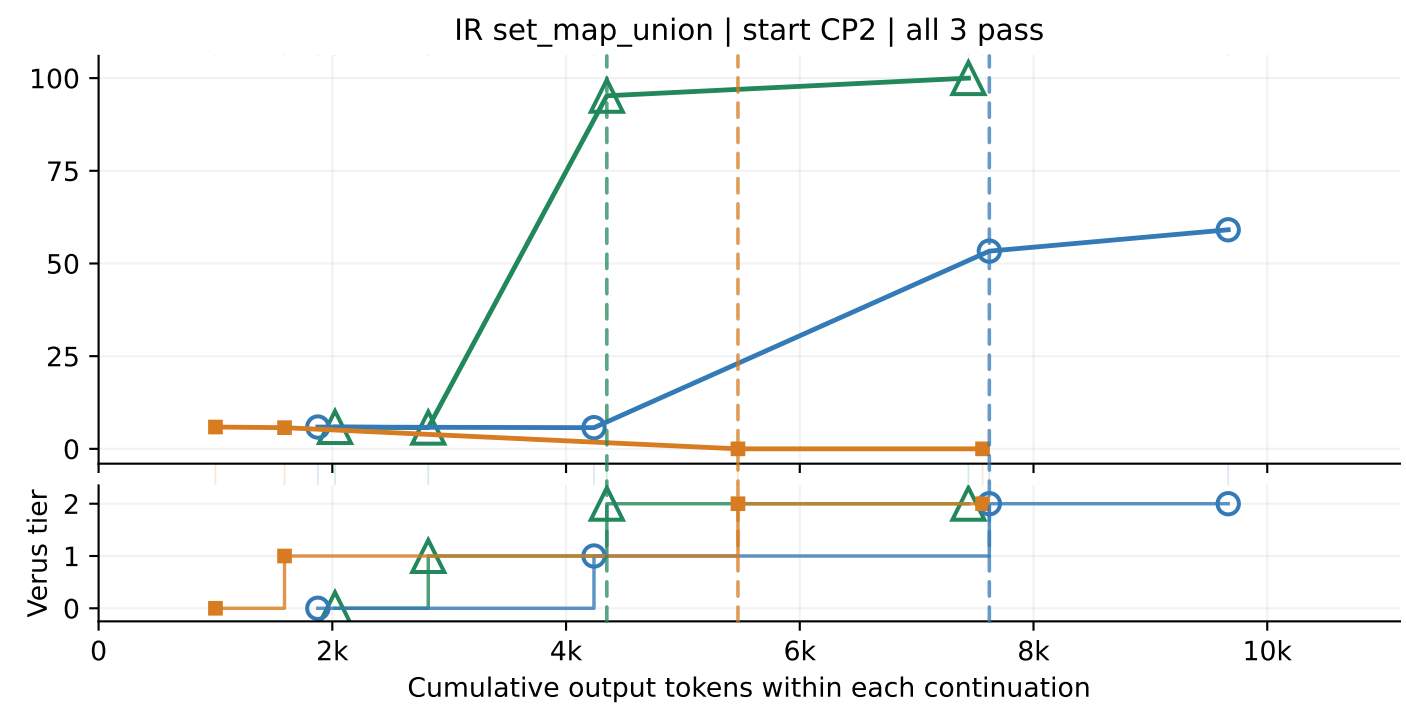


Three-arm checkpoint continuation: token cost and reference-path similarity

IR: 1 task / 6 starts; AL: 1 task / 2 starts; AC: 0 | 24/24 Verus + Lynette pass

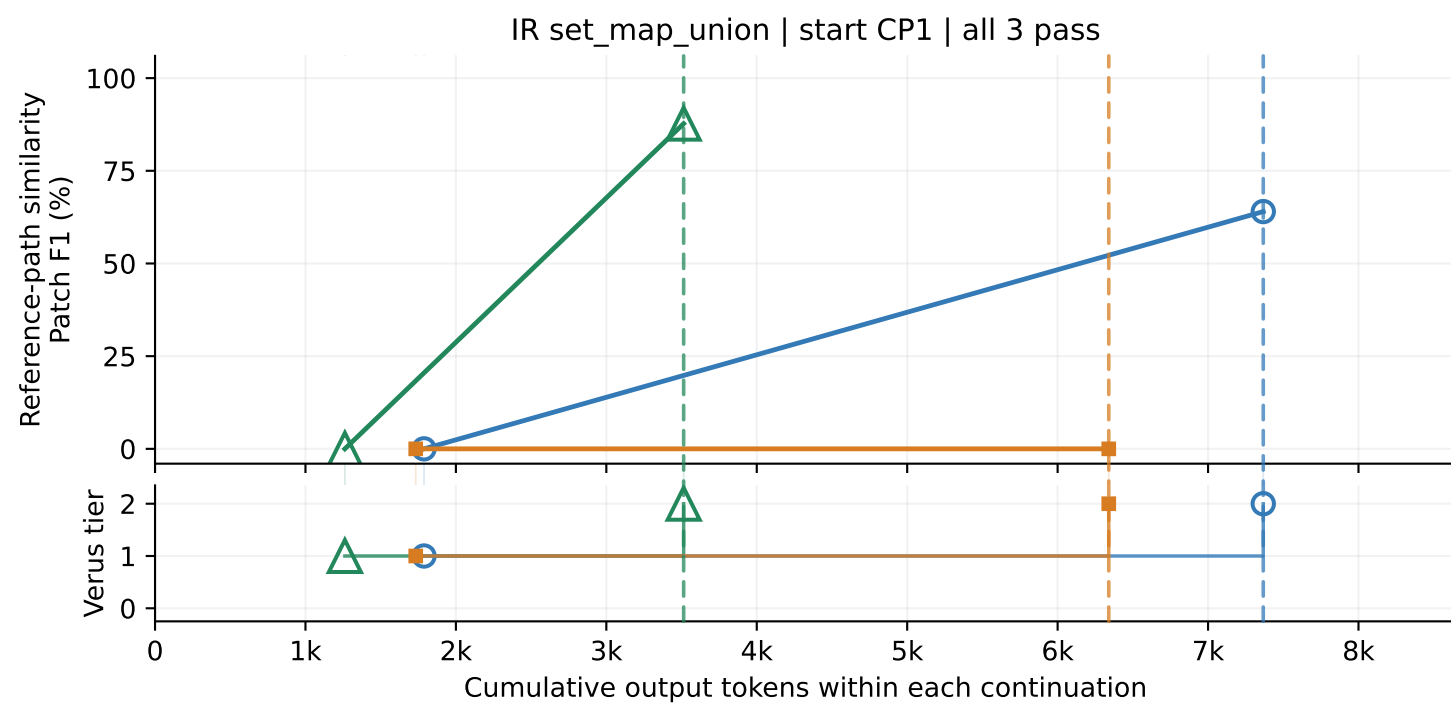

△ Full F ■ No F --- Vertical dashed: first passing checkpoint
○ Pruned F — Solid: vs original F

Tokens: API completion tokens summed over completed calls (reasoning included, not added twice); original-prefix/input tokens excluded.
 Top and bottom: IDENTICAL extracted checkpoints and token coordinates; vertical guides align each pair of points.
 Tier 0 = compile failure or unparsed; 1 = proof failure; 2 = verified. Vertical dashed lines mark first passing checkpoints; a starting state may already pass.
 Full F and no-F IR isolated; pruned F and no-F AL not isolated. No stagnation claim; own-endpoint 100% is by construction.