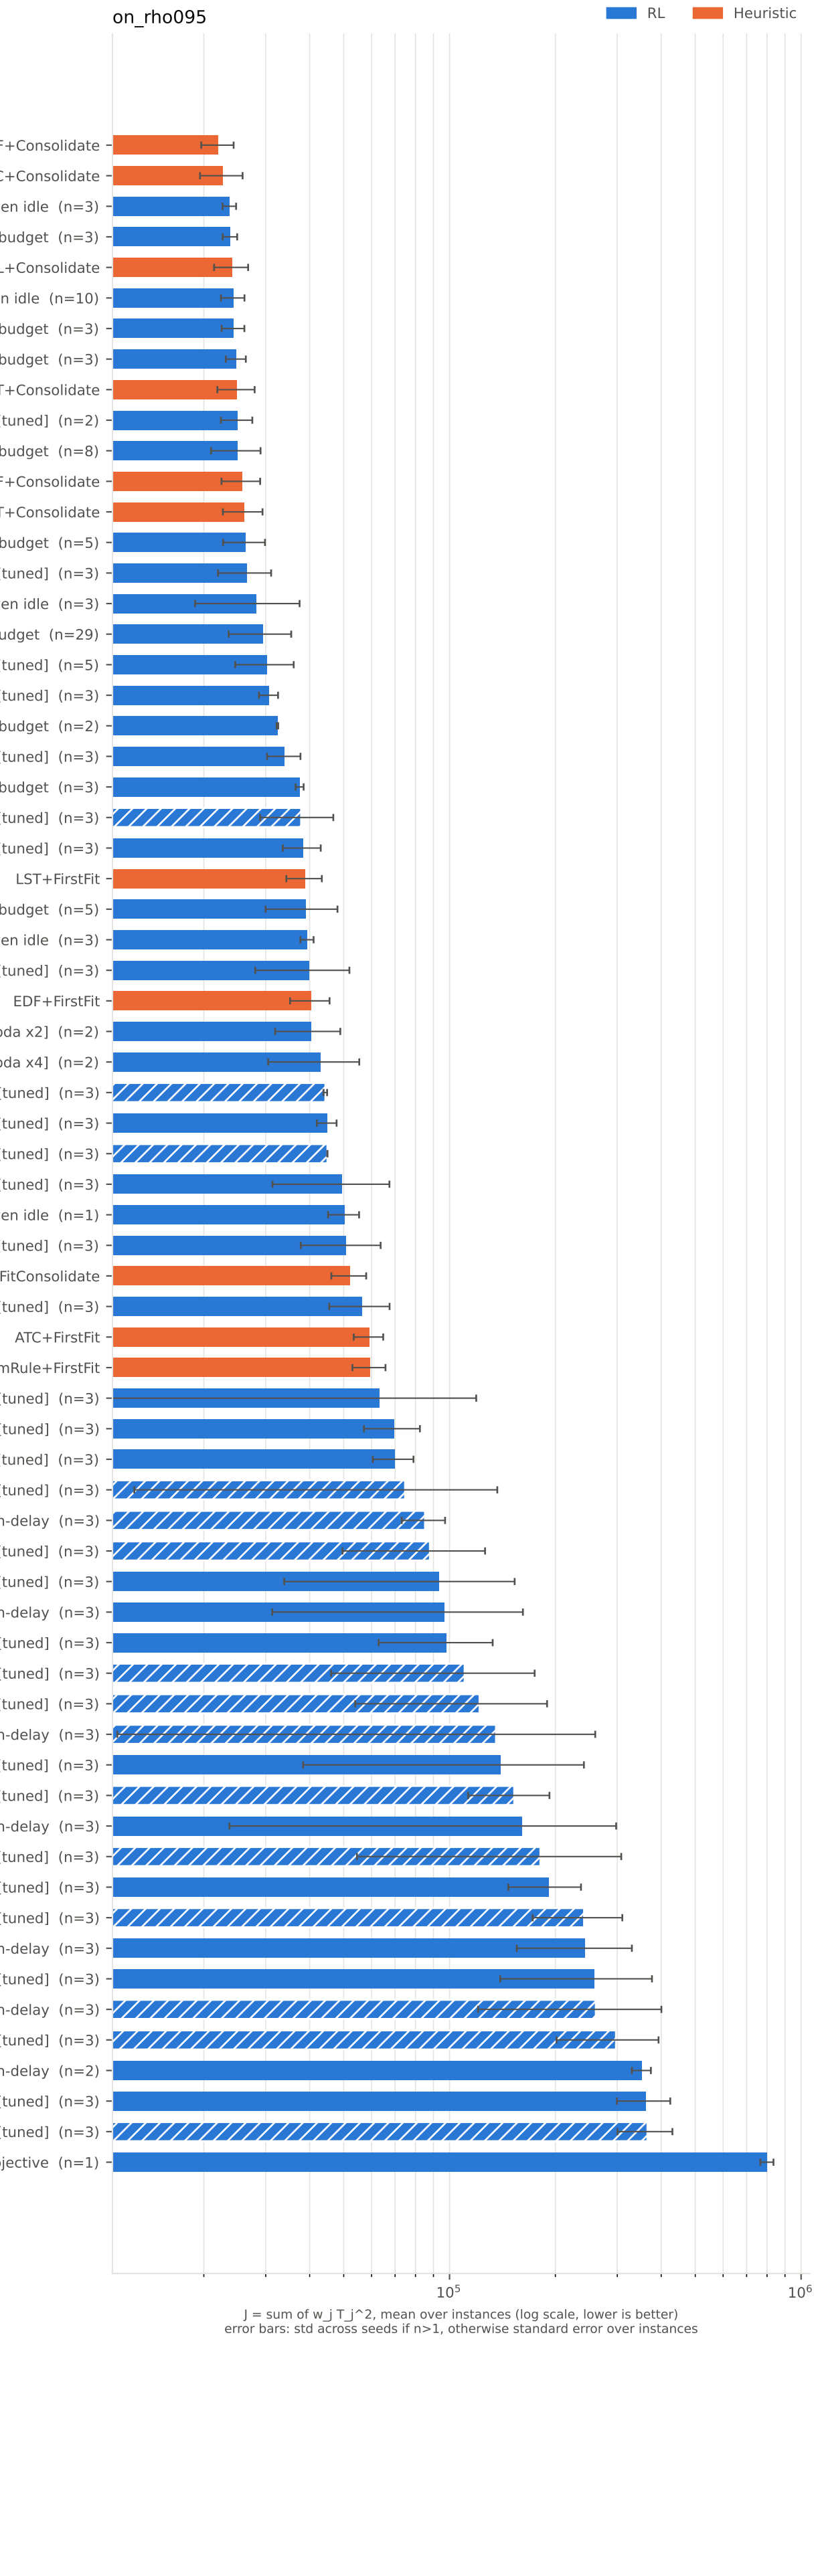
on_rho095
RL
Heuristic
F+Consolidate
C+Consolidate
en idle (n=3)
budget (n=3)
L+Consolidate
n idle (n=10)
budget (n=3)
budget (n=3)
T+Consolidate
tuned] (n=2)
budget (n=8)
F+Consolidate
T+Consolidate
budget (n=5)
tuned] (n=3)
en idle (n=3)
udget (n=29)
tuned] (n=5)
tuned] (n=3)
budget (n=2)
tuned] (n=3)
budget (n=3)
tuned] (n=3)
tuned] (n=3)
LST+FirstFit
budget (n=5)
en idle (n=3)
tuned] (n=3)
EDF+FirstFit
oda x2] (n=2)
oda x4] (n=2)
tuned] (n=3)
tuned] (n=3)
tuned] (n=3)
en idle (n=1)
tuned] (n=3)
FitConsolidate
tuned] (n=3)
ATC+FirstFit
mRule+FirstFit
tuned] (n=3)
tuned] (n=3)
tuned] (n=3)
tuned] (n=3)
n-delay (n=3)
tuned] (n=3)
tuned] (n=3)
n-delay (n=3)
tuned] (n=3)
tuned] (n=3)
tuned] (n=3)
n-delay (n=3)
tuned] (n=3)
tuned] (n=3)
n-delay (n=3)
tuned] (n=3)
tuned] (n=3)
n-delay (n=3)
tuned] (n=3)
n-delay (n=3)
tuned] (n=3)
n-delay (n=2)
tuned] (n=3)
tuned] (n=3)
jective (n=1)
10^5
10^6
J = sum of w_j T_j^2, mean over instances (log scale, lower is better)
error bars: std across seeds if n>1, otherwise standard error over instances