

GitHub - jquast/wcwidth: Python library that measures the width of strings in a terminal · GitHub

 [jquast](#) / [wcwidth](#) Public

-  [Notifications](#)
-  [Fork 66](#)
-  [Star 450](#)

 master ▾

 [13 Branches](#)  [34 Tags](#)

 [Go to file](#)

[Go to file](#)

 [Code](#) ▾

...

Folders and files

Name	Name	Last commit mes...	Last commit date
Latest commit dependabot[bot] Bump pygments from 2.19.2 to 2.20.0 in /docs (#212)   last week 07817a7 · last week			
History  474 Commits  			
 .github/workflows	 .github/workflows	Standalone emoji support (#202)	3 months ago
 bin	 bin	Remove docs, add utils (#209)	last month
 code_templates	 code_templates	Remove all but latest unicode version (#195)	3 months ago
 docs	 docs	Bump pygments from 2.19.2 to 2.20.0 in /docs (#212)	last week
 tests	 tests	Complete textwrap.wrap() with 6 missing params! (#207)	2 months ago
 wewidth	 wewidth	Remove docs, add utils (#209)	last month
 .gitignore	 .gitignore	Do not distribute any data files (#199)	3 months ago

Name	Name	Last commit mes...	Last commit date
 .pylintrc	 .pylintrc	small tox and linting updates	4 years ago
 .python-version-default	 .python-version-default	Upgrade GitHub Actions to node20 runtime (#131)	2 years ago
 .readthedocs.yaml	 .readthedocs.yaml	Test Python 3.13+3.14 again, and, update dev/ci requirements.txt (#150)	7 months ago
 LICENSE	 LICENSE	recalibrating decision tree	6 years ago
 README.rst	 README.rst	modeling bi-directional splines	6 years ago
 pyproject.toml	 pyproject.toml	Complete textwrap.wrap() with 6 missing params! (#207)	2 months ago
 requirements-develop.txt	 requirements-develop.txt	Small improvements to update-tables.py and wcwidth-browser.py (#160)	3 months ago
 requirements-docs.in	 requirements-docs.in	Complete textwrap.wrap() with 6 missing params! (#207)	2 months ago
 requirements-tests38.in	 requirements-tests38.in	Do not distribute any data files (#199)	3 months ago
 requirements-tests38.txt	 requirements-tests38.txt	Do not distribute any data files (#199)	3 months ago
 requirements-tests39.in	 requirements-tests39.in	Do not distribute any data files (#199)	3 months ago

Name	Name	Last commit mes...	Last commit date
 requirements-tests39.txt	 requirements-tests39.txt	Do not distribute any data files (#199)	3 months ago
 requirements-update.in	 requirements-update.in	Update requirements	3 years ago
 requirements-update.txt	 requirements-update.txt	Test Python 3.13+3.14 again, and, update dev/ci requirements.txt (#150)	7 months ago
 tox.ini	 tox.ini	Standalone emoji support (#202)	3 months ago
View all files			



 downloads **205M/month**

 codecov **100%**

license **MIT**

Introduction



This library is mainly for CLI/TUI programs that carefully produce output for Terminals.

Installation



The stable version of this package is maintained on pypi, install or upgrade, using pip:

```
pip install --upgrade wcwidth
```

Problem



All Python string-formatting functions, [textwrap.wrap\(\)](#), [str.ljust\(\)](#), [str.rjust\(\)](#), and [str.center\(\)](#) **incorrectly** measure the displayed width of a string as equal to the number of their codepoints.

Some examples of **incorrect results**:

```
>>> # result consumes 16 total cells, 11 expected,  
>>> 'コンニチハ'.rjust(11, 'X')  
'XXXXXXコンニチハ'  
  
>>> # result consumes 5 total cells, 6 expected,  
>>> 'café'.center(6, 'X')  
'caféX'
```



Solution



The lowest-level functions in this library are the POSIX.1-2001 and POSIX.1-2008 [wcwidth\(3\)](#) and [wcswidth\(3\)](#), which this library precisely copies by interface as [wcwidth\(\)](#) and [wcswidth\(\)](#). These functions return -1 when C0 and C1 control codes are present.

An easy-to-use [width\(\)](#) function is provided as a wrapper of [wcswidth\(\)](#) that is also capable of measuring most terminal control codes and sequences, like colors, bold, tabstops, and horizontal cursor movement.

Text-justification is solved by the grapheme and sequence-aware functions [ljust\(\)](#), [rjust\(\)](#), [center\(\)](#), and [wrap\(\)](#), serving as drop-in replacements to python standard functions of the same names.

The iterator functions [iter_graphemes\(\)](#) and [iter_sequences\(\)](#) allow for careful navigation of grapheme and terminal control sequence boundaries. [iter_graphemes_reverse\(\)](#), and [grapheme_boundary_before\(\)](#) are useful for editing and searching of complex unicode. The [clip\(\)](#) function extracts substrings by display column positions, and [strip_sequences\(\)](#) removes terminal escape sequences from text altogether.

Discrepancies



You may find that support *varies* for complex unicode sequences or codepoints.

A companion utility, [jquast/ucs-detect](#) was authored to gather and publish the results of Wide character, language/grapheme clustering and complex script support, emojis and zero-width joiner, variations, and regional indicator (flags) as a [General Tabulated Summary](#) by terminal emulator software and version.

Overview



wcwidth()



Use function `wcwidth()` to determine the length of a *single unicode codepoint*.

A brief overview, through examples, for all of the public API functions.

Full API Documentation at <https://wcwidth.readthedocs.io/en/latest/api.html>

wcwidth()



Measures width of a single codepoint,

```
>>> # '♀' narrow emoji
>>> wcwidth.wcwidth('\u2640')
1
```



Use function `wcwidth()` to determine the length of a *single unicode character*.

See [specification](#) of character measurements. Note that `-1` is returned for control codes.

wcswidth()



Measures width of a string, returns -1 for control codes.

```
>>> # '♀ ' emoji w/vs-16
>>> wcwidth.wcswidth('\u2640\u200b')
2
```



Use function `wcswidth()` to determine the length of many, a *string of unicode characters*.

See [specification](#) of character measurements. Note that `-1` is returned if control codes occurs anywhere in the string.

`width()`



Use function `width()` to measure a string with improved handling of `control_codes`.

```
>>> # same support as wcswidth(), eg. regional indicator flag:
>>> wcwidth.width('\U0001F1FF\U0001F1FC')
2
>>> # but also supports SGR colored text, 'WARN', followed by SGR reset
>>> wcwidth.width('\x1b[38;2;255;150;100mWARN\x1b[0m')
4
>>> # tabs,
>>> wcwidth.width('\t', tabsize=4)
4
>>> # or, tab and all other control characters can be ignored
>>> wcwidth.width('\t', control_codes='ignore')
0
>>> # "vertical" control characters are ignored
>>> wcwidth.width('\n')
0
>>> # as well as sequences with "indeterminate" effects like Home + Clear
>>> wcwidth.width('\x1b[H\x1b[2J')
0
>>> # or, raise ValueError for "indeterminate" effects using
>>> control_codes='strict'
>>> wcwidth.width('\n', control_codes='strict')
Traceback (most recent call last):
...
ValueError: Vertical movement character 0xa at position 0
```



Use `control_codes='ignore'` when the input is known not to contain any control characters or terminal sequences for slightly improved performance. Note that TAB (`'\t'`) is a control character and is also ignored, you may want to use [`str.expandtabs\(\)`](#), first.

iter_sequences()



Iterates through text, segmented by terminal sequence,

```
>>> list(wcwidth.iter_sequences('hello'))
[('hello', False)]
>>> list(wcwidth.iter_sequences('\x1b[31mred\x1b[0m'))
[('\x1b[31m', True), ('red', False), ('\x1b[0m', True)]
```



Use [iter_sequences\(\)](#) to split text into segments of plain text and escape sequences. Each tuple contains the segment string and a boolean indicating whether it is an escape sequence (`True`) or text (`False`).

iter_graphemes()



Use [iter_graphemes\(\)](#) to iterate over *grapheme clusters* of a string.

```
>>> from wcwidth import iter_graphemes
>>> # ok + Regional Indicator 'Z', 'W' (Zimbabwe)
>>> list(wcwidth.iter_graphemes('ok\u0001F1FF\u0001F1FC'))
['o', 'k', '🇯🇲']

>>> # cafe + combining acute accent
>>> list(wcwidth.iter_graphemes('cafe\u0301'))
['c', 'a', 'f', 'é']

>>> # ok + Emoji Man + ZWJ + Woman + ZWJ + Girl
>>>
list(wcwidth.iter_graphemes('ok\u0001F468\u200D\u0001F469\u200D\u0001F467'))
['o', 'k', '👨\u200D👩\u200D👧']
```



A grapheme cluster is what a user perceives as a single character, even if it is composed of multiple Unicode codepoints. This function implements [Unicode Standard Annex #29](#) grapheme cluster boundary rules.

ljust()



Use `ljust()` as replacement of `str.ljust()`:

```
>>> 'コンニチハ'.ljust(11, '*')          # don't do this
'コンニチハ*****'
>>> wcwidth.ljust('コンニチハ', 11, '*')  # do this!
'コンニチハ*'
```



rjust()



Use `rjust()` as replacement of `str.rjust()`:

```
>>> 'コンニチハ'.rjust(11, '*')          # don't do this
'*****コンニチハ'
>>> wcwidth.rjust('コンニチハ', 11, '*')  # do this!
'*コンニチハ'
```



center()



Use `center()` as replacement of `str.center()`:

```
>>> 'café\u0301'.center(6, '*')          # don't do this
'café*'
>>> wcwidth.center('café\u0301', 6, '*')   # do this!
'*café*'
```



wrap()



Use function `wrap()` to wrap text containing terminal sequences, Unicode grapheme clusters, and wide characters to a given display width.

```
>>> from wcwidth import wrap
>>> # Basic wrapping
>>> wrap('hello world', 5)
['hello', 'world']

>>> # Wrapping CJK text (each character is 2 cells wide)
>>> wrap('コンニチハ', 4)
['コン', 'ニチ', 'ハ']

>>> # Text with ANSI color sequences – SGR codes are propagated by default
>>> # Each line ends with reset, next line starts with restored style
>>> wrap('\x1b[1;31mhello world\x1b[0m', 5)
['\x1b[1;31mhello\x1b[0m', '\x1b[1;31mworld\x1b[0m']
```



clip()



Use [clip\(\)](#) to extract a substring by column positions, preserving terminal sequences.

```
>>> from wcwidth import clip
>>> # Wide characters split to Narrow boundaries using fillchar=' '
>>> clip('中文字', 0, 3)
'中 '
>>> clip('中文字', 1, 5, fillchar='.')
'.文.'
```

```
>>> # SGR codes are propagated by default – result begins with active style
>>> # and ends with reset if styles are active
>>> clip('\x1b[1;31mHello world\x1b[0m', 6, 11)
'\x1b[1;31mworld\x1b[0m'
```

```
>>> # Disable SGR propagation to preserve original sequences as-is
>>> clip('\x1b[31m中文\x1b[0m', 0, 3, propagate_sgr=False)
'\x1b[31m中 \x1b[0m'
```



strip_sequences()



Use [strip_sequences\(\)](#) to remove all terminal escape sequences from text.

```
>>> from wcwidth import strip_sequences
>>> strip_sequences('\x1b[31mred\x1b[0m')
'red'
```



ambiguous_width



Some Unicode characters have "East Asian Ambiguous" (A) width. These characters display as 1 cell by default, matching Western terminal contexts, but many CJK (Chinese, Japanese, Korean) environments may have a preference for 2 cells. This is often found as boolean option, "Ambiguous width as wide" in Terminal Emulator software preferences.

By default, `wcwidth` treats ambiguous characters as narrow (width 1). For CJK environments where your terminal is configured to display ambiguous characters as double-width, pass `ambiguous_width=2`:

```
>>> # CIRCLED DIGIT ONE – ambiguous width
>>> wcwidth.width('\u2460')
1
>>> wcwidth.width('\u2460', ambiguous_width=2)
2
```



The `ambiguous_width` parameter is available on all width-measuring functions: `wcwidth()`, `wcswidth()`, `width()`, `ljust()`, `rjust()`, `center()`, `wrap()`, and `clip()`.

Terminal Detection

The most reliable method to detect whether a terminal profile is set for "Ambiguous width as wide" mode is to display an ambiguous character surrounded by a pair of Cursor Position Report (CPR) queries with a terminal in cooked or raw mode, and to parse the responses for their `(y, x)` locations and measure the difference `x`.

This code should also be careful to check whether it is attached to a terminal and be careful of possible timeout, slow network, or non-response when working with "dumb terminals" like a CI build.

[jqast/blessed](#) library provides such a helping `Terminal.detect_ambiguous_width()` method:

```
>>> import blessed, functools
>>> # Detect terminal ambiguous width as wide (2) or narrow (1)
>>> ambiguous_width = blessed.Terminal().detect_ambiguous_width()
>>> # Define a new 'width' function with this argument
>>> awidth = functools.partial(wcwidth.width,
    ambiguous_width=ambiguous_width)
>>> # result depends on attached terminal mode
>>> awidth('\u2460')
1
```



Developing



Install wcwidth in editable mode:

```
pip install -e .
```

Execute all code generation, autoformatters, linters and unit tests using tox:

```
tox
```

Or execute individual tasks, see `tox -lv` for all available targets:

```
tox -e pylint,py36,py314
```

To run tests with detailed coverage reporting showing missing lines:

```
tox -epy314 -- --cov-report=term-missing
```

Updating Unicode Version



Regenerate python code tables from latest Unicode Specification data files:

```
tox -e update
```

The script is located at `bin/update-tables.py`, requires Python 3.9 or later. It is recommended but not necessary to run this script with the newest Python, because

the newest Python has the latest `unicodedata` for generating comments.

Building Documentation



This project is using [sphinx](#) 4.5 to build documentation:

```
tox -e sphinx
```

The output will be in `docs/_build/html/`.

Updating Requirements



This project is using [pip-tools](#) to manage requirements.

To upgrade requirements for updating unicode version, run:

```
tox -e update_requirements_update
```

To upgrade requirements for testing, run:

```
tox -e update_requirements38,update_requirements39
```

To upgrade requirements for building documentation, run:

```
tox -e update_requirements_docs
```

Utilities



Supplementary tools for browsing and testing terminals for wide unicode characters are found in the [bin/](#) of this project's source code. Just ensure to first `pip install -r requirements-develop.txt` from this projects main folder. For example, an interactive browser for testing:

```
python ./bin/wcwidth-browser.py
```

Uses



This library is used in:

- [jqbast/blessed](#): a thin, practical wrapper around terminal capabilities in Python.
- [jqbast/telix](#): A Modern telnet client especially designed for BBSs and MUDs.
- [prompt-toolkit/python-prompt-toolkit](#): a Library for building powerful interactive command lines in Python.
- [urwid/urwid](#): Console user interface library for Python
- [prettytable/prettytable](#): Display tabular data in a visually appealing ASCII table format
- [leviathan0992/Pylsy](#): Pylsy is a simple python library draw tables in the Terminal. Just two lines of code.
- [dbcli/pgcli](#): Postgres CLI with autocompletion and syntax highlighting.
- [thomasballinger/curtsies](#): a Curses-like terminal wrapper with a display based on compositing 2d arrays of text.
- [selectel/pyte](#): Simple VTXXX-compatible linux terminal emulator.
- [astanin/python-tabulate](#): Pretty-print tabular data in Python, a library and a command-line utility.
- [rspeer/python-ffty](#): Fixes mojibake and other glitches in Unicode text.
- [nbedos/termtosvg](#): Terminal recorder that renders sessions as SVG animations.
- [peterbrittain/asciimatics](#): A cross platform package to do curses-like operations, plus higher level APIs and widgets to create text UIs and ASCII art animations
- [python-cmd2/cmd2](#): A tool for building interactive command line apps
- [stratis-storage/stratis-cli](#): CLI for the Stratis project
- [ihabunek/toot](#): A Mastodon CLI/TUI client
- [saulpw/visidata](#): Terminal spreadsheet multitool for discovering and arranging data
- [jqbast/ucs-detect](#): Utility for unicode support detection.

Other Languages



There are similar implementations of the [wcwidth\(\)](#) and [wcswidth\(\)](#) functions in other languages.

- [timoxley/wcwidth](#): JavaScript
- [janlelis/unicode-display_width](#): Ruby

- [alecrabbit/php-wcwidth](#): PHP
- [Text::CharWidth](#): Perl
- [bluebear94/terminal-wcwidth](#): Perl 6
- [mattt/go-runewidth](#): Go
- [grepsuzette/wcwidth](#): Haxe
- [aperezdc/lua-wcwidth](#): Lua
- [joachimschmidt557/zig-wcwidth](#): Zig
- [fumiya/wcwidth-cjk](#): LD_PRELOAD override
- [joshuarubin/wcwidth9](#): Unicode version 9 in C
- [spectreconsole/wcwidth](#): C#

History



0.6.0 2026-02-06

- **New** Parameters `expand_tabs`, `replace_whitespace`, `fix_sentence_endings`, `drop_whitespace`, `max_lines`, and `placeholder` for `wrap()`, completing stdlib `textwrap.wrap()` compatibility.

0.5.3 2026-01-30

- **Bugfix** Brahmic using Virama conjunct formation. [Issue #155](#), [PR #204](#).

0.5.2 2026-01-29

- **Bugfix** Measurement of category `Mc` ([Spacing Combining Mark](#)), approx. 443, has a more nuanced [specification](#), and may be categorized as either zero or wide. [PR #200](#).
- **Bugfix** Measurement of "standalone" modifiers and regional indicators, [PR #202](#).
- **Updated** Data files used in some automatic tests are no longer distributed. [PR #199](#)

0.5.1 2026-01-27

- **Updated** generated zero and wide code tables to length of 1 to complete the previously announced removal of historical wide and zero tables. [PR #196](#).

0.5.0 2026-01-26

- **Drop Support** of many historical versions of wide and zero unicode tables. Only the latest Unicode version (17.0.0) is now shipped. The related `unicode_version='auto'` keyword of the `wcwidth()` family of functions are ignored. `list_versions()` always returns a tuple of only a single element of the only unicode version supported. [PR #195](#).
- **Performance** improvement of most common call without version or `ambiguous_width` specified by 20%. [PR #195](#).

- **New** Function `propagate_sgr()` for applying SGR state propagation to a list of lines. [PR #194](#).
- **Improved** `wrap()` and `clip()` with `propagate_sgr=True`. [PR #194](#).
- **Bugfix** `clip()` zero-width characters at clipping boundaries. [PR #194](#).
- **Bugfix** OSC Hyperlinks when broken mid-text by `wrap()`. [PR #193](#).

0.4.0 2026-01-25

- **New** Functions `iter_graphemes_reverse()`, `grapheme_boundary_before()`. [PR #192](#).
- **Bugfix** OSC Hyperlinks should not be broken by `wrap()`. [PR #191](#).

0.3.5 2026-01-24

- **Bugfix** packaging of 0.3.4 contains a failing test.

0.3.4 2026-01-24

- **Bugfix** `center()` should match the eccentric `parity padding` of `str.center()`. [PR #188](#).

0.3.3 2026-01-24

- **Performance** improvement in `width()`. [PR #185](#).
- **Bugfix** missing `py.typed`, `Typing :: Typed`. [PR #184](#).

0.3.2 2026-01-23

- **Updated** type hinting for full `mypy --strict` compliance. [PR #183](#).

0.3.1 2026-01-22

- **Performance** improvement up to 30% in `width()`. [PR #181](#).

0.3.0 2026-01-21

- **Drop Support** for Python 3.6 and 3.7. [PR #156](#).
- **New** Function `iter_graphemes()`. [PR #165](#).
- **New** Functions `width()` and `iter_sequences()`. [PR #166](#).
- **New** Functions `ljust()`, `rjust()`, `center()`. [PR #168](#).
- **New** Function `wrap()`. [PR #169](#).
- **Performance** improvement in `wcswidth()`. [PR #171](#).
- **New** argument `ambiguous_width` to all functions. [PR #172](#).
- **New** Functions `clip()` and `strip_sequences()`. [PR #173](#).
- **Bugfix** Characters with `Default_Ignorable_Code_Point` property now return width 0. [PR #174](#).
- **Bugfix** Characters with `Prepend_Concatenation_Mark` property now return width 1. [PR #175](#).

0.2.14 2025-09-22

- **Drop Support** for Python 2.7 and 3.5. [PR #117](#).
- **Update** tables to include Unicode Specifications 16.0.0 and 17.0.0. [PR #146](#).
- **Bugfix** U+00AD SOFT HYPHEN should measure as 1, versions 0.2.9 through 0.2.13 measured as 0. [PR #149](#).

0.2.13 2024-01-06

- **Bugfix** zero-width support for Hangul Jamo (Korean)

0.2.12 2023-11-21

- **Bugfix** Re-release to remove .pyi files misplaced in wheel [Issue #101](#).

0.2.11 2023-11-20

- **Updated** Include tests files in the source distribution ([PR #98](#), [PR #100](#)).

0.2.10 2023-11-13

- **Bugfix** accounting of some kinds of emoji sequences using U+FE0F Variation Selector 16 ([PR #97](#)).
- **Updated** [specification](#).

0.2.9 2023-10-30

- **Bugfix** zero-width characters used in Emoji ZWJ sequences, Balinese, Jamo, Devanagari, Tamil, Kannada and others ([PR #91](#)).
- **Updated** to include [specification](#) of character measurements.

0.2.8 2023-09-30

- Include requirements files in the source distribution ([PR #82](#)).

0.2.7 2023-09-28

- **Updated** tables to include Unicode Specification 15.1.0.
- Include `bin`, `docs`, and `tox.ini` in the source distribution

0.2.6 2023-01-14

- **Updated** tables to include Unicode Specification 14.0.0 and 15.0.0.
- **Changed** developer tools to use pip-compile, and to use jinja2 templates for code generation in `bin/update-tables.py` to prepare for possible compiler optimization release.

0.2.1 .. 0.2.5 2020-06-23

- **Repository** changes to update tests and packaging issues, and begin tagging repository with matching release versions.

0.2.0 2020-06-01

- **Enhancement:** Unicode version may be selected by exporting the Environment variable `UNICODE_VERSION`, such as `13.0`, or `6.3.0`. See the [jqquast/ucs-detect](#) CLI utility for automatic detection.
- **Enhancement:** API Documentation is published to [readthedocs.io](#).
- **Updated** tables for *all* Unicode Specifications with files published in a programmatically consumable format, versions 4.1.0 through 13.0

0.1.9 2020-03-22

- **Performance** optimization by [Avram Lubkin](#), [PR #35](#).
- **Updated** tables to Unicode Specification 13.0.0.

0.1.8 2020-01-01

- **Updated** tables to Unicode Specification 12.0.0. ([PR #30](#)).

0.1.7 2016-07-01

- **Updated** tables to Unicode Specification 9.0.0. ([PR #18](#)).

0.1.6 2016-01-08 *Production/Stable*

- `LICENSE` file now included with distribution.

0.1.5 2015-09-13 Alpha

- **Bugfix:** Resolution of "[combining](#) character width" issue, most especially those that previously returned -1 now often (correctly) return 0. resolved by [Philip Craig](#) via [PR #11](#).
- **Deprecated:** The module path `wcwidth.table_comb` is no longer available, it has been superseded by module path `wcwidth.table_zero`.

0.1.4 2014-11-20 Pre-Alpha

- **Feature:** `wcswidth()` now determines printable length for (most) [combining](#) characters. The developer's tool [bin/wcwidth-browser.py](#) is improved to display [combining](#) characters when provided the `--combining` option ([Thomas Ballinger](#) and [Leta Montopoli PR #5](#)).
- **Feature:** added static analysis ([prospector](#)) to testing framework.

0.1.3 2014-10-29 Pre-Alpha

- **Bugfix:** 2nd parameter of `wcswidth` was not honored. ([Thomas Ballinger, PR #4](#)).

0.1.2 2014-10-28 Pre-Alpha

- **Updated** tables to Unicode Specification 7.0.0. ([Thomas Ballinger, PR #3](#)).

0.1.1 2014-05-14 Pre-Alpha

- Initial release to pypi, Based on Unicode Specification 6.3.0

This code was originally derived directly from C code of the same name, whose latest version is available at <https://www.cl.cam.ac.uk/~mgk25/ucs/wcwidth.c>:

```
* Markus Kuhn -- 2007-05-26 (Unicode 5.0)
*
* Permission to use, copy, modify, and distribute this software
* for any purpose and without fee is hereby granted. The author
* disclaims all warranties with regard to this software.
```

About

Python library that measures the width of strings in a terminal

Topics

[wcwidth](#)

Resources

 [Readme](#)

License

 [View license](#)

 [Activity](#)

Stars

☆ **450** stars

Watchers

👁 **11** watching

Forks

🍴 **66** forks

[Report repository](#)

Releases 34



0.6.0 Latest



on Feb 6

+ 33 releases

Packages

No packages published

Contributors 22



- 
- 
- 
- 
- 
- 
- 
- 
- 
- 

[+ 8 contributors](#)

Languages

- - [Python 99.6%](#)
 - [Jinja 0.4%](#)

jquast (Jeff Quast) · GitHub



jquast [Follow](#)



jquast
[Follow](#)



I may be slow to respond.

Jeff Quast jquast



I may be slow to respond.


[Follow](#)

♡ [Sponsor](#)

👤 [207 followers](#) · [582 following](#)

- 🔗 <https://jeffquast.com/>

Achievements



x3



x3

Achievements





x3



x3

Block or Report

Pinned Loading

1.  [blessed](#) Public

Forked from [erikrose/blessings](#)

Blessed is an easy, practical library for making python terminal apps

Python ☆ 1.4k 🍴 81

2.  [telnetlib3](#) Public

Feature-rich Telnet Server, Client, and Protocol library for Python

Python ☆ 170 🍴 39

3.  [wcwidth](#) Public

Python library that measures the width of strings in a terminal

Python ☆ 450 🍴 66

4.  [tehmaze/xmodem](#) Public

XMODEM protocol implementation for Python

Python ☆ 110 🍷 61

5. 📦 [ucs-detect](#) Public

Interactive Unicode Terminal Test and Reporting utility

Python ☆ 62 🍷 6

6. 📦 [Telix](#) Public

A Modern telnet client especially designed for BBSs and MUDs.

Python ☆ 9 🍷 1

882 contributions in the last year

[Skip to contributions year list](#)

Contributions																						
Day of Week	Apr April				May May				Jun June				Jul July				Aug August				Septe	
Sunday																						
Monday Mon																						
Tuesday																						
Wednesday Wed																						
Thursday																						
Friday Fri																						
Saturday																						

[Learn how we count contributions](#)


Less

No
Low
Medium
High
More
contributions:
contributions.

Activity overview



Contributed to [jqbast/Telix](#), [jqbast/wcwidth](#), [jqbast/telnetlib3](#) and 54 other repositories

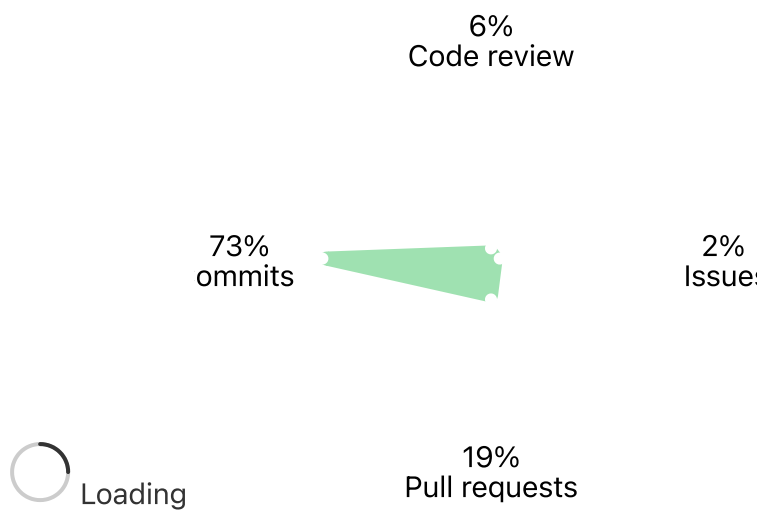

Contribution activity

April 2026



▼ Created 11 commits in 4 repositories  

- [jqbast/modem.xyz](#) 7 commits
- [contour-terminal/contour](#) 2 commits
- [jqbast/Telix](#) 1 commit
- [prettytable/prettytable](#) 1 commit



Created a pull request in [jqbast/telnetlib3](#) that received 2 comments

Apr 1



More terminal testing, 'vt-detect' integration

small fix for requesting very many environment variables integrate with 'vt-detect' tool (unreleased) a "vulnerabilities" interface for detection,...

+1,603 –150 lines changed • 2 comments



▼ Opened 1 other pull request in 1 repository  



[jqbast/ucs-detect](#) 1 open  

-  [Add SecureCRT, LOCALE reset, and syslog/stream](#)

This contribution was made on Apr 3 Apr 3



▼ Reviewed 1 pull request in 1 repository ✨ ✨



contour-terminal/contour 1 pull request ✨ ✨

-  [bugfix kitty keyboard protocol release events are missing](#)

This contribution was made on Apr 1 Apr 1



Loading

Show more activity

- [2026](#)
- [2025](#)
- [2024](#)
- [2023](#)
- [2022](#)
- [2021](#)
- [2020](#)
- [2019](#)
- [2018](#)
- [2017](#)
- [2016](#)
- [2015](#)
- [2014](#)
- [2013](#)
- [2012](#)
- [2011](#)

Sign in to GitHub · GitHub



Sign in to GitHub

Username or email address

Password [Forgot password?](#)

or

 Continue with Google

 Continue with Apple

New to GitHub? [Create an account](#)

Branches · jquast/wcwidth · GitHub

 [jquast](#) / [wcwidth](#) Public

-  [Notifications](#)
-  [Fork 66](#)
-  [Star 450](#)

 Search branches...

Default

Branch	Updated	Check status	BehindAhead	Pull
master 	 last week	✓ 42 / 42	Default	

Active branches

Branch	Updated	Check status
jq/python-315-iter-graphemes 	 2 weeks ago	× 44 / 45
jq/delete-old-zero-tables 	 3 months ago	× 41 / 42
jq/docfix-double-escapes 	 3 months ago	✓ 43 / 43
wcwidth.merged-grapheme-ljust-center 	 3 months ago	
jq/merged-grapheme-and-width 	 3 months ago	

Tags · jqbast/wcwidth · GitHub

 [jqbast](#) / [wcwidth](#) Public

-  [Notifications](#)
-  [Fork 66](#)
-  [Star 450](#)

Tags: jqbast/wcwidth

 Tags

0.6.0



Verified

Complete `textwrap.wrap()` with 6 missing params! ([#207](#))

Make available all keyword parameters for ```wcwidth.wrap()``` as ```textwrap.wrap()```.

New Parameters `expand_tabs`, `replace_whitespace`, `fix_sentence_endings`, `drop_whitespace`, `max_lines`, and placeholder for `wrap()`, completing `stdlib` `textwrap.wrap()` compatibility.

-  on Feb 6
-  [e19d2a2](#)
-  [zip](#)
-  [tar.gz](#)
-  [Notes](#)

0.5.3



rephrase ucs-detect for upcoming version

- 🕒 on Jan 31
- 🔗 [666c501](#)
- 📦 [zip](#)
- 📦 [tar.gz](#)
- 📄 [Notes](#)

0.5.2



Verified

Standalone emoji support ([#202](#))

Closes [#133](#) and [#154](#).

This decreases general performance by ~10% for complex CJK/combining and emoji strings.

- Regional Indicator pairs measured as one 2-cell flag; unpaired RI measured individually
- Fitzpatrick skin tone modifiers are zero-width when following an emoji base, Narrow when "standalone"

- 🕒 on Jan 29
- 🔗 [38d03a5](#)
- 📦 [zip](#)
- 📦 [tar.gz](#)
- 📄 [Notes](#)

0.5.1



Verified

Bugfix zero and wide tables were not trimmed ([#196](#))

- Bugfix that the zero and wide tables were not actually trimmed in 0.5.0 release, pie on my face!
- also, add test coverage of ``\_parse\_sgr\_params`` special SGR modes parsed

- 🕒 on Jan 27
- 🔗 [c6d25b6](#)
- 📦 [zip](#)
- 📦 [tar.gz](#)
- 📄 [Notes](#)

0.5.0



some tiny punctuation fixes

- 🕒 on Jan 27
- 🔗 [ed93a05](#)
- 📦 [zip](#)
- 📦 [tar.gz](#)
- 📄 [Notes](#)

0.4.0



Verified

New functions: `iter_graphemes_reverse()`, `grapheme_boundary_before()` ([#...192](#))

As I audit and integrate with dependent libraries, in [urwid] (<https://github.com/urwid/urwid/>) I find the need to help "move the cursor left" and look backwards from a location in a string to the previous boundary, while looking forward using `iter_graphemes()`.

Looking backwards is provided by new function `grapheme_boundary_before()`.

The more obvious function, `iter_graphemes_reverse()` is provided (though not useful to urwid). [@penguinolog](#)

- 🕒 on Jan 26
- 🔗 [b297eaf](#)
- 📦 [zip](#)
- 📦 [tar.gz](#)
- 📄 [Notes](#)

0.3.5



release 0.3.5 for failing test

- 🕒 on Jan 25
- 🔗 [c3310f9](#)
- 📦 [zip](#)
- 📦 [tar.gz](#)
- 📄 [Notes](#)

0.3.4



prepare for 0.3.4

- 🕒 on Jan 25
- 🔗 [2e34217](#)
- 📦 [zip](#)
- 📦 [tar.gz](#)
- 📄 [Notes](#)

0.3.3



note the correct function in changelog

- 🕒 on Jan 24
- 🔗 [3bf7ba5](#)
- 📦 [zip](#)
- 📦 [tar.gz](#)
- 📄 [Notes](#)

0.3.2



add missing PR [#183](#) link

- 🕒 on Jan 23
- 🔗 [4738d79](#)
- 📁 [zip](#)
- 📁 [tar.gz](#)
- 📄 [Notes](#)

[Previous](#)[Next](#)

Configuring Dependabot security updates - GitHub Docs

Configuring Dependabot security updates

You can use Dependabot security updates or manual pull requests to easily update vulnerable dependencies.

Who can use this feature?



Users with **write** access

 Copy as Markdown



In this article

Managing Dependabot security updates for your repositories

You can enable or disable Dependabot security updates for all qualifying repositories owned by your personal account or organization. For more information, see [Managing security and analysis features](#) or [Managing security and analysis settings for your organization](#).

You can also enable or disable Dependabot security updates for an individual repository.

Enabling or disabling Dependabot security updates for an individual repository

1. On GitHub, navigate to the main page of the repository.
2. Under your repository name, click  **Settings**. If you cannot see the "Settings" tab, select the **...** dropdown menu, then click **Settings**.

 Screenshot of a repository header showing the tabs. The "Settings" tab is highlighted by a dark orange outline.

3. In the "Security" section of the sidebar, click  **Advanced Security**.
4. To the right of "Dependabot security updates," click **Enable** to enable the feature or **Disable** to disable it. For public repositories, the button is disabled if the feature is always enabled.

Grouping Dependabot security updates into a single pull request

In order to use grouped security updates, you must first enable the following features:

- **Dependency graph.** For more information, see [Enabling the dependency graph](#).
- **Dependabot alerts.** For more information, see [Configuring Dependabot alerts](#).
- **Dependabot security updates.** For more information, see [Configuring Dependabot security updates](#).

Note

When grouped security updates are first enabled, Dependabot will immediately try to create grouped pull requests. You may notice Dependabot closing old pull requests and opening new ones.

You can enable grouped pull requests for Dependabot security updates in one, or both, of the following ways.

- To group as many available security updates together as possible, across directories and per ecosystem, enable grouping in the "Advanced Security" settings for your repository, or in "Global settings" under Advanced Security for your organization.
- For more granular control of grouping, such as grouping by package name, development/production dependencies, SemVer level, or across multiple directories per ecosystem, add configuration options to the `dependabot.yml` configuration file in your repository.

Note

If you have configured group rules for Dependabot security updates in a `dependabot.yml` file, all available updates will be grouped according to the rules you've specified.

Dependabot will only group across those directories not configured in your `dependabot.yml` if the setting for grouped security updates at the organization or repository level is also enabled.

Enabling or disabling grouped Dependabot security updates for an individual repository

1. On GitHub, navigate to the main page of the repository.
2. Under your repository name, click  **Settings**. If you cannot see the "Settings" tab, select the **...** dropdown menu, then click **Settings**.

 Screenshot of a repository header showing the tabs. The "Settings" tab is highlighted by a dark orange outline.

3. In the "Security" section of the sidebar, click  **Advanced Security**.
4. Under "Dependabot," to the right of "Grouped security updates," click **Enable** to enable the feature or **Disable** to disable it.

Enabling or disabling grouped Dependabot security updates for an organization

You can enable grouped Dependabot security updates into a single pull request. For more information, see [Configuring global security settings for your organization](#).

Overriding the default behavior with a configuration file

You can override the default behavior of Dependabot security updates by adding a `dependabot.yml` file to your repository. With a `dependabot.yml` file, you can have more granular control of grouping, and override the default behavior of Dependabot security updates settings.

Use the `groups` option with the `applies-to: security-updates` key to create sets of dependencies (per package manager), so that Dependabot opens a single pull request to update multiple dependencies at the same time. You can define groups by package name (the `patterns` and `exclude-patterns` keys), dependency type (`dependency-type` key), and SemVer (the `update-types` key).

Dependabot creates groups in the order they appear in your `dependabot.yml` file. If a dependency update could belong to more than one group, it is only assigned to the first group it matches with.

If you only require *security* updates and want to exclude *version* updates, you can set `open-pull-requests-limit` to `0` in order to prevent version updates for a given `package-ecosystem`.

For more information about the configuration options available for security updates, see [Customizing pull requests for Dependabot security updates](#).

```
# Example configuration file that:
# - Has a private registry
# - Ignores lodash dependency
# - Disables version-updates
# - Defines a group by package name, for security updates for golang
dependencies

version: 2
registries:
  example:
    type: npm-registry
    url: https://example.com
    token: ${secrets.NPM_TOKEN}
updates:
  - package-ecosystem: "npm"
    directory: "/src/npm-project"
    schedule:
      interval: "daily"
    # For Lodash, ignore all updates
    ignore:
      - dependency-name: "lodash"
    # Disable version updates for npm dependencies
    open-pull-requests-limit: 0
    registries:
      - example
  - package-ecosystem: "gomod"
    directories:
      - "**/*"
    schedule:
      interval: "weekly"
    open-pull-requests-limit: 0
    groups:
      golang:
        applies-to: security-updates
        patterns:
          - "golang.org*"
```

Note

In order for Dependabot to use this configuration for security updates, the `directory` must be the path to the manifest files (or `directories` must contain paths or glob patterns matching the manifest file locations), and you should not specify a `target-branch`.

Further reading

- [About Dependabot alerts](#)
- [Configuring Dependabot alerts](#)
- [Dependency graph supported package ecosystems](#)

Commits · jqvast/wcwidth · GitHub

 [jqvast](#) / [wcwidth](#) Public

-  [Notifications](#)
-  [Fork 66](#)
-  [Star 450](#)

Branch selector


master ▾

User selector


dependabot[bot] ▾

Datepicker

 All time ▾

Commit History



Commits on Mar 30, 2026

- Bump pygments from 2.19.2 to 2.20.0 in /docs (#212)



dependabot[bot]
authoredlast week

.

✓ 42 / 42

Verified

07817a7



...



Commits on Mar 26, 2026

- Bump requests from 2.32.5 to 2.33.0 in /docs (#210)



dependabot[bot]
authored2 weeks ago

.
✓ 42 / 42
Verified
82c83e1

<>
...



Commits on Jan 10, 2026

- [Bump urllib3 from 2.5.0 to 2.6.3 in /docs \(#159\)](#)



[dependabot\[bot\]](#)
authored on Jan 10
.
✓ 41 / 41
Verified
fc101be

<>
...



Commits on Sep 17, 2025

- [Bump urllib3 from 2.2.2 to 2.5.0 in /docs](#)



[dependabot\[bot\]](#)
authored on Sep 17, 2025
.
✓ 47 / 47
Verified

ca6b13e



Commits on Sep 16, 2025

- [Bump requests from 2.32.0 to 2.32.4 in /docs](#)



[dependabot\[bot\]](#)

authored on Sep 16, 2025

.

✓ 47 / 47

Verified

[9644095](#)



Commits on Mar 6, 2025

- [Bump jinja2 from 3.1.4 to 3.1.6 in /docs](#)



[dependabot\[bot\]](#)

authored on Mar 6, 2025

.

✗ 30 / 41

Verified

[deec7bf](#)



...



Commits on Jul 6, 2024

- [Bump certifi from 2023.7.22 to 2024.7.4 in /docs \(#129\)](#)



[dependabot\[bot\]](#)

authored on Jul 6, 2024

Verified

[a20c944](#)



...

- [Bump urllib3 from 2.0.7 to 2.2.2 in /docs \(#128\)](#)



[dependabot\[bot\]](#)

authored on Jul 6, 2024

Verified

[214e375](#)



...

- [--- \(#127\)](#)



[dependabot\[bot\]](#)

authored on Jul 6, 2024

Verified

[6f50994](#)



...

- [Bump jinja2 from 3.1.3 to 3.1.4 in /docs \(#125\)](#)



[dependabot\[bot\]](#)

authored on Jul 6, 2024

Verified

[568a161](#)



...

- [Bump idna from 3.4 to 3.7 in /docs \(#124\)](#)



[dependabot\[bot\]](#)

authored on Jul 6, 2024

Verified

[fa9eb2f](#)



...



Commits on Feb 14, 2024

- [Bump jinja2 from 3.1.2 to 3.1.3 \(#116\)](#)



[dependabot\[bot\]](#)

authored on Feb 14, 2024

Verified

[056ee4b](#)



...



Commits on Jan 17, 2024

- [Bump jinja2 from 3.1.2 to 3.1.3 in /docs \(#113\)](#)



[dependabot\[bot\]](#)

authored on Jan 17, 2024

Verified

[b0e4c88](#)



...



Commits on Oct 30, 2023

- [Bump urllib3 from 2.0.6 to 2.0.7 \(#90\)](#)



[dependabot\[bot\]](#)



[jquast](#)

authored on Oct 30, 2023

Verified

[ba12006](#)



...

- [Bump urllib3 from 2.0.6 to 2.0.7 in /docs \(#89\)](#)



[dependabot\[bot\]](#)



[jquast](#)

authored on Oct 30, 2023

Verified

95e4820



Bump pygments from 2.19.2 to 2.20.0 in /docs (#212) · jquast/wcwidth@07817a7 · GitHub

 [jquast](#) / [wcwidth](#) Public

-  [Notifications](#)
-  [Fork 66](#)
-  [Star 450](#)

File tree



1 file changed

+1

-1

lines changed

 [Top](#)







✓  docs

 [requirements.txt](#)



1 file changed

+1

-1

lines changed





`docs/requirements.txt`



+1-1Lines changed: 1 addition & 1 deletion



Original file line number	Diff line number	Diff line change
⋮ @@ -27,7 +27,7 @@ markupsafe==3.0.3		
27	27	# via jinja2
28	28	packaging==26.0
29	29	# via sphinx
30		- pygments==2.19.2
	30	+ pygments==2.20.0
31	31	# via sphinx
32	32	requests==2.33.0
33	33	# via sphinx
⋮		

0 commit comments

Comments



Please [sign in](#) to comment.

Bump pygments from 2.19.2 to 2.20.0 in /docs by dependabot[bot] · Pull Request #212 · jquast/wcwidth · GitHub

 [jquast](#) / [wcwidth](#) Public

-  [Notifications](#)
-  [Fork 66](#)
-  [Star 450](#)

Conversation



► ...

Contributor



dependabot bot commented on behalf of [github](#) last week

Bumps [pygments](#) from 2.19.2 to 2.20.0.

- Release notes
- Changelog
- Commits

 compatibility 75%

Dependabot will resolve any conflicts with this PR as long as you don't alter it yourself. You can also trigger a rebase manually by commenting `@dependabot rebase`.

-
- Dependabot commands and options





Bump pygments from 2.19.2 to 2.20.0 in /docs ...

Verified



e55e6a6

```
Bumps [pygments](https://github.com/pygments/pygments) from 2.19.2 to
2.20.0.
- [Release notes](https://github.com/pygments/pygments/releases)
- [Changelog](https://github.com/pygments/pygments/blob/master/CHANGES)
- [Commits](pygments/pygments@2.19.2...2.20.0)
```

updated-dependencies:

```
- dependency-name: pygments
  dependency-version: 2.20.0
  dependency-type: direct:production
...
```

Signed-off-by: dependabot[bot] <support@github.com>



dependabot bot added dependencies python labels last week



codspeed-hq bot commented last week

Merging this PR will not alter performance

✓ 64 untouched benchmarks

Comparing dependabot/pip/docs/pygments-2.20.0 (e55e6a6) with master (82c83e1)



Open In CodSpeed



[Hide details](#) [View details](#)



[jquast](#) merged commit `07817a7` into master [last week](#)

40 of 41 checks passed



[jquast](#) deleted the dependabot/pip/docs/pygments-2.20.0 branch [last week](#)

[Sign up for free](#) to join this conversation on **GitHub**. Already have an account? [Sign in to comment](#)

Reviewers

No reviews

Assignees

No one assigned

Labels

[dependencies](#) [python](#)

Projects

None yet

Milestone

No milestone

Development

Successfully merging this pull request may close these issues.

None yet

1 participant



Commits · jqvast/wcwidth · GitHub

 [jqvast](#) / [wcwidth](#) Public

-  [Notifications](#)
-  [Fork 66](#)
-  [Star 450](#)

Branch selector


master ▾

User selector


All users ▾

Datepicker

 All time ▾

Commit History



Commits on Mar 30, 2026

- Bump pygments from 2.19.2 to 2.20.0 in /docs (#212)



dependabot[bot]
authoredlast week

.

✓ 42 / 42

Verified

07817a7



...



Commits on Mar 26, 2026

- Bump requests from 2.32.5 to 2.33.0 in /docs (#210)



dependabot[bot]
authored2 weeks ago

.
✓ 42 / 42
Verified
82c83e1

<>
...



Commits on Mar 13, 2026

- [Remove docs, add utils \(#209\)](#)



[jquast](#)
authoredlast month
.
✓ 42 / 42
Verified
bfa1b3c

<>
...



Commits on Feb 28, 2026

- [add a few downstream dependencies](#)


[jquast](#)
committedon Feb 28
.
✓ 42 / 42
c3a2d35

<>

...

- [spellfix](#)



[jquast](#)

committed on Feb 28

.

✓ 42 / 42

[1e8244d](#)



...



Commits on Feb 6, 2026

- [Complete textwrap.wrap\(\) with 6 missing params! \(#207\)](#)



[jquast](#)

authored on Feb 6

.

✓ 42 / 42

Verified

[e19d2a2](#)



...



Commits on Jan 31, 2026

- [rephrase ucs-detect for upcoming version](#)



[jquast](#)

committed on Jan 31

.
✓ 42 / 42

666c501



...

- [Add Virama conjunct for the Brahmic scripts \(#204\)](#)



[jquast](#)

authored on Jan 31

.
✓ 42 / 42

Verified

84a7248



...



Commits on Jan 29, 2026

- [Standalone emoji support \(#202\)](#)



[jquast](#)

authored on Jan 29

.
✗ 41 / 42

Verified

38d03a5



...

- **changelog and hyperlinks**



[jquast](#)

committed on Jan 29

.

✓ 42 / 42

[8c8eac8](#)



...

- **Update Category "Mc" code, specs, tests (#200)**



[jquast](#)

authored on Jan 29

.

✗ 41 / 42

Verified

[a198889](#)



...

- **Do not distribute any data files (#199)**



[jquast](#)

authored on Jan 29

.

✗ 41 / 42

Verified

[8d27c08](#)



...



Commits on Jan 28, 2026

- [reduce ambiguous_width detection doc](#)



[jquast](#)

committed on Jan 28

.

✓ 42 / 42

[17b0bad](#)



<>

...

- [hyperlink where it counts!](#)



[jquast](#)

committed on Jan 28

.

✓ 42 / 42

[29f10e7](#)



<>

...



Commits on Jan 27, 2026

- [Bugfix zero and wide tables were not trimmed \(#196\)](#)



[jquast](#)

authored on Jan 27

.

✓ 42 / 42

Verified

[c6d25b6](#)



...

- **small hyperlink improvement**



[jquast](#)

committed on Jan 27

.

✕ 41 / 42

[ca785bf](#)



...

- **some tiny punctuation fixes**



[jquast](#)

committed on Jan 27

.

✕ 41 / 42

[ed93a05](#)



...

- **battle for 100% with tabs and ignore unused function**



[jquast](#)

committed on Jan 27

.

✕ 41 / 42

[b2d3c69](#)



...

- **Bump version for release**



[jquast](#)

committed on Jan 27

.

✕ 41 / 42

[05df2cf](#)



<>

...

- **Remove all but latest unicode version (#195)**



[jquast](#)

authored on Jan 27

.

✕ 41 / 42

Verified

[4ad63d0](#)



<>

...



Commits on Jan 26, 2026

- **Useful SGR Code Propagation (#194)**



[jquast](#)

authored on Jan 26

.

✕ 38 / 42

Verified

[70dd591](#)



...

- **Bugfix OSC Hyperlinks when broken mid-text by wrap() (#193)**



[jquast](#)

authored on Jan 26

.

✕ 37 / 40

Verified

[7de2e9b](#)



...

- **New functions: iter_graphemes_reverse(), grapheme_boundary_before() (#192)**



[jquast](#)

authored on Jan 26

.

✓ 42 / 42

Verified

[b297eaf](#)



...

- **Bugfix: OSC Hyperlinks should not be broken by wrap() (#191)**



[jquast](#)

authored on Jan 26

.
✓ 42 / 42
Verified
b1cdbdf
📄
<>
...



Commits on Jan 25, 2026

- [release 0.3.5 for failing test](#)


[jquast](#)
committed on Jan 25

.
✓ 42 / 42
c3310f9
📄
<>
...

- [clarify dropped support for python 3.6 and 3.7 :\(](#)


[jquast](#)
committed on Jan 25

.
✗ 6 / 40
ecd25bb
📄
<>
...

- [prepare for 0.3.4](#)


[jquast](#)
committed on Jan 25

.

✕ 6 / 40

2e34217



...

- [Bugfix our center\(\) padding algorithm \(#188\)](#)



[jquast](#)

authored on Jan 25

.

✓ 42 / 42

Verified

030b4b5



...



Commits on Jan 24, 2026

- [hyperlink to width in intro](#)



[jquast](#)

committed on Jan 24

.

✓ 42 / 42

a1b9a83



...

- [docfix: accidental double-escapes \\t -> \t \(#187\)](#)



[jquast](#)

authored on Jan 24

.

✓ 42 / 42

Verified

[b9ef4df](#)



...

- [note the correct function in changelog](#)



[jquast](#)

committed on Jan 24

.

✓ 42 / 42

[3bf7ba5](#)



...

- [prepare for 0.3.3 release](#)



[jquast](#)

committed on Jan 24

.

✓ 42 / 42

[14a1f46](#)



...



Commits on Jan 23, 2026

- [Add py.typed file and Typing :: Typed classifier \(#184\)](#)



[hugovk](#)

authored on Jan 23

.

✓ 42 / 42

Verified

[68a3bd5](#)



...

- **Add fast path for ASCII printables to width() (#185)**



[hugovk](#)

authored on Jan 23

.

✓ 42 / 42

Verified

[9c3356e](#)



...

- **add missing PR #183 link**



[jquast](#)

committed on Jan 23

.

✓ 42 / 42

[4738d79](#)



...

wcwidth/.github/workflows at master · jquast/wcwidth · GitHub

 [jquast](#) / [wcwidth](#) Public

-  [Notifications](#)
-  [Fork 66](#)
-  [Star 450](#)



Files



 Go to file

Standalone emoji support (#202) · jquast/wcwidth@38d03a5 · GitHub

 [jquast](#) / [wcwidth](#) Public

-  [Notifications](#)
-  [Fork 66](#)
-  [Star 450](#)

File tree



10 files changed

+217

-30

lines changed

 [Top](#)







✓  [.github/workflows](#)

 [ci.yml](#)

✓  [docs](#)

 [intro.rst](#)

 [specs.rst](#)

✓  [tests](#)

 [test_benchmarks.py](#)

 [test_emojis.py](#)

 [test_width.py](#)

 [tox.ini](#)

▼  wewidth

 [table_wide.py](#)

 [table_zero.py](#)

 [wewidth.py](#)



10 files changed

+217

-30

lines changed

 Search within code



[.github/workflows/ci.yml](#)



+6-2Lines changed: 6 additions & 2 deletions



Original file line number	Diff line number	Diff line change
 <pre>@@ -108,14 +108,18 @@ jobs: </pre>		
108	108	
109	109	 python -Im pip install tox
110	110	
111		- - name: Build wheel
	111	+ - name: Prepare sdist and source-dir
112	112	 shell: bash
113	113	 run:
114	114	 python -Im pip install build
115		- python -Im build --wheel
	115	+ python -Im build
	116	+
	117	+ mkdir source-dir

Original file line number	Diff line number	Diff line change
	118	+ tar -xzvf dist/wcwidth-*.tar.gz -C source-dir --strip-components=1
116	119	
117	120	 - name: Fetch test data files
118	121	 if: matrix.python-version == '3.14' && matrix.os == 'ubuntu-latest'
	122	+ continue-on-error: true
119	123	 shell: bash
120	124	 run:
121	125	 python -Im tox -e fetch
 ⋮ ↓ 		



[docs/intro.rst](#)



+5-4Lines changed: 5 additions & 4 deletions



Original file line number	Diff line number	Diff line change
 @@ -455,10 +455,10 @@ languages. 		
455	455	History
456	456	=====
457	457	
458		- 0.5.2 *unreleased*
459		- * **Bugfix** Specification and result of category ``Mc`` (`Spacing Combining Mark`_), approx. 443
460		- codepoints, has a more nuanced specification_, and may be categorized as both zero or wide.
461		- `PR #200`.
	458	+ 0.5.2 *2026-01-29*
	459	+ * **Bugfix** Measurement of category ``Mc`` (`Spacing Combining Mark`_), approx. 443, has a more

Original file line number	Diff line number	Diff line change
	460	+ nuanced specification_, and may be categorized as either zero or wide. `PR #200`_
	461	+ * **Bugfix** Measurement of "standalone" modifiers and regional indicators, `PR #202`_
462	462	 * **Updated** Data files used in some automatic tests are no longer distributed. `PR #199`_
463	463	
464	464	 0.5.1 *2026-01-27*
⌵ ⌶ @@ -666,6 +666,7 @@ https://www.cl.cam.ac.uk/~mgk25/ucs/wcwidth.c:: 		
666	666	 .. _`PR #196`: https://github.com/jquast/wcwidth/pull/196
667	667	 .. _`PR #199`: https://github.com/jquast/wcwidth/pull/199
668	668	 .. _`PR #200`: https://github.com/jquast/wcwidth/pull/200
	669	+ .. _`PR #202`: https://github.com/jquast/wcwidth/pull/202
669	670	 .. _`Issue #101`: https://github.com/jquast/wcwidth/issues/101

Original file line number	Diff line number	Diff line change
670	671	.. _`Issue #190`: https://github.com/jquast/wcwidth/issues/190
671	672	.. _`jquast/blessed`: https://github.com/jquast/blessed
⋮ ↓		



docs/specs.rst



+29-4Lines changed: 29 additions & 4 deletions



Original file line number	Diff line number	Diff line change
 <pre>@@ -33,13 +33,22 @@ Any characters defined by `General Category`_ codes in `DerivedGeneralCategory.t</pre>		
33	33	<pre>`Prepended_Concatenation_Mark`_ characters, aprox. 147 characters.</pre>
34	34	<pre>- 'Zl': `U+2028`_ LINE SEPARATOR only</pre>
35	35	<pre>- 'Zp': `U+2029`_ PARAGRAPH SEPARATOR only</pre>
36		<pre>- - 'Sk': `Modifier Symbol`_, aprox. 4 characters of only those where phrase</pre>
37		<pre>- ```'EMOJI MODIFIER``` is present in comment of `UnicodeData.txt`_.</pre>
	36	<pre>+ - 'Sk': `Modifier Symbol`_, aprox. 1 character with ```FULLWIDTH``` in comment</pre>
	37	<pre>+ of `UnicodeData.txt`_ (see `Width of 2`_). `Emoji Modifier`_ Fitzpatrick</pre>
	38	<pre>+ symbols (`U+1F3FB`_ through `U+1F3FF`_) are zero-width only when following</pre>

Original file line number	Diff line number	Diff line change
	39	+ an emoji base character in sequence; see `Width of 2`_ for standalone.
38	40	
39	41	The NULL character (`U+0000`_).
40	42	
41		- Any character following ZWJ (`U+200D`_) when in sequence by
42		- function :func:`wcwidth.wcswidth`.
	43	+ Any character following ZWJ (`U+200D`_) when preceded by an emoji
	44	+ (`Extended_Pictographic`_ property) or `Regional Indicator`_ in sequence by
	45	+ function :func:`wcwidth.wcswidth`. When ZWJ follows a non-emoji character
	46	+ (including CJK), only the ZWJ itself is zero-width; the following character
	47	+ is measured normally.

Original file line number	Diff line number	Diff line change
	48	+
	49	+ The second `Regional Indicator`_ symbol (`U+1F1E6`_ through `U+1F1FF`_) in a
	50	+ consecutive pair, when measured in sequence by :func:`wcwidth.wcswidth` or
	51	+ :func:`wcwidth.width`. The first indicator of the pair is `Width of 2`_.
43	52	
44	53	 `Hangul Jamo`_ Jungseong and "Extended-B" code blocks, `U+1160`_ through
45	54	 `U+11FF`_ and `U+D7B0`_ through `U+D7FF`_.
⌕ @@ -62,6 +71,15 @@ Any character defined by `East Asian`_ Fullwidth (`F`) or Wide (`W`)		
62	71	 properties in `EastAsianWidth.txt`_ files, except those that are defined by the
63	72	 Category code of `Nonspacing Mark`_ (`Mn`).

Original file line number	Diff line number	Diff line change
64	73	
	74	+ `Regional Indicator`_ symbols (`U+1F1E6`_ through `U+1F1FF`_). Though
	75	+ classified as Neutral in `EastAsianWidth.txt`, terminals universally render
	76	+ these as double-width. A consecutive pair of Regional Indicators forms a flag
	77	+ emoji and is measured as width 2 total (first indicator is 2, second is 0).
	78	+
	79	+ `Emoji Modifier`_ Fitzpatrick symbols (`U+1F3FB`_ through `U+1F3FF`_) when
	80	+ measured standalone (not following an emoji base character). When following
	81	+ an emoji base, they combine with the base and add 0 to total width.
	82	+

Original file line number	Diff line number	Diff line change
65	83	 Any characters of `Modifier Symbol`_ category, ``'Sk'`` where ``'FULLWIDTH'`` is
66	84	 present in comment of `UnicodeData.txt`, aprox. 3 characters.
67	85	
⌵ ⌶ @@ -105,4 +123,11 @@ by a Nukta (``Mn``) and then a vowel sign (``Mc``) is measured as base + 1. 		
105	123	 .. _`U+D7FF`: https://codepoints.net/U+D7FF
106	124	 .. _`UnicodeData.txt`: https://www.unicode.org/Public/UCD/latest/ucd/UnicodeData.txt
107	125	 .. _`East Asian`: https://www.unicode.org/reports/tr11/
	126	+ .. _`U+1F1E6`: https://codepoints.net/U+1F1E6
	127	+ .. _`U+1F1FF`: https://codepoints.net/U+1F1FF
	128	+ .. _`U+1F3FB`: https://codepoints.net/U+1F3FB

Original file line number	Diff line number	Diff line change
	129	+ .. _`U+1F3FF`: https://codepoints.net/U+1F3FF
	130	+ .. _`Regional Indicator`: https://www.unicode.org/charts/PDF/U1F100.pdf
	131	+ .. _`Emoji Modifier`: https://unicode.org/reports/tr51/#Emoji_Modifiers
	132	+ .. _`Extended_Pictographic`: https://www.unicode.org/reports/tr51/#def_extended_pictographic
108	133	 .. _`Nonspacing Mark`: https://www.unicode.org/versions/latest/core-spec/chapter-4/#G134153

▼

[tests/test_benchmarks.py](#)



+25Lines changed: 25 additions & 0 deletions



Original file line number	Diff line number	Diff line change
 @@ -61,6 +61,31 @@ def test_wcswidth_emoji_sequence(benchmark):		
61	61	benchmark(wcwidth.wcswidth, text)
62	62	
63	63	
	64	+ # Regional Indicator benchmarks – paired flags and unpaired RI
	65	+ RI_FLAGS_PAISED = '🇺🇸🇬🇧🇫🇷🇩🇪🇯🇵' * 100
	66	+ RI_FLAGS_UNPAIRED = '🇺🇸🇬🇧🇪' * 100
	67	+
	68	+
	69	+ def test_wcswidth_ri_flags_paired(benchmark):
	70	+ """Benchmark wcswidth() with paired regional indicator flags."""

Original file line number	Diff line number	Diff line change
	71	+ benchmark(wcwidth.wcswidth, RI_FLAGS_PAISED)
	72	+
	73	+
	74	+ def test_wcswidth_ri_flags_unpaired(benchmark):
	75	+ """"Benchmark wcswidth() with mixed paired and unpaired regional indicators.""""
	76	+ benchmark(wcwidth.wcswidth, RI_FLAGS_UNPAISED)
	77	+
	78	+
	79	+ def test_width_ri_flags_paired(benchmark):
	80	+ """"Benchmark width() with paired regional indicator flags.""""
	81	+ benchmark(wcwidth.width, RI_FLAGS_PAISED)
	82	+
	83	+

Original file line number	Diff line number	Diff line change
	84	+ def test_width_ri_flags_unpaired(benchmark):
	85	+ """Benchmark width() with mixed paired and unpaired regional indicators."""
	86	+ benchmark(wcwidth.width, RI_FLAGS_UNPAIRED)
	87	+
	88	+
64	89	 # NFC vs NFD comparison – text with combining marks
65	90	 DIACRITICS_COMPOSED = 'café résumé naïve ' * 100
66	91	 DIACRITICS_DECOMPOSED = unicodedata.normalize('NFD', DIACRITICS_COMPOSED)
		



[tests/test_emojis.py](#)



+55-5Lines changed: 55 additions & 5 deletions



Original file line number	Diff line number	Diff line change
 @@ -31,7 +31,7 @@ def emoji_zwj_sequence():		
31	31	"\u200d" # Joiner, Category Cf, East Asian Width property 'N' -- ZERO WIDTH JOINER
32	32	"\U0001f4bb") # Fused, Category So, East Asian Width property 'W' -- PERSONAL COMPUTER
33	33	# This test adapted from https://www.unicode.org/L2/L2023/23107-terminal-suppt.pdf
34		- expect_length_each = (2, 0, 0, 2)
	34	+ expect_length_each = (2, 2, 0, 2)
35	35	expect_length_phrase = 2
36	36	
37	37	# exercise,
 @@ -49,7 +49,7 @@ def test_unfinished_zwj_sequence():		

Original file line number	Diff line number	Diff line change
49	49	 phrase = ("\U0001f469" # Base, Category So, East Asian Width property 'W' -- WOMAN
50	50	 "\U0001f3fb" # Modifier, Category Sk, East Asian Width property 'W' -- EMOJI MODIFIER FITZPATRICK TYPE-1-2
51	51	 "\u200d") # Joiner, Category Cf, East Asian Width property 'N' -- ZERO WIDTH JOINER
52		- expect_length_each = (2, 0, 0)
	52	+ expect_length_each = (2, 2, 0)
53	53	 expect_length_phrase = 2
54	54	
55	55	 # exercise,
⌕ @@ -67,7 +67,7 @@ def test_non_recommended_zwj_sequence(): 		
67	67	 phrase = ("\U0001f469" # Base, Category So, East Asian Width property 'W' -- WOMAN
68	68	 "\U0001f3fb" # Modifier, Category Sk, East Asian Width property 'W' -- EMOJI MODIFIER FITZPATRICK TYPE-1-2

Original file line number	Diff line number	Diff line change
69	69	 "\u200d") # Joiner, Category Cf, East Asian Width property 'N' -- ZERO WIDTH JOINER
70		- expect_length_each = (2, 0, 0)
	70	+ expect_length_each = (2, 2, 0)
71	71	 expect_length_phrase = 2
72	72	
73	73	 # exercise,
⌕ @@ -87,7 +87,7 @@ def test_another_emoji_zwj_sequence(): 		
87	87	 "\u200D" # ZERO WIDTH JOINER
88	88	 "\u2640" # FEMALE SIGN
89	89	 "\uFE0F") # VARIATION SELECTOR-16
90		- expect_length_each = (1, 0, 0, 1, 0)

Original file line number	Diff line number	Diff line change
	90	+ expect_length_each = (1, 2, 0, 1, 0)
91	91	 expect_length_phrase = 2
92	92	
93	93	 # exercise,
⌵ ⌶ @@ -120,7 +120,7 @@ def test_longer_emoji_zwj_sequence(): 		
120	120	 "\U0001F3FD" # 'Sk', 'W' -- EMOJI MODIFIER FITZPATRICK TYPE-4
121	121	) * 2
122	122	 # This test adapted from https://www.unicode.org/L2/L2023/23107-terminal-suppt.pdf
123		- expect_length_each = (2, 0, 0, 1, 0, 0, 2, 0, 2, 0) * 2
	123	+ expect_length_each = (2, 2, 0, 1, 0, 0, 2, 0, 2, 2) * 2
124	124	 expect_length_phrase = 4

Original file line number	Diff line number	Diff line change
125	125	
126	126	 # exercise,
⌵ ⌶ @@ -191,6 +191,56 @@ def measure_all(): 		
191	191	 assert len(sequences) >= 742
192	192	
193	193	
	194	+ @pytest.mark.skipif(NARROW_ONLY, reason="Test cannot verify on python 'narrow' builds")
	195	+ def test_regional_indicator_single():
	196	+ """Single Regional Indicator symbol is width 2."""
	197	+ assert wcwidth.wcwidth('\U0001F1FA') == 2
	198	+ assert wcwidth.wcswidth('\U0001F1FA') == 2

Original file line number	Diff line number	Diff line change
	199	+
	200	+
	201	+ @pytest.mark.skipif(NARROW_ONLY, reason="Test cannot verify on python 'narrow' builds")
	202	+ def test_regional_indicator_pair():
	203	+ """Flag pair (two Regional Indicators) is width 2, not 4."""
	204	+ assert wcwidth.wcswidth('\U0001F1FA\U0001F1F8') == 2
	205	+
	206	+
	207	+ @pytest.mark.skipif(NARROW_ONLY, reason="Test cannot verify on python 'narrow' builds")
	208	+ def test_regional_indicator_three():
	209	+ """Three Regional Indicators: one pair (2) + one single (2) = 4."""
	210	+ assert wcwidth.wcswidth('\U0001F1FA\U0001F1F8\U0001F1E6') == 4

Original file line number	Diff line number	Diff line change
	211	+
	212	+
	213	+ @pytest.mark.skipif(NARROW_ONLY, reason="Test cannot verify on python 'narrow' builds")
	214	+ def test_regional_indicator_four():
	215	+ """"Four Regional Indicators: two pairs = 2 + 2 = 4."""
	216	+ assert wcwidth.wcwidth(
	217	+ '\U0001F1FA\U0001F1F8\U0001F1E6\U0001F1FA') == 4
	218	+
	219	+
	220	+ @pytest.mark.skipif(NARROW_ONLY, reason="Test cannot verify on python 'narrow' builds")
	221	+ def test_zwj_after_non_emoji():
	222	+ """"ZWJ after non-emoji unconditionally consumes next character."""

Original file line number	Diff line number	Diff line change
	223	+ # This does <i>*not*</i> match most terminal behavior -- it is a negative test,
	224	+ # they fail because our library doesn't handle 'glitch' emoji as an
	225	+ # optimization. Non-emoji + ZWJ is undefined per Unicode UAX #29 GB11.
	226	+ assert wcwidth.wcswidth('xx\u200d\u0001F384') == 2
	227	+ assert wcwidth.wcswidth('a\u200d\u0001F600') == 1
	228	+ assert wcwidth.wcswidth('\u4e16\u200d\u0001F600') == 2
	229	+
	230	+
	231	+ @pytest.mark.skipif(NARROW_ONLY, reason="Test cannot verify on python 'narrow' builds")
	232	+ def test_fitzpatrick_standalone():
	233	+ """Standalone Fitzpatrick modifier is width 2."""

Original file line number	Diff line number	Diff line change
	234	+ assert wcwidth.wcwidth('\U0001F3FB') == 2
	235	+ assert wcwidth.wcswidth('\U0001F3FB') == 2
	236	+
	237	+
	238	+ @pytest.mark.skipif(NARROW_ONLY, reason="Test cannot verify on python 'narrow' builds")
	239	+ def test_fitzpatrick_after_emoji():
	240	+ """Fitzpatrick modifier after emoji base combines, total width 2."""
	241	+ assert wcwidth.wcswidth('\U0001F469\U0001F3FB') == 2
	242	+
	243	+
194	244	 def test_vs16_effect():
195	245	 """Verify effect of VS-16 (always active with latest Unicode version)."""

Original file line number	Diff line number	Diff line change
196	246	<pre>phrase = ("\u2640" # FEMALE SIGN</pre>
⋮ ↓		



tests/test_width.py



+12Lines changed: 12 additions & 0 deletions



Original file line number	Diff line number	Diff line change
 @@ -437,3 +437,15 @@ def test_soft_hyphen_exception():		
437	437	"""U+00AD SOFT HYPHEN remains width 1 for ISO-8859-1 compatibility."""
438	438	result = wcwidth.wcwidth('\u00AD')
439	439	assert result == 1
	440	+
	441	+
	442	+ def test_fitzpatrick_modifier_after_emoji():
	443	+ """Fitzpatrick modifier following emoji base adds zero-width in width()."""
	444	+ result = wcwidth.width('\U0001F469\U0001F3FB')
	445	+ assert result == 2
	446	+
	447	+

Original file line number	Diff line number	Diff line change
	448	+ def test_fitzpatrick_modifier_standalone_width():
	449	+ """Standalone Fitzpatrick modifier, however, is wide character in width()."""
	450	+ result = wcwidth.width('\U0001F3FB')
	451	+ assert result == 2



tox.ini



+1-1Lines changed: 1 addition & 1 deletion



Original file line number	Diff line number	Diff line change
⬆ @@ -107,7 +107,7 @@ commands = python {toxidir}/bin/update-tables.py {posargs:--fetch-all-versions 		
107	107	basepython = python3.14
108	108	usedevelop = true
109	109	deps = -r requirements-update.txt
110		- commands = python {toxidir}/bin/update-tables.py {posargs:--only-fetch}
	110	+ commands = - python {toxidir}/bin/update-tables.py {posargs:--only-fetch}
111	111	
112	112	[testenv:autopep8]
113	113	basepython = python3.14
⬇		

wcwidth/table_wide.py



+2Lines changed: 2 additions & 0 deletions



Original file line number	Diff line number	Diff line change
 @@ -90,6 +90,7 @@		
90	90	(0x1f0cf, 0x1f0cf,), # Playing Card Black Joker
91	91	(0x1f18e, 0x1f18e,), # Negative Squared Ab
92	92	(0x1f191, 0x1f19a,), # Squared Cl ..Squared Vs
	93	+ (0x1f1e6, 0x1f1ff,), # Regional Indicator Symbo..Regional Indicator Symbo
93	94	(0x1f200, 0x1f202,), # Square Hiragana Hoka ..Squared Katakana Sa
94	95	(0x1f210, 0x1f23b,), # Squared Cjk Unified Ideo..Squared Cjk Unified Ideo
95	96	(0x1f240, 0x1f248,), # Tortoise Shell Bracketed..Tortoise Shell Bracketed
 @@ -104,6 +105,7 @@		
104	105	(0x1f3e0, 0x1f3f0,), # House Building ..European Castle

Original file line number	Diff line number	Diff line change
105	106	(0x1f3f4, 0x1f3f4,), # Waving Black Flag
106	107	(0x1f3f8, 0x1f3fa,), # Badminton Racquet And Sh..Amphora
	108	+ (0x1f3fb, 0x1f3ff,), # Emoji Modifier Fitzpatri..Emoji Modifier Fitzpatri
107	109	(0x1f400, 0x1f43e,), # Rat ..Paw Prints
108	110	(0x1f440, 0x1f440,), # Eyes
109	111	(0x1f442, 0x1f4fc,), # Ear ..Videocassette
⋮ ↓		



`wcwidth/table_zero.py`



+3-1Lines changed: 3 additions & 1 deletion



Original file line number	Diff line number	Diff line change
 @@ -345,7 +345,9 @@		
345	345	(0x1e6f5, 0x1e6f5,), # Tai Yo Sign Om
346	346	(0x1e8d0, 0x1e8d6,), # Mende Kikakui Combining ..Mende Kikakui Combining
347	347	(0x1e944, 0x1e94a,), # Adlam Alif Lengthener ..Adlam Nukta
348		- (0x1f3fb, 0x1f3ff,), # Emoji Modifier Fitzpatri..Emoji Modifier Fitzpatri
	348	+ # Emoji Modifier Fitzpatrick types (U+1F3FB..U+1F3FF) excluded:
	349	+ # standalone they display as wide (2 cells), only zero-width
	350	+ # when following an emoji base character in sequence.
349	351	(0xe0000, 0xe0fff,), # (nil)
350	352	),

Original file line number	Diff line number	Diff line change
351	353	}



[wcwidth/wcwidth.py](#)



+79-13Lines changed: 79 additions & 13 deletions



Original file line number	Diff line number	Diff line change
⬆ @@ -81,6 +81,7 @@		
81	81	from .table_wide import WIDE_EASTASIAN
82	82	from .table_zero import ZERO_WIDTH
83	83	from .control_codes import ILLEGAL_CTRL, VERTICAL_CTRL, HORIZONTAL_CTRL, ZERO_WIDTH_CTRL
	84	+ from .table_grapheme import EXTENDED_PICTOGRAPHIC, GRAPHEME_REGIONAL_INDICATOR
84	85	from .table_ambiguous import AMBIGUOUS_EASTASIAN
85	86	from .escape_sequences import (ZERO_WIDTH_PATTERN,
86	87	CURSOR_LEFT_SEQUENCE,
⬆ @@ -100,6 +101,13 @@		
100	101	_WIDE_EASTASIAN_TABLE = WIDE_EASTASIAN[_LATEST_VERSION]
101	102	_AMBIGUOUS_TABLE = AMBIGUOUS_EASTASIAN[next(iter(AMBIGUOUS_EASTASIAN))]

Original file line number	Diff line number	Diff line change
102	103	<pre> _CATEGORY_MC_TABLE = CATEGORY_MC[_LATEST_VERSION] </pre>
	104	<pre>+ _REGIONAL_INDICATOR_SET = frozenset(</pre>
	105	<pre>+ range(GRAPHEME_REGIONAL_INDICATOR[0][0], GRAPHEME_REGIONAL_INDICATOR[0][1] + 1) </pre>
	106	<pre>+) </pre>
	107	<pre>+ _EMOJI_ZWJ_SET = frozenset(</pre>
	108	<pre>+ cp for lo, hi in EXTENDED_PICTOGRAPHIC for cp in range(lo, hi + 1) </pre>
	109	<pre>+) _REGIONAL_INDICATOR_SET </pre>
	110	<pre>+ _FITZPATRICK_RANGE = (0x1F3FB, 0x1F3FF) </pre>
103	111	<pre> </pre>
104	112	<pre> # In 'parse' mode, strings longer than this are checked for cursor-movement </pre>

Original file line number	Diff line number	Diff line change
105	113	<pre> # controls (BS, TAB, CR, cursor sequences); when absent, mode downgrades to </pre>
⌵ ⌶ <pre> @@ -192,7 +200,7 @@ def wwidth(wc: str, unicode_version: str = 'auto', ambiguous_width: int = 1) -> </pre>		
192	200	<pre> return 1 </pre>
193	201	<pre> </pre>
194	202	<pre> </pre>
195		<pre>- def wwidth(# pylint: disable=unused-argument </pre>
	203	<pre>+ def wwidth(# pylint: disable=unused-argument,too-many- locals,too-many-branches </pre>
196	204	<pre> pwcs: str, </pre>
197	205	<pre> n: int None = None, </pre>
198	206	<pre> unicode_version: str = 'auto', </pre>
⌵ ⌶ <pre> @@ -220,7 +228,8 @@ def wwidth(# pylint: disable=unused-argument</pre>		

Original file line number	Diff line number	Diff line change
220	228	
221	229	 See :ref:`Specification` for details of cell measurement.
222	230	 """"
223		- # this 'n' argument is a holdover for POSIX function
	231	+ # this 'n' argument is a holdover for POSIX function.
	232	+ # pylint:disable=too-complex
224	233	
225	234	 # Fast path: pure ASCII printable strings are always width == length
226	235	 if n is None and pwcs.isascii() and pwcs.isprintable():
⌕ @@ -235,29 +244,59 @@ def wcswidth(# pylint: disable=unused-argument 		
235	244	 total_width = 0

Original file line number	Diff line number	Diff line change
236	245	 idx = 0
237	246	 last_measured_idx = -2 # Track index of last measured char for VS16
	247	+ last_measured_ucs = -1 # Codepoint of last measured char (for deferred emoji check)
238	248	 while idx < end:
239	249	 char = pwcs[idx]
240		- if char == '\u200D':
241		- # Zero Width Joiner, do not measure this or next character
242		- idx += 2
	250	+ ucs = ord(char)
	251	+ if ucs == 0x200D:
	252	+ # Zero Width Joiner: skip next character unconditionally.

Original file line number	Diff line number	Diff line change
	253	+ # Non-emoji + ZWJ is undefined so we don't care the cost to check.
	254	+ if idx + 1 < end:
	255	+ idx += 2
	256	+ else:
	257	+ idx += 1
243	258	 continue
244		- if char == '\uFE0F' and last_measured_idx >= 0:
	259	+ if ucs == 0xFE0F and last_measured_idx >= 0:
245	260	 # VS16 following a measured character: add 1 if that character is
246	261	 # known to be converted from narrow to wide by VS16.
247		- # Note: VS16 support requires Unicode 9.0+, which is always true

Original file line number	Diff line number	Diff line change
248		- # since only the latest version is shipped.
249	262	 total_width += _bisearch(ord(pwcs[last_measured_idx]),
250	263	 VS16_NARROW_TO_WIDE["9.0.0"])
251	264	 last_measured_idx = -2 # Prevent double application
	265	+ # VS16 preserves emoji context: last_measured_ucs stays as the base
252	266	 idx += 1
253	267	 continue
	268	+ # Regional Indicator & Fitzpatrick: both above BMP (U+1F1E6+)
	269	+ if ucs > 0xFFFF:
	270	+ if ucs in _REGIONAL_INDICATOR_SET:
	271	+ # Lazy RI pairing: count preceding consecutive RIs only when the last one is

Original file line number	Diff line number	Diff line change
	272	+ # received, because RI's are received so rarely its better than per-loop tracking of
	273	+ # 'last char was an RI'.
	274	+ ri_before = 0
	275	+ j = idx - 1
	276	+ while j >= 0 and ord(pwcs[j]) in _REGIONAL_INDICATOR_SET:
	277	+ ri_before += 1
	278	+ j -= 1
	279	+ if ri_before % 2 == 1:
	280	+ # Second RI in pair: contributes 0 (pair = one 2-cell flag) using an even-or-odd
	281	+ # check to determine, 'CAUS' would be two flags, but 'CAU' would be 1 flag
	282	+ # and wide 'U'.

Original file line number	Diff line number	Diff line change
	283	+ idx += 1
	284	+ last_measured_ucs = ucs
	285	+ continue
	286	+ # First or unpaired RI: measured normally (width 2 from table)
	287	+ # Fitzpatrick modifier: zero-width when following emoji base
	288	+ elif (_FITZPATRICK_RANGE[0] <= ucs <= _FITZPATRICK_RANGE[1]
	289	+ and last_measured_ucs in _EMOJI_ZWJ_SET):
	290	+ idx += 1
	291	+ continue
254	292	 wcw = _wcwidth(char)
255	293	 if wcw < 0:

Original file line number	Diff line number	Diff line change
256	294	 # early return -1 on C0 and C1 control characters
257	295	 return wcw
258	296	 if wcw > 0:
259	297	 last_measured_idx = idx
260		- elif last_measured_idx >= 0 and _bisearch(ord(char), _CATEGORY_MC_TABLE):
	298	+ last_measured_ucs = ucs
	299	+ elif last_measured_idx >= 0 and _bisearch(ucs, _CATEGORY_MC_TABLE):
261	300	 # Spacing Combining Mark (Mc) following a base character adds 1
262	301	 wcw = 1
263	302	 last_measured_idx = -2

Original file line number	Diff line number	Diff line change
⌵ ⌶ <pre> @@ -463,6 +502,7 @@ def width(</pre>		
463	502	<pre> max_extent = 0 </pre>
464	503	<pre> idx = 0 </pre>
465	504	<pre> last_measured_idx = -2 # Track index of last measured char for VS16; -2 can never match idx-1 </pre>
	505	<pre> + last_measured_ucs = -1 # Codepoint of last measured char (for deferred emoji check) </pre>
466	506	<pre> text_len = len(text) </pre>
467	507	<pre> </pre>
468	508	<pre> # Select wwidth call pattern for best lru_cache performance: </pre>
⌵ ⌶ <pre> @@ -520,32 +560,58 @@ def width(</pre>		
520	560	<pre> idx += 1 </pre>
521	561	<pre> continue </pre>

Original file line number	Diff line number	Diff line change
522	562	
523		- # 4. Handle ZWJ (skip this and next character)
	563	+ # 4. Handle ZWJ: skip next char unconditionally.
524	564	 if char == '\u200D':
525		- idx += 2
	565	+ if idx + 1 < text_len:
	566	+ idx += 2
	567	+ else:
	568	+ idx += 1
526	569	 continue
527	570	

Original file line number	Diff line number	Diff line change
528	571	<pre> # 5. Handle other zero-width characters (control chars) </pre>
529	572	<pre> if char in ZERO_WIDTH_CTRL: </pre>
530	573	<pre> idx += 1 </pre>
531	574	<pre> continue </pre>
532	575	<pre> </pre>
	576	<pre> + ucs = ord(char) </pre>
	577	<pre> + </pre>
533	578	<pre> # 6. Handle VS16: converts preceding narrow character to wide </pre>
534		<pre> - if char == '\uFE0F': </pre>
	579	<pre> + if ucs == 0xFE0F: </pre>
535	580	<pre> if last_measured_idx == idx - 1: </pre>
536	581	<pre> if _bisearch(ord(text[last_measured_idx]), VS16_NARROW_TO_WIDE["9.0.0"]):</pre>

Original file line number	Diff line number	Diff line change
537	582	 current_col += 1
538	583	 max_extent = max(max_extent, current_col)
	584	+ # VS16 preserves emoji context: last_measured_ucs stays as the base
539	585	 idx += 1
540	586	 continue
541	587	
	588	+ # 6b. Regional Indicator & Fitzpatrick: both above BMP (U+1F1E6+)
	589	+ if ucs > 0xFFFF:
	590	+ if ucs in _REGIONAL_INDICATOR_SET:
	591	+ # Lazy RI pairing: count preceding consecutive RIs
	592	+ ri_before = 0

Original file line number	Diff line number	Diff line change
	593	+ j = idx - 1
	594	+ while j >= 0 and ord(text[j]) in _REGIONAL_INDICATOR_SET:
	595	+ ri_before += 1
	596	+ j -= 1
	597	+ if ri_before % 2 == 1:
	598	+ last_measured_ucs = ucs
	599	+ idx += 1
	600	+ continue
	601	+ # 6c. Fitzpatrick modifier: zero-width when following emoji base
	602	+ elif (_FITZPATRICK_RANGE[0] <= ucs <= _FITZPATRICK_RANGE[1]
	603	+ and last_measured_ucs in _EMOJI_ZWJ_SET):

Original file line number	Diff line number	Diff line change
	604	+ idx += 1
	605	+ continue
	606	+
542	607	 # 7. Normal characters: measure with wcwidth
543	608	 w = _wcwidth(char)
544	609	 if w > 0:
545	610	 current_col += w
546	611	 max_extent = max(max_extent, current_col)
547	612	 last_measured_idx = idx
548		- elif last_measured_idx >= 0 and _bisearch(ord(char), _CATEGORY_MC_TABLE):
	613	+ last_measured_ucs = ucs
	614	+ elif last_measured_idx >= 0 and _bisearch(ucs, _CATEGORY_MC_TABLE):

Original file line number	Diff line number	Diff line change
549	615	 # Spacing Combining Mark (Mc) following a base character adds 1
550	616	 current_col += 1
551	617	 max_extent = max(max_extent, current_col)
⋮ ↓		

0 commit comments

Comments

0



Please [sign in](#) to comment.

Standalone emoji support by jqvast · Pull Request #202 · jqvast/wcwidth · GitHub

 [jqvast](#) / [wcwidth](#) Public

-  [Notifications](#)
-  [Fork 66](#)
-  [Star 450](#)

Conversation



Owner



jqvast commented on Jan 29 •



edited ▾

Closes [#133](#) and [#154](#).

This decreases general performance by ~10% for complex CJK/combining and emoji strings.

- Regional Indicator pairs measured as one 2-cell flag; unpaired RI measured individually
- Fitzpatrick skin tone modifiers are zero-width when following an emoji base, Narrow when "standalone"



[jqvast](#) added 5 commits [3 months ago](#)





Rephrase a bit, try to be brief

859529f



specs, in a way I duplicate some grapheme clustering description

...

8a27086

But i think that's ok -- mainly: we describe the specification of our
wcwidth() and wcswidth() function. This includes that stuff.



nice this TDD caught most of it right

0e6e47e



individual points go in and out of zero and wide tables.

...

29a7492

```
I'll say, there are uses downstream, I see silly lines like:
for cp in range(1000000):
    if wcwidth.wcwidth(cp) == 2:
        wide_table.append(cp)
```

and they're going to suffer a bit from this, or they also benefit,
depending on context, but if they're "doing it wrong" they're probably
also not using iter_graphemes() anyway so there is no help



standalone RI/emoji algorithm



e40ed95



codspeed-hq bot commented on Jan 29 •



edited ▾

CodSpeed Performance Report

Merging this PR will **degrade performance by 22.14%**

Comparing `jq/standalone-modifiers` ([7e265fa](#)) with `master` ([8c8eac8](#))

Summary

-  8 regressed benchmarks
-  48 untouched benchmarks
-  4 new benchmarks

 Please fix the performance issues or [acknowledge them on CodSpeed](#).

Performance Changes

	Benchmark	BASE	HEAD	Efficiency
	test_wcswidth_ri_flags_unpaired	N/A	87.9 ms	N/A
	test_width_udhr_lines	263 ms	294.5 ms	-10.7%
	test_width_wcswidth_consistency_udhr	386.8 ms	440.5 ms	-12.21%
	test_wcswidth_ri_flags_paired	N/A	371.5 ms	N/A
	test_ljust_udhr_lines	265.9 ms	297.4 ms	-10.61%
	test_width_ri_flags_paired	N/A	371.7 ms	N/A
	test_width_composed	1.6 ms	1.9 ms	-12.85%
	test_wcswidth_long_japanese	231 μs	267.1 μs	-13.52%
	test_wcswidth_composed	1.4 ms	1.7 ms	-14.5%
	test_wcswidth_decomposed	2.2 ms	2.4 ms	-10.57%
	test_wcswidth_emoji_sequence	47.4 μs	60.8 μs	-22.14%
	test_width_ri_flags_unpaired	N/A	88 ms	N/A



codecov bot commented on Jan 29 •



edited ▾

Codecov Report

✔ All modified and coverable lines are covered by tests.

✔ Project coverage is 100.00%. Comparing base ([8c8eac8](#)) to head ([7e265fa](#)).

⚠ Report is 1 commits behind head on master.

▶ Additional details and impacted files

 [View full report in Codecov by Sentry.](#)

 Have feedback on the report? [Share it here.](#)

▶  New features to boost your workflow:



[jqbast](#) added 9 commits [3 months ago](#)



`mypy.. now to study this awful performance`
`0e6051a`



`faster before refactor?`
`c7655c2`



`some optimizations and remove local variables,` ...



`f432f7f`

`the frozenset, _EMOJI_ZWJ_SET is fastest`





revert CI to sdist, and ignore tox -efetch failures (intermittent)



×

cd08bd6



Count RI's reverse on-demand, maybe faster?

15dede5



add a few RI-related benchmarks, broken and unbroken



×

51e556d



revert intentional check (it works!)



×

1746e5f



deferred-ord again, big bucks no whammies!



×

19cd728



Deferred ord: disaster.



×

661601d



[jquast](#) marked this pull request as ready for review [3 months ago](#)



[jqkast](#) added 2 commits 3 months ago



remove unnecessary 'last_measured_ucs in _EMOJI_ZWJ_SET' check



6a60d4d



revise test with removed ZWJ guards



7e265fa



Hide details View details



[jqkast](#) merged commit [38d03a5](#) into master on Jan 29

39 checks passed



[jqkast](#) deleted the jq/standalone-modifiers branch 3 months ago



[jqkast](#) mentioned this pull request on Jan 31

[bugfix kitty keyboard protocol detection jqkast/blessed#348](#)

Merged



[jqkast](#) added a commit to [jqkast/blessed](#) that referenced this pull request on Feb 1



bugfix kitty keyboard protocol detection (#348)



Verified



990c181

The boundary pattern in ``get\_kitty\_keyboard\_state()`` used ``.+`` which matched prematurely!

Existing tests didn't catch this because they use `ungetch()` which buffers the entire response

[jquast/wcwidth#200](#)
[jquast/wcwidth#202](#)



[gi11es](#) mentioned this pull request [last week](#)

[Regional Indicator columnWidth](#) returns 2 but `wcwidth()` returns 1, breaking flag emoji in [tmux migueldeicaza/SwiftTerm#515](#)

🔒 Closed

[Sign up for free](#) to join this conversation on **GitHub**. Already have an account? [Sign in to comment](#)

Reviewers

No reviews

Assignees

No one assigned

Labels

None yet

Projects

None yet

Milestone

No milestone

Development

Successfully merging this pull request may close these issues.

👍 [Emoji: Skin tone modifiers used in isolation](#)

1 participant



wcwidth/bin at master · jqkast/wcwidth · GitHub

 [jqkast](#) / [wcwidth](#) Public

-  [Notifications](#)
-  [Fork 66](#)
-  [Star 450](#)



Files



 Go to file

Remove docs, add utils (#209) · jquast/wcwidth@bfa1b3c · GitHub

jquast / **wcwidth** Public

-  Notifications
-  Fork 66
-  Star 450

File tree



4 files changed

+44

-4

lines changed

 Top



 Filter files...



✓  bin

 [show-sequences](#)

 [strip-sequences](#)

✓  docs

 [intro.rst](#)

✓  wcwidth

 [wcwidth.py](#)



4 files changed

+44

-4

lines changed

 Search within code



[bin/show-sequences](#)



+23Lines changed: 23 additions & 0 deletions



Original file line number	Diff line number	Diff line change
...		<pre> @@ -0,0 +1,23 @@ </pre>
	1	<pre> + #!/usr/bin/env python3 </pre>
	2	<pre> + """Show terminal escape sequences in a file or stdin as repr() literals.""" </pre>
	3	<pre> + # std imports </pre>
	4	<pre> + import sys </pre>
	5	<pre> + </pre>
	6	<pre> + # local </pre>
	7	<pre> + from wcwidth import iter_sequences </pre>
	8	<pre> + </pre>
	9	<pre> + </pre>
	10	<pre> + def _read_input(): </pre>

Original file line number	Diff line number	Diff line change
	11	+ # some care is taken regarding '\r\n' because this program is meant to show
	12	+ # raw terminal data to terminals that are *not* in raw mode, so different
	13	+ # interpretation of '\r\n' is needed.
	14	+ if len(sys.argv) > 1:
	15	+ with open(sys.argv[1], "rb") as f:
	16	+ return f.read().replace(b"\r\n", b"\n").decode()
	17	+ return sys.stdin.buffer.read().replace(b"\r\n", b"\n").decode()
	18	+
	19	+
	20	+ for line in _read_input().split("\n"):
	21	+ for item, is_seq in iter_sequences(line):

Original file line number	Diff line number	Diff line change
	22	+ print(repr(item) if is_seq else item.replace("\r", repr("\r")), end="") 
	23	+ print("", flush=True) 



[bin/strip-sequences](#)



+18Lines changed: 18 additions & 0 deletions



Original file line number	Diff line number	Diff line change
...		
@@ -0,0 +1,18 @@		
	1	+ #!/usr/bin/env python3
	2	+ """Strip terminal escape sequences from a file or stdin."""
	3	+ # std imports
	4	+ import sys
	5	+
	6	+ # local
	7	+ from wwidth import strip_sequences
	8	+
	9	+ # some care is taken regarding '\r\n' because this program is meant to show
	10	+ # raw terminal data to terminals that are *not* in raw mode, so different

Original file line number	Diff line number	Diff line change
	11	+ # interpretation of '\r\n' is needed.
	12	+
	13	+ if len(sys.argv) > 1:
	14	+ with open(sys.argv[1], "rb") as f:
	15	+ text = f.read().replace(b"\r\n", b"\n").replace(b"\r", b"").decode()
	16	+ else:
	17	+ text = sys.stdin.buffer.read().replace(b"\r\n", b"\n").replace(b"\r", b"").decode()
	18	+ sys.stdout.write(strip_sequences(text))

▼

[docs/intro.rst](#)



+3Lines changed: 3 additions & 0 deletions



Original file line number	Diff line number	Diff line change
⬆ <pre>@@ -399,6 +399,8 @@ This library is used in: </pre>		
399	399	<pre>- `jqkast/blessed`_: a thin, practical wrapper around terminal capabilities in </pre>
400	400	<pre>Python. </pre>
401	401	<pre> </pre>
	402	+ <pre>- `jqkast/telnet`_: A Modern telnet client especially designed for BBSs and MUDs. </pre>
	403	+ <pre> </pre>
402	404	<pre>- `prompt-toolkit/python-prompt-toolkit`_: a Library for building powerful </pre>
403	405	<pre>interactive command lines in Python. </pre>
404	406	<pre> </pre>
⬇ ⬆ <pre>@@ -688,6 +690,7 @@ https://www.cl.cam.ac.uk/~mgk25/ucs/wcwidth.c:: </pre>		

Original file line number	Diff line number	Diff line change
 <pre>@@ -246,10 +246,6 @@ def wcswidth(</pre>		
246	246	<pre> :param n: When ``n`` is None (default), return the length of the entire </pre>
247	247	<pre> string, otherwise only the first ``n`` characters are measured. </pre>
248	248	<pre> </pre>
249		<pre>- Better to use string slicing capability, ``wcswidth(pwcs[:n])``, instead, </pre>
250		<pre>- for performance. This argument is a holdover from the POSIX function for </pre>
251		<pre>- matching signatures. Be careful that ``n`` is at grapheme boundaries. </pre>
252		<pre>- </pre>
253	249	<pre> :param unicode_version: Ignored. Retained for backwards compatibility. </pre>
254	250	<pre> </pre>
255	251	<pre> .. deprecated:: 0.3.0 </pre>

Original file line number	Diff line number	Diff line change
⋮ ↓		

0 commit comments

Comments

0



Please [sign in](#) to comment.

Remove docs, add utils by jquast · Pull Request #209 · jquast/wcwidth · GitHub

 [jquast](#) / [wcwidth](#) Public

-  [Notifications](#)
-  [Fork 66](#)
-  [Star 450](#)

Conversation



Owner



jquast commented [last month](#)

Don't "mislead" people, [#208](#)

Introducing two VGP's, bin/strip-sequences and show-sequences



[jquast](#) added 4 commits [last month](#)



`self-reference dependencies by self`

`1a21538`



`Don't "mislead" people, better left unsaid, enjoy`

`3ced37f`



introducing `bin/strip-sequences` and `show-sequences` !



784280a



`isort`, `usort`, we sort



bbc7760



jquast marked this pull request as ready for review [last month](#)



codspeed-hq bot commented [last month](#) •



edited ▾

Merging this PR will not alter performance

✓ 64 untouched benchmarks

Comparing `jq/py.typed` ([bbc7760](#)) with `master` ([c3a2d35](#))



Open In CodSpeed



codecov bot commented **last month** •



edited ▾

Codecov Report

- ✅ All modified and coverable lines are covered by tests.
- ✅ Project coverage is 100.00%. Comparing base ([c3a2d35](#)) to head ([bbc7760](#)).
- ⚠️ Report is 1 commits behind head on master.

► Additional details and impacted files

 [View full report in Codecov by Sentry.](#)

 Have feedback on the report? [Share it here.](#)

►  New features to boost your workflow:



Hide details View details



[jquast](#) merged commit [bfa1b3c](#) into master **last month**

43 checks passed



[jquast](#) deleted the jq/py.typed branch **last month**

[Sign up for free](#) to join this conversation on **GitHub**. Already have an account? [Sign in to comment](#)

Reviewers

No reviews

Assignees

No one assigned

Labels

None yet

Projects

None yet

Milestone

No milestone

Development

Successfully merging this pull request may close these issues.

None yet

1 participant



wcwidth/code_templates at master · jquast/wcwidth · GitHub

 [jquast](#) / [wcwidth](#) Public

-  [Notifications](#)
-  [Fork 66](#)
-  [Star 450](#)



Files



 Go to file

Remove all but latest unicode version (#195) · jquast/wcwidth@4ad63d0 · GitHub

 [jquast](#) / [wcwidth](#) Public

-  [Notifications](#)
-  [Fork 66](#)
-  [Star 450](#)

File tree



10 files changed

+207

-461

lines changed

 [Top](#)







✓  [bin](#)

 [update-tables.py](#)

✓  [code_templates](#)

 [unicode_versions.py.j2](#)

✓  [docs](#)

 [intro.rst](#)

✓  [tests](#)

 [test_core.py](#)

 [test_emojis.py](#)

 [test_sgr_state.py](#)

 [test_ucslevel.py](#)

▼  wewidth

 [sgr_state.py](#)

 [unicode_versions.py](#)

 [wewidth.py](#)



10 files changed

+207

-461

lines changed

 Search within code



[bin/update-tables.py](#)



+85-83Lines changed: 85 additions & 83 deletions



Original file line number	Diff line number	Diff line change
 <pre>@@ -367,96 +367,98 @@ def fetch_source_headers() -> UnicodeVersionRstRenderCtx: </pre>		
367	367	
368	368	
369	369	
		def fetch_table_wide_data() -> UnicodeTableRenderCtx:
370		-
		"""Fetch east-asian tables."""
	370	+
		"""Fetch east-asian tables for the latest Unicode version only."""
371	371	
		table: dict[UnicodeVersion, TableDef] = {}
372		-
		for version in fetch_unicode_versions():
373		-
		# parse typical 'wide' characters by categories 'W' and 'F',
374		-
		table[version] =
		parse_category(fname=UnicodeDataFile.EastAsianWidth(version),
375		-
		wide=2)

Original file line number	Diff line number	Diff line change
376		-
377		- # subtract(!) wide characters that were defined above as 'W' category in EastAsianWidth,
378		- # but also zero-width category 'Mn' or 'Mc' in DerivedGeneralCategory!
379		- table[version].values = table[version].values.difference(parse_category(
380		- fname=UnicodeDataFile.DerivedGeneralCategory(version),
381		- wide=0).values)
382		-
383		- # Also subtract Hangul Jamo Vowels and Hangul Trailing Consonants
384		- table[version].values = table[version].values.difference(HANGUL_JAMO_ZEROWIDTH)
385		-
386		- # Subtract Default_Ignorable_Code_Point characters (they should be zero-width).

Original file line number	Diff line number	Diff line change
387		- # Exception: U+115F HANGUL CHOSEONG FILLER remains wide for jamo composition.
388		- # See https://github.com/jquast/wcwidth/issues/118
389		- default_ignorable = parse_derived_core_property(
390		- fname=UnicodeDataFile.DerivedCoreProperties(version),
391		- property_name='Default_Ignorable_Code_Point')
392		- default_ignorable.discard(0x115F) # Keep HANGUL CHOSEONG FILLER as wide
393		- table[version].values = table[version].values.difference(default_ignorable)
394		-
395		- # finally, join with atypical 'wide' characters defined by category 'Sk',
396		- fname = UnicodeDataFile.DerivedGeneralCategory(version)

Original file line number	Diff line number	Diff line change
397		- table[version].values.update(parse_category(fname=fname, wide=2).values)
	372	+ version = fetch_unicode_versions()[-1] # Only latest version
	373	+
	374	+ # parse typical 'wide' characters by categories 'W' and 'F',
	375	+ table[version] = parse_category(fname=UnicodeDataFile.EastAsianWidth(version),
	376	+ wide=2)
	377	+
	378	+ # subtract(!) wide characters that were defined above as 'W' category in EastAsianWidth,
	379	+ # but also zero-width category 'Mn' or 'Mc' in DerivedGeneralCategory!
	380	+ table[version].values = table[version].values.difference(parse_category(
	381	+ fname=UnicodeDataFile.DerivedGeneralCategory(version),

Original file line number	Diff line number	Diff line change
	382	+ wide=0).values)
	383	+
	384	+ # Also subtract Hangul Jamo Vowels and Hangul Trailing Consonants
	385	+ table[version].values = table[version].values.difference(HANGUL_JAMO_ZEROWIDTH)
	386	+
	387	+ # Subtract Default_Ignorable_Code_Point characters (they should be zero-width).
	388	+ # Exception: U+115F HANGUL CHOSEONG FILLER remains wide for jamo composition.
	389	+ # See https://github.com/jquast/wcwidth/issues/118
	390	+ default_ignorable = parse_derived_core_property(
	391	+ fname=UnicodeDataFile.DerivedCoreProperties(version),
	392	+ property_name='Default_Ignorable_Code_Point')

Original file line number	Diff line number	Diff line change
	393	+ default_ignorable.discard(0x115F) # Keep HANGUL CHOSEONG FILLER as wide
	394	+ table[version].values = table[version].values.difference(default_ignorable)
	395	+
	396	+ # finally, join with atypical 'wide' characters defined by category 'Sk',
	397	+ fname = UnicodeDataFile.DerivedGeneralCategory(version)
	398	+ table[version].values.update(parse_category(fname=fname, wide=2).values)
398	399	 return UnicodeTableRenderCtx('WIDE_EASTASIAN', table)
399	400	
400	401	
401	402	 def fetch_table_zero_data() -> UnicodeTableRenderCtx:
402	403	 ''''

Original file line number	Diff line number	Diff line change
403		- Fetch zero width tables.
	404	+ Fetch zero width tables for the latest Unicode version only.
404	405	
405	406	 See also: https://unicode.org/L2/L2002/02368-default-ignorable.html
406	407	 """"
407	408	 table: dict[UnicodeVersion, TableDef] = {}
408		- for version in fetch_unicode_versions():
409		- # Determine values of zero-width character lookup table by the following category codes
410		- fname = UnicodeDataFile.DerivedGeneralCategory(version)
411		- table[version] = parse_category(fname=fname, wide=0)
412		-

Original file line number	Diff line number	Diff line change
413		- # Include NULL
414		- table[version].values.add(0)
415		-
416		- # Add Hangul Jamo Vowels and Hangul Trailing Consonants
417		- table[version].values.update(HANGUL_JAMO_ZEROWIDTH)
418		-
419		- # Add Default_Ignorable_Code_Point characters
420		- # Per Unicode Standard (https://www.unicode.org/faq/unsup_char.html):
421		- # "All default-ignorable characters should be rendered as completely invisible
422		- # (and non advancing, i.e. 'zero width'), if not explicitly supported in rendering."
423		- #
424		- # See also:

Original file line number	Diff line number	Diff line change
425		- # - https://www.unicode.org/reports/tr44/#Default_Ignorable_Code_Point
426		- # - https://github.com/jquast/wcwidth/issues/118
427		- table[version].values.update(parse_derived_core_property(
428		- fname=UnicodeDataFile.DerivedCoreProperties(version),
429		- property_name='Default_Ignorable_Code_Point'))
430		-
431		- # Remove U+115F HANGUL CHOSEONG FILLER from zero-width table.
432		- # Although it has Default_Ignorable_Code_Point property, it should remain
433		- # width 2 because it combines with other Hangul Jamo to form width-2
434		- # syllable blocks.
435		- table[version].values.discard(0x115F)

Original file line number	Diff line number	Diff line change
436		-
437		- # Remove u+00AD categoryCode=Cf name="SOFT HYPHEN",
438		- # > https://www.unicode.org/faq/casemap_charprop.html
439		- #
440		- # > Q: Unicode now treats the SOFT HYPHEN as format control (Cf)
441		- # > character when formerly it was a punctuation character (Pd).
442		- # > Doesn't this break ISO 8859-1 compatibility?
443		- #
444		- # > [...] In a terminal emulation environment, particularly in
445		- # > ISO-8859-1 contexts, one could display the SOFT HYPHEN as a hyphen
446		- # > in all circumstances.

Original file line number	Diff line number	Diff line change
447		- #
448		- # This value was wrongly measured as a width of '0' in this wcwidth
449		- # versions 0.2.9 - 0.2.13. Fixed in 0.2.14
450		- table[version].values.discard(0x00AD) # SOFT HYPHEN
451		-
452		- # Remove Prepended_Concatenation_Mark characters from zero-width.
453		- # Per Unicode Standard Annex #44, these format characters (General_Category=Cf) have
454		- # mandatory visible display and should NOT be treated as invisible.
455		- # See https://github.com/jquast/wcwidth/issues/119
456		- table[version].values = table[version].values.difference(
457		- parse_derived_core_property(

Original file line number	Diff line number	Diff line change
458		- fname=UnicodeDataFile.PropList(version),
459		- property_name='Prepended_Concatenation_Mark'))
	409	+ version = fetch_unicode_versions()[-1] # Only latest version
	410	+
	411	+ # Determine values of zero-width character lookup table by the following category codes
	412	+ fname = UnicodeDataFile.DerivedGeneralCategory(version)
	413	+ table[version] = parse_category(fname=fname, wide=0)
	414	+
	415	+ # Include NULL
	416	+ table[version].values.add(0)
	417	+
	418	+ # Add Hangul Jamo Vowels and Hangul Trailing Consonants

Original file line number	Diff line number	Diff line change
	419	+ table[version].values.update(HANGUL_JAMO_ZEROWIDTH)
	420	+
	421	+ # Add Default_Ignorable_Code_Point characters
	422	+ # Per Unicode Standard (https://www.unicode.org/faq/unsup_char.html):
	423	+ # "All default-ignorable characters should be rendered as completely invisible
	424	+ # (and non advancing, i.e. 'zero width'), if not explicitly supported in rendering."
	425	+ #
	426	+ # See also:
	427	+ # - https://www.unicode.org/reports/tr44/#Default_Ignorable_Code_Point
	428	+ # - https://github.com/jquast/wcwidth/issues/118
	429	+ table[version].values.update(parse_derived_core_property(

Original file line number	Diff line number	Diff line change
	430	+ fname=UnicodeDataFile.DerivedCoreProperties(version),
	431	+ property_name='Default_Ignorable_Code_Point'))
	432	+
	433	+ # Remove U+115F HANGUL CHOSEONG FILLER from zero-width table.
	434	+ # Although it has Default_Ignorable_Code_Point property, it should remain
	435	+ # width 2 because it combines with other Hangul Jamo to form width-2
	436	+ # syllable blocks.
	437	+ table[version].values.discard(0x115F)
	438	+
	439	+ # Remove u+00AD categoryCode=Cf name="SOFT HYPHEN",
	440	+ # > https://www.unicode.org/faq/casemap_charprop.html

Original file line number	Diff line number	Diff line change
	441	+ #
	442	+ # > Q: Unicode now treats the SOFT HYPHEN as format control (Cf)
	443	+ # > character when formerly it was a punctuation character (Pd).
	444	+ # > Doesn't this break ISO 8859-1 compatibility?
	445	+ #
	446	+ # > [...] In a terminal emulation environment, particularly in
	447	+ # > ISO-8859-1 contexts, one could display the SOFT HYPHEN as a hyphen
	448	+ # > in all circumstances.
	449	+ #
	450	+ # This value was wrongly measured as a width of '0' in this wcwidth
	451	+ # versions 0.2.9 - 0.2.13. Fixed in 0.2.14

Original file line number	Diff line number	Diff line change
	452	+ table[version].values.discard(0x00AD) # SOFT HYPHEN
	453	+
	454	+ # Remove Prependend_Concatenation_Mark characters from zero-width.
	455	+ # Per Unicode Standard Annex #44, these format characters (General_Category=Cf) have
	456	+ # mandatory visible display and should NOT be treated as invisible.
	457	+ # See https://github.com/jquast/wcwidth/issues/119
	458	+ table[version].values = table[version].values.difference(
	459	+ parse_derived_core_property(
	460	+ fname=UnicodeDataFile.PropList(version),
	461	+ property_name='Prependend_Concatenation_Mark'))
460	462	
461	463	 return UnicodeTableRenderCtx('ZERO_WIDTH', table)

Original file line number	Diff line number	Diff line change
462	464	
⌵ ⌶ @@ -545,8 +547,8 @@ def fetch_table_vs16_data() -> UnicodeTableRenderCtx:		
545	547	hex_str_vs=HEX_STR_VS16).values)
546	548	
547	549	# perform culling on any values that are already understood as 'wide'
548		- # without the variation-16 selector
549		- wide_table = wide_tables[unicode_version].as_value_ranges()
	550	+ # without the variation-16 selector (use latest wide table)
	551	+ wide_table = wide_tables[unicode_latest].as_value_ranges()
550	552	table[unicode_version].values = {
551	553	ucs for ucs in table[unicode_version].values

Original file line number	Diff line number	Diff line change
552	554	<pre> if not _bisearch(ucs, wide_table) </pre>
⋮ ⋮ <pre> @@ -1064,7 +1066,7 @@ def main(fetch_all_versions: bool = False, check_last_modified: bool = False) -> </pre>		
1064	1066	<pre> # code. </pre>
1065	1067	<pre> def get_codegen_definitions() -> Iterator[RenderDefinition]: </pre>
1066	1068	<pre> yield UnicodeVersionPyRenderDef.new(</pre>
1067		<pre> - UnicodeVersionPyRenderCtx(fetch_unicode_versions()) </pre>
	1069	<pre> + UnicodeVersionPyRenderCtx([fetch_unicode_versions()[-1]]) # Only latest </pre>
1068	1070	<pre>) </pre>
1069	1071	<pre> yield UnicodeTableRenderDef.new('table_vs16.py', fetch_table_vs16_data()) </pre>
1070	1072	<pre> yield UnicodeTableRenderDef.new('table_wide.py', fetch_table_wide_data()) </pre>

Original file line number	Diff line number	Diff line change
⋮ ↓		



`code_templates/unicode_versions.py.j2`



+2-2Lines changed: 2 additions & 2 deletions



Original file line number	Diff line number	Diff line change
 <pre>@@ -11,8 +11,8 @@ def list_versions() -> tuple[str, ...]: </pre>		
11	11	<pre> </pre>
12	12	<pre> Return Unicode version levels supported by this module release. </pre>
13	13	<pre> </pre>
14		<pre>- Any of the version strings returned may be used as keyword argument </pre>
15		<pre>- ``unicode_version`` to the ``wcwidth()`` family of functions. </pre>
	14	<pre>+ .. versionchanged:: 0.5.0 </pre>
	15	<pre>+ Now returns a single-element tuple containing only the latest version. </pre>
16	16	<pre> </pre>
17	17	<pre> :returns: Supported Unicode version numbers in ascending sorted order. </pre>
18	18	<pre> </pre>

Original file line number	Diff line number	Diff line change



[docs/intro.rst](#)



+14-6Lines changed: 14 additions & 6 deletions



Original file line number	Diff line number	Diff line change
⬆ @@ -454,13 +454,17 @@ languages.		
454	454	History
455	455	=====
456	456	
457		- 0.4.1 *2026-01-26*
	457	+ 0.5.0 *2026-01-26*
	458	+ * **Drop Support** of many historical versions of wide and zero unic
	459	+ Unicode version (17.0.0) is now shipped. The related ``unicode_versi
	460	+ `wctype()` family of functions are ignored. `list_versions()` alw
	461	+ a single element of the only unicode version supported. `PR #195`_.
	462	+ * **Performance** improvement of most common call without version or

Original file line number	Diff line number	Diff line change
	463	+ 20%. `PR #195`_
458	464	 * **New** Function `propagate_sgr()`_ for applying SGR state propaga
459		- * **Bugfix** `wrap()`_ now propagates SGR styling across lines (each
460		- line restores active style). Pass ``propagate_sgr=False`` for previo
461		- * **Bugfix** `clip()`_ now propagates SGR state (result begins with
462		- reset). Pass ``propagate_sgr=False`` for previous behavior.
463		- * **Bugfix** `clip()`_ combining characters and zero-width marks at
	465	+ `PR #194`_
	466	+ * **Improved** `wrap()`_ and `clip()`_ with ``propagate_sgr=True``.
	467	+ * **Bugfix** `clip()`_ zero-width characters at clipping boundaries.
464	468	 * **Bugfix** OSC Hyperlinks when broken mid-text by ``wrap()``. `PR

Original file line number	Diff line number	Diff line change
465	469	
466	470	 0.4.0 *2026-01-25*
⌵ ⌶ @@ -646,7 +650,10 @@ https://www.cl.cam.ac.uk/~mgk25/ucs/wcwidth.c::		
646	650	 .. _`PR #191`: https://github.com/jquast/wcwidth/pull/191
647	651	 .. _`PR #192`: https://github.com/jquast/wcwidth/pull/192
648	652	 .. _`PR #193`: https://github.com/jquast/wcwidth/pull/193
	653	+ .. _`PR #194`: https://github.com/jquast/wcwidth/pull/194
	654	+ .. _`PR #195`: https://github.com/jquast/wcwidth/pull/195
649	655	 .. _`Issue #101`: https://github.com/jquast/wcwidth/issues/101
	656	+ .. _`Issue #190`: https://github.com/jquast/wcwidth/issues/190
650	657	 .. _`jquast/blessed`: https://github.com/jquast/blessed
651	658	 .. _`selectel/pyte`: https://github.com/selectel/pyte

Original file line number	Diff line number	Diff line change
652	659	 .. _`thomasballinger/curtsies`: https://github.com/thomasballinger/c
⋮ ↓ ⋮ ↑ @@ -698,6 +705,7 @@ https://www.cl.cam.ac.uk/~mgk25/ucs/wcwidth.c:: 		
698	705	 .. _`strip_sequences()`: https://wcwidth.readthedocs.io/en/latest/ap
699	706	 .. _`propagate_sgr()`: https://wcwidth.readthedocs.io/en/latest/api.
700	707	 .. _`iter_sequences()`: https://wcwidth.readthedocs.io/en/latest/api
	708	+ .. _`list_versions()`: https://wcwidth.readthedocs.io/en/latest/api.
701	709	 .. _`Unicode Standard Annex #29`: https://www.unicode.org/reports/tr
702	710	 .. _`Terminal.detect_ambiguous_width()`: https://blessed.readthedocs.io/en/latest/api/terminal.html#blessed.t
703	711	 .. _`parity padding`: https://jazcap53.github.io/pythons-eccentric-s
⋮ ↓		

tests/test_core.py



-14Lines changed: 0 additions & 14 deletions



Original file line number	Diff line number	Diff line change
 <pre>@@ -379,20 +379,6 @@ def test_kannada_script_2(): </pre>		
379	379	<pre> assert length_phrase == expect_length_phrase </pre>
380	380	<pre> </pre>
381	381	<pre> </pre>
382		<pre>- def test_zero_wide_conflict(): </pre>
383		<pre>- # Test characters considered both "wide" and "zero" width </pre>
384		<pre>- # - (0x03000, 0x0303e,), # Ideographic Space ..Ideographic Variation In </pre>
385		<pre>- # + (0x03000, 0x03029,), # Ideographic Space ..Hangzhou Numeral Nine </pre>
386		<pre>- assert wcwidth.wcwidth(chr(0x03029), unicode_version='4.1.0') == 2 </pre>
387		<pre>- assert wcwidth.wcwidth(chr(0x0302a), unicode_version='4.1.0') == 0 </pre>
388		<pre>- </pre>

Original file line number	Diff line number	Diff line change
389		- # - (0x03099, 0x030ff,), # Combining Katakana-hirag..Katakana Digraph Koto
390		- # + (0x0309b, 0x030ff,), # Katakana-hiragana Voiced..Katakana Digraph Koto
391		- assert wcwidth.wcwidth(chr(0x03099), unicode_version='4.1.0') == 0
392		- assert wcwidth.wcwidth(chr(0x0309a), unicode_version='4.1.0') == 0
393		- assert wcwidth.wcwidth(chr(0x0309b), unicode_version='4.1.0') == 2
394		-
395		-
396	382	def test_soft_hyphen():
397	383	# Test SOFT HYPHEN, category 'Cf' usually are zero-width, but most
398	384	# implementations agree to draw it was '1' cell, visually
⋮ ↓		



tests/test_emojis.py



+4-21Lines changed: 4 additions & 21 deletions



Original file line number	Diff line number	Diff line change
 <pre>@@ -187,34 +187,17 @@ def measure_all(): </pre>		
187	187	<pre> assert len(sequences) >= 742 </pre>
188	188	<pre> </pre>
189	189	<pre> </pre>
190		<pre>- def test_unicode_9_vs16(): </pre>
191		<pre>- """Verify effect of VS-16 on unicode_version 9.0 and later.""" </pre>
	190	<pre>+ def test_vs16_effect(): </pre>
	191	<pre>+ """Verify effect of VS-16 (always active with latest Unicode version).""" </pre>
192	192	<pre> phrase = ("\u2640" # FEMALE SIGN </pre>
193	193	<pre> "\uFE0F") # VARIATION SELECTOR-16 </pre>
194	194	<pre> </pre>

Original file line number	Diff line number	Diff line change
195	195	 expect_length_each = (1, 0)
196	196	 expect_length_phrase = 2
197	197	
198	198	 # exercise,
199		- length_each = tuple(wcwidth.wcwidth(w_char, unicode_version='9.0') for w_char in phrase)
200		- length_phrase = wcwidth.wcswidth(phrase, unicode_version='9.0')
201		-
202		- # verify.
203		- assert length_each == expect_length_each
204		- assert length_phrase == expect_length_phrase
205		-
206		-

Original file line number	Diff line number	Diff line change
207		- def test_unicode_8_vs16():
208		- """"Verify that VS-16 has no effect on unicode_version 8.0 and earlier.""""
209		- phrase = ("\u2640" # FEMALE SIGN
210		- "\uFE0F") # VARIATION SELECTOR-16
211		-
212		- expect_length_each = (1, 0)
213		- expect_length_phrase = 1
214		-
215		- # exercise,
216		- length_each = tuple(wcwidth.wcwidth(w_char, unicode_version='8.0') for w_char in phrase)
217		- length_phrase = wcwidth.wcswidth(phrase, unicode_version='8.0')

Original file line number	Diff line number	Diff line change
	199	+ length_each = tuple(wcwidth.wcwidth(w_char) for w_char in phrase)
	200	+ length_phrase = wcwidth.wcswidth(phrase)
218	201	
219	202	 # verify.
220	203	 assert length_each == expect_length_each
... 		



tests/test_sgr_state.py



+6Lines changed: 6 additions & 0 deletions



Original file line number	Diff line number	Diff line change
 <pre>@@ -230,3 +230,9 @@ def test_sgr_malformed_sequences(): </pre>		
230	230	<pre> assert _sgr_state_update(_SGR_STATE_DEFAULT, '\x1b[38;5m').foreground is None </pre>
231	231	<pre> assert _sgr_state_update(_SGR_STATE_DEFAULT, '\x1b[38;2;255m').foreground is None </pre>
232	232	<pre> assert _sgr_state_update(_SGR_STATE_DEFAULT, '\x1b[999m') == _SGR_STATE_DEFAULT </pre>
	233	<pre>+ # malformed background extended colors </pre>
	234	<pre>+ assert _sgr_state_update(_SGR_STATE_DEFAULT, '\x1b[48;5m').background is None </pre>
	235	<pre>+ assert _sgr_state_update(_SGR_STATE_DEFAULT, '\x1b[48;2;255m').background is None </pre>
	236	<pre>+ # invalid mode (not 2 or 5) for extended color </pre>
	237	<pre>+ assert _sgr_state_update(_SGR_STATE_DEFAULT, '\x1b[38;3;128m').foreground is None </pre>
	238	<pre>+ assert _sgr_state_update(_SGR_STATE_DEFAULT, '\x1b[48;3;128m').background is None </pre>



`tests/test_ucslevel.py`



+38-169Lines changed: 38 additions & 169 deletions



Original file line number	Diff line number	Diff line change
... @@ -1,189 +1,58 @@ 		
1	1	 """Unicode version level tests for wcwidth."""
2		- # std imports
3		- import warnings
4		-
5		- # 3rd party
6		- import pytest
7		-
8	2	 # local
9	3	 import wcwidth
10	4	
11	5	

Original file line number	Diff line number	Diff line change
	6	+ def test_list_versions_single():
	7	+ """list_versions returns only the latest version."""
	8	+ versions = wcmatch.list_versions()
	9	+ assert len(versions) == 1
	10	+ assert versions[0] == "17.0.0"
	11	+
	12	+
12	13	 def test_latest():
13		- """wcmatch._wcmatch_version('latest') returns tail item."""
14		- # given,
	14	+ """wcmatch._wcmatch_version('latest') returns the latest version."""

Original file line number	Diff line number	Diff line change
15	15	 expected = wcwidth.list_versions()[-1]
16		-
17		- # exercise,
18	16	 result = wcwidth._wcmatch_version('latest')
19		-
20		- # verify.
21		- assert result == expected
22		-
23		-
24		- def test_exact_410_str():
25		- """wcwidth._wcmatch_version('4.1.0') returns equal value (str)."""
26		- # given,
27		- given = expected = '4.1.0'

Original file line number	Diff line number	Diff line change
28		-
29		- # exercise,
30		- result = wcwidth._wcmatch_version(given)
31		-
32		- # verify.
33		- assert result == expected
34		-
35		-
36		- def test_exact_410_unicode():
37		- """wcwidth._wcmatch_version(u'4.1.0') returns equal value (unicode)."""
38		- # given,
39		- given = expected = '4.1.0'

Original file line number	Diff line number	Diff line change
40		-
41		- # exercise,
42		- result = wcwidth._wcmatch_version(given)
43		-
44		- # verify.
45		- assert result == expected
46		-
47		-
48		- def test_nearest_505_str():
49		- """"
50		- wcwidth._wcmatch_version('5.0.5') returns nearest '5.0.0'.
51		-
52		- (str)

Original file line number	Diff line number	Diff line change
53		<pre>- "" </pre>
54		<pre>- # given </pre>
55		<pre>- given, expected = '5.0.5', '5.0.0' </pre>
56		<pre>- </pre>
57		<pre>- # exercise </pre>
58		<pre>- result = wcwidth._wcmatch_version(given) </pre>
59		<pre>- </pre>
60		<pre>- # verify. </pre>
61		<pre>- assert result == expected </pre>
62		<pre>- </pre>
63		<pre>- </pre>
64		<pre>- def test_nearest_505_unicode(): </pre>
65		<pre>- "" </pre>

Original file line number	Diff line number	Diff line change
66		<pre>- width._wcmatch_version(u'5.0.5') returns nearest u'5.0.0'. </pre>
67		<pre>- </pre>
68		<pre>- (unicode) </pre>
69		<pre>- '''''' </pre>
70		<pre>- # given </pre>
71		<pre>- given, expected = '5.0.5', '5.0.0' </pre>
72		<pre>- </pre>
73		<pre>- # exercise </pre>
74		<pre>- result = width._wcmatch_version(given) </pre>
75		<pre>- </pre>
76		<pre>- # verify. </pre>
77		<pre>- assert result == expected </pre>
78		<pre>-</pre>

Original file line number	Diff line number	Diff line change
79		-
80		- def test_nearest_lowint40_str():
81		- """wcmatch_version('4.0') returns nearest '4.1.0'."""
82		- # given
83		- given, expected = '4.0', '4.1.0'
84		- warnings.resetwarnings()
85		- wcmatch_version.cache_clear()
86		-
87		- # exercise
88		- with pytest.warns(UserWarning):
89		- # warns that given version is lower than any available
90		- result = wcmatch_version(given)

Original file line number	Diff line number	Diff line change
91		-
92		- # verify.
93		- assert result == expected
94		-
95		-
96		- def test_nearest_lowint40_unicode():
97		- """wcwidth._wcmatch_version(u'4.0') returns nearest u'4.1.0'."""
98		- # given
99		- given, expected = '4.0', '4.1.0'
100		- warnings.resetwarnings()
101		- wcwidth._wcmatch_version.cache_clear()
102		-

Original file line number	Diff line number	Diff line change
103		- # exercise
104		- with pytest.warns(UserWarning):
105		- # warns that given version is lower than any available
106		- result = wcwidth._wcmatch_version(given)
107		-
108		- # verify.
109		- assert result == expected
110		-
111		-
112		- def test_nearest_800_str():
113		- """wcwidth._wcmatch_version('8') returns nearest '8.0.0'."""
114		- # given

Original file line number	Diff line number	Diff line change
115		- given, expected = '8', '8.0.0'
116		-
117		- # exercise
118		- result = wcwidth._wcmatch_version(given)
119		-
120		- # verify.
121	17	 assert result == expected
122	18	
123	19	
124		- def test_nearest_800_unicode():
125		- """wcwidth._wcmatch_version(u'8') returns nearest u'8.0.0'."""
126		- # given

Original file line number	Diff line number	Diff line change
127		- given, expected = '8', '8.0.0'
128		-
129		- # exercise
130		- result = wcwidth._wcmatch_version(given)
131		-
132		- # verify.
133		- assert result == expected
134		-
135		-
136		- def test_nearest_999_str():
137		- """wcwidth._wcmatch_version('999.0') returns nearest (latest)."""
138		- # given
139		- given, expected = '999.0', wcwidth.list_versions()[-1]

Original file line number	Diff line number	Diff line change
140		-
141		- # exercise
142		- result = wcwidth._wcmatch_version(given)
143		-
144		- # verify.
	20	+ def test_auto():
	21	+ """wcwidth._wcmatch_version('auto') returns the latest version."""
	22	+ expected = wcwidth.list_versions()[-1]
	23	+ result = wcwidth._wcmatch_version('auto')
145	24	 assert result == expected
146	25	
147	26	

Original file line number	Diff line number	Diff line change
148		- def test_nearest_999_unicode():
149		- """wcmatch_version(u'999.0') returns nearest (latest)."""
150		- # given
151		- given, expected = '999.0', wcmatch.list_versions()[-1]
	27	+ def test_wcmatch_version_always_latest():
	28	+ """_wcmatch_version always returns latest regardless of input."""
	29	+ latest = wcmatch.list_versions()[-1]
	30	+ assert wcmatch._wcmatch_version('4.1.0') == latest
	31	+ assert wcmatch._wcmatch_version('9.0.0') == latest
	32	+ assert wcmatch._wcmatch_version('auto') == latest
	33	+ assert wcmatch._wcmatch_version('latest') == latest

Original file line number	Diff line number	Diff line change
	34	+ assert wcwidth._wcmatch_version('invalid') == latest
	35	+ assert wcwidth._wcmatch_version('999.0.0') == latest
	36	+ assert wcwidth._wcmatch_version('x.y.z') == latest
	37	+ assert wcwidth._wcmatch_version('8') == latest
	38	+ assert wcwidth._wcmatch_version('5.0.5') == latest
152	39	
153		- # exercise
154		- result = wcwidth._wcmatch_version(given)
155		-
156		- # verify.
157		- assert result == expected
158	40	

Original file line number	Diff line number	Diff line change
159		-
160		- def test_nonint_unicode():
161		- """wcmatch_version(u'x.y.z') returns latest (unicode)."""
162		- # given
163		- given, expected = 'x.y.z', wcmatch.list_versions()[-1]
164		- warnings.resetwarnings()
	41	+ def test_env_var_ignored(monkeypatch):
	42	+ """UNICODE_VERSION environment variable is ignored."""
	43	+ monkeypatch.setenv('UNICODE_VERSION', '4.1.0')
165	44	 wcmatch._wcmatch_version.cache_clear()
	45	+ assert wcmatch._wcmatch_version('auto') == wcmatch.list_versions()[-1]
166	46	

Original file line number	Diff line number	Diff line change
167		- # exercise
168		- with pytest.warns(UserWarning):
169		- # warns that given version is not valid
170		- result = wcwidth._wcmatch_version(given)
171		-
172		- # verify.
173		- assert result == expected
174	47	
	48	+ def test_unicode_version_param_ignored():
	49	+ """unicode_version parameter is ignored in wcwidth/wcswidth."""
	50	+ # wcwidth should work the same regardless of unicode_version value

Original file line number	Diff line number	Diff line change
	51	+ assert wcwidth.wcwidth('A', unicode_version='4.1.0') == 1
	52	+ assert wcwidth.wcwidth('A', unicode_version='latest') == 1
	53	+ assert wcwidth.wcwidth('A', unicode_version='invalid') == 1
175	54	
176		- def test_nonint_str():
177		- """wcwidth._wcmatch_version(u'x.y.z') returns latest (str)."""
178		- # given
179		- given, expected = 'x.y.z', wcwidth.list_versions()[-1]
180		- warnings.resetwarnings()
181		- wcwidth._wcmatch_version.cache_clear()
182		-
183		- # exercise

Original file line number	Diff line number	Diff line change
184		- with pytest.warns(UserWarning):
185		- # warns that given version is not valid
186		- result = wcwidth._wcmatch_version(given)
187		-
188		- # verify.
189		- assert result == expected
	55	+ # wcswidth should work the same regardless of unicode_version value
	56	+ assert wcwidth.wcswidth('hello', unicode_version='4.1.0') == 5
	57	+ assert wcwidth.wcswidth('hello', unicode_version='latest') == 5
	58	+ assert wcwidth.wcswidth('hello', unicode_version='invalid') == 5

wcwidth/sgr_state.py



+1-1Lines changed: 1 addition & 1 deletion



Original file line number	Diff line number	Diff line change
@@ -13,7 +13,7 @@		
13	13	
14	14	 from typing import TYPE_CHECKING, Iterator, NamedTuple
15	15	
16		- if TYPE_CHECKING:
	16	+ if TYPE_CHECKING: # pragma: no cover
17	17	 from typing import Sequence
18	18	
19	19	



`wcwidth/unicode_versions.py`



+3-23Lines changed: 3 additions & 23 deletions



Original file line number	Diff line number	Diff line change
... @@ -1,7 +1,7 @@ 		
1	1	
2	2	 Exports function list_versions() for unicode version level support.
3	3	
4		- This code generated by wcwidth/bin/update-tables.py on 2026-01-23 17:31:08 UTC.
	4	+ This code generated by wcwidth/bin/update-tables.py on 2026-01-27 00:41:01 UTC.
5	5	
6	6	
7	7	 from __future__ import annotations
 @@ -11,31 +11,11 @@ def list_versions() -> tuple[str, ...]: 		
11	11	

Original file line number	Diff line number	Diff line change
12	12	<pre> Return Unicode version levels supported by this module release. </pre>
13	13	<pre> </pre>
14		<pre> - Any of the version strings returned may be used as keyword argument </pre>
15		<pre> - ``unicode_version`` to the ``wcwidth()`` family of functions. </pre>
	14	<pre> + .. versionchanged:: 0.5.0 </pre>
	15	<pre> + Now returns a single-element tuple containing only the latest version. </pre>
16	16	<pre> </pre>
17	17	<pre> :returns: Supported Unicode version numbers in ascending sorted order. </pre>
18	18	<pre> """ </pre>
19	19	<pre> return (</pre>
20		<pre> - "4.1.0", </pre>

Original file line number	Diff line number	Diff line change
21		- "5.0.0",
22		- "5.1.0",
23		- "5.2.0",
24		- "6.0.0",
25		- "6.1.0",
26		- "6.2.0",
27		- "6.3.0",
28		- "7.0.0",
29		- "8.0.0",
30		- "9.0.0",
31		- "10.0.0",

Original file line number	Diff line number	Diff line change
32		- "11.0.0",
33		- "12.0.0",
34		- "12.1.0",
35		- "13.0.0",
36		- "14.0.0",
37		- "15.0.0",
38		- "15.1.0",
39		- "16.0.0",
40	20	 "17.0.0",
41	21	()

▼

[wcwidth/wcwidth.py](#)



+54-142Lines changed: 54 additions & 142 deletions



Original file line number	Diff line number	Diff line change
⬆️ @@ -64,8 +64,6 @@		
64	64	from __future__ import annotations
65	65	
66	66	# std imports
67		- import os
68		- import warnings
69	67	from functools import lru_cache
70	68	
71	69	from typing import TYPE_CHECKING
⬇️ ⬆️ @@ -95,6 +93,11 @@		
95	93	
96	94	from typing import Literal

Original file line number	Diff line number	Diff line change
97	95	
	96	+ # Pre-compute table references for the latest (and only) Unicode version.
	97	+ # This avoids dictionary lookups in the hot path.
	98	+ _LATEST_VERSION = list_versions()[-1]
	99	+ _ZERO_WIDTH_TABLE = ZERO_WIDTH[_LATEST_VERSION]
	100	+ _WIDE_EASTASIAN_TABLE = WIDE_EASTASIAN[_LATEST_VERSION]
98	101	 _AMBIGUOUS_TABLE = AMBIGUOUS_EASTASIAN[next(iter(AMBIGUOUS_EASTASIAN))]
99	102	
100	103	 # Translation table to strip C0/C1 control characters for fast 'ignore' mode.
⌵ ⌶ @@ -128,27 +131,15 @@		

Original file line number	Diff line number	Diff line change
128	131	
129	132	
130	133	 @lru_cache(maxsize=2000)
131		- def wcwidth(wc: str, unicode_version: str = 'auto', ambiguous_width: int = 1) -> int:
	134	+ def wcwidth(wc: str, unicode_version: str = 'auto', ambiguous_width: int = 1) -> int: # pylint: disable=unused-argument
132	135	 r"""
133	136	 Given one Unicode codepoint, return its printable length on a terminal.
134	137	
135	138	 :param wc: A single Unicode character.
136		- :param unicode_version: A Unicode version number, such as
137		- ``'6.0.0'``. A list of version levels supported by wcwidth

Original file line number	Diff line number	Diff line change
138		- is returned by :func:`list_versions`.
139		-
140		- Any version string may be specified without error -- the nearest
141		- matching version is selected. When ``'auto'`` (default), the
142		- ``UNICODE_VERSION`` environment variable is used if set, otherwise
143		- the highest Unicode version level is used.
	139	+ :param unicode_version: Ignored. Retained for backwards compatibility.
144	140	
145	141	 .. deprecated:: 0.3.0
146		-
147		- This parameter is deprecated. Empirical data shows that Unicode

Original file line number	Diff line number	Diff line change
148		- support in terminals varies not only by unicode version, but
149		- by capabilities, Emojis, and specific language support.
150		-
151		- The default ``'auto'`` behavior is recommended for all use cases.
	142	+ Only the latest Unicode version is now shipped.
152	143	
153	144	 :param ambiguous_width: Width to use for East Asian Ambiguous (A)
154	145	 characters. Default is ``1`` (narrow). Set to ``2`` for CJK contexts
⌕ @@ -175,14 +166,12 @@ def wwidth(wc: str, unicode_version: str = 'auto', ambiguous_width: int = 1) -> 		
175	166	 if ucs and ucs < 32 or 0x07F <= ucs < 0x0A0:
176	167	 return -1

Original file line number	Diff line number	Diff line change
177	168	
178		- _unicode_version = _wcmatch_version(unicode_version)
179		-
180	169	 # Zero width
181		- if _bisearch(ucs, ZERO_WIDTH[_unicode_version]):
	170	+ if _bisearch(ucs, _ZERO_WIDTH_TABLE):
182	171	 return 0
183	172	
184	173	 # Wide (F/W categories)
185		- if _bisearch(ucs, WIDE_EASTASIAN[_unicode_version]):
	174	+ if _bisearch(ucs, _WIDE_EASTASIAN_TABLE):
186	175	 return 2

Original file line number	Diff line number	Diff line change
187	176	
188	177	 # Ambiguous width (A category) - only when ambiguous_width=2
 @@ -192,7 +181,7 @@ def wcwidth(wc: str, unicode_version: str = 'auto', ambiguous_width: int = 1) -> 		
192	181	 return 1
193	182	
194	183	
195		- def wcswidth(
	184	+ def wcswidth(# pylint: disable=unused-argument
196	185	 pwcs: str,
197	186	 n: int None = None,
198	187	 unicode_version: str = 'auto',

Original file line number	Diff line number	Diff line change
 <pre>@@ -207,18 +196,10 @@ def wcswidth(</pre>		
207	196	<pre> argument exists only for compatibility with the C POSIX function </pre>
208	197	<pre> signature. It is suggested instead to use python's string slicing </pre>
209	198	<pre> capability, ``wcswidth(pwcs[:n])`` </pre>
210		<pre>- :param unicode_version: A Unicode version number, such as </pre>
211		<pre>- ``'6.0.0'``, or ``'auto'`` (default) which uses the </pre>
212		<pre>- ``UNICODE_VERSION`` environment variable if defined, or the latest </pre>
213		<pre>- available unicode version otherwise. </pre>
	199	<pre>+ :param unicode_version: Ignored. Retained for backwards compatibility. </pre>
214	200	<pre> </pre>
215	201	<pre> .. deprecated:: 0.3.0 </pre>

Original file line number	Diff line number	Diff line change
216		-
217		- This parameter is deprecated. Empirical data shows that Unicode
218		- support in terminals varies not only by unicode version, but
219		- by capabilities, Emojis, and specific language support.
220		-
221		- The default ``'auto'`` behavior is recommended for all use cases.
	202	+ Only the latest Unicode version is now shipped.
222	203	
223	204	 :param ambiguous_width: Width to use for East Asian Ambiguous (A)
224	205	 characters. Default is ``1`` (narrow). Set to ``2`` for CJK contexts.
 @@ -234,7 +215,11 @@ def wcswidth(		

Original file line number	Diff line number	Diff line change
234	215	 if n is None and pwcs.isascii() and pwcs.isprintable():
235	216	 return len(pwcs)
236	217	
237		- _unicode_version = None
	218	+ # Select wcwidth call pattern for best lru_cache performance:
	219	+ # - ambiguous_width=1 (default): single-arg calls share cache with direct wcwidth() calls
	220	+ # - ambiguous_width=2: full positional args needed (results differ, separate cache is correct)
	221	+ _wcwidth = wcwidth if ambiguous_width == 1 else lambda c: wcwidth(c, 'auto', ambiguous_width)
	222	+
238	223	 end = len(pwcs) if n is None else n
239	224	 total_width = 0

Original file line number	Diff line number	Diff line change
240	225	<pre> idx = 0 </pre>
⌕ <pre> @@ -248,16 +233,14 @@ def wcswidth(</pre>		
248	233	<pre> if char == '\uFE0F' and last_measured_idx >= 0: </pre>
249	234	<pre> # VS16 following a measured character: add 1 if that character is </pre>
250	235	<pre> # known to be converted from narrow to wide by VS16. </pre>
251		<pre> - if _unicode_version is None: </pre>
252		<pre> - _unicode_version = _wcversion_value(_wcmatch_version(unicode_version)) </pre>
253		<pre> - if _unicode_version >= (9, 0, 0): </pre>
254		<pre> - total_width += _bisearch(ord(pwcs[last_measured_idx]), </pre>
255		<pre> - VS16_NARROW_TO_WIDE["9.0.0"]) </pre>
	236	<pre> + # Note: VS16 support requires Unicode 9.0+, which is always true </pre>

Original file line number	Diff line number	Diff line change
	237	+ # since only the latest version is shipped.
	238	+ total_width += _bisearch(ord(pwcs[last_measured_idx]),
	239	+ VS16_NARROW_TO_WIDE["9.0.0"])
256	240	 last_measured_idx = -2 # Prevent double application
257	241	 idx += 1
258	242	 continue
259		- # measure character at current index
260		- wcw = wcwidth(char, unicode_version, ambiguous_width)
	243	+ wcw = _wcwidth(char)
261	244	 if wcw < 0:
262	245	 # early return -1 on C0 and C1 control characters

Original file line number	Diff line number	Diff line change
263	246	<pre> return wcw </pre>
 <pre> @@ -268,11 +251,21 @@ def wcswidth(</pre>		
268	251	<pre> return total_width </pre>
269	252	<pre> </pre>
270	253	<pre> </pre>
	254	<pre> + # NOTE: _wcversion_value and _wcmatch_version are no longer used internally </pre>
	255	<pre> + # by wcwidth since version 0.5.0 (only the latest Unicode version is shipped). </pre>
	256	<pre> + # They are retained for API compatibility with external tools like ucs-detect </pre>
	257	<pre> + # that may use these private functions. </pre>
	258	<pre> + </pre>
	259	<pre> + </pre>
271	260	<pre> @lru_cache(maxsize=128) </pre>

Original file line number	Diff line number	Diff line change
272	261	 def _wcversion_value(ver_string: str) -> tuple[int, ...]:
273	262	
274	263	 Integer-mapped value of given dotted version string.
275	264	
	265	+ .. note::
	266	+ This function is no longer used internally by wcwidth but is retained
	267	+ for API compatibility with external tools.
	268	+
276	269	 :param ver_string: Unicode version string, of form ``n.n.n``.
277	270	 :returns: tuple of digit tuples, ``tuple(int, [...])``.
278	271	

Original file line number	Diff line number	Diff line change
 <pre>@@ -281,109 +274,23 @@ def _wcversion_value(ver_string: str) -> tuple[int, ...]: </pre>		
281	274	
282	275	
283	276	
		@lru_cache(maxsize=8)
284		-
		def _wcmatch_version(given_version: str) -> str:
	277	+
		def _wcmatch_version(given_version: str) -> str: # pylint:
		disable=unused-argument
285	278	
		"""
286		-
		Return nearest matching supported Unicode version level.
287		-
288		-
		If an exact match is not determined, the nearest lowest
		version level is
289		-
		returned after a warning is emitted. For example, given
		supported levels

Original file line number	Diff line number	Diff line change
290		- ``4.1.0`` and ``5.0.0``, and a version string of ``4.9.9``, then ``4.1.0``
291		- is selected and returned:
292		-
293		- >>> _wcmatch_version('4.9.9')
294		- '4.1.0'
295		- >>> _wcmatch_version('8.0')
296		- '8.0.0'
297		- >>> _wcmatch_version('1')
298		- '4.1.0'
299		-
300		- :param given_version: given version for compare, may be ``auto``
301		- (default), to select Unicode Version from Environment Variable,

Original file line number	Diff line number	Diff line change
302		- ``UNICODE_VERSION``. If the environment variable is not set, then the
303		- latest is used.
304		- :returns: unicode string.
	279	+ Return the supported Unicode version level.
	280	+
	281	+ .. note::
	282	+ This function is no longer used internally by wcwidth but is retained
	283	+ for API compatibility with external tools.
	284	+
	285	+ .. deprecated:: 0.3.0
	286	+ This function now always returns the latest version.

Original file line number	Diff line number	Diff line change
	287	+ The ``unicode_version`` parameter and ``UNICODE_VERSION`` environment
	288	+ variable are ignored.
	289	+
	290	+ :param given_version: Ignored. Any value is accepted for compatibility.
	291	+ :returns: The latest unicode version string.
305	292	 """"
306		- # Design note: the choice to return the same type that is given certainly
307		- # complicates it for python 2 str-type, but allows us to define an api that
308		- # uses 'string-type' for unicode version level definitions, so all of our
309		- # example code works with all versions of python.

Original file line number	Diff line number	Diff line change
310		- #
311		- # That, along with the string-to-numeric and comparisons of earliest,
312		- # latest, matching, or nearest, greatly complicates this function.
313		- # Performance is somewhat curbed by memoization.
314		-
315		- unicode_versions = list_versions()
316		- latest_version = unicode_versions[-1]
317		-
318		- if given_version == 'auto':
319		- given_version = os.environ.get(
320		- 'UNICODE_VERSION',

Original file line number	Diff line number	Diff line change
321		- 'latest')
322		-
323		- if given_version == 'latest':
324		- # default match, when given as 'latest', use the most latest unicode
325		- # version specification level supported.
326		- return latest_version
327		-
328		- if given_version in unicode_versions:
329		- # exact match, downstream has specified an explicit matching version
330		- # matching any value of list_versions().
331		- return given_version
332		-

Original file line number	Diff line number	Diff line change
333		<pre>- # The user's version is not supported by ours. We return the newest unicode </pre>
334		<pre>- # version level that we support below their given value. </pre>
335		<pre>- try: </pre>
336		<pre>- cmp_given = _wctype_value(given_version) </pre>
337		<pre>- </pre>
338		<pre>- except ValueError: </pre>
339		<pre>- # submitted value raises ValueError in int(), warn and use latest. </pre>
340		<pre>- warnings.warn(f"UNICODE_VERSION value, {given_version!r}, is invalid. " </pre>
341		<pre>- "Value should be in form of `integer[.]+`, the latest " </pre>
342		<pre>- f"supported unicode version {latest_version!r} has been " </pre>
343		<pre>- "inferred.") </pre>

Original file line number	Diff line number	Diff line change
344		- return latest_version
345		-
346		- # given version is less than any available version, return earliest
347		- # version.
348		- earliest_version = unicode_versions[0]
349		- cmp_earliest_version = _wcversion_value(earliest_version)
350		-
351		- if cmp_given <= cmp_earliest_version:
352		- # this probably isn't what you wanted, the oldest wcwidth.c you will
353		- # find in the wild is likely version 5 or 6, which we both support,
354		- # but it's better than not saying anything at all.

Original file line number	Diff line number	Diff line change
355		<pre>- warnings.warn(f"UNICODE_VERSION value, {given_version!r}, is lower " </pre>
356		<pre>- "than any available unicode version. Returning lowest " </pre>
357		<pre>- f"version level, {earliest_version!r}") </pre>
358		<pre>- return earliest_version </pre>
359		<pre>- </pre>
360		<pre>- # create list of versions which are less than our equal to given version, </pre>
361		<pre>- # and return the tail value, which is the highest level we may support, </pre>
362		<pre>- # or the latest value we support, when completely unmatched or higher </pre>
363		<pre>- # than any supported version. </pre>
364		<pre>- # </pre>
365		<pre>- # function will never complete, always returns. </pre>

Original file line number	Diff line number	Diff line change
366		<pre>- for idx, unicode_version in enumerate(unicode_versions): </pre>
367		<pre>- # look ahead to next value </pre>
368		<pre>- try: </pre>
369		<pre>- cmp_next_version = _wcversion_value(unicode_versions[idx + 1]) </pre>
370		<pre>- except IndexError: </pre>
371		<pre>- # at end of list, return latest version </pre>
372		<pre>- return latest_version </pre>
373		<pre>- </pre>
374		<pre>- # Maybe our given version has less parts, as in tuple(8, 0), than the </pre>
375		<pre>- # next compare version tuple(8, 0, 0). Test for an exact match by </pre>
376		<pre>- # comparison of only the leading dotted piece(s): (8, 0) == (8, 0). </pre>

Original file line number	Diff line number	Diff line change
377		<pre>- if cmp_given == cmp_next_version[:len(cmp_given)]: </pre>
378		<pre>- return unicode_versions[idx + 1] </pre>
379		<pre>- </pre>
380		<pre>- # Or, if any next value is greater than our given support level </pre>
381		<pre>- # version, return the current value in index. Even though it must </pre>
382		<pre>- # be less than the given value, it's our closest possible match. That </pre>
383		<pre>- # is, 4.1 is returned for given 4.9.9, where 4.1 and 5.0 are available. </pre>
384		<pre>- if cmp_next_version > cmp_given: </pre>
385		<pre>- return unicode_version </pre>
386		<pre>- assert False, ("Code path unreachable", given_version, unicode_versions) # pragma: no cover </pre>

Original file line number	Diff line number	Diff line change
	293	+ return _LATEST_VERSION
387	294	
388	295	
389	296	 def iter_sequences(text: str) -> Iterator[tuple[str, bool]]:
⌵ ⌶ @@ -544,6 +451,11 @@ def width(		
544	451	 last_measured_idx = -2 # Track index of last measured char for VS16; -2 can never match idx-1
545	452	 text_len = len(text)
546	453	
	454	+ # Select wwidth call pattern for best lru_cache performance:
	455	+ # - ambiguous_width=1 (default): single-arg calls share cache with direct wwidth() calls

Original file line number	Diff line number	Diff line change
	456	+ # - ambiguous_width=2: full positional args needed (results differ, separate cache is correct)
	457	+ _wcwidth = wcwidth if ambiguous_width == 1 else lambda c: wcwidth(c, 'auto', ambiguous_width)
	458	+
547	459	 while idx < text_len:
548	460	 char = text[idx]
549	461	
⋮ ⋮ @@ -614,7 +526,7 @@ def width(		
614	526	 continue
615	527	
616	528	 # 7. Normal characters: measure with wcwidth
617		- w = wcwidth(char, 'auto', ambiguous_width)

Original file line number	Diff line number	Diff line change
	529	+ w = _wctype(char)
618	530	if w > 0:
619	531	current_col += w
620	532	max_extent = max(max_extent, current_col)

0 commit comments

Comments

0



Please [sign in](#) to comment.

Remove all but latest unicode version by jqkast · Pull Request #195 · jqkast/wcwidth · GitHub

 [jqkast](#) / [wcwidth](#) Public

-  [Notifications](#)
-  [Fork 66](#)
-  [Star 450](#)

Conversation



Owner



jqkast commented on Jan 27 ·



edited ▾

Closes [#190](#).

By our cautious use of `list_versions()` and other public API's, safely ignore any `unicode_version` argument or `UNICODE_VERSION` environment variable. No such things are ever processed. maybe this improves performance of the very first call.

A 20-30% performance boost is found by careful study of an `lru_cache` performance issue, by careful construction of positional only arguments, of fewest possible positions in the common case (`ambiguous_width=1`, and `unicode_version='auto'`). This "performance boost" would have worked with multiple versions, too, a nice discovery.





Safely Remove all but latest unicode version



5be3e77

By our cautious use of `list_versions()` and other public API's, safely ignore any ```unicode_version``` argument or ```UNICODE_VERSION``` environment variable. No such things are ever processed. maybe this improves performance of the very first call.

One small regret, that we cannot just delete the keyword argument from the signature and stop documenting about it while also ignoring any use, which could reduce its overhead in `lru_cache`, but I couldn't find a solution that wouldn't also raise `TypeError` or have some other performance impact.



github-advanced-security bot found potential problems [on Jan 27](#)

[View reviewed changes](#)



[tests/test_ucslevel.py](#) Fixed Show fixed Hide fixed



...

codspeed-hq bot commented on Jan 27 •



edited ▾

Merging this PR will improve performance by 25.73%

- < 9 improved benchmarks
- ✔ 47 untouched benchmarks

Performance Changes

	Benchmark	BASE	HEAD	Efficiency
⚡	test_wcswidth_decomposed	2.3 ms	1.8 ms	+25.73%
⚡	test_width_decomposed	2.6 ms	2.1 ms	+22.16%
⚡	test_wcswidth_long_japanese	279 μs	230.9 μs	+20.84%
⚡	test_width_udhr	138.9 ms	115.4 ms	+20.38%
⚡	test_width_composed	2 ms	1.7 ms	+21.72%
⚡	test_rjust_udhr_lines	1.8 ms	1.5 ms	+18.12%
⚡	test_wcswidth_composed	1.8 ms	1.4 ms	+24.87%
⚡	test_ljust_udhr_lines	1.8 ms	1.5 ms	+18.2%
⚡	test_center_udhr_lines	1.9 ms	1.6 ms	+16.7%

Comparing `jq/remove-older-tables` (9cd3f33) with `master` (70dd591)

 Open In CodSpeed



1





codecov bot commented on Jan 27 •



edited ▾

Codecov Report

- ✅ All modified and coverable lines are covered by tests.
- ✅ Project coverage is 98.53%. Comparing base ([70dd591](#)) to head ([9cd3f33](#)).
- ⚠️ Report is 2 commits behind head on master.

▶ Additional details and impacted files

[View full report in Codecov by Sentry.](#)

Have feedback on the report? [Share it here.](#)

▶ New features to boost your workflow:



[jqkast](#) added 3 commits [3 months ago](#)



[rewrite changelog](#)



[ba08704](#)



[lru_cache performance fix](#)



[2c41929](#)

```
lru_cache, it seems, is very peculiar about its positional arguments, so
we define a single-positioned cache in (default) case of
ambiguous_width=1, and otherwise we must also use the positional case of
(c, 'auto', ambiguous_width).
```



linting is the worst



23aa68f



[jqquast](#) changed the title ~~Safely Remove all but latest unicode version~~ Safely Remove all but latest unicode version, and small performance boost [on Jan 27](#)



[jqquast](#) changed the title ~~Safely Remove all but latest unicode version, and small performance boost~~ Remove all but latest unicode version [on Jan 27](#)



document performance improvement



9cd3f33



Hide details View details



[jqquast](#) merged commit [4ad63d0](#) into master [on Jan 27](#)

39 checks passed



[jqquast](#) deleted the jq/remove-older-tables branch [3 months ago](#)

[Sign up for free](#) to join this conversation on **GitHub**. Already have an account? [Sign in to comment](#)

Reviewers

No reviews

Assignees

No one assigned

Labels

None yet

Projects

None yet

Milestone

No milestone

Development

Successfully merging this pull request may close these issues.

👉 [Drop all but latest unicode table versions, reducing package size](#)

2 participants



wcwidth/tests at master · jqquast/wcwidth · GitHub

 [jqquast](#) / [wcwidth](#) Public

-  [Notifications](#)
-  [Fork 66](#)
-  [Star 450](#)



Files



 Go to file

Complete textwrap.wrap() with 6 missing params! (#207) · jquast/wcwidth@e19d2a2 · GitHub

 [jquast](#) / [wcwidth](#) Public

-  [Notifications](#)
-  [Fork 66](#)
-  [Star 450](#)

File tree



8 files changed

+299

-109

lines changed

[↑ Top](#)







✓  docs

 [conf.py](#)

 [intro.rst](#)

 [requirements.txt](#)

 [pyproject.toml](#)

 [requirements-docs.in](#)

✓  tests

 [test_textwrap.py](#)

▼  wewidth

 [__init__.py](#)

 [textwrap.py](#)



8 files changed

+299

-109

lines changed

 Search within code



[docs/conf.py](#)



+2-1Lines changed: 2 additions & 1 deletion



Original file line number	Diff line number	Diff line change
⌄ @@ -39,7 +39,8 @@		
39	39	'sphinx.ext.doctest',
40	40	'sphinx.ext.intersphinx',
41	41	'sphinx.ext.coverage',
42		- 'sphinx.ext.viewcode']
	42	+ 'sphinx.ext.viewcode',
	43	+ 'sphinx_autodoc_typehints']
43	44	
44	45	# Add any paths that contain templates here, relative to this directory.
45	46	templates_path = ['_templates']
⌄		

docs/intro.rst



+5Lines changed: 5 additions & 0 deletions



Original file line number	Diff line number	Diff line change
 @@ -456,6 +456,11 @@ languages. 		
456	456	History
457	457	=====
458	458	
	459	+ 0.6.0 *2026-02-06*
	460	+ * **New** Parameters ``expand_tabs``, ``replace_whitespace``, ``fix_sentence_endings``,
	461	+ ``drop_whitespace``, ``max_lines``, and ``placeholder`` for `wrap()`_, completing stdlib
	462	+ `textwrap.wrap()`_ compatibility.
	463	+
459	464	0.5.3 *2026-01-30*
460	465	* **Bugfix** Brahmic using Virama conjunct formation. `Issue #155`_, `PR #204`_.

Original file line number	Diff line number	Diff line change
461	466	
⋮ ↓		



docs/requirements.txt



+14-11Lines changed: 14 additions & 11 deletions



Original file line number	Diff line number	Diff line change
 @@ -2,45 +2,48 @@		
2	2	# This file is autogenerated by pip-compile with Python 3.12
3	3	# by the following command:
4	4	#
5		- # pip-compile --allow-unsafe --cert=None --client-cert=None --index-url=None --no-emit-index-url --output-file=docs/requirements.txt --pip-args=None --strip-extras requirements-docs.in
	5	+ # pip-compile --allow-unsafe --no-emit-index-url --output-file=docs/requirements.txt --strip-extras requirements-docs.in
6	6	#
7	7	
8	8	alabaster==1.0.0
9	9	# via sphinx

Original file line number	Diff line number	Diff line change
10		- babel==2.17.0
	10	+ babel==2.18.0
11	11	 # via sphinx
12		- certifi==2025.8.3
	12	+ certifi==2026.1.4
13	13	 # via requests
14		- charset-normalizer==3.4.3
	14	+ charset-normalizer==3.4.4
15	15	 # via requests
16		- docutils==0.21.2
	16	+ docutils==0.22.4

Original file line number	Diff line number	Diff line change
17	17	 # via
18	18	 # sphinx
19	19	 # sphinx-rtd-theme
20		- idna==3.10
	20	+ idna==3.11
21	21	 # via requests
22	22	 imagesize==1.4.1
23	23	 # via sphinx
24	24	 jinja2==3.1.6
25	25	 # via sphinx
26		- markupsafe==3.0.2

Original file line number	Diff line number	Diff line change
	26	+ markupsafe==3.0.3
27	27	 # via jinja2
28		- packaging==25.0
	28	+ packaging==26.0
29	29	 # via sphinx
30	30	 pygments==2.19.2
31	31	 # via sphinx
32	32	 requests==2.32.5
33	33	 # via sphinx
34		- roman-numerals-py==3.1.0
	34	+ roman-numerals==4.1.0

Original file line number	Diff line number	Diff line change
35	35	 # via sphinx
36	36	 snowballstemmer==3.0.1
37	37	 # via sphinx
38		- sphinx==8.2.3
	38	+ sphinx==9.1.0
39	39	 # via
40	40	 # -r requirements-docs.in
	41	+ # sphinx-autodoc-typehints
41	42	 # sphinx-rtd-theme
42	43	 # sphinxcontrib-jquery
43		- sphinx-rtd-theme==3.0.2

Original file line number	Diff line number	Diff line change
	44	+ sphinx-autodoc-typehints==3.6.2
	45	+ # via -r requirements-docs.in
	46	+ sphinx-rtd-theme==3.1.0
44	47	 # via -r requirements-docs.in
45	48	 sphinxcontrib-applehelp==2.0.0
46	49	 # via sphinx
⋮ ↓		



pyproject.toml



+1-1Lines changed: 1 addition & 1 deletion



Original file line number	Diff line number	Diff line change
 @@ -4,7 +4,7 @@ requires = ["hatchling"]		
4	4	
5	5	[project]
6	6	name = "wcwidth"
7		- version = "0.5.3"
	7	+ version = "0.6.0"
8	8	description = "Measures the displayed width of unicode strings in a terminal"
9	9	readme = "README.rst"
10	10	keywords = [
		

▼

[requirements-docs.in](#)



+1Lines changed: 1 addition & 0 deletions



Original file line number	Diff line number	Diff line change
... @@ -1,2 +1,3 @@		
1	1	Sphinx
2	2	sphinx_rtd_theme
	3	+ sphinx-autodoc-typehints



tests/test_textwrap.py



+131-55Lines changed: 131 additions & 55 deletions



Original file line number	Diff line number	Diff line change
↑... @@ -26,7 +26,6 @@ def fake_token_hex(n):		
26	26	
27	27	
28	28	SGR_RED = '\x1b[31m'
29		- SGR_BLUE = '\x1b[34m'
30	29	SGR_BOLD = '\x1b[1m'
31	30	SGR_RESET = '\x1b[0m'
32	31	ATTRS = ('\x1b[31m', '\x1b[34m', '\x1b[4m', '\x1b[7m', '\x1b[41m', '\x1b[37m', '\x1b[107m')
↓... ↑... @@ -59,7 +58,7 @@ def _adjust_stdlib_result(expected, kwargs):		
59	58	
60	59	if not expected:

Original file line number	Diff line number	Diff line change
61	60	 return expected
62		 - if kwargs.get('drop_whitespace'):
	61	 + if kwargs.get('drop_whitespace', True):
63	62	 # Strip trailing whitespace from each line (old Python bug)
64	63	 expected = [line.rstrip() for line in expected]
65	64	 # Remove leading all-whitespace lines (old Python bug)
⌕ @@ -77,15 +76,17 @@ def _colorize(text): 		
77	76	)
78	77	
79	78	
80		 - # Edge cases not covered by stdlib comparison

Original file line number	Diff line number	Diff line change
81		- BASIC_EDGE_CASES = []
	79	+ EDGE_CASES = []
82	80	[('', 10, []),]
83	81	[(' ', 10, []),]
84	82	[('������', 0, ['������']),]
	83	+ ('������', 1, ['������']),]
	84	+ (ZWJ_FAMILY, 1, [ZWJ_FAMILY]),]
	85	+ (HANGUL_GA, 1, [HANGUL_GA]),]
85	86	[]]
86	87	[]
87	88	[]

Original file line number	Diff line number	Diff line change
88		- @pytest.mark.parametrize('text,w,expected', BASIC_EDGE_CASES)
	89	+ @pytest.mark.parametrize('text,w,expected', EDGE_CASES)
89	90	def test_wrap_edge_cases(text, w, expected):
90	91	assert wrap(text, w) == expected
91	92	
⌕ @@ -94,12 +95,6 @@ def test_wrap_initial_indent():		
94	95	assert wrap('hello world', 10, initial_indent='> ') == ['> hello', 'world']
95	96	
96	97	
97		- def test_wrap_drops_trailing_whitespace():
98		- """Trailing whitespace stripped when drop_whitespace=True (CPython #140627)."""

Original file line number	Diff line number	Diff line change
99		- result = wrap(' Z! a bc defghij', 3)
100		- assert result[:3] == [' Z!', 'a', 'bc']
101		-
102		-
103	98	 LONG_WORD_CASES = [
104	99	 ('abcdefghij', 3, True, ['abc', 'def', 'ghi', 'j']),
105	100	 ('abcdefghij', 3, False, ['abcdefghij']),
⌕ @@ -111,30 +106,19 @@ def test_wrap_long_words(text, w, break_long, expected): 		
111	106	 assert wrap(text, w, break_long_words=break_long) == expected
112	107	
113	108	
114		- # Hyphen edge cases for long word breaking

Original file line number	Diff line number	Diff line change
115	109	 HYPHEN_LONG_WORD_CASES = [
116		- ('a-b-c-d', 3, True, ['a-', 'b-', 'c-d']),
117		- ('a-b-c-d', 3, False, ['a-b', '-c-', 'd']),
118		- ('---', 2, True, ['--', '-']),
119		- ('a---b', 2, True, ['a-', '--', 'b']),
120		- # With propagate_sgr=True, SGR continues to next line
121		- ('a-\x1b[31mb', 2, True, ['a-\x1b[31m\x1b[0m', '\x1b[31mb\x1b[0m']),
	110	+ ('a-b-c-d', 3, True, True, ['a-', 'b-', 'c-d']),
	111	+ ('a-b-c-d', 3, False, True, ['a-b', '-c-', 'd']),
	112	+ ('---', 2, True, True, ['--', '-']),
	113	+ ('a---b', 2, True, True, ['a-', '--', 'b']),

Original file line number	Diff line number	Diff line change
	114	+ ('a-\x1b[31mb', 2, True, True, ['a-\x1b[31m\x1b[0m', '\x1b[31mb\x1b[0m']),
	115	+ ('a-\x1b[31mb', 2, True, False, ['a-\x1b[31m', 'b']),
122	116	]
123	117	
124		- HYPHEN_LONG_WORD_CASES_NO_PROPAGATE = [
125		- # With propagate_sgr=False, SGR stays where it is
126		- ('a-\x1b[31mb', 2, True, ['a-\x1b[31m', 'b']),
127		-
128	118	
129		-
130		- @pytest.mark.parametrize('text,w,break_hyphens,expected', HYPHEN_LONG_WORD_CASES)
131		- def test_wrap_hyphen_long_words(text, w, break_hyphens, expected):

Original file line number	Diff line number	Diff line change
132		- assert wrap(text, w, break_on_hyphens=break_hyphens) == expected
133		-
134		-
135		- @pytest.mark.parametrize('text,w,break_hyphens,expected', HYPHEN_LONG_WORD_CASES_NO_PROPAGATE)
136		- def test_wrap_hyphen_long_words_no_propagate(text, w, break_hyphens, expected):
137		- assert wrap(text, w, break_on_hyphens=break_hyphens, propagate_sgr=False) == expected
	119	+ @pytest.mark.parametrize('text,w,break_hyphens,propagate,expected', HYPHEN_LONG_WORD_CASES)
	120	+ def test_wrap_hyphen_long_words(text, w, break_hyphens, propagate, expected):
	121	+ assert wrap(text, w, break_on_hyphens=break_hyphens, propagate_sgr=propagate) == expected
138	122	

Original file line number	Diff line number	Diff line change
139	123	
140	124	 # Comprehensive stdlib compatibility
@@ -147,6 +131,17 @@ def test_wrap_hyphen_long_words_no_propagate(text, w, break_hyphens, expected): 		
147	131	 {'break_long_words': True, 'drop_whitespace': True, 'subsequent_indent': ' '},
148	132	 {'break_long_words': True, 'drop_whitespace': True, 'break_on_hyphens': True},
149	133	 {'break_long_words': True, 'drop_whitespace': True, 'break_on_hyphens': False},
	134	+ {'break_long_words': True, 'drop_whitespace': False,
	135	+ 'subsequent_indent': '', 'max_lines': 4, 'placeholder': '~'},
	136	+ {'break_long_words': True, 'drop_whitespace': True,
	137	+ 'max_lines': 3, 'placeholder': '...'},

Original file line number	Diff line number	Diff line change
	138	+ {'break_long_words': True, 'drop_whitespace': True, }
	139	+ 'max_lines': 1, 'placeholder': '...'}, }
	140	+ {'expand_tabs': False, 'break_long_words': True, 'drop_whitespace': True}, }
	141	+ {'replace_whitespace': False, 'break_long_words': True, }
	142	+ 'drop_whitespace': True}, }
	143	+ {'fix_sentence_endings': True, 'break_long_words': True, }
	144	+ 'drop_whitespace': True}, }
150	145	 } }
151	146	 }
152	147	 }
⌵ ⌶ @@ -187,20 +182,6 @@ def test_wrap_multiline_matches_stdlib(): 		

Original file line number	Diff line number	Diff line change
187	182	 assert wrap(given, 30) == textwrap.wrap(given, 30)
188	183	
189	184	
190		- # Wide characters that exceed width=1 (tests force-grapheme logic)
191		- WIDE_CHAR_WIDTH_1_CASES = [
192		- ('��5973', 1, ['��5973']),
193		- (ZWJ_FAMILY, 1, [ZWJ_FAMILY]),
194		- (HANGUL_GA, 1, [HANGUL_GA]),
195		-]
196		-
197		-
198		- @pytest.mark.parametrize('text,w,expected', WIDE_CHAR_WIDTH_1_CASES)

Original file line number	Diff line number	Diff line change
199		- def test_wrap_wide_char_width_1(text, w, expected): }
200		- assert wrap(text, w) == expected }
201		- }
202		- }
203		- # Unicode width-aware wrapping }
204	185	{ UNICODE_CASES = [}
205	186	{ # CJK (2 cells each) }
206	187	{ ('����������������', 4, ['��������', '��������']), }
⌵ ⌶ @@ -244,24 +225,15 @@ def test_wrap_unicode(benchmark, text, w, expected): }		
244	225	{ ('abc�x1bdefghij', 3, ['abc�x1b', 'def', 'ghi', 'j']), }
245	226	{ } }
246	227	{ }

Original file line number	Diff line number	Diff line change
247		- # Old behavior tests (propagate_sgr=False)
248	228	 SEQUENCE_CASES_NO_PROPAGATE = [
249		- (f'{SGR_RED}red{SGR_RESET} blue', 4, [f'{SGR_RED}red{SGR_RESET}', 'blue']),
250	229	 (f'hello{SGR_RED} world', 6, [f'hello{SGR_RED}', 'world']),
251		- (f'{SGR_RED}{SGR_RESET}', 10, [f'{SGR_RED}{SGR_RESET}']),
252		- (f'hello {SGR_RED}{SGR_RESET}world', 6, ['hello', f'{SGR_RED} {SGR_RESET}world']),
253		- # Sequences preserved where they are, not propagated
254	230	 (f'\x1b[31mabcdefghij\x1b[0m', 3, [f'\x1b[31mab', 'cde', 'fgh', 'ij\x1b[0m']),
255	231	]
256	232	
257	233	

Original file line number	Diff line number	Diff line change
258	234	@pytest.mark.parametrize('text,w,expected', SEQUENCE_CASES)
259	235	def test_wrap_sequences(benchmark, text, w, expected):
260		- result = benchmark(wrap, text, w)
261		- if any('\x1b' in e or '\x00' <= e[0] < '\x20' for e in expected if e):
262		- assert result == expected
263		- else:
264		- assert result == expected
	236	+ assert benchmark(wrap, text, w) == expected
265	237	
266	238	
267	239	@pytest.mark.parametrize('text,w,expected', SEQUENCE_CASES_NO_PROPAGATE)

Original file line number	Diff line number	Diff line change
		<pre> @@ -445,3 +417,107 @@ def test_wrap_hyperlink_word_boundary(text, w, expected): </pre>
445	417	<pre> """OSC hyperlink sequences should act as word boundaries.""" </pre>
446	418	<pre> result = wrap(text, w) </pre>
447	419	<pre> assert result == expected </pre>
	420	<pre> + </pre>
	421	<pre> + </pre>
	422	<pre> + PLACEHOLDER_STDLIB_CASES = [</pre>
	423	<pre> + ('The quick brown fox jumps over the lazy dog', </pre>
	424	<pre> + {'width': 10, 'max_lines': 3, 'placeholder': '...'}), </pre>
	425	<pre> + ('1234567890 1234567890 extra', </pre>
	426	<pre> + {'width': 10, 'max_lines': 2, 'placeholder': '...'}), </pre>
	427	<pre> + ('1234567890 1234567890', </pre>

Original file line number	Diff line number	Diff line change
	428	+ {'width': 10, 'max_lines': 1, 'placeholder': '...'}),
	429	+ ('short 1234567890 extra',
	430	+ {'width': 10, 'max_lines': 2, 'placeholder': '...'}),
	431	+ ('hello world',
	432	+ {'width': 10, 'max_lines': 5, 'placeholder': '...'}),
	433	+ ('hello world foo bar baz',
	434	+ {'width': 8, 'max_lines': 2, 'placeholder': ' [...]'}),
	435	+ ('a bb ccc',
	436	+ {'width': 3, 'max_lines': 2, 'placeholder': '.'}),
	437	+ ('a bb ccc dddd',
	438	+ {'width': 4, 'max_lines': 3, 'placeholder': '~'}),
	439	+ (' a ', {'width': 1, 'max_lines': 2, 'drop_whitespace': False, 'placeholder': '~'}),

Original file line number	Diff line number	Diff line change
	440	+ ('hello world', {'width': 20, 'max_lines': 5}),
	441	+ ('ab cd', {'width': 5, 'max_lines': 1}),
	442	+ ('aaa bbb ccc', {'width': 3, 'max_lines': 2, 'placeholder': '...'}),
	443	+ ('hello world foo bar',
	444	+ {'width': 10, 'subsequent_indent': ' ', 'max_lines': 2, 'placeholder': '...'}),
	445	+ ('hello world foo bar',
	446	+ {'width': 10, 'initial_indent': '> ', 'max_lines': 2, 'placeholder': '...'}),
	447	+]
	448	+
	449	+
	450	+ @pytest.mark.parametrize('text,kwargs', PLACEHOLDER_STDLIB_CASES)

Original file line number	Diff line number	Diff line change
	451	+ def test_wrap_max_lines_matches_stdlib(text, kwargs):
	452	+ expected = _adjust_stdlib_result(textwrap.wrap(text, **kwargs), kwargs)
	453	+ assert wrap(text, **kwargs) == expected
	454	+
	455	+
	456	+ def test_wrap_placeholder_too_large():
	457	+ with pytest.raises(ValueError, match="placeholder too large"):
	458	+ wrap('hello', width=3, max_lines=1, placeholder='.....')
	459	+ with pytest.raises(ValueError):
	460	+ textwrap.wrap('fox', width=1, max_lines=3, placeholder='...')
	461	+
	462	+
	463	+ MAX_LINES_SEQUENCE_CASES = [

Original file line number	Diff line number	Diff line change
	464	+ (f'{SGR_RED}hello world foo bar{SGR_RESET}',
	465	+ 8, 2, '...', [f'{SGR_RED}hello{SGR_RESET}', f'{SGR_RED}world... {SGR_RESET}']],
	466	+ (f'{SGR_RED}hello{SGR_RESET} world foo',
	467	+ 8, 2, '...', [f'{SGR_RED}hello{SGR_RESET}', 'world...']],
	468	+ (f'{SGR_RED}hello{SGR_RESET} world',
	469	+ 6, 1, '.', [f'{SGR_RED}hello{SGR_RESET}.']],
	470	+ ('\u4e2d\u6587 \u5b57\u7b26 hello', 5, 1, '~', ['\u4e2d\u6587~']),
	471	+ ('\u4e2d\u6587 \u5b57\u7b26 hello world', 5, 2, '~', ['\u4e2d\u6587', '\u5b57\u7b26~']),
	472	+ ('\u4e2d\u6587\u5b57\u7b26 hello', 12, 1, '...', ['\u4e2d\u6587\u5b57\u7b26...']),
	473	+]
	474	+

Original file line number	Diff line number	Diff line change
	475	+
	476	+ @pytest.mark.parametrize('text,w,ml,ph,expected', MAX_LINES_SEQUENCE_CASES)
	477	+ def test_wrap_max_lines_sequences(text, w, ml, ph, expected):
	478	+ assert wrap(text, w, max_lines=ml, placeholder=ph) == expected
	479	+
	480	+
	481	+ def test_wrap_max_lines_hyperlink_closed():
	482	+ """Truncation inside a hyperlink closes it before the placeholder."""
	483	+ text = f'{OSC_START_ST}Click here please{OSC_END_ST}'
	484	+ result = wrap(text, 10, max_lines=1, placeholder='...')
	485	+ assert len(result) == 1
	486	+ assert result[0].endswith(f'{OSC_END_ST}...')

Original file line number	Diff line number	Diff line change
	487	+ assert OSC_START_ST in result[0]
	488	+
	489	+
	490	+ def test_wrap_max_lines_hyperlink_close_on_prev_line():
	491	+ """"Fallback to previous line preserves hyperlink close sequence."""
	492	+ text = f'{OSC_START_ST}ab{OSC_END_ST} ccccccccc ddddd'
	493	+ result = wrap(text, 10, max_lines=2, placeholder='...')
	494	+ assert result == [f'{OSC_START_ST}ab{OSC_END_ST}...']
	495	+
	496	+
	497	+ # -- expand_tabs, replace_whitespace, fix_sentence_endings --
	498	+
	499	+ STDLIB_PARAM_CASES = [

Original file line number	Diff line number	Diff line change
	500	+ (<code>'hello\tworld'</code> , <code>{'width': 20, 'expand_tabs': False, 'replace_whitespace': False}</code>),
	501	+ (<code>'hello\tworld foo\tbar baz'</code> , <code>{'width': 12, 'expand_tabs': False, 'tabsize': 8}</code>),
	502	+ (<code>'hello\nworld'</code> , <code>{'width': 20, 'replace_whitespace': False}</code>),
	503	+ (<code>'a\t b\n c'</code> , <code>{'width': 20, 'replace_whitespace': False}</code>),
	504	+ (<code>'Hello world. This is a test. More text.'</code> , <code>{'width': 20, 'fix_sentence_endings': True}</code>),
	505	+ (<code>'Dr. Smith went to Washington. He left.'</code> , <code>{'width': 20, 'fix_sentence_endings': True}</code>),
	506	+]
	507	+
	508	+
	509	+ <code>@pytest.mark.parametrize('text,kwargs', STDLIB_PARAM_CASES)</code>
	510	+ <code>def test_wrap_stdlib_params(text, kwargs):</code>

Original file line number	Diff line number	Diff line change
	511	+ assert wrap(text, **kwargs) == textwrap.wrap(text, **kwargs)
	512	+
	513	+
	514	+ def test_wrap_expand_tabs_false_with_sequences():
	515	+ text = f'{SGR_RED}a\tb{SGR_RESET}'
	516	+ result = wrap(text, 20, expand_tabs=False, replace_whitespace=False)
	517	+ assert '\t' in _strip(result[0])
	518	+
	519	+
	520	+ def test_wrap_replace_whitespace_false_newlines_zero_width():
	521	+ """Newlines have zero display width, so more text fits per line than stdlib."""
	522	+ assert wrap('hello\nworld foo\nbar', 10, replace_whitespace=False) == [

Original file line number	Diff line number	Diff line change
	523	+ 'hello\nworld', 'foo\nbar']



wcwidth/__init__.py



+1-1Lines changed: 1 addition & 1 deletion



Original file line number	Diff line number	Diff line change
⬆ @@ -40,4 +40,4 @@		
40	40	
41	41	# Using 'hatchling', it does not seem to provide the pyproject.toml nicety, "dynamic = ['version']"
42	42	# like flit_core, maybe there is some better way but for now we have to duplicate it in both places
43		- __version__ = '0.5.3'
	43	+ __version__ = '0.6.0'



[wcwidth/textwrap.py](#)



+144-40Lines changed: 144 additions & 40 deletions



Original file line number	Diff line number	Diff line change
 <pre> @@ -228,6 +228,16 @@ def _wrap_chunks(self, chunks: list[str]) -> list[str]: # pylint: disable=too-m </pre>		
228	228	<pre> if not chunks: </pre>
229	229	<pre> return [] </pre>
230	230	<pre> </pre>
	231	<pre> + if self.max_lines is not None: </pre>
	232	<pre> + if self.max_lines > 1: </pre>
	233	<pre> + indent = self.subsequent_indent </pre>
	234	<pre> + else: </pre>
	235	<pre> + indent = self.initial_indent </pre>
	236	<pre> + if (self._width(indent) </pre>
	237	<pre> + + self._width(self.placeholder.lstrip()) </pre>
	238	<pre> + > self.width): </pre>

Original file line number	Diff line number	Diff line change
	239	+ raise ValueError("placeholder too large for max width")
	240	+
231	241	 lines: list[str] = []
232	242	 is_first_line = True
233	243	
⌵ ⌶ @@ -296,48 +306,90 @@ def _wrap_chunks(self, chunks: list[str]) -> list[str]: # pylint: disable=too-m 		
296	306	 current_line[-1] = current_line[-1] + sequences
297	307	
298	308	 if current_line:
299		- line_content = ''.join(current_line)
300		-

Original file line number	Diff line number	Diff line change
301		<pre>- # Track hyperlink state through this line's content </pre>
302		<pre>- new_state = self._track_hyperlink_state(line_content, hyperlink_state) </pre>
303		<pre>- </pre>
304		<pre>- # If we end inside a hyperlink, append close sequence </pre>
305		<pre>- if new_state is not None: </pre>
306		<pre>- # Ensure we have an id for continuation </pre>
307		<pre>- if current_hyperlink_id is None: </pre>
308		<pre>- if 'id=' in new_state.params: </pre>
309		<pre>- current_hyperlink_id = new_state.params </pre>
310		<pre>- elif new_state.params: </pre>
311		<pre>- # Prepend id to existing params (per OSC 8 spec, params can have </pre>
312		<pre>- # multiple key=value pairs separated by :)</pre>

Original file line number	Diff line number	Diff line change
313		- current_hyperlink_id = (
314		- f'id={self._next_hyperlink_id()}:{new_state.params}')
315		- else:
316		- current_hyperlink_id = f'id={self._next_hyperlink_id()}'
317		- line_content = line_content + _make_hyperlink_close(new_state.terminator)
318		-
319		- # Also need to inject the id into the opening sequence if it didn't have one
320		- if 'id=' not in new_state.params:
321		- # Find and replace the original open sequence with one that has id
322		- old_open = _make_hyperlink_open(
323		- new_state.url, new_state.params, new_state.terminator)

Original file line number	Diff line number	Diff line change
324		- new_open = _make_hyperlink_open(
	309	+ # Check whether this is a normal append or max_lines
	310	+ # truncation. Matches stdlib textwrap precedence:
	311	+ # normal if max_lines not set, not yet reached, or no
	312	+ # remaining visible content that would need truncation.
	313	+ no_more_content = (
	314	+ not chunks or
	315	+ self.drop_whitespace and
	316	+ len(chunks) == 1 and
	317	+ not self._strip_sequences(chunks[0]).strip()
	318	+)

Original file line number	Diff line number	Diff line change
	319	+ if (self.max_lines is None or
	320	+ len(lines) + 1 < self.max_lines or
	321	+ no_more_content
	322	+ and current_width <= line_width):
	323	+ line_content = ''.join(current_line)
	324	+
	325	+ # Track hyperlink state through this line's content
	326	+ new_state = self._track_hyperlink_state(line_content, hyperlink_state)
	327	+
	328	+ # If we end inside a hyperlink, append close sequence
	329	+ if new_state is not None:
	330	+ # Ensure we have an id for continuation

Original file line number	Diff line number	Diff line change
	331	+ if current_hyperlink_id is None:
	332	+ if 'id=' in new_state.params:
	333	+ current_hyperlink_id = new_state.params
	334	+ elif new_state.params:
	335	+ # Prepend id to existing params (per OSC 8 spec, params can have
	336	+ # multiple key=value pairs separated by :)
	337	+ current_hyperlink_id = (
	338	+ f'id={self._next_hyperlink_id()}:{new_state.params}')
	339	+ else:
	340	+ current_hyperlink_id = f'id={self._next_hyperlink_id()}'
	341	+ line_content += _make_hyperlink_close(new_state.terminator)
	342	+

Original file line number	Diff line number	Diff line change
	343	+ # Also need to inject the id into the opening
	344	+ # sequence if it didn't have one
	345	+ if 'id=' not in new_state.params:
	346	+ # Find and replace the original open sequence with one that has id
	347	+ old_open = _make_hyperlink_open(
	348	+ new_state.url, new_state.params, new_state.terminator)
	349	+ new_open = _make_hyperlink_open(
	350	+ new_state.url, current_hyperlink_id, new_state.terminator)
	351	+ line_content = line_content.replace(old_open, new_open, 1)
	352	+
	353	+ # Update state for next line, using computed id

Original file line number	Diff line number	Diff line change
	354	+ hyperlink_state = _HyperlinkState(
325	355	 new_state.url, current_hyperlink_id, new_state.terminator)
326		- line_content = line_content.replace(old_open, new_open, 1)
327		-
328		- # Update state for next line, using computed id
329		- hyperlink_state = _HyperlinkState(
330		- new_state.url, current_hyperlink_id, new_state.terminator)
	356	+ else:
	357	+ hyperlink_state = None
	358	+ current_hyperlink_id = None # Reset id when hyperlink closes
	359	+

Original file line number	Diff line number	Diff line change
	360	+ # Strip trailing whitespace when drop_whitespace is enabled
	361	+ # (matches CPython #140627 fix behavior)
	362	+ if self.drop_whitespace:
	363	+ line_content = line_content.rstrip()
	364	+ lines.append(indent + line_content)
	365	+ is_first_line = False
331	366	 else:
332		- hyperlink_state = None
333		- current_hyperlink_id = None # Reset id when hyperlink closes
334		-
335		- # Strip trailing whitespace when drop_whitespace is enabled

Original file line number	Diff line number	Diff line change
336		- # (matches CPython #140627 fix behavior)
337		- if self.drop_whitespace:
338		- line_content = line_content.rstrip()
339		- lines.append(indent + line_content)
340		- is_first_line = False
	367	+ # max_lines reached with remaining content -
	368	+ # pop chunks until placeholder fits, then break.
	369	+ placeholder_w = self._width(self.placeholder)
	370	+ while current_line:
	371	+ last_text = self._strip_sequences(current_line[-1])
	372	+ if (last_text.strip()

Original file line number	Diff line number	Diff line change
	373	+ and current_width + placeholder_w <= line_width):
	374	+ line_content = ''.join(current_line)
	375	+ new_state = self._track_hyperlink_state(
	376	+ line_content, hyperlink_state)
	377	+ if new_state is not None:
	378	+ line_content += _make_hyperlink_close(
	379	+ new_state.terminator)
	380	+ lines.append(indent + line_content + self.placeholder)
	381	+ break
	382	+ current_width -= self._width(current_line[-1])
	383	+ del current_line[-1]

Original file line number	Diff line number	Diff line change
	384	+ else:
	385	+ if lines:
	386	+ prev_line = self._rstrip_visible(lines[-1])
	387	+ if (self._width(prev_line) + placeholder_w
	388	+ <= self.width):
	389	+ lines[-1] = prev_line + self.placeholder
	390	+ break
	391	+ lines.append(indent + self.placeholder.lstrip())
	392	+ break
341	393	
342	394	 return lines

Original file line number	Diff line number	Diff line change
	522	+ last_vis = i
	523	+ if last_vis == -1:
	524	+ return ''
	525	+ result = []
	526	+ for i, (segment, is_seq) in enumerate(segments):
	527	+ if i < last_vis:
	528	+ result.append(segment)
	529	+ elif i == last_vis:
	530	+ result.append(segment.rstrip())
	531	+ elif is_seq:
	532	+ result.append(segment)

Original file line number	Diff line number	Diff line change
	533	+ return ''.join(result)
	534	+
464	535	
465	536	 def wrap(text: str, width: int = 70, *,
466	537	 control_codes: Literal['parse', 'strict', 'ignore'] = 'parse',
467	538	 tabsize: int = 8,
	539	+ expand_tabs: bool = True,
	540	+ replace_whitespace: bool = True,
468	541	 ambiguous_width: int = 1,
469	542	 initial_indent: str = '',
470	543	 subsequent_indent: str = '',

Original file line number	Diff line number	Diff line change
	544	+ fix_sentence_endings: bool = False,
471	545	 break_long_words: bool = True,
472	546	 break_on_hyphens: bool = True,
	547	+ drop_whitespace: bool = True,
	548	+ max_lines: int None = None,
	549	+ placeholder: str = ' [...]',
473	550	 propagate_sgr: bool = True) -> list[str]:
474	551	 r"""
475	552	 Wrap text to fit within given width, returning a list of wrapped lines.
 @@ -482,12 +559,28 @@ def wrap(text: str, width: int = 70, *,		
482	559	 :param width: Maximum line width in display cells.

Original file line number	Diff line number	Diff line change
483	560	<pre> :param control_codes: How to handle terminal sequences (see :func:`~.width`). </pre>
484	561	<pre> :param tabsize: Tab stop width for tab expansion. </pre>
	562	<pre> + :param expand_tabs: If True (default), tab characters are expanded </pre>
	563	<pre> + to spaces using ``tabsize``. </pre>
	564	<pre> + :param replace_whitespace: If True (default), each whitespace character </pre>
	565	<pre> + is replaced with a single space after tab expansion. When False, </pre>
	566	<pre> + control whitespace like ``\n`` has zero display width (unlike </pre>
	567	<pre> + :func:`~textwrap.wrap` which counts ``len()``, so wrap points </pre>
	568	<pre> + may differ from stdlib for non-space whitespace characters. </pre>

Original file line number	Diff line number	Diff line change
485	569	 :param ambiguous_width: Width to use for East Asian Ambiguous (A)
486	570	 characters. Default is ``1`` (narrow). Set to ``2`` for CJK contexts.
487	571	 :param initial_indent: String prepended to first line.
488	572	 :param subsequent_indent: String prepended to subsequent lines.
	573	+ :param fix_sentence_endings: If True, ensure sentences are always
	574	+ separated by exactly two spaces.
489	575	 :param break_long_words: If True, break words longer than width.
490	576	 :param break_on_hyphens: If True, allow breaking at hyphens.
	577	+ :param drop_whitespace: If True (default), whitespace at the beginning

Original file line number	Diff line number	Diff line change
	578	+ and end of each line (after wrapping but before indenting) is dropped.
	579	+ Set to False to preserve whitespace.
	580	+ :param max_lines: If set, output contains at most this many lines, with
	581	+ ``placeholder`` appended to the last line if the text was truncated.
	582	+ :param placeholder: String appended to the last line when text is
	583	+ truncated by ``max_lines``. Default is ``' [...]''``.
491	584	 :param propagate_sgr: If True (default), SGR (terminal styling) sequences
492	585	 are propagated across wrapped lines. Each line ends with a reset
493	586	 sequence and the next line begins with the active style restored.
⌵ ⌶ <pre>@@ -526,6 +619,10 @@ def wrap(text: str, width: int = 70, *,</pre>		

Original file line number	Diff line number	Diff line change
526	619	 .. versionchanged:: 0.5.0
527	620	 Added ``propagate_sgr`` parameter (default True).
528	621	
	622	+ .. versionchanged:: 0.6.0
	623	+ Added ``expand_tabs``, ``replace_whitespace``, ``fix_sentence_endings``,
	624	+ ``drop_whitespace``, ``max_lines``, and ``placeholder`` parameters.
	625	+
529	626	 Example::
530	627	
531	628	 >>> from wcwidth import wrap
 @@ -534,15 +631,22 @@ def wrap(text: str, width: int = 70, *, 		
534	631	 >>> wrap('中文字符', 4) # CJK characters (2 cells each)

Original file line number	Diff line number	Diff line change
535	632	 '中文', '字符'
536	633	 """"
	634	 + # pylint: disable=too-many-arguments,too-many-locals
537	635	 wrapper = SequenceTextWrapper(
538	636	 width=width,
539	637	 control_codes=control_codes,
540	638	 tabsize=tabsize,
	639	 + expand_tabs=expand_tabs,
	640	 + replace_whitespace=replace_whitespace,
541	641	 ambiguous_width=ambiguous_width,
542	642	 initial_indent=initial_indent,

0 commit comments

Comments

0



Please [sign in](#) to comment.

Complete `textwrap.wrap()` with 6 missing params! by jquast · Pull Request #207 · jquast/wcwidth · GitHub

 [jquast](#) / [wcwidth](#) Public

-  [Notifications](#)
-  [Fork 66](#)
-  [Star 450](#)

Conversation



Owner



jquast commented [on Feb 6](#) ·



edited ▾

Make available all keyword parameters for `wcwidth.wrap()` as `textwrap.wrap()`.

New Parameters `expand_tabs`, `replace_whitespace`, `fix_sentence_endings`, `drop_whitespace`, `max_lines`, and `placeholder` for `wrap()`, completing `stdlib textwrap.wrap()` compatibility.

Code mostly for 'drop_whitespace' and 'placeholder', and, that I found a very peculiar bug in standard python's `textwrap fix_sentence_endings`, that `'\n'` is "of length 1" -- anyway this argument is rarely used -- the other parameters simply needed to be "wired in", I forgot them!





codspeed-hq bot commented on Feb 6 •



edited ▾

Merging this PR will not alter performance

✅ 64 untouched benchmarks

Comparing `jq/more-wrap-options` ([1ee7f15](#)) with `master` ([666c501](#))



Open In CodSpeed



codecov bot commented on Feb 6 •



edited ▾

Codecov Report

- ✅ All modified and coverable lines are covered by tests.
- ✅ Project coverage is 100.00%. Comparing base ([666c501](#)) to head ([1ee7f15](#)).
- ⚠️ Report is 1 commits behind head on master.

► Additional details and impacted files

[View full report in Codecov by Sentry.](#)

Have feedback on the report? [Share it here.](#)

► New features to boost your workflow:



jqbast marked this pull request as ready for review 2 months ago



jqbast force-pushed the jq/more-wrap-options branch 2 times, most recently from 40d2ccc to fd42dd3 Compare 2 months ago



jqbast mentioned this pull request on Feb 6

Bugfix: Terminal.wrap drops color escape sequence jqbast/blessed#352

🔗 Merged



Complete textwrap.wrap() with 6 missing params! ...



1ee7f15

```
**New** Parameters ``expand_tabs``, ``replace_whitespace``,  
``fix_sentence_endings``,  
``drop_whitespace``, ``max_lines``, and ``placeholder`` for ``wrap()``,  
completing stdlib  
``textwrap.wrap()`` compatibility.
```

Wrote code mostly for 'drop_whitespace' and 'placeholder', and found a very peculiar bug in standard python's textwrap fix_sentence_endings, that '\n' is "of length 1" -- the other parameters simply needed to be "wired in".



jqbast force-pushed the jq/more-wrap-options branch from fd42dd3 to 1ee7f15 Compare 2 months ago



Hide details View details



[jqkast](#) merged commit [e19d2a2](#) into master [on Feb 6](#)

39 checks passed



[jqkast](#) deleted the jq/more-wrap-options branch [2 months ago](#)



[jqkast](#) added a commit to jqkast/blessed that referenced this pull request [on Feb 6](#)



[Bugfix: Terminal.wrap drops color escape sequence \(#352\)](#)



Verified



[ae07a28](#)

Bugfix by integration with `wcwidth.width()` 0.6.0, just released,
[jqkast/wcwidth#207](#)

Closes [#351](#).

[Sign up for free](#) to join this conversation on **GitHub**. Already have an account? [Sign in to comment](#)

Reviewers

No reviews

Assignees

No one assigned

Labels

None yet

Projects

None yet

Milestone

No milestone

Development

Successfully merging this pull request may close these issues.

None yet

1 participant



wcwidth/wcwidth at master · jqmast/wcwidth · GitHub

 [jqmast](#) / [wcwidth](#) Public

-  [Notifications](#)
-  [Fork 66](#)
-  [Star 450](#)



Files



 Go to file


wcwidth/.gitignore at master · jquast/wcwidth · GitHub

 [jquast](#) / [wcwidth](#) Public

-  [Notifications](#)
-  [Fork 66](#)
-  [Star 450](#)



Files



 Go to file

Do not distribute any data files (#199) ·

jquast/wcwidth@8d27c08 · GitHub

 [jquast](#) / [wcwidth](#) Public

-  [Notifications](#)
-  [Fork 66](#)
-  [Star 450](#)

File tree



25 files changed

+316

-5973

lines changed

 [Top](#)







✓  [.github/workflows](#)

 [ci.yml](#)

 [codspeed.yml](#)

 [.gitignore](#)

✓  [bin](#)

 [update-tables.py](#)

 [verify-table-integrity.py](#)

✓  [docs](#)

 [unicode_version.rst](#)

-  [pyproject.toml](#)
-  [requirements-tests38.in](#)
-  [requirements-tests38.txt](#)
-  [requirements-tests39.in](#)
-  [requirements-tests39.txt](#)
- ▼  tests
 -  [GraphemeBreakTest.txt](#)
 -  [emoji-variation-sequences.txt](#)
 -  [emoji-zwj-sequences.txt](#)
 -  [test_benchmarks.py](#)
 -  [test_emojis.py](#)
 -  [test_grapheme.py](#)
 -  [test_table_integrity.py](#)
 -  [test_textwrap.py](#)
 -  [udhr_combined.txt](#)
 -  [tox.ini](#)
- ▼  wcwidth
 -  [__init__.py](#)
 -  [table_grapheme.py](#)
 -  [table_wide.py](#)
 -  [table_zero.py](#)



25 files changed

+316

-5973

lines changed

🔍 Search within code



`.github/workflows/ci.yml`



+8-8Lines changed: 8 additions & 8 deletions



Original file line number	Diff line number	Diff line change
 <pre>@@ -108,28 +108,28 @@ jobs: </pre>		
108	108	
109	109	 python -Im pip install tox
110	110	
111		- - name: Prepare sdist and source-dir
	111	+ - name: Build wheel
112	112	 shell: bash
113	113	 run:
114	114	 python -Im pip install build
115		- python -Im build
	115	+ python -Im build --wheel
116	116	
117		- mkdir source-dir

Original file line number	Diff line number	Diff line change
118		- tar -xzvf dist/wcwidth-*.tar.gz -C source-dir --strip-components=1
	117	+ - name: Fetch test data files
	118	+ if: matrix.python-version == '3.14' && matrix.os == 'ubuntu-latest'
	119	+ shell: bash
	120	+ run:
	121	+ python -Im tox -e fetch
119	122	
120	123	 - name: Run tests
121	124	 shell: bash
122		- working-directory: ./source-dir
123	125	 run:

Original file line number	Diff line number	Diff line change
124		- python -Im tox -e \${ env.TOX_PYTHON }}
	126	+ python -Im tox -e \${ env.TOX_PYTHON }} --installpkg dist/wcwidth-*.whl
125	127	
126	128	- name: Rename coverage data
127	129	shell: bash
128		- working-directory: ./source-dir
129	130	run:
130	131	if test -f .coverage; then
131	132	mv .coverage{,.\${ matrix.os }}.\${ env.TOX_PYTHON }}.\${(date +%Y-%m-%d_%H%M%S")}
132		- mv .coverage.* ..
133	133	fi

Original file line number	Diff line number	Diff line change
134	134	
135	135	 - name: Upload coverage data
⋮ ↓		



[.github/workflows/codspeed.yml](#)



+2-2Lines changed: 2 additions & 2 deletions



Original file line number	Diff line number	Diff line change
 @@ -26,8 +26,8 @@ jobs:		
26	26	- name: Install dependencies
27	27	run:
28	28	python -Im pip install --upgrade pip
29		- python -Im pip install -e .
30		- python -Im pip install -r requirements-tests39.txt
	29	+ python -Im pip install -e . -r requirements-tests39.txt -r requirements-update.txt
	30	+ python bin/update-tables.py --only-fetch
31	31	- name: Run benchmarks
32	32	uses: CodSpeedHQ/action@v4
33	33	with:

Original file line number	Diff line number	Diff line change
⋮ ↓		



`.gitignore`



+1-1Lines changed: 1 addition & 1 deletion



Original file line number	Diff line number	Diff line change
⋮ ↑ @@ -15,4 +15,4 @@ data		
15	15	.DS_Store
16	16	.idea
17	17	.python-version
18		-
	18	+ tests/*.txt



`bin/update-tables.py`



+112-17Lines changed: 112 additions & 17 deletions



Original file line number	Diff line number	Diff line change
⬆ @@ -11,10 +11,12 @@		
11	11	from __future__ import annotations
12	12	
13	13	# std imports
	14	+ import io
14	15	import os
15	16	import re
16	17	import string
17	18	import difflib
	19	+ import zipfile
18	20	import argparse

Original file line number	Diff line number	Diff line change
19	21	 import datetime
20	22	 import functools
⌵ ⌶ <pre> @@ -51,9 +53,10 @@ </pre>		
51	53	 UTC_NOW = datetime.datetime.now(datetime.UTC).strftime("%Y-%m-%d %H: UTC")
52	54	
53	55	 CONNECT_TIMEOUT = int(os.environ.get('CONNECT_TIMEOUT', '10'))
	56	+ READ_TIMEOUT = int(os.environ.get('READ_TIMEOUT', '30'))
54	57	 FETCH_BLOCKSIZE = int(os.environ.get('FETCH_BLOCKSIZE', '4096'))
55	58	 MAX_RETRIES = int(os.environ.get('MAX_RETRIES', '10'))
56		- BACKOFF_FACTOR = float(os.environ.get('BACKOFF_FACTOR', '0.1'))
	59	+ BACKOFF_FACTOR = float(os.environ.get('BACKOFF_FACTOR', '1.0'))

Original file line number	Diff line number	Diff line change
57	60	
58	61	 # Global flag set by main() from --check-last-modified CLI argument.
59	62	 # When True, perform HTTP HEAD requests to check if remote files are
⌵ ⌶ @@ -818,6 +821,7 @@ class UnicodeDataFile: 		
818	821	 URL_DERIVED_CORE_PROPS = 'https://www.unicode.org/Public/{version}/ucd/DerivedCoreProperties.'
819	822	 URL_PROP_LIST = 'https://www.unicode.org/Public/{version}/ucd/PropLi
820	823	 URL_GRAPHEME_BREAK_TEST = 'https://www.unicode.org/Public/{version}/ucd/auxiliary/GraphemeBrea
	824	+ URL_UDHR_ZIP = 'http://efele.net/udhr/assemblies/udhr_txt.zip'
821	825	
822	826	 @classmethod
823	827	 def DerivedAge(cls) -> str:

Original file line number	Diff line number	Diff line change
⌵ ⌶ <pre> @@ -896,6 +900,47 @@ def TestGraphemeBreakTest(cls) -> str: </pre>		
896	900	<pre> cls.do_retrieve(url=cls.URL_GRAPHEME_BREAK_TEST.format(version=versi fname=fname) </pre>
897	901	<pre> return fname </pre>
898	902	<pre> </pre>
	903	<pre> + @classmethod </pre>
	904	<pre> + def UDHRCombined(cls) -> str: </pre>
	905	<pre> + """ </pre>
	906	<pre> + Fetch UDHR zip, extract and combine all translations into a single f </pre>
	907	<pre> + </pre>
	908	<pre> + Downloads http://efele.net/udhr/assemblies/udhr_txt.zip, extracts th files, </pre>
	909	<pre> + and combines them with '--' separator between translations. </pre>

Original file line number	Diff line number	Diff line change
	910	+ """"
	911	+ fname = os.path.join(PATH_TESTS, 'udhr_combined.txt')
	912	+ cls.do_retrieve_udhr_combined(url=cls.URL_UDHR_ZIP, fname=fname)
	913	+ return fname
	914	+
	915	+ @staticmethod
	916	+ def do_retrieve_udhr_combined(url: str, fname: str) -> None:
	917	+ """"Fetch UDHR zip file, extract, and combine all translations.""""
	918	+ if not UnicodeDataFile.is_url_newer(url, fname):
	919	+ return
	920	+
	921	+ session = UnicodeDataFile.get_http_session()

Original file line number	Diff line number	Diff line change
	922	+ print(f"fetching {url}: ", end='', flush=True)
	923	+ resp = session.get(url, timeout=(CONNECT_TIMEOUT, READ_TIMEOUT))
	924	+ resp.raise_for_status()
	925	+ print('ok')
	926	+
	927	+ print(f"extracting and combining to {fname}: ", end='', flush=True)
	928	+ combined_content = []
	929	+ with zipfile.ZipFile(io.BytesIO(resp.content)) as zf:
	930	+ txt_files = sorted([n for n in zf.namelist() if n.endswith('.txt')])
	931	+ for txt_name in txt_files:
	932	+ with zf.open(txt_name) as f:
	933	+ content = f.read().decode('utf-8').rstrip()

Original file line number	Diff line number	Diff line change
	934	+ combined_content.append(f'----\n\n{content}\n')
	935	+
	936	+ folder = os.path.dirname(fname)
	937	+ if folder and not os.path.exists(folder):
	938	+ os.makedirs(folder)
	939	+
	940	+ with open(fname, 'w', encoding='utf-8', newline='\n') as fout:
	941	+ fout.writelines(combined_content)
	942	+ print('ok')
	943	+
899	944	 @staticmethod
900	945	 def do_retrieve(url: str, fname: str) -> None:
901	946	 """"Retrieve given url to target filepath fname.""""

Original file line number	Diff line number	Diff line change
 @@ -905,7 +950,7 @@ def do_retrieve(url: str, fname: str) -> None:		
905	950	 if not UnicodeDataFile.is_url_newer(url, fname):
906	951	 return
907	952	 session = UnicodeDataFile.get_http_session()
908		- resp = session.get(url, timeout=CONNECT_TIMEOUT)
	953	+ resp = session.get(url, timeout=(CONNECT_TIMEOUT, READ_TIMEOUT))
909	954	 resp.raise_for_status()
910	955	 print(f"saving {fname}: ", end='', flush=True)
911	956	 with open(fname, 'wb') as fout:
 @@ -919,7 +964,7 @@ def is_url_newer(url: str, fname: str) -> bool:		
919	964	 return True

Original file line number	Diff line number	Diff line change
920	965	<pre> if CHECK_LAST_MODIFIED: </pre>
921	966	<pre> session = UnicodeDataFile.get_http_session() </pre>
922		<pre> - resp = session.head(url, timeout=CONNECT_TIMEOUT) </pre>
	967	<pre> + resp = session.head(url, timeout=(CONNECT_TIMEOUT, READ_TIMEOUT)) </pre>
923	968	<pre> resp.raise_for_status() </pre>
924	969	<pre> remote_url_dt = dateutil.parser.parse(resp.headers['Last-Modified']).astimezone() </pre>
925	970	<pre> local_file_dt = datetime.datetime.fromtimestamp(os.path.getmtime(fname)).astimezone(</pre>
 <pre>@@ -929,10 +974,23 @@ def is_url_newer(url: str, fname: str) -> bool: </pre>		
929	974	<pre> @functools.cache </pre>
930	975	<pre> def get_http_session() -> requests.Session: </pre>
931	976	<pre> session = requests.Session() </pre>

Original file line number	Diff line number	Diff line change
932		- retries = urllib3.util.Retry(total=MAX_RETRIES,
933		- backoff_factor=BACKOFF_FACTOR,
934		- status_forcelist=[500, 502, 503, 504, 520])
935		- session.mount('https://', requests.adapters.HTTPAdapter(max_retries=
	977	+ session.headers.update({
	978	+ 'User-Agent': 'wcidwidth-update-tables/1.0 (https://github.com/jquast/
	979	+ })
	980	+ retries = urllib3.util.Retry(
	981	+ total=MAX_RETRIES,
	982	+ connect=MAX_RETRIES,
	983	+ read=MAX_RETRIES,

Original file line number	Diff line number	Diff line change
	984	+ backoff_factor=BACKOFF_FACTOR,
	985	+ backoff_jitter=BACKOFF_FACTOR,
	986	+ status_forcelist=[408, 429, 500, 502, 503, 504, 520],
	987	+ allowed_methods=['HEAD', 'GET'],
	988	+ raise_on_status=False,
	989	+ respect_retry_after_header=True,
	990	+)
	991	+ adapter = requests.adapters.HTTPAdapter(max_retries=retries)
	992	+ session.mount('https://', adapter)
	993	+ session.mount('http://', adapter)
936	994	 return session

Original file line number	Diff line number	Diff line change
937	995	
938	996	 @staticmethod
⌵ ⌶ <pre> @@ -1040,6 +1098,11 @@ def parse_args() -> dict[str, Any]: </pre>		
1040	1098	 description='Update Unicode code tables for wcwidth using jinja2 cod generation.',
1041	1099	 epilog='https://github.com/jquast/wcwidth'
1042	1100	)
	1101	+ parser.add_argument(
	1102	+ '--only-fetch',
	1103	+ action='store_true',
	1104	+ help='Only fetch data files without processing or code generation'
	1105	+)

Original file line number	Diff line number	Diff line change
1043	1106	 parser.add_argument(
1044	1107	 '--fetch-all-versions',
1045	1108	 action='store_true',
⌕ @@ -1054,12 +1117,53 @@ def parse_args() -> dict[str, Any]: 		
1054	1117	 return vars(parser.parse_args())
1055	1118	
1056	1119	
1057		- def main(fetch_all_versions: bool = False, check_last_modified: bool -> None:
	1120	+ def fetch_all_data_files(fetch_all_versions: bool = False) -> None:
	1121	+ """"
	1122	+ Fetch all required Unicode data files.

Original file line number	Diff line number	Diff line change
	1123	+
	1124	+ Fetches data files for code generation and test files. Files are only downloaded if they don't
	1125	+ exist locally or if CHECK_LAST_MODIFIED is True and the remote file
	1126	+ """"
	1127	+ # Fetch DerivedAge first to determine available Unicode versions
	1128	+ UnicodeDataFile.DerivedAge()
	1129	+ version = fetch_unicode_versions()[-1]
	1130	+
	1131	+ # Fetch data files required for code generation
	1132	+ UnicodeDataFile.EastAsianWidth(version)
	1133	+ UnicodeDataFile.DerivedGeneralCategory(version)
	1134	+ UnicodeDataFile.EmojiVariationSequences(version)

Original file line number	Diff line number	Diff line change
	1135	+ UnicodeDataFile.LegacyEmojiVariationSequences()
	1136	+ UnicodeDataFile.GraphemeBreakProperty(version)
	1137	+ UnicodeDataFile.EmojiData(version)
	1138	+ UnicodeDataFile.DerivedCoreProperties(version)
	1139	+ UnicodeDataFile.PropList(version)
	1140	+
	1141	+ # Fetch test data files
	1142	+ UnicodeDataFile.TestEmojiVariationSequences()
	1143	+ UnicodeDataFile.TestEmojiZWJSequences()
	1144	+ UnicodeDataFile.TestGraphemeBreakTest()
	1145	+ UnicodeDataFile.UDHRCombined()
	1146	+

Original file line number	Diff line number	Diff line change
	1147	+ # Fetch all legacy emoji files if requested
	1148	+ if fetch_all_versions:
	1149	+ fetch_all_emoji_files()
	1150	+
	1151	+
	1152	+ def main(only_fetch: bool = False, fetch_all_versions: bool = False,
	1153	+ check_last_modified: bool = False) -> None:
1058	1154	 """"Update east-asian, combining and zero width tables.""""
1059	1155	 # Set global flag for HTTP requests to check Last-Modified headers
1060	1156	 global CHECK_LAST_MODIFIED
1061	1157	 CHECK_LAST_MODIFIED = check_last_modified
1062	1158	

Original file line number	Diff line number	Diff line change
	1159	+ # Always fetch data files first
	1160	+ fetch_all_data_files(fetch_all_versions)
	1161	+
	1162	+ # Exit early if only fetching was requested
	1163	+ if only_fetch:
	1164	+ print('Fetch complete (--only-fetch mode, skipping code generation)'
	1165	+ return
	1166	+
1063	1167	 # This defines which jinja source templates map to which output file
1064	1168	 # and what function defines the source data. We hope to add more sou
1065	1169	 # language options using jinja2 templates, with minimal modification
⌵ ⌶ <pre>@@ -1088,15 +1192,6 @@ def get_codegen_definitions() -> Iterator[RenderDefinition]:</pre>		

Original file line number	Diff line number	Diff line change
1088	1192	 assert render_def.output_filename != 'table_vs16.py', ('table_vs16 n expected to change!')
1089	1193	 print('ok')
1090	1194	
1091		- # fetch latest test data files, used by our automatic tests
1092		- UnicodeDataFile.TestEmojiVariationSequences()
1093		- UnicodeDataFile.TestEmojiZWJSequences()
1094		- UnicodeDataFile.TestGraphemeBreakTest()
1095		-
1096		- # fetch all legacy emoji files if requested
1097		- if fetch_all_versions:
1098		- fetch_all_emoji_files()
1099		-

Original file line number	Diff line number	Diff line change
1100	1195	<pre> </pre>
1101	1196	<pre> if __name__ == '__main__': </pre>
1102	1197	<pre> main(**parse_args()) </pre>



[bin/verify-table-integrity.py](#)



+7-1Lines changed: 7 additions & 1 deletion



Original file line number	Diff line number	Diff line change
		<pre> ... @@ -1,5 +1,11 @@ </pre>
1	1	<pre> #!/usr/bin/env python3 </pre>
2	2	<pre> """ </pre>
	3	<pre> + .. deprecated:: 0.5.0 </pre>
	4	<pre> + </pre>
	5	<pre> + This file depends on a previous version of wcwidth API that offered multiple versions of each </pre>
	6	<pre> + unicode table. It is just useful for investigative purposes and kept for the discoveries marked </pre>
	7	<pre> + below. </pre>
	8	<pre> + </pre>
3	9	<pre> This is a small script to make an inquiry into the version history of unicode data tables, and to </pre>
4	10	<pre> validate conflicts in the tables as they are published: </pre>

Original file line number	Diff line number	Diff line change
5	11	
 @@ -37,7 +43,6 @@ 		
37	43	 -EastAsianWidth-6.1.0.txt:11A3;W # HANGUL JUNGSEONG A-EU
38	44	 +EastAsianWidth-6.2.0.txt:11A3;N # HANGUL JUNGSEONG A-EU
39	45	
40		-
41	46	 2.
42	47	
43	48	 value 0x1cf2 in table ZERO_WIDTH version 11.0.0 is not defined in 12.0.0 from range ('0x1cf2', '0x1cf4')
@@ -58,6 +63,7 @@ 		
58	63	
59	64	 -DerivedGeneralCategory-7.0.0.txt:19B0..19C0 ; Mc # [17] NEW TAI LUE VOWEL SIGN VOWEL SHORTENER..NEW TAI LUE VOWEL SIGN IY

Original file line number	Diff line number	Diff line change
60	65	+DerivedGeneralCategory-8.0.0.txt:19B0..19C9 ; Lo # [26] NEW TAI LUE VOWEL SIGN VOWEL SHORTENER..NEW TAI LUE TONE MARK-2
	66	+
61	67	
62	68	# std imports
63	69	import logging
..... ↓		



[docs/unicode_version.rst](#)



-135Lines changed: 0 additions & 135 deletions



Original file line number	Diff line number	Diff line change
 <pre>@@ -7,150 +7,15 @@ The most current release of this API is based on the Unicode Standard </pre>		
7	7	<pre> release files: </pre>
8	8	<pre> </pre>
9	9	<pre> </pre>
10		<pre>- `DerivedGeneralCategory-4.1.0.txt` </pre>
11		<pre>- *Date: 2005-02-26, 02:35:50 GMT [MD]* </pre>
12		<pre>- </pre>
13		<pre>- `DerivedGeneralCategory-5.0.0.txt` </pre>
14		<pre>- *Date: 2006-02-27, 23:41:27 GMT [MD]* </pre>
15		<pre>- </pre>
16		<pre>- `DerivedGeneralCategory-5.1.0.txt` </pre>
17		<pre>- *Date: 2008-03-20, 17:54:57 GMT [MD]* </pre>

Original file line number	Diff line number	Diff line change
18		-
19		- ``DerivedGeneralCategory-5.2.0.txt``
20		- *Date: 2009-08-22, 04:58:21 GMT [MD]*
21		-
22		- ``DerivedGeneralCategory-6.0.0.txt``
23		- *Date: 2010-08-19, 00:48:09 GMT [MD]*
24		-
25		- ``DerivedGeneralCategory-6.1.0.txt``
26		- *Date: 2011-11-27, 05:10:22 GMT [MD]*
27		-
28		- ``DerivedGeneralCategory-6.2.0.txt``
29		- *Date: 2012-05-20, 00:42:34 GMT [MD]*
30		-

Original file line number	Diff line number	Diff line change
31		- ``DerivedGeneralCategory-6.3.0.txt``
32		- *Date: 2013-07-05, 14:08:45 GMT [MD]*
33		-
34		- ``DerivedGeneralCategory-7.0.0.txt``
35		- *Date: 2014-02-07, 18:42:12 GMT [MD]*
36		-
37		- ``DerivedGeneralCategory-8.0.0.txt``
38		- *Date: 2015-02-13, 13:47:11 GMT [MD]*
39		-
40		- ``DerivedGeneralCategory-9.0.0.txt``
41		- *Date: 2016-06-01, 10:34:26 GMT*
42		-
43		- ``DerivedGeneralCategory-10.0.0.txt``

Original file line number	Diff line number	Diff line change
44		- *Date: 2017-03-08, 08:41:49 GMT*
45		-
46		- ``DerivedGeneralCategory-11.0.0.txt``
47		- *Date: 2018-02-21, 05:34:04 GMT*
48		-
49		- ``DerivedGeneralCategory-12.0.0.txt``
50		- *Date: 2019-01-22, 08:18:28 GMT*
51		-
52		- ``DerivedGeneralCategory-12.1.0.txt``
53		- *Date: 2019-03-10, 10:53:08 GMT*
54		-
55		- ``DerivedGeneralCategory-13.0.0.txt``
56		- *Date: 2019-10-21, 14:30:32 GMT*

Original file line number	Diff line number	Diff line change
57		-
58		- ``DerivedGeneralCategory-14.0.0.txt``
59		- *Date: 2021-07-10, 00:35:08 GMT*
60		-
61		- ``DerivedGeneralCategory-15.0.0.txt``
62		- *Date: 2022-04-26, 23:14:35 GMT*
63		-
64		- ``DerivedGeneralCategory-15.1.0.txt``
65		- *Date: 2023-07-28, 23:34:02 GMT*
66		-
67		- ``DerivedGeneralCategory-16.0.0.txt``
68		- *Date: 2024-04-30, 21:48:17 GMT*
69		-

Original file line number	Diff line number	Diff line change
70	10	<pre> `DerivedGeneralCategory-17.0.0.txt` </pre>
71	11	<pre> *Date: 2025-07-24, 00:12:50 GMT* </pre>
72	12	<pre> </pre>
73		<pre> - `EastAsianWidth-4.1.0.txt` </pre>
74		<pre> - *Date: 2005-03-17, 15:21:00 PST [KW]* </pre>
75		<pre> - </pre>
76		<pre> - `EastAsianWidth-5.0.0.txt` </pre>
77		<pre> - *Date: 2006-02-15, 14:39:00 PST [KW]* </pre>
78		<pre> - </pre>
79		<pre> - `EastAsianWidth-5.1.0.txt` </pre>
80		<pre> - *Date: 2008-03-20, 17:42:00 PDT [KW]* </pre>
81		<pre> - </pre>
82		<pre> - `EastAsianWidth-5.2.0.txt` </pre>

Original file line number	Diff line number	Diff line change
83		- *Date: 2009-06-09, 17:47:00 PDT [KW]*
84		-
85		- ``EastAsianWidth-6.0.0.txt``
86		- *Date: 2010-08-17, 12:17:00 PDT [KW]*
87		-
88		- ``EastAsianWidth-6.1.0.txt``
89		- *Date: 2011-09-19, 18:46:00 GMT [KW]*
90		-
91		- ``EastAsianWidth-6.2.0.txt``
92		- *Date: 2012-05-15, 18:30:00 GMT [KW]*
93		-
94		- ``EastAsianWidth-6.3.0.txt``
95		- *Date: 2013-02-05, 20:09:00 GMT [KW, LI]*

Original file line number	Diff line number	Diff line change
96		-
97		- ``EastAsianWidth-7.0.0.txt``
98		- *Date: 2014-02-28, 23:15:00 GMT [KW, LI]*
99		-
100		- ``EastAsianWidth-8.0.0.txt``
101		- *Date: 2015-02-10, 21:00:00 GMT [KW, LI]*
102		-
103		- ``EastAsianWidth-9.0.0.txt``
104		- *Date: 2016-05-27, 17:00:00 GMT [KW, LI]*
105		-
106		- ``EastAsianWidth-10.0.0.txt``
107		- *Date: 2017-03-08, 02:00:00 GMT [KW, LI]*
108		-

Original file line number	Diff line number	Diff line change
109		- ``EastAsianWidth-11.0.0.txt``
110		- *Date: 2018-05-14, 09:41:59 GMT [KW, LI]*
111		-
112		- ``EastAsianWidth-12.0.0.txt``
113		- *Date: 2019-01-21, 14:12:58 GMT [KW, LI]*
114		-
115		- ``EastAsianWidth-12.1.0.txt``
116		- *Date: 2019-03-31, 22:01:58 GMT [KW, LI]*
117		-
118		- ``EastAsianWidth-13.0.0.txt``
119		- *Date: 2029-01-21, 18:14:00 GMT [KW, LI]*
120		-
121		- ``EastAsianWidth-14.0.0.txt``

Original file line number	Diff line number	Diff line change
122		- *Date: 2021-07-06, 09:58:53 GMT [KW, LI]*
123		-
124		- ``EastAsianWidth-15.0.0.txt``
125		- *Date: 2022-05-24, 17:40:20 GMT [KW, LI]*
126		-
127		- ``EastAsianWidth-15.1.0.txt``
128		- *Date: 2023-07-28, 23:34:08 GMT*
129		-
130		- ``EastAsianWidth-16.0.0.txt``
131		- *Date: 2024-04-30, 21:48:20 GMT*
132		-
133	13	 ``EastAsianWidth-17.0.0.txt``
134	14	 *Date: 2025-07-24, 00:12:54 GMT*

Original file line number	Diff line number	Diff line change
135	15	
136	16	 ``emoji-variation-sequences-12.0.0.txt``
137	17	 *Date: 2019-01-15, 12:10:05 GMT*
138	18	
139		- ``emoji-variation-sequences-13.0.0.txt``
140		- *Date: 2020-01-21, 07:15:05 GMT*
141		-
142		- ``emoji-variation-sequences-14.0.0.txt``
143		- *Date: 2021-06-08, 05:19:16 GMT*
144		-
145		- ``emoji-variation-sequences-15.0.0.txt``
146		- *Date: 2022-05-13, 21:54:24 GMT*

Original file line number	Diff line number	Diff line change
147		-
148		- ``emoji-variation-sequences-15.1.0.txt``
149		- *Date: 2023-02-01, 02:22:54 GMT*
150		-
151		- ``emoji-variation-sequences-16.0.0.txt``
152		- *Date: 2024-05-01, 21:25:24 GMT*
153		-
154	19	 ``emoji-variation-sequences-17.0.0.txt``
155	20	 *Date: 2025-01-30, 21:48:29 GMT*
156	21	



pyproject.toml



+2-3Lines changed: 2 additions & 3 deletions



Original file line number	Diff line number	Diff line change
⬆ @@ -4,7 +4,7 @@ requires = ["hatchling"] ⬇		
4	4	⬇
5	5	⬇ [project] ⬇
6	6	⬇ name = "wcwidth" ⬇
7		⬇ - version = "0.5.1" ⬇
	7	⬇ + version = "0.5.2" ⬇
8	8	⬇ description = "Measures the displayed width of unicode strings in a terminal" ⬇
9	9	⬇ readme = "README.rst" ⬇
10	10	⬇ keywords = [⬇
⬆ ⬆ @@ -60,8 +60,7 @@ include = [⬇		
60	60	⬇ "/bin/**", ⬇

Original file line number	Diff line number	Diff line change
61	61	"/code_templates/**",
62	62	"/docs/**",
63		- "/data/**",
64		- "/tests/**",
	63	+ "/tests/*.py",
65	64	"/README.rst",
66	65	"/LICENSE",
67	66	"/tox.ini",
⋮ ↓		



requirements-tests38.in



+1Lines changed: 1 addition & 0 deletions



Original file line number	Diff line number	Diff line change
... @@ -1,5 +1,6 @@ 		
1	1	 # for python3.8
2	2	 pytest<7
3	3	 pytest-cov
	4	+ pytest-xdist
4	5	 coverage[toml]<6
5	6	 packaging<26



requirements-tests38.txt



+5Lines changed: 5 additions & 0 deletions



Original file line number	Diff line number	Diff line change
 @@ -10,6 +10,8 @@ coverage==5.5		
10	10	# via
11	11	# -r requirements-tests38.in
12	12	# pytest-cov
	13	+ execnet==2.1.2
	14	+ # via pytest-xdist
13	15	iniconfig==2.1.0
14	16	# via pytest
15	17	packaging==25.0
 @@ -24,8 +26,11 @@ pytest==6.2.5		
24	26	# via

Original file line number	Diff line number	Diff line change
25	27	 # -r requirements-tests38.in
26	28	 # pytest-cov
	29	+ # pytest-xdist
27	30	 pytest-cov==5.0.0
28	31	 # via -r requirements-tests38.in
	32	+ pytest-xdist==3.5.0
	33	+ # via -r requirements-tests38.in
29	34	 toml==0.10.2
30	35	 # via
31	36	 # coverage
... 		



requirements-tests39.in



+1Lines changed: 1 addition & 0 deletions



Original file line number	Diff line number	Diff line change
...		
@@ -1,6 +1,7 @@		
1	1	# For Python 3.9 *and newer*
2	2	pytest>=7.4.2
3	3	pytest-cov>=4.1.0
	4	+ pytest-xdist
4	5	pytest-codspeed
5	6	importlib-metadata<8.7.1
6	7	packaging<26.0



requirements-tests39.txt



+7-1Lines changed: 7 additions & 1 deletion



Original file line number	Diff line number	Diff line change
 @@ -4,6 +4,7 @@		
4	4	 #
5	5	 # pip-compile --allow-unsafe --no-emit-index-url --output- file=requirements-tests39.txt --strip-extras requirements- tests39.in
6	6	 #
	7	 +
7	8	 cffi==1.17.1
8	9	 # via
9	10	 # -r requirements-tests39.in
 @@ -12,6 +13,8 @@ coverage==7.10.7		
12	13	 # via pytest-cov
13	14	 exceptiongroup==1.3.1
14	15	 # via pytest

Original file line number	Diff line number	Diff line change
	16	+ execnet==2.1.2
	17	+ # via pytest-xdist
15	18	 importlib-metadata==8.7.0
16	19	 # via
17	20	 # -r requirements-tests39.in
⌵ ⌶ @@ -41,11 +44,14 @@ pytest==8.4.2 		
41	44	 # -r requirements-tests39.in
42	45	 # pytest-codspeed
43	46	 # pytest-cov
	47	+ # pytest-xdist
44	48	 pytest-codspeed==4.2.0

Original file line number	Diff line number	Diff line change
45	49	# via -r requirements-tests39.in
46	50	pytest-cov==7.0.0
47	51	# via -r requirements-tests39.in
48		- rich==14.2.0
	52	+ pytest-xdist==3.8.0
	53	+ # via -r requirements-tests39.in
	54	+ rich==14.3.1
49	55	# via pytest-codspeed
50	56	tomli==2.2.1
51	57	# via
⋮ ↓		



[tests/GraphemeBreakTest.txt](#)



-796Lines changed: 0 additions & 796 deletions



[REDACTED]

Load Diff

This file was deleted.



[tests/emoji-variation-sequences.txt](#)



-757Lines changed: 0 additions & 757 deletions



[REDACTED]

Load Diff

This file was deleted.



[tests/emoji-zwj-sequences.txt](#)



-1,529Lines changed: 0 additions & 1529 deletions



[REDACTED]

Load Diff

This file was deleted.



[tests/test_benchmarks.py](#)



+49-14Lines changed: 49 additions & 14 deletions



Original file line number	Diff line number	Diff line change
⬆ @@ -3,6 +3,9 @@		
3	3	import os
4	4	import unicodedata
5	5	
	6	+ # 3rd party
	7	+ import pytest
	8	+
6	9	# local
7	10	import wcwidth
8	11	
⬇ ⬆ @@ -297,38 +300,70 @@ def test_iter_sequences_mixed(benchmark):		

Original file line number	Diff line number	Diff line change
297	300	
298	301	
299	302	 # UDHR-based benchmarks,
300		- # Load combined text (12 world languages)
	303	+ # Load combined text (500+ world languages)
301	304	 UDHR_FILE = os.path.join(os.path.dirname(__file__), 'udhr_combined.txt')
302		- with open(UDHR_FILE, encoding='utf-8') as f:
303		- UDHR_TEXT = f.read()
304		- UDHR_LINES = UDHR_TEXT.splitlines()[:200]
305		-
306		-
	305	+ UDHR_TEXT = ''

Original file line number	Diff line number	Diff line change
	306	+ # parallel arrays for pre-computed widths for center/ljust/+1's
	307	+ UDHR_LINES = []
	308	+ UDHR_WIDTHS = []
	309	+ UDHR_FILLCHAR = '█'
	310	+ if os.path.exists(UDHR_FILE):
	311	+ with open(UDHR_FILE, encoding='utf-8') as f:
	312	+ UDHR_TEXT = f.read()
	313	+ UDHR_LINES = [line.rstrip() for line in UDHR_TEXT.splitlines()]
	314	+ UDHR_WIDTHS = [wcwidth.width(line) for line in UDHR_LINES]
	315	+ for line, w in zip(UDHR_LINES, UDHR_WIDTHS):
	316	+ assert (w > 0) == (len(line) > 0)
	317	+

Original file line number	Diff line number	Diff line change
	318	+
	319	+ @pytest.mark.skipif(not os.path.exists(UDHR_FILE),
	320	+ reason=f"{os.path.basename(UDHR_FILE)} is missing; run bin/update-tables.py")
307	321	 def test_wrap_udhr(benchmark):
308	322	 """Benchmark wrap() with multilingual UDHR text."""
309		- benchmark(wcwidth.wrap, UDHR_TEXT, 80)
	323	+ result = benchmark.pedantic(wcwidth.wrap, args=(UDHR_TEXT, 80), rounds=1, iterations=1)
	324	+ assert len(result)
	325	+ assert all(0 <= wcwidth.width(_l) <= 80 for _l in result)
310	326	
311	327	

Original file line number	Diff line number	Diff line change
	328	+ @pytest.mark.skipif(not os.path.exists(UDHR_FILE),
	329	+ reason=f"{os.path.basename(UDHR_FILE)} is missing; run bin/update-tables.py")
312	330	 def test_width_udhr(benchmark):
313	331	 """Benchmark width() with multilingual UDHR text."""
314		- benchmark(wcwidth.width, UDHR_TEXT)
	332	+ result = benchmark.pedantic(wcwidth.width, args= (UDHR_TEXT,), rounds=1, iterations=1)
	333	+ assert result > 0
315	334	
316	335	
317		- def test_wcwidth_udhr(benchmark):
318		- """Benchmark wcwidth() with multilingual UDHR text."""

Original file line number	Diff line number	Diff line change
319		- benchmark(wcwidth.wcswidth, UDHR_TEXT)
	336	+ @pytest.mark.skipif(not os.path.exists(UDHR_FILE),
	337	+ reason=f"{os.path.basename(UDHR_FILE)} is missing; run bin/update-tables.py")
	338	+ def test_width_udhr_lines(benchmark):
	339	+ """"Benchmark width() on UDHR lines.""""
	340	+ result = benchmark.pedantic(lambda: sum(wcwidth.width(line) for line in UDHR_LINES),
	341	+ rounds=1, iterations=1)
	342	+ assert result > 0
320	343	
321	344	
	345	+ @pytest.mark.skipif(not os.path.exists(UDHR_FILE),

Original file line number	Diff line number	Diff line change
	346	+ reason=f"{os.path.basename(UDHR_FILE)} is missing; run bin/update-tables.py")
322	347	 def test_ljust_udhr_lines(benchmark):
323	348	 """Benchmark ljust() on UDHR lines."""
324		- benchmark(lambda: [wcwidth.ljust(line, 100) for line in UDHR_LINES])
	349	+ benchmark.pedantic(lambda: [wcwidth.ljust(line, width + 1, UDHR_FILLCHAR)
	350	+ for line, width in zip(UDHR_LINES, UDHR_WIDTHS)],
	351	+ rounds=1, iterations=1)
325	352	
326	353	
	354	+ @pytest.mark.skipif(not os.path.exists(UDHR_FILE),

Original file line number	Diff line number	Diff line change
	355	+ reason=f"{os.path.basename(UDHR_FILE)} is missing; run bin/update-tables.py")
327	356	 def test_rjust_udhr_lines(benchmark):
328	357	 """Benchmark rjust() on UDHR lines."""
329		- benchmark(lambda: [wcwidth.rjust(line, 100) for line in UDHR_LINES])
	358	+ benchmark.pedantic(lambda: [wcwidth.rjust(line, width + 1, UDHR_FILLCHAR)
	359	+ for line, width in zip(UDHR_LINES, UDHR_WIDTHS)],
	360	+ rounds=1, iterations=1)
330	361	
331	362	
	363	+ @pytest.mark.skipif(not os.path.exists(UDHR_FILE),

Original file line number	Diff line number	Diff line change
	364	+ reason=f"{os.path.basename(UDHR_FILE)} is missing; run bin/update-tables.py")
332	365	 def test_center_udhr_lines(benchmark):
333	366	 """"Benchmark center() on UDHR lines.""""
334		- benchmark(lambda: [wcwidth.center(line, 100) for line in UDHR_LINES])
	367	+ benchmark.pedantic(lambda: [wcwidth.center(line, width + 1, UDHR_FILLCHAR)
	368	+ for line, width in zip(UDHR_LINES, UDHR_WIDTHS)],
	369	+ rounds=1, iterations=1)

▼

tests/test_emojis.py



+4Lines changed: 4 additions & 0 deletions



Original file line number	Diff line number	Diff line change
⬆ @@ -142,6 +142,8 @@ def read_sequences_from_file(filename):		
142	142	
143	143	
144	144	 @pytest.mark.skipif(NARROW_ONLY, reason="Some sequences in text file are not compatible with 'narrow' builds")
	145	+ @pytest.mark.skipif(not os.path.exists(os.path.join(os.path.dirname(__file__), 'emoji-zwj-sequences.txt')),
	146	+ reason="emoji-zwj-sequences.txt; missing run bin/update- tables.py")
145	147	 def test_recommended_emoji_zwj_sequences(benchmark):
146	148	 """Test wcswidth of all of the unicode.org-published emoji-zwj-sequences.txt."""
147	149	 lines, sequences = read_sequences_from_file('emoji-zwj- sequences.txt')
⬆ @@ -164,6 +166,8 @@ def measure_all():		

Original file line number	Diff line number	Diff line change
164	166	 assert len(sequences) >= 1468
165	167	
166	168	
	169	+ @pytest.mark.skipif(not os.path.exists(os.path.join(os.path.dirname(__file__), 'emoji-variation-sequences.txt')),
	170	+ reason="emoji-variation-sequences.txt is missing; run bin/update-tables.py")
167	171	 def test_recommended_variation_16_sequences(benchmark):
168	172	 """Test wcswidth of all of the unicode.org-published emoji-variation-sequences.txt."""
169	173	 lines, sequences = read_sequences_from_file('emoji- variation-sequences.txt')
⋮ ↓		



[tests/test_grapheme.py](#)



+4Lines changed: 4 additions & 0 deletions



Original file line number	Diff line number	Diff line change
⬆ ⬆ <pre>@@ -140,6 +140,8 @@ def test_wide_unicode_graphemes(input_str, expected): </pre>		
140	140	
141	141	
142	142	
		@pytest.mark.skipif(NARROW_ONLY, reason="requires wide Unicode")
	143	+ <pre>@pytest.mark.skipif(not os.path.exists(os.path.join(os.path.dirname(__file__), 'GraphemeBreakTest.txt')), </pre>
	144	+ <pre>reason="GraphemeBreakTest.txt is missing; run bin/update- tables.py") </pre>
143	145	<pre>@pytest.mark.parametrize(("input_str", "expected"), read_grapheme_break_test()) </pre>
144	146	<pre>def test_unicode_grapheme_break_test(input_str, expected): </pre>
145	147	<pre>"""Validate against official Unicode GraphemeBreakTest.txt.""" </pre>
⬇ ⬆ <pre>@@ -226,6 +228,8 @@ def test_iter_graphemes_reverse_unicode(input_str, expected):</pre>		

Original file line number	Diff line number	Diff line change
226	228	
227	229	
228	230	 @pytest.mark.skipif(NARROW_ONLY, reason="requires wide Unicode")
	231	+ @pytest.mark.skipif(not os.path.exists(os.path.join(os.path.dirname(__file__), 'GraphemeBreakTest.txt')),
	232	+ reason="GraphemeBreakTest.txt is missing; run bin/update- tables.py")
229	233	 @pytest.mark.parametrize(("input_str", "expected"), read_grapheme_break_test())
230	234	 def test_grapheme_roundtrip_consistency(input_str, expected):
231	235	 """Forward and reverse iteration produce identical boundaries."""
⋮ ↓		

[tests/test_table_integrity.py](#)



-16Lines changed: 0 additions & 16 deletions



[REDACTED]

Load Diff

This file was deleted.



[tests/test_textwrap.py](#)



+2-2Lines changed: 2 additions & 2 deletions



Original file line number	Diff line number	Diff line change
 @@ -151,7 +151,7 @@ def test_wrap_hyphen_long_words_no_propagate(text, w, break_hyphens, expected):		
151	151	
152	152	
153	153	@pytest.mark.parametrize('kwargs', TEXTWRAP_KWARGS)
154		- @pytest.mark.parametrize('width', [3, 7, 8, 9, 10, 16, 20, 40])
	154	+ @pytest.mark.parametrize('width', [3, 8, 20, 33])
155	155	def test_wrap_matches_stdlib(kwargs, width):
156	156	pgraph = ' Z! a bc defghij klmnopqrstuvwxyz012345678900 ' * 2
157	157	pgraph_colored = _colorize(pgraph)
 @@ -170,7 +170,7 @@ def test_wrap_matches_stdlib(kwargs, width):		
170	170	

Original file line number	Diff line number	Diff line change
171	171	
172	172	 @pytest.mark.parametrize('kwargs', TEXTWRAP_KWARGS)
173		- @pytest.mark.parametrize('width', [8, 10, 16, 20, 40])
	173	+ @pytest.mark.parametrize('width', [8, 20, 37])
174	174	 @pytest.mark.parametrize('tabsize', [4, 5, 8])
175	175	 def test_wrap_tabsize_matches_stdlib(kwargs, width, tabsize):
176	176	 tabsize = min(tabsize, width)
⌵		



tests/udhr_combined.txt



-2,587Lines changed: 0 additions & 2587 deletions



[REDACTED]

Load Diff

This file was deleted.



`tox.ini`



+13-6Lines changed: 13 additions & 6 deletions



Original file line number	Diff line number	Diff line change
... @@ -1,5 +1,5 @@ 		
1	1	 [tox]
2		- envlist = update, compile, autopep8, docformatter, docformatter_chec isort_check, pylint, pylint_tests, flake8, flake8_tests, pydocstyle, codespell, format, lint, docs, verify_tables, py{38, 39, 310, 311, 3 314}, pypy{38, 39, 310, 311}
	2	+ envlist = update, fetch, compile, autopep8, docformatter, docformatter_check, isort, isort_check, pylint, pylint_tests, flake8 flake8_tests, pydocstyle, mypy, codespell, format, lint, docs, verif py{38, 39, 310, 311, 312, 313, 314}, pypy{38, 39, 310, 311}
3	3	 skip_missing_interpreters = true
4	4	
5	5	 [base]
 @@ -8,6 +8,7 @@ pip_compile_command = pip-compile --resolver=backtracking --strip-extras 		
8	8	 [testenv]
9	9	 deps = -r requirements-tests39.txt

Original file line number	Diff line number	Diff line change
10	10	 commands = {envpython} -m pytest --cov-config={toxindir}/tox.ini {p
	11	+ -n auto \
11	12	 --verbose \
12	13	 --junit-xml=.tox/results.{envname}.xml \
13	14	 --durations=3 \
⌵ ⌶ @@ -97,11 +98,17 @@ deps = -r requirements-tests38.txt 		
97	98	 deps = -r requirements-tests38.txt
98	99	
99	100	 [testenv:update]
100		- basepython = python3.13
	101	+ basepython = python3.14
101	102	 usedevelop = true

Original file line number	Diff line number	Diff line change
102	103	 deps = -r requirements-update.txt
103	104	 commands = python {toxidir}/bin/update-tables.py {posargs:--fetch-versions}
104	105	
	106	+ [testenv:fetch]
	107	+ basepython = python3.14
	108	+ usedevelop = true
	109	+ deps = -r requirements-update.txt
	110	+ commands = python {toxidir}/bin/update-tables.py {posargs:--only-f
	111	+
105	112	 [testenv:autopep8]
106	113	 basepython = python3.14

Original file line number	Diff line number	Diff line change
107	114	<pre> deps = autopep8 </pre>
⋮ ⋮ <pre> @@ -164,9 +171,9 @@ commands = pydocstyle --source --explain {toxinidir}/wcwidth </pre>		
164	171	<pre> basepython = python3.13 </pre>
165	172	<pre> deps = docformatter>=1.7.7 </pre>
166	173	<pre> untokenize </pre>
167		<pre> - commands = docformatter --in-place --recursive --pre-summary-newline </pre>
168		<pre> - --wrap-summaries=100 --wrap-descriptions=100 \ </pre>
169		<pre> - {toxinidir}/wcwidth/ {toxinidir}/bin {toxinidir}/tests/ </pre>
	174	<pre> + commands = - docformatter --in-place --recursive --pre-summary-newli </pre>
	175	<pre> + --wrap-summaries=100 --wrap-descriptions=100 \ </pre>
	176	<pre> + {toxinidir}/wcwidth/ {toxinidir}/bin {toxinidir}/tests/ </pre>
170	177	<pre> </pre>

Original file line number	Diff line number	Diff line change
171	178	 [testenv:docformatter_check]
172	179	 basepython = python3.13
⌵ ⌶ @@ -206,7 +213,7 @@ warn_unused_ignores = true 		
206	213	 [testenv:codespell]
207	214	 basepython = python3.13
208	215	 deps = codespell
209		 - commands = codespell --skip="*.pyc,htmlcov,_build,build,*.egg-info,.tox,data,*.txt,*.csv,*.ods,table_*.py,docs/specs.rst,*.isorted
	216	 + commands = codespell --skip="*.pyc,htmlcov,_build,build,*.egg-info,.tox,data,./tests/*.txt,*.csv,*.ods,table_*.py,docs/specs.rst,* \
210	217	 --ignore-words-list="thirdparty,claus,oclock,womens,aprox" \
211	218	 --uri-ignore-words-list '*' \

Original file line number	Diff line number	Diff line change
212	219	--summary --count
⋮ ↓		



wcwidth/__init__.py



+1-1Lines changed: 1 addition & 1 deletion



Original file line number	Diff line number	Diff line change
⋮ ↑ @@ -40,4 +40,4 @@		
40	40	
41	41	# Using 'hatchling', it does not seem to provide the pyproject.toml nicety, "dynamic = ['version']"
42	42	# like flit_core, maybe there is some better way but for now we have to duplicate it in both places
43		- __version__ = '0.5.1'
	43	+ __version__ = '0.5.2'



[wcwidth/table_grapheme.py](#)



+64-64Lines changed: 64 additions & 64 deletions



```
[REDACTED]
```

Load Diff

Large diffs are not rendered by default.



[wcwidth/table_wide.py](#)



+12-12Lines changed: 12 additions & 12 deletions



Original file line number	Diff line number	Diff line change
... @@ -1,7 +1,7 @@ 		
1	1	
2	2	 Exports WIDE_EASTASIAN table keyed by supporting unicode version level.
3	3	
4		- This code generated by wcwidth/bin/update-tables.py on 2026-01-27 07:17:49 UTC.
	4	+ This code generated by wcwidth/bin/update-tables.py on 2026-01-28 06:02:26 UTC.
5	5	
6	6	 # pylint: disable=duplicate-code
7	7	 WIDE_EASTASIAN = {
⋮ ⋮ @@ -56,7 +56,7 @@ 		
56	56	 (0x03105, 0x0312f,), # Bopomofo Letter B ..Bopomofo Letter Nn

Original file line number	Diff line number	Diff line change
57	57	 (0x03131, 0x03163,), # Hangul Letter Kiyeok ..Hangul Letter I
58	58	 (0x03165, 0x0318e,), # Hangul Letter Ssangnieun..Hangul Letter Araeae
59		- (0x03190, 0x031e5,), # Ideographic Annotation L..(nil)
	59	+ (0x03190, 0x031e5,), # Ideographic Annotation L..Cjk Stroke Szp
60	60	 (0x031ef, 0x0321e,), # Ideographic Description ..Parenthesized Korean Cha
61	61	 (0x03220, 0x03247,), # Parenthesized Ideograph ..Circled Ideograph Koto
62	62	 (0x03250, 0x0a48c,), # Partnership Sign ..Yi Syllable Yyr
⌵ @@ -71,10 +71,10 @@		
71	71	 (0xff01, 0xff60,), # Fullwidth Exclamation Ma..Fullwidth Right White Pa
72	72	 (0xffe0, 0xffe6,), # Fullwidth Cent Sign ..Fullwidth Won Sign

Original file line number	Diff line number	Diff line change
73	73	 (0x16fe0, 0x16fe3,), # Tangut Iteration Mark ..Old Chinese Iteration Ma
74		- (0x16ff2, 0x16ff6,), # (nil)
	74	+ (0x16ff2, 0x16ff6,), # Chinese Small Simplified..Yangqin Sign Slow Two Be
75	75	 (0x17000, 0x18cd5,), # (nil) ..Khitan Small Script Char
76		- (0x18cff, 0x18d1e,), # (nil)
77		- (0x18d80, 0x18df2,), # (nil)
	76	+ (0x18cff, 0x18d1e,), # Khitan Small Script Char..(nil)
	77	+ (0x18d80, 0x18df2,), # Tangut Component-769 ..Tangut Component-883
78	78	 (0x1aff0, 0x1aff3,), # Katakana Letter Minnan T..Katakana Letter Minnan T
79	79	 (0x1aff5, 0x1affb,), # Katakana Letter Minnan T..Katakana Letter Minnan N

Original file line number	Diff line number	Diff line change
80	80	 (0x1affd, 0x1affe,), # Katakana Letter Minnan N..Katakana Letter Minnan N
⌵ ⌶ @@ -117,7 +117,7 @@		
117	117	 (0x1f680, 0x1f6c5,), # Rocket ..Left Luggage
118	118	 (0x1f6cc, 0x1f6cc,), # Sleeping Accommodation
119	119	 (0x1f6d0, 0x1f6d2,), # Place Of Worship ..Shopping Trolley
120		- (0x1f6d5, 0x1f6d8,), # Hindu Temple ..(nil)
	120	+ (0x1f6d5, 0x1f6d8,), # Hindu Temple ..Landslide
121	121	 (0x1f6dc, 0x1f6df,), # Wireless ..Ring Buoy
122	122	 (0x1f6eb, 0x1f6ec,), # Airplane Departure ..Airplane Arriving
123	123	 (0x1f6f4, 0x1f6fc,), # Scooter ..Roller Skate
⌵ @@ -127,12 +127,12 @@		

Original file line number	Diff line number	Diff line change
127	127	 (0x1f93c, 0x1f945,), # Wrestlers ..Goal Net
128	128	 (0x1f947, 0x1f9ff,), # First Place Medal ..Nazar Amulet
129	129	 (0x1fa70, 0x1fa7c,), # Ballet Shoes ..Crutch
130		- (0x1fa80, 0x1fa8a,), # Yo-yo ..(nil)
131		- (0x1fa8e, 0x1fac6,), # (nil)
132		- (0x1fac8, 0x1fac8,), # (nil)
133		- (0x1facd, 0x1fadc,), # (nil)
134		- (0x1fadf, 0x1faea,), # (nil)
135		- (0x1faef, 0x1faf8,), # (nil) ..Rightwards Pushing Hand
	130	+ (0x1fa80, 0x1fa8a,), # Yo-yo ..Trombone
	131	+ (0x1fa8e, 0x1fac6,), # Treasure Chest ..Fingerprint

Original file line number	Diff line number	Diff line change
	132	+ (0x1fac8, 0x1fac8,), # Hairy Creature
	133	+ (0x1facd, 0x1fadc,), # Orca ..Root Vegetable
	134	+ (0x1fadf, 0x1faea,), # Splatter ..Distorted Face
	135	+ (0x1faef, 0x1faf8,), # Fight Cloud ..Rightwards Pushing Hand
136	136	 (0x20000, 0x2fffd,), # Cjk Unified Ideograph-20..(nil)
137	137	 (0x30000, 0x3fffd,), # Cjk Unified Ideograph-30..(nil)
138	138	 ,
... 		



[wcwidth/table_zero.py](#)



+21-21Lines changed: 21 additions & 21 deletions



Original file line number	Diff line number	Diff line change
... @@ -1,7 +1,7 @@ 		
1	1	
2	2	 Exports ZERO_WIDTH table keyed by supporting unicode version level.
3	3	
4		- This code generated by wcwidth/bin/update-tables.py on 2026-01-27 07:17:49 UTC.
	4	+ This code generated by wcwidth/bin/update-tables.py on 2026-01-28 06:02:26 UTC.
5	5	
6	6	 # pylint: disable=duplicate-code
7	7	 ZERO_WIDTH = {
⋮ ↓ ⋮ ↑ @@ -35,7 +35,7 @@ 		
35	35	 (0x00825, 0x00827,), # Samaritan Vowel Sign Sho..Samaritan Vowel Sign U

Original file line number	Diff line number	Diff line change
36	36	 (0x00829, 0x0082d,), # Samaritan Vowel Sign Lon..Samaritan Mark Nequdaa
37	37	 (0x00859, 0x0085b,), # Mandaic Affrication Mark..Mandaic Gemination Mark
38		- (0x00897, 0x0089f,), # (nil) ..Arabic Half Madda Over M
	38	+ (0x00897, 0x0089f,), # Arabic Pepet ..Arabic Half Madda Over M
39	39	 (0x008ca, 0x008e1,), # Arabic Small High Farsi ..Arabic Small High Sign S
40	40	 (0x008e3, 0x00903,), # Arabic Turned Damma Belo..Devanagari Sign Visarga
41	41	 (0x0093a, 0x0093c,), # Devanagari Vowel Sign 0e..Devanagari Sign Nukta
⌵ ⌶ @@ -147,8 +147,8 @@		
147	147	 (0x01a55, 0x01a5e,), # Tai Tham Consonant Sign ..Tai Tham Consonant Sign

Original file line number	Diff line number	Diff line change
148	148	 (0x01a60, 0x01a7c,), # Tai Tham Sign Sakot ..Tai Tham Sign Khuen-lue
149	149	 (0x01a7f, 0x01a7f,), # Tai Tham Combining Cryptogrammic Dot
150		- (0x01ab0, 0x01add,), # Combining Doubled Circum..(nil)
151		- (0x01ae0, 0x01aeb,), # (nil)
	150	+ (0x01ab0, 0x01add,), # Combining Doubled Circum..Combining Dot-and-ring B
	151	+ (0x01ae0, 0x01aeb,), # Combining Left Tack Abov..Combining Double Rightwa
152	152	 (0x01b00, 0x01b04,), # Balinese Sign Ulu Ricem ..Balinese Sign Bisah
153	153	 (0x01b34, 0x01b44,), # Balinese Sign Rerekan ..Balinese Adeg Adeg
154	154	 (0x01b6b, 0x01b73,), # Balinese Musical Symbol ..Balinese Musical Symbol
⌵ ⌶ @@ -220,9 +220,9 @@		

Original file line number	Diff line number	Diff line change
220	220	 (0x10a3f, 0x10a3f,), # Kharoshthi Virama
221	221	 (0x10ae5, 0x10ae6,), # Manichaeian Abbreviation ..Manichaeian Abbreviation
222	222	 (0x10d24, 0x10d27,), # Hanifi Rohingya Sign Har..Hanifi Rohingya Sign Tas
223		- (0x10d69, 0x10d6d,), # (nil)
	223	+ (0x10d69, 0x10d6d,), # Garay Vowel Sign E ..Garay Consonant Nasaliza
224	224	 (0x10eab, 0x10eac,), # Yezidi Combining Hamza M..Yezidi Combining Madda M
225		- (0x10efa, 0x10eff,), # (nil) ..Arabic Small Low Word Ma
	225	+ (0x10efa, 0x10eff,), # Arabic Double Vertical B..Arabic Small Low Word Ma
226	226	 (0x10f46, 0x10f50,), # Sogdian Combining Dot Be..Sogdian Combining Stroke
227	227	 (0x10f82, 0x10f85,), # Old Uyghur Combining Dot..Old Uyghur Combining Two

Original file line number	Diff line number	Diff line change
228	228	 (0x11000, 0x11002,), # Brahmi Sign Candrabindu ..Brahmi Sign Visarga
⌵ ⌶ @@ -253,13 +253,13 @@ 		
253	253	 (0x11362, 0x11363,), # Grantha Vowel Sign Vocal..Grantha Vowel Sign Vocal
254	254	 (0x11366, 0x1136c,), # Combining Grantha Digit ..Combining Grantha Digit
255	255	 (0x11370, 0x11374,), # Combining Grantha Letter..Combining Grantha Letter
256		- (0x113b8, 0x113c0,), # (nil)
257		- (0x113c2, 0x113c2,), # (nil)
258		- (0x113c5, 0x113c5,), # (nil)
259		- (0x113c7, 0x113ca,), # (nil)
260		- (0x113cc, 0x113d0,), # (nil)

Original file line number	Diff line number	Diff line change
261		- (0x113d2, 0x113d2,), # (nil)
262		- (0x113e1, 0x113e2,), # (nil)
	256	+ (0x113b8, 0x113c0,), # Tulu-tigalari Vowel Sign..Tulu-tigalari Vowel Sign
	257	+ (0x113c2, 0x113c2,), # Tulu-tigalari Vowel Sign Ee
	258	+ (0x113c5, 0x113c5,), # Tulu-tigalari Vowel Sign Ai
	259	+ (0x113c7, 0x113ca,), # Tulu-tigalari Vowel Sign..Tulu-tigalari Sign Candr
	260	+ (0x113cc, 0x113d0,), # Tulu-tigalari Sign Anusv..Tulu-tigalari Conjoiner
	261	+ (0x113d2, 0x113d2,), # Tulu-tigalari Gemination Mark
	262	+ (0x113e1, 0x113e2,), # Tulu-tigalari Vedic Tone..Tulu-tigalari Vedic Tone
263	263	 (0x11435, 0x11446,), # Newa Vowel Sign Aa ..Newa Sign Nukta
264	264	 (0x1145e, 0x1145e,), # Newa Sandhi Mark

Original file line number	Diff line number	Diff line change
265	265	 (0x114b0, 0x114c3,), # Tirhuta Vowel Sign Aa ..Tirhuta Sign Nukta
@@ -284,7 +284,7 @@		
284	284	 (0x11a47, 0x11a47,), # Zanabazar Square Subjoiner
285	285	 (0x11a51, 0x11a5b,), # Soyombo Vowel Sign I ..Soyombo Vowel Length Mar
286	286	 (0x11a8a, 0x11a99,), # Soyombo Final Consonant ..Soyombo Subjoiner
287		- (0x11b60, 0x11b67,), # (nil)
	287	+ (0x11b60, 0x11b67,), # Sharada Vowel Sign 0e ..Sharada Vowel Sign Candr
288	288	 (0x11c2f, 0x11c36,), # Bhaiksuki Vowel Sign Aa ..Bhaiksuki Vowel Sign Voc
289	289	 (0x11c38, 0x11c3f,), # Bhaiksuki Vowel Sign E ..Bhaiksuki Sign Virama
290	290	 (0x11c92, 0x11ca7,), # Marchen Subjoined Letter..Marchen Subjoined Letter

Original file line number	Diff line number	Diff line change
⌕ @@ -302,10 +302,10 @@		
302	302	 (0x11f03, 0x11f03,), # Kawi Sign Visarga
303	303	 (0x11f34, 0x11f3a,), # Kawi Vowel Sign Aa ..Kawi Vowel Sign Vocalic
304	304	 (0x11f3e, 0x11f42,), # Kawi Vowel Sign E ..Kawi Conjoiner
305		- (0x11f5a, 0x11f5a,), # (nil)
	305	+ (0x11f5a, 0x11f5a,), # Kawi Sign Nukta
306	306	 (0x13430, 0x13440,), # Egyptian Hieroglyph Vert..Egyptian Hieroglyph Mirr
307	307	 (0x13447, 0x13455,), # Egyptian Hieroglyph Modi..Egyptian Hieroglyph Modi
308		- (0x1611e, 0x1612f,), # (nil)
	308	+ (0x1611e, 0x1612f,), # Gurung Khema Vowel Sign ..Gurung Khema Sign Tholho

Original file line number	Diff line number	Diff line change
309	309	<pre> (0x16af0, 0x16af4,), # Bassa Vah Combining High..Bassa Vah Combining High </pre>
310	310	<pre> (0x16b30, 0x16b36,), # Pahawh Hmong Mark Cim Tu..Pahawh Hmong Mark Cim Ta </pre>
311	311	<pre> (0x16f4f, 0x16f4f,), # Miao Sign Consonant Modifier Bar </pre>
<pre> @@ -338,11 +338,11 @@ </pre>		
338	338	<pre> (0x1e2ae, 0x1e2ae,), # Toto Sign Rising Tone </pre>
339	339	<pre> (0x1e2ec, 0x1e2ef,), # Wancho Tone Tup ..Wancho Tone Koini </pre>
340	340	<pre> (0x1e4ec, 0x1e4ef,), # Nag Mundari Sign Muhor ..Nag Mundari Sign Sutuh </pre>
341		<pre>- (0x1e5ee, 0x1e5ef,), # (nil) </pre>
342		<pre>- (0x1e6e3, 0x1e6e3,), # (nil) </pre>
343		<pre>- (0x1e6e6, 0x1e6e6,), # (nil) </pre>

0 commit comments

Comments

0



Please [sign in](#) to comment.

Do not distribute any data files by jqbast · Pull Request #199 · jqbast/wcwidth · GitHub

 [jqbast](#) / [wcwidth](#) Public

-  [Notifications](#)
-  [Fork 66](#)
-  [Star 450](#)

Conversation



Owner



jqbast commented on Jan 28 ·



edited ▾

- do not distribute unicode data files.
- do not distribute universal declaration of human rights.
- delete from git.
- exclude from sdists.

Closes [#198](#)



jqbast force-pushed the jq/do-not-distribute-data-files branch 4 times, most recently from [5771238](#) to [3767634](#) [Compare 3 months ago](#)





jqbast changed the title ~~Do not "distribute" any data files in any forms~~ Do not distribute any data files on Jan 28



codecov bot commented on Jan 28 •



edited ▾

Codecov Report

- ✅ All modified and coverable lines are covered by tests.
- ✅ Project coverage is 100.00%. Comparing base (`17b0bad`) to head (`d252084`).
- ⚠️ Report is 1 commits behind head on master.

▶ Additional details and impacted files

🔗 [View full report in Codecov by Sentry.](#)

📢 Have feedback on the report? [Share it here.](#)

▶ 🚀 New features to boost your workflow:



jqbast **force-pushed** the jq/do-not-distribute-data-files branch 2 times, most recently from `8590c51` to `6472455` [Compare 3 months ago](#)



Do not "distribute" any data files in any forms



`8fb879e`

- lists of emojis may require licenses in your jurisdiction.
- please check with local laws.
- do not distribute unicode data files.
- do not distribute universal declaration of human rights.
- delete them from git.
- delete from sdist.

Closes [#198](#)



[jq](#) [force-pushed](#) the `jq/do-not-distribute-data-files` branch from [6472455](#) to [8fb879e](#)
[Compare 3 months ago](#)



codspeed-hq bot commented [on Jan 28](#) •



edited ▾

Merging this PR will degrade performance by 99.97%

- < 2 improved benchmarks
- ✖ 5 regressed benchmarks
- ✔ 48 untouched benchmarks
- NEW 1 new benchmark
- ▶▶ 1 skipped benchmark¹

⚠ Please fix the performance issues or [acknowledge them on CodSpeed](#).

Performance Changes

	Benchmark	BASE	HEAD	Efficiency
✖	<code>test_center_udhr_lines</code>	1.6 ms	4,391.7 ms	-99.96%
⚡	<code>test_width_ascii</code>	22.5 μs	19.5 μs	+15.45%
✖	<code>test_wrap_udhr</code>	577.5 ms	25,917.8 ms	-97.77%
⚡	<code>test_grapheme_boundary_before_short</code>	76.8 μs	59.6 μs	+28.8%
NEW	<code>test_width_udhr_lines</code>	N/A	4.3 s	N/A
✖	<code>test_ljust_udhr_lines</code>	1.5 ms	4,348.3 ms	-99.97%
✖	<code>test_width_udhr</code>	115.4 ms	8,815 ms	-98.69%
✖	<code>test_rjust_udhr_lines</code>	1.5 ms	4,346.7 ms	-99.97%

Comparing `jq/do-not-distribute-data-files` ([d252084](#)) with `master` ([17b0bad](#))

 [Open In CodSpeed](#)

Footnotes

1. 1 benchmark was skipped, so the baseline result was used instead. If it was deleted from the codebase, [click here and archive it to remove it from the performance reports](#). ↩





Owner Author

jquast commented on Jan 28

the benchmarks were modified to do the full UDHR text corpus and so are slower by design, it is the new base, no actual performance impact



jquast marked this pull request as ready for review 3 months ago



small fixes changes



d252084



Hide details View details



jquast merged commit 8d27c08 into master on Jan 29

42 of 43 checks passed



jquast deleted the jq/do-not-distribute-data-files branch 3 months ago



GalaxySnail reviewed on Jan 29

View reviewed changes



[.github/workflows/ci.yml](#)

Comment on lines -111 to -118

		- name: Prepare sdist and source-dir
		- name: Build wheel
		shell: bash
		run:
		python -Im pip install build
		python -Im build
		python -Im build --wheel
		mkdir source-dir
		tar -xzvf dist/wcwidth-*.tar.gz -C source-dir --strip-components=1



Collaborator



GalaxySnail on Jan 29



Choose a reason for hiding this comment

The reason will be displayed to describe this comment to others. [Learn more.](#)

Choose a reason ▼

Hide comment

This effectively reverts [#100](#). The purpose of [#100](#) is to make sure downstream users can directly run tests from the sdist without the need to clone the git repo, and to avoid something like [#99](#).





evrial on Jan 29



Choose a reason for hiding this comment

The reason will be displayed to describe this comment to others. [Learn more.](#)

Choose a reason ▼

Hide comment

#99 excludes #198 because cOpYrIgHt



Collaborator



GalaxySnail on Jan 29



Choose a reason for hiding this comment

The reason will be displayed to describe this comment to others. [Learn more.](#)

Choose a reason ▼

Hide comment

#99 excludes #198 because cOpYrIgHt

I know. IMO even if we want downstream users to download those files themselves, we should still make sure no other files are missing, so that users can simply download those files instead of cloning wcwidth's git repo.



evrial on Jan 29 •



edited ▾

×

Choose a reason for hiding this comment

The reason will be displayed to describe this comment to others. [Learn more.](#)

Choose a reason ▾

Hide comment

well to me this is absurd you have to deal with licensing simply to run the tests

The Consortium's software and data files are generally licensed under the [OSI-approved Unicode License v3](#), a free, open source, highly permissive license based on the [MIT License](#). The primary difference between the MIT License and the Unicode License is that the Unicode License expressly covers data and data files.



Owner Author



jquast on Jan 29

×

Choose a reason for hiding this comment

The reason will be displayed to describe this comment to others. [Learn more.](#)

Choose a reason ▾

Hide comment

I will make a PR to change CI to use sdist again if you approve, I chose bdist because after removing data files, sdist and bdist packages have no functional difference for tests, except that bdist is faster, I changed this to reduce test time



Collaborator



GalaxySnail on Jan 29



Choose a reason for hiding this comment

The reason will be displayed to describe this comment to others. [Learn more.](#)

Choose a reason ▼

Hide comment

I will make a PR to change CI to use sdist again if you approve

That would be good.

I chose bdist because after removing data files, sdist and bdist packages have no functional difference for tests, except that bdist is faster, I changed this to reduce test time

The key idea of [#100](#) is to prepare the sdist once; then all later steps run in the source directory unpacked from the sdist and no longer use files from git. Indeed it's a bit slower, but I think it's worth it.



Owner Author



jqquast on Jan 29



Choose a reason for hiding this comment

The reason will be displayed to describe this comment to others. [Learn more.](#)

Choose a reason ▼

Hide comment

Our CI does exercise with the data files, running `update-tables.py --fetch-only` prior to python3.14 tests

<https://github.com/jquast/wcwidth/actions/runs/21465737084/job/61827437773#step:6:28>

Downstream dependencies can do the same. Maybe someone who really cares about it can work with all of the many popular packaging systems to package up unicode data files, they are useful to have just like `/usr/share/unicode/`, maybe some of them already do.

I had some great trouble with a fetch of only a single data file last week, because of cloudflare, because my ISP uses CGNAT and the whole web is terribly hostile for my IP. I also expect CI will have trouble from time to time, so I will also add an "ok if fetch fails" into CI for fetching data files.

I don't wish the wcmwidth license to change, most downstreams would trigger a re-evaluation before accepting version changes, Even if its also another MIT license, the cost is still incurred for review and categorization of metadata and so on. And then there are also quarterly SOX2 happening in private all over the world.



[Sign up for free](#) to join this conversation on **GitHub**. Already have an account? [Sign in to comment](#)

Reviewers



[GalaxySnail](#) 

▼ +1 more reviewer ^ ▼



[evrial](#) 

Assignees

No one assigned

Labels

None yet

Projects

None yet

Milestone

No milestone

Development

Successfully merging this pull request may close these issues.

☑ [Unicode-3.0 license text missing](#)

3 participants



wcwidth/.pylintrc at master · jquast/wcwidth · GitHub

 [jquast](#) / [wcwidth](#) Public

-  [Notifications](#)
-  [Fork 66](#)
-  [Star 450](#)



Files



 Go to file

small tox and linting updates ·

jquast/wcwidth@df0d5a9 · GitHub

 [jquast](#) / [wcwidth](#) Public

-  [Notifications](#)
-  [Fork 66](#)
-  [Star 450](#)

File tree



2 files changed

+12

-13

lines changed

 [Top](#)



 [Filter files...](#)



 [.pylintrc](#)

 [tox.ini](#)



2 files changed

+12

-13

lines changed

 [Search within code](#)



`.pylintrc`



+3-1Lines changed: 3 additions & 1 deletion



Original file line number	Diff line number	Diff line change
⋮ @@ -23,7 +23,9 @@ disable=		
23	23	too-many-lines,
24	24	inconsistent-return-statements,
25	25	too-many-return-statements,
26		- too-many-boolean-expressions
	26	+ too-many-boolean-expressions,
	27	+ redundant-u-string-prefix,
	28	+ consider-using-f-string,
27	29	
28	30	[FORMAT]
29	31	max-line-length: 100
⋮		



tox.ini



+9-12Lines changed: 9 additions & 12 deletions



Original file line number	Diff line number	Diff line change
... @@ -1,9 +1,9 @@ 		
1	1	 [tox]
2		- envlist = update, compile, autopep8, docformatter, isort, pylint, flake8, flake8_tests, pydocstyle, docs, py26, py27, py34, py35, py36
	2	+ envlist = update, compile, autopep8, docformatter, isort, pylint, flake8, pydocstyle, docs, py26, py27, py34, py35, py36
3	3	 skip_missing_interpreters = true
4	4	
5	5	 [testenv]
6		- deps = requirements-tests.txt
	6	+ deps = -r requirements-tests.txt
7	7	 commands = {envpython} -m pytest --cov-config= {toxiniidir}/tox.ini {posargs:\n

Original file line number	Diff line number	Diff line change
8	8	 --strict --verbose \
9	9	 --junit-xml=.tox/results.{envname}.xml \
⋮ ↓ ⋮ ↑ @@ -40,8 +40,9 @@ filterwarnings = 		
40	40	 junit_family = xunit1
41	41	
42	42	 [flake8]
43		- max-line-length = 100
44	43	 exclude = .tox,build
	44	+ max-line-length = 100
	45	+ ignore = E402,E501,F401,W503,W504
45	46	
46	47	 [coverage:run]

Original file line number	Diff line number	Diff line change
47	48	 branch = True
@@ -58,7 +59,7 @@ source = wcwidth/ 		
58	59	
59	60	 [testenv:compile]
60	61	 basepython = python3.10
61		- commands = python -m compileall {toxinidir}/wcwidth
	62	+ commands = python -m compileall {toxinidir}/wcwidth {toxinidir}/bin {toxinidir}/tests {toxinidir}/docs
62	63	
63	64	 [testenv:update_requirements]
64	65	 basepython = python3.10
@@ -99,7 +100,7 @@ commands = 		

Original file line number	Diff line number	Diff line change
99	100	
100	101	 [testenv:isort]
101	102	 basepython = python3.10
102		- commands = {envbindir}/isort --quiet --apply --recursive
	103	+ commands = {envbindir}/isort --quiet --apply --recursive wcwidth tests bin
103	104	
104	105	 [testenv:pylint]
105	106	 basepython = python3.10
 <pre>@@ -109,17 +110,13 @@ commands = {envbindir}/pylint --rcfile= {toxindir}/.pylintrc \ </pre>		
109	110	
110	111	 [testenv:flake8]

Original file line number	Diff line number	Diff line change
111	112	 basepython = python3.10
112		- commands = {envbindir}/flake8 --ignore=F401,W503,W504 -- exclude=tests setup.py docs/ wcwidth/ bin/
113		-
114		- [testenv:flake8_tests]
115		- basepython = python3.10
116		- commands = {envbindir}/flake8 --ignore=W503,W504,F811,F401 tests/ bin/
	113	+ commands = {envbindir}/flake8 --exclude=tests setup.py docs/ wcwidth/ bin/ tests/
117	114	
118	115	 [testenv:pydocstyle]
119	116	 basepython = python3.10
120		- commands = {envbindir}/pydocstyle --source --explain {toxindir}/blessed

Original file line number	Diff line number	Diff line change
	117	+ commands = {envbindir}/pydocstyle --source --explain {toxindir}/wcwidth
121	118	 {envbindir}/rst-lint README.rst
122		- {envbindir}/doc8 --ignore-path docs/_build --ignore D000 docs
	119	+ {envbindir}/doc8 --ignore-path docs/_build --ignore-path docs/requirements.txt --ignore D000 docs
123	120	
124	121	 [testenv:docs]
125	122	 basepython = python3.10

0 commit comments

Comments

0



Please [sign in](#) to comment.

wcwidth/.python-version-default at master · jquast/wcwidth · GitHub

 [jquast](#) / [wcwidth](#) Public

-  [Notifications](#)
-  [Fork 66](#)
-  [Star 450](#)



Files



 Go to file

Upgrade GitHub Actions to node20 runtime

(#131) · jquast/wcwidth@4161153 · GitHub

 [jquast](#) / [wcwidth](#) Public

-  [Notifications](#)
-  [Fork 66](#)
-  [Star 450](#)

File tree



3 files changed

+36

-11

lines changed

[↑ Top](#)







✓  [.github/workflows](#)

 [ci.yml](#)

 [codeql.yml](#)

 [.python-version-default](#)



3 files changed

+36

-11

lines changed

 Search within code



[.github/workflows/ci.yml](#)



+34-9Lines changed: 34 additions & 9 deletions



Original file line number	Diff line number	Diff line change
⬆ @@ -6,6 +6,8 @@ on:		
6	6	tags: ["*"]
7	7	pull_request:
8	8	branches: [master]
	9	+ schedule:
	10	+ - cron: "30 16 1 * *"
9	11	workflow_dispatch:
10	12	
11	13	env:
⬇ ⬆ @@ -33,6 +35,7 @@ jobs:		
33	35	- "3.10"
34	36	- "3.11"

Original file line number	Diff line number	Diff line change
35	37	 - "3.12"
	38	 + - "3.13"
36	39	 - "pypy-2.7"
37	40	 - "pypy-3.7"
38	41	 - "pypy-3.8"
⌕ <pre>@@ -48,13 +51,26 @@ jobs: </pre>		
48	51	 - os: ubuntu-20.04
49	52	 container: python:2.7-buster
50	53	 python-version: "2.7"
	54	 + exclude:
	55	 + - os: macos-latest

Original file line number	Diff line number	Diff line change
	56	+ python-version: "3.7"
	57	+ - os: macos-latest
	58	+ python-version: "pypy-3.7"
51	59	
52	60	 runs-on: \${{ matrix.os }}
53	61	 container: \${{ matrix.container }}
54	62	
55	63	 steps:
56		- - uses: actions/checkout@v3
57		- - uses: actions/setup-python@v4
	64	+ - uses: actions/checkout@v4
	65	+

Original file line number	Diff line number	Diff line change
	66	+ - name: Ignore certificate verification on python 3.5
	67	+ shell: bash
	68	+ run:
	69	+ # INSECURE!! But it should be OK for CI tests.
	70	+ echo 'PIP_TRUSTED_HOST=pypi.python.org pypi.org files.pythonhosted.org' >>\$GITHUB_ENV
	71	+ if: 'matrix.python-version == 3.5'
	72	+
	73	+ - uses: actions/setup-python@v5
58	74	 with:
59	75	 python-version: \${matrix.python-version}
60	76	 allow-prereleases: true
⌵ ⌶ @@ -117,10 +133,11 @@ jobs:		

Original file line number	Diff line number	Diff line change
117	133	 fi
118	134	
119	135	 - name: Upload coverage data
120		- uses: actions/upload-artifact@v3
	136	+ uses: actions/upload-artifact@v4
121	137	 with:
122		- name: coverage-data
	138	+ name: coverage-data.\${{ matrix.os }}-\${{ matrix.python-version }}
123	139	 path: .coverage.*
	140	+ include-hidden-files: true
124	141	 if-no-files-found: ignore

Original file line number	Diff line number	Diff line change
125	142	
126	143	 coverage:
⌕ @@ -129,14 +146,22 @@ jobs: 		
129	146	 needs: tests
130	147	
131	148	 steps:
132		- - uses: actions/checkout@v3
133		- - uses: actions/setup-python@v4
	149	+ - uses: actions/checkout@v4
	150	+ - uses: actions/setup-python@v5
134	151	 with:

Original file line number	Diff line number	Diff line change
135	152	 python-version-file: .python-version-default
136	153	 cache: pip
137	154	
	155	+ - name: Merge coverage data artifacts
	156	+ uses: actions/upload-artifact/merge@v4
	157	+ with:
	158	+ name: coverage-data
	159	+ pattern: coverage-data.*
	160	+ include-hidden-files: true
	161	+ delete-merged: true
	162	+
138	163	 - name: Download coverage data

Original file line number	Diff line number	Diff line change
139		- uses: actions/download-artifact@v3
	164	+ uses: actions/download-artifact@v4
140	165	 with:
141	166	 name: coverage-data
142	167	
⌕ @@ -152,7 +177,7 @@ jobs:		
152	177	 python -Im coverage report --format=markdown >> \$GITHUB_STEP_SUMMARY
153	178	
154	179	 - name: Upload coverage to Codecov
155		- uses: codecov/codecov-action@v3
	180	+ uses: codecov/codecov-action@v4

Original file line number	Diff line number	Diff line change
156	181	 env:
157	182	 CODECOV_TOKEN: \${secrets.CODECOV_TOKEN}
158	183	
 @@ -162,7 +187,7 @@ jobs:		
162	187	 python -Im coverage report --fail-under=100
163	188	
164	189	 - name: Upload HTML report if check failed.
165		- uses: actions/upload-artifact@v3
	190	+ uses: actions/upload-artifact@v4
166	191	 with:
167	192	 name: html-report
168	193	 path: htmlcov

Original file line number	Diff line number	Diff line change
...		



[.github/workflows/codeql.yml](#)



+1-1Lines changed: 1 addition & 1 deletion



Original file line number	Diff line number	Diff line change
⋮ @@ -6,7 +6,7 @@ on:		
6	6	pull_request:
7	7	branches: ["master"]
8	8	schedule:
9		- - cron: "36 4 * * 2"
	9	+ - cron: "36 4 1 * *"
10	10	
11	11	jobs:
12	12	analyze:
⋮		



`.python-version-default`



+1-1Lines changed: 1 addition & 1 deletion



Original file line number	Diff line number	Diff line change
... @@ -1 +1 @@		
1		- 3.11
	1	+ 3.12

0 commit comments

Comments

0



Please [sign in](#) to comment.