

Core Java

ASSIGNMENT 2

STUDENT NAME: TELORE GANESH BHASKAR | GT
ROLL NO:
CLASS: TYBBACA
GUIDE: PROF. DESHMUKH SHIVANI
ASSIGNMENT BASED ON:

ASSIGNMENT 2

SET-A


Q.1 Write a Java program to calculate power of a number using recursion.

Ans:

```
class power{

    public static void main(String []para){
        System.out.println("Power of X^Y: "+showres(2,4));
    }
    public static long showres(int base,int expo){
        if(expo!=0)
            return base*showres(base,expo-1);
        else
            return 1;
    }
}
```

Output:

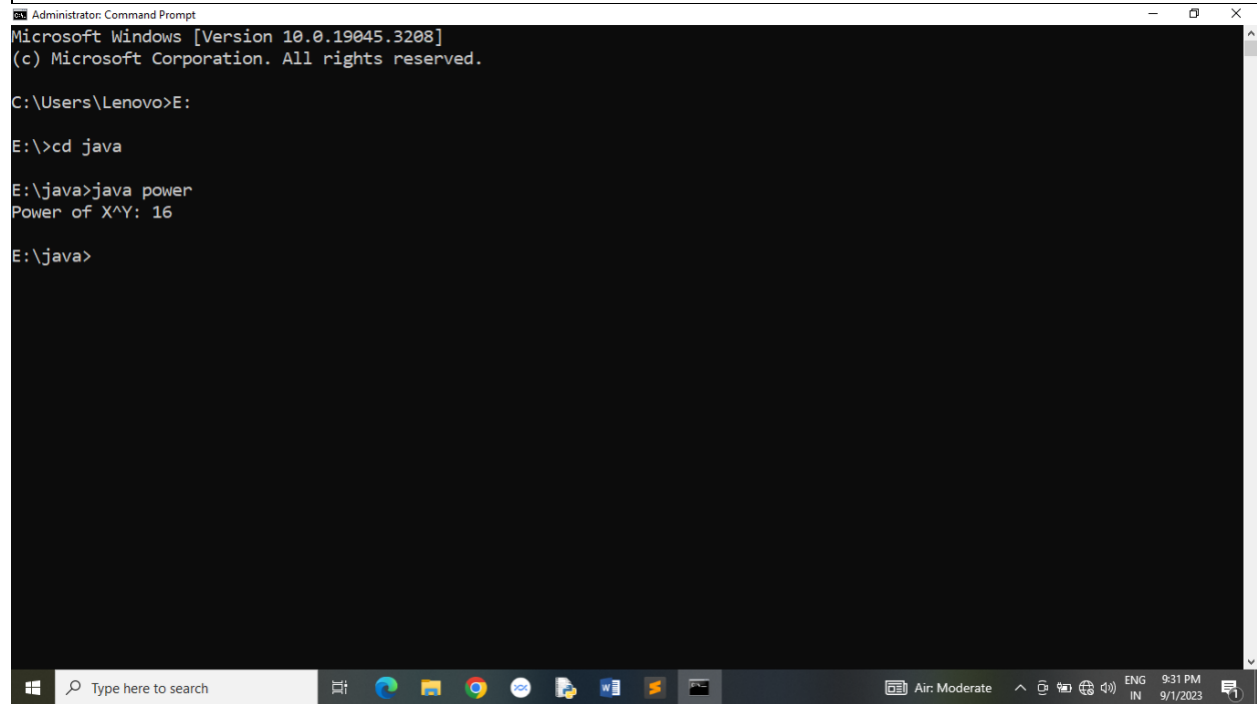

The screenshot shows a Windows Command Prompt window titled "Administrator: Command Prompt". The text inside the window is as follows:

```
Microsoft Windows [Version 10.0.19045.3208]
(c) Microsoft Corporation. All rights reserved.

C:\Users\Lenovo>E:

E:\>cd java

E:\java>java power
Power of X^Y: 16

E:\java>
```

The Windows taskbar is visible at the bottom of the screen, showing the search bar, task view button, and several application icons including Edge, File Explorer, Chrome, and others. The system tray on the right shows the date and time as 9:31 PM on 9/1/2023.

ASSIGNMENT 2


SET-A

Q.2 Write a Java program to display Fibonacci series using function.

Ans:

```
class Q2{
    public static void calfibonacci(int term){
        int n=0,n1=0,n2=1,count=1;
        if(term<=0){
            System.out.println("Limit should be positive");
        }
        else if(term==1){
            System.out.println("Fibonacci series :"+n1);
        }
        else{
            System.out.println("Fibonacci Series: ");
            while(count<term){
                System.out.println(n1);
                n=n+1;
                n1=n2;
                n2=n;
                count=count+1;
            }
        }
    }
    public static void main(String[] args) {
        calfibonacci(8);
    }
}
```

Output:

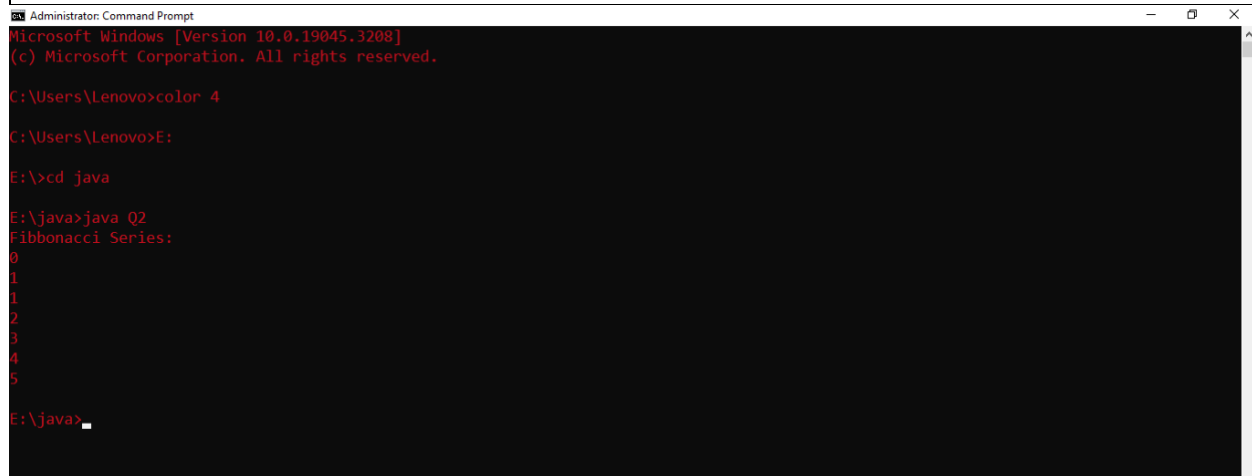

```
Administrator: Command Prompt
Microsoft Windows [Version 10.0.19045.3208]
(c) Microsoft Corporation. All rights reserved.

C:\Users\Lenovo>color 4

C:\Users\Lenovo>E:

E:\>cd java

E:\java>java Q2
Fibonacci Series:
0
1
1
2
3
4
5

E:\java>
```

ASSIGNMENT 2


SET-A

Q.3 Write a Java program to calculate area of Circle, Triangle & Rectangle.(Use Method Overloading)

Ans:

```
class Q3{
    double pi=3.14;
    void area(float r){
        double circle=pi*(r*r);
        System.out.println("Area of circle is: "+circle);
    }
    void area(double b,int h){
        double triangle=0.5*b*h;
        System.out.println("Area of triangle is: "+triangle);
    }
    void area(int l,int w){
        int rectangle=l*w;
        System.out.println("Area of Rectangle is: "+rectangle);
    }
    public static void main(String[] args) {
        Q3 obj=new Q3();
        obj.area(4);
        obj.area(5.2,5);
        obj.area(4,5);
    }
}
```

Output:

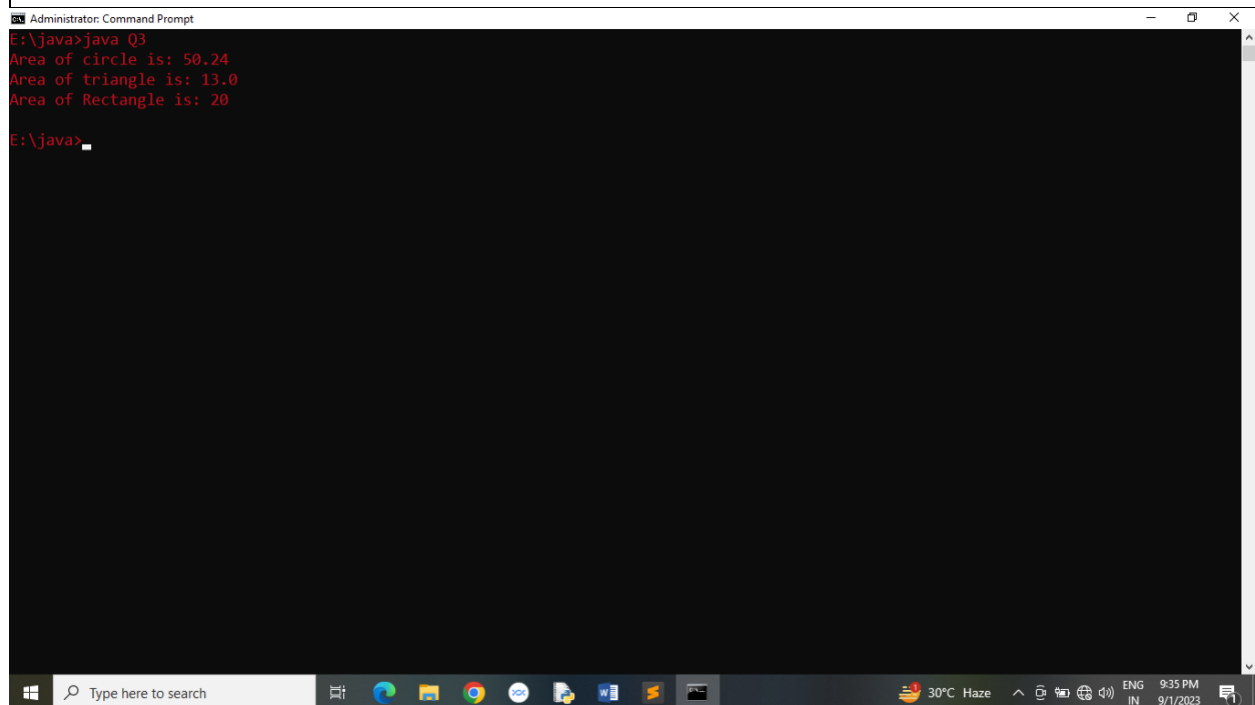

```
Administrator: Command Prompt
E:\java>java Q3
Area of circle is: 50.24
Area of triangle is: 13.0
Area of Rectangle is: 20
E:\java>
```

ASSIGNMENT 2


SET-A

Q.4 Write a Java program to Copy data of one object to another Object.

Ans:

```
class Q4{
    public static void main(String[] args){
        int i,n;
        int []a;
        a=new int[3];
        a[0]=1;
        a[1]=2;
        a[2]=3;
        for(i=0;i<a.length;i++){
            if(a[i]%2==0){
                System.out.println(a[i]);
            }
        }
    }
}
```

Output:

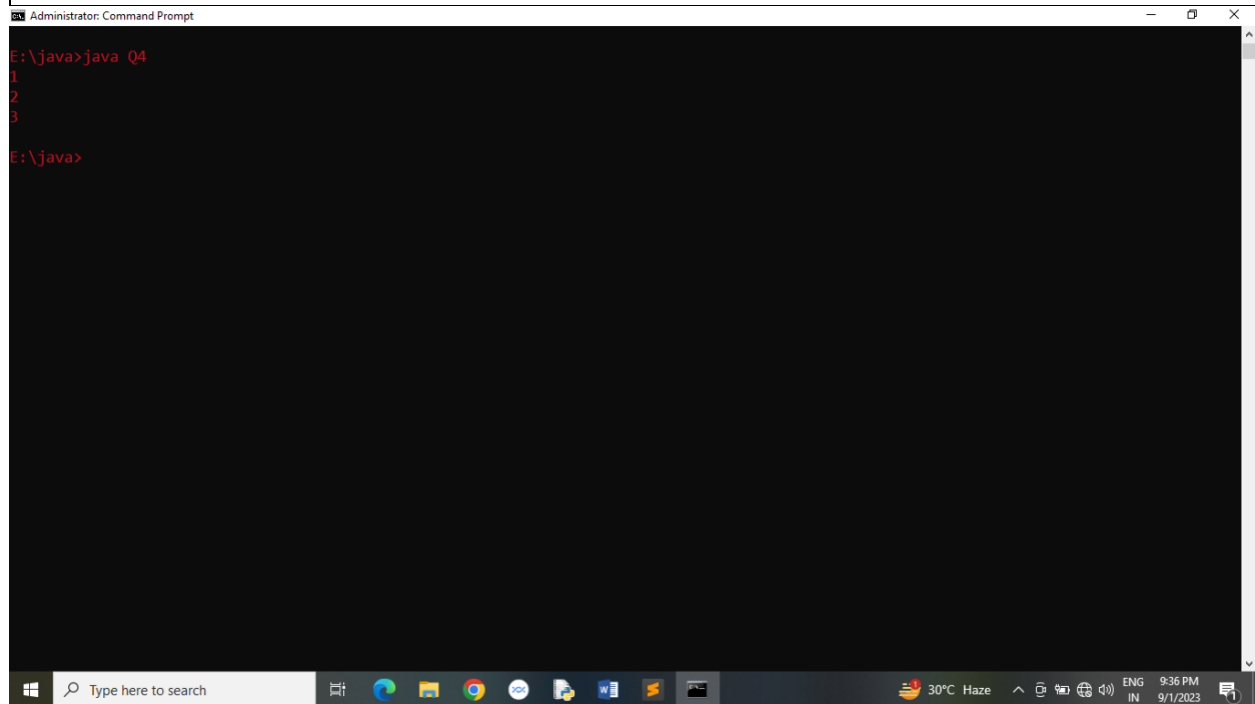

The screenshot shows a Windows Command Prompt window titled "Administrator: Command Prompt". The command prompt shows the following sequence of commands and output:

```
E:\java>java Q4
1
2
3
E:\java>
```

The output of the program is the numbers 1, 2, and 3, each on a new line. The Windows taskbar is visible at the bottom of the screen, showing the time as 9:36 PM on 9/1/2023, and the temperature as 30°C Haze.

ASSIGNMENT 2


SET-A

Q.5 Write a Java program to calculate factorial of a number using recursion.

Ans:

```
class Q5{
    public static void main(String[] para){
        int num=5;
        long fact=factorial(5);
        System.out.print("Factorial is: "+fact);
    }
    public static long factorial(int n){
        if(n<=1){
            return 1;
        }
        else{
            return n*factorial(n-1);
        }
    }
}
```

Output:

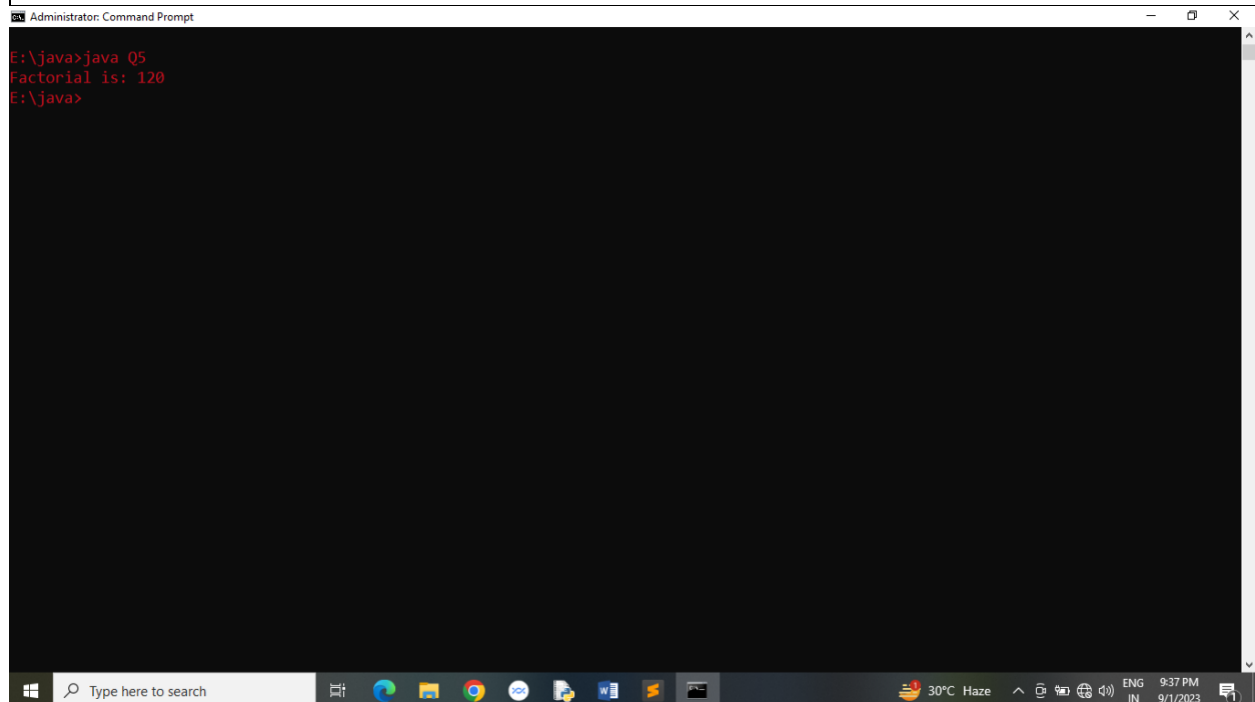

The screenshot shows a Windows Command Prompt window titled "Administrator: Command Prompt". The command prompt displays the following text:

```
E:\java>java Q5
Factorial is: 120
E:\java>
```

The output "Factorial is: 120" is displayed in red text. The Windows taskbar is visible at the bottom, showing the search bar, task view button, and several application icons. The system tray on the right shows the date and time as 9:37 PM on 9/1/2023, along with weather information (30°C Haze) and system icons.

ASSIGNMENT 2

SET-B

Q.1 Define a class person(pid,pname,age,gender). Define Default and parameterised constructor. Overload the constructor. Accept the 5 person details and display it.(use this keyword).

Ans:

```
import java.util.Scanner;
class person{
    int pid,age;
    String pname,gender;
    person(int a,int b,String n, String g){
        this.pid=a;
        this.age=b;
        this.pname=n;
        this.gender=g;
        System.out.println("ID: "+pid+" Person Name: "+pname+" Age: "+age+" Gender:
"+gender);
    }

    public static void main(String[] para){
        Scanner sc=new Scanner(System.in);
        person[] per=new person[5];
        for(int i=0;i<5;i++){
            System.out.println("Enter PID: ");
            int pid=sc.nextInt();
            System.out.println("Enter Age: ");
            int age=sc.nextInt();
            sc.nextLine();
            System.out.println("Enter Person Name :");
            String pname=sc.nextLine();
            System.out.println("Enter Gender: ");
            String gender=sc.nextLine();
            per[i]=new person(pid,age,pname,gender);
        }
        sc.nextLine();
    }
}
```

Output:

```
Administrator: Command Prompt
E:\java\SET-B>javac person.java

E:\java\SET-B>java person
Enter PID:
1
Enter Age:
12
Enter Person Name :
Ganesh
Enter Gender:
Male
ID: 1 Person Name: Ganesh Age: 12 Gender: Male
Enter PID:
2
Enter Age:
12
Enter Person Name :
Prashant
Enter Gender:
Male
ID: 2 Person Name: Prashant Age: 12 Gender: Male
Enter PID:
3
Enter Age:
12
Enter Person Name :
Sarthak
Enter Gender:
Male
ID: 3 Person Name: Sarthak Age: 12 Gender: Male
Enter PID:
4
Enter Age:
12
Enter Person Name :
Priya
Enter Gender:
Female
ID: 4 Person Name: Priya Age: 12 Gender: Female
Enter PID:
5
Enter Age:
12
Enter Person Name :
```



ASSIGNMENT 2

SET-B

Q.2 Define a class product(pid,pname,price). Write a function to accept the product details, to display product details and to calculate total amount. (use array of Objects)

Ans:

```
import java.util.Scanner;
class product{
    int pid;
    String pname;
    int price;
    void getdetails(int a,String b,int c){
        this.pid=a;
        this.pname=b;
        this.price=c;
    }
    void display(){
        System.out.print("Product id: "+pid+" Product Name: "+pname+" Price: "+price);
        System.out.print("\n");
    }
    public static void main(String[] args) {
        product[] obj=new product[3];
        Scanner sc=new Scanner(System.in);
        for(int i=0;i<3;i++){
            System.out.println("Enter pid :");
            int pid=sc.nextInt();
            sc.nextLine();
            System.out.println("Enter pname :");
            String pname=sc.nextLine();
            System.out.println("Enter price :");
            int price=sc.nextInt();
            obj[i]= new product();
            obj[i].getdetails(pid,pname,price);
            obj[i].display();
        }
    }
}
```

Output:

ASSIGNMENT 2


SET-B

Q.3 Define a class Student(rollno,name,per). Create n objects of the student class and Display it using toString().(Use parameterized constructor)

Ans:

```
class student{
    int rollno;
    String name;
    double per;
    student(int a,String b,double c){
        rollno=a;
        name=b;
        per=c;
    }
    public String toString(){
        return rollno+" "+name+" "+per;
    }
    public static void main(String[] args) {
        student s1=new student(1,"Ganesh",90.2);
        student s2=new student(2,"Priya",82.2);
        System.out.println(s1);
        System.out.println(s2);
    }
}
```

Output:

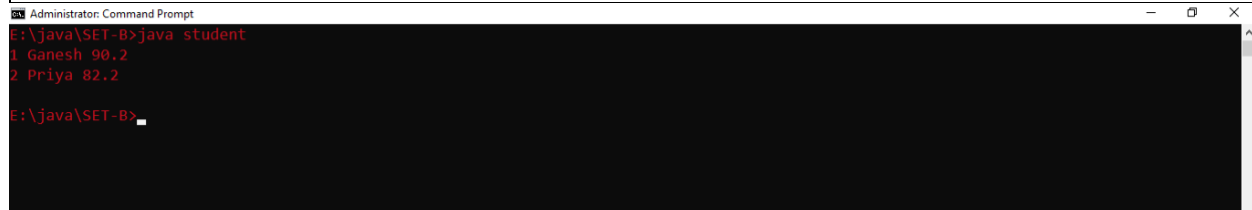

```
Administrator: Command Prompt
E:\java\SET-B>java student
1 Ganesh 90.2
2 Priya 82.2
E:\java\SET-B>
```

ASSIGNMENT 2


SET-B

Q.4 Define a class MyNumber having one private integer data member. Write a default constructor to initialize it to 0 and another constructor to initialize it to a value. Write methods isNegative, isPositive. Use command line argument to pass a value to the object and perform the above tests.

Ans:

```
class MyNumber{
    private int data1;
    MyNumber(){
        data1=0;
    }
    MyNumber(int a){
        this.data1=a;
    }
    void isNegative(){
        if(data1<0){
            System.out.println("Value is negative");
        }
    }
    void isPositive(){
        if(data1<=0){
            System.out.println("Value is Positive");
        }
    }
    public static void main(String[] args) {
        MyNumber n=new MyNumber();
        MyNumber n1=new MyNumber(1);
        System.out.println("First Constructor Result: ");
        n.isNegative();
        n.isPositive();
        System.out.println("Second Constructor Result: ");
        n1.isPositive();
        n1.isNegative();
    }
}
```

Output:

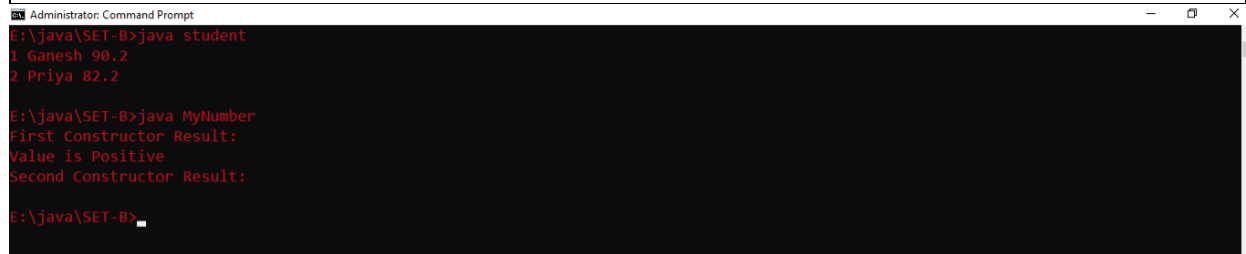

```
Administrator: Command Prompt
E:\java\SET-B>java student
1 Ganesh 90.2
2 Priya 82.2

E:\java\SET-B>java MyNumber
First Constructor Result:
Value is Positive
Second Constructor Result:

E:\java\SET-B>
```

ASSIGNMENT 2

SET-C

Q.1 Define class Student(rno, name, mark1, mark2). Define Result class(total, percentage) inside the student class. Accept the student details & display the mark sheet with rno, name, mark1, mark2, total, percentage. (Use inner class concept)

Ans:

```
class student{
    int rno;
    String name;
    double mark1;
    double mark2;

    void getdata(int a,String b,double c,double d){
        rno=a;
        name=b;
        mark1=c;
        mark2=d;
    }
    void show(){
        System.out.println("*****Marksheet*****");
        System.out.println("Rollno: "+rno);
        System.out.println("Student Name: "+name);
        System.out.println("Mark1: "+mark2);
        System.out.println("Mark2: "+mark1);
    }
    class result{
        double total,percentage;
        void calculateres(){
            total=mark1+mark2;
            percentage=total/2;
            System.out.println("Total :"+total);
            System.out.println("Percentage: "+percentage+"%");
        }
    }

    public static void main(String[] args) {
        student s=new student();
        s.getdata(1,"Ganesh",92,94);
        s.show();
        student.result s1=s.new result();
        s1.calculateres();
    }
}
```

Output:

Administrator: Command Prompt

E:\java\SET-C>color 4

E:\java\SET-C>java student

*****Marksheet*****

Rollno: 1

Student Name: Ganesh

Mark1: 94.0

Mark2: 92.0

Total :186.0

Percentage: 93.0%

E:\java\SET-C>

ASSIGNMENT 2

SET-C

Q.2 Write a java program to accept n employee names from user. Sort them in ascending order and Display them.(Use array of object and Static keyword)

Ans:

```
import java.util.*;
class Employee{
    String name;
    public Employee(String name){
        this.name=name;
    }
}

public class EmployeeSort{
    static void sortEmployees(Employee[] employees){
        for(int i=0;i<employees.length-1;i++){
            for(int j=0;j<employees.length-i-1;j++){
                if(employees[j].name.compareTo(employees[j+1].name)>0){
                    Employee temp=employees[j];
                    employees[j]=employees[j+1];
                    employees[j+1]=temp;
                }
            }
        }
    }

    public static void main(String[] args) {
        Scanner sc=new Scanner(System.in);
        System.out.println("Enter the number of Employees :");
        int n=sc.nextInt();
        Employee[] employees=new Employee[n];
        sc.nextLine();
        for(int i=0;i<n;i++){
            System.out.println("Enter the Name of employee "+(i+1)+":");
            String name=sc.nextLine();
            employees[i]=new Employee(name);
        }

        sortEmployees(employees);
        System.out.println("\n Sorted Employee names :");
        for(int i=0;i<n;i++){
            System.out.println(employees[i].name);
        }
    }
}
```

Output:

```
Administrator: Command Prompt
E:\java\SET-C>java EmployeeSort
Enter the number of Employees :
2
Enter the Name of employee 1:
Ganesh
Enter the Name of employee 2:
Mahadev

Sorted Employee names :
Ganesh
Mahadev
E:\java\SET-C>
```

ASSIGNMENT 2

SET-C

Q.3 Write a java program to accept details of 'n' cricket players(pid, pname, totalRuns, InningsPlayed, NotOuttimes). Calculate the average of all the players. Display the details of player having maximum average.

Ans:

```
import java.util.*;
class CricketPlayer{
    int pid;
    String pname;
    int totalRuns;
    int inningsplayed;
    int notouttimes;
    public CricketPlayer(int pid, String pname,int totalRuns,int inningsplayed,int notouttimes){
        this.pid=pid;
        this.pname=pname;
        this.totalRuns=totalRuns;
        this.inningsplayed=inningsplayed;
        this.notouttimes=notouttimes;
    }
    public double calculateAvg(){
        if(inningsplayed-notouttimes>0){
            return(double)totalRuns/(inningsplayed-notouttimes);
        }
        else{
            return 0.0;
        }
    }
}
class cricketplayerstats{
    public static void main(String[] args) {
        Scanner sc=new Scanner(System.in);
        System.out.print("Enter the number of players :");
        int n=sc.nextInt();
        CricketPlayer[] players=new CricketPlayer[n];
        for(int i=0;i<n;i++){
            System.out.println("Enter the details for player "+(i+1)+" : ");
            System.out.println("Player ID: ");
            int pid=sc.nextInt();
            sc.nextLine();
            System.out.println("Player Name: ");
            String pname=sc.nextLine();
            System.out.println("Total Runs :");
            int totalRuns=sc.nextInt();
            System.out.println("Innings Played :");
            int inningsplayed=sc.nextInt();
```



```

        System.out.println("Number of times Not Out: ");
        int notouttimes=sc.nextInt();
        players[i]=new
CricketPlayer(pid,pname,totalRuns,inningsplayed,notouttimes);
    }
    double maxAvg=-1;
    CricketPlayer maxAvgPlayer=null;
    for(CricketPlayer player: players){
        double average=player.calculateAvg();
        if(average>maxAvg){
            maxAvg=average;
            maxAvgPlayer=player;
        }
    }
    System.out.println("Details of Player with max Avg :");
    System.out.println("Player Id :"+maxAvgPlayer.pid+"\nPlayer Name:
"+maxAvgPlayer.pname+"\nTotal Runs: "+maxAvgPlayer.totalRuns+
        "\nInnings Played : "+maxAvgPlayer.inningsplayed+"\nNo of times Not Out:
"+maxAvgPlayer.notouttimes+
        "\nAverage :"+maxAvg);
    }
}

```

Output:

```

Select Administrator: Command Prompt
E:\java\SET-C>java cricketplayerstats
Enter the number of players :2
Enter the details for player 1:
Player ID:
1
Player Name:
GT
Total Runs :
100
Innings Played :
50
Number of times Not Out:
40
Enter the details for player 2:
Player ID:
2
Player Name:
Mahadev
Total Runs :
100
Innings Played :
100
Number of times Not Out:
49
Details of Player with max Avg :
Player Id :1
Player Name: GT
Total Runs: 100
Innings Played :50
No of times Not Out: 40
Average :10.0
E:\java\SET-C>

```

ASSIGNMENT 2

SET-C


Q.4 Write a java program to accept details of 'n' books. And Display the quantity of given book.

Ans:

```
import java.util.Scanner;
class Book{
    int bookid;
    String bookname;
    String author;
    int quantity;
    public Book(int bookid,String bookname,String author,int quantity){
        this.bookid=bookid;
        this.bookname=bookname;
        this.author=author;
        this.quantity=quantity;
    }
}
public class bookinventory{
    public static void main(String[] args) {
        Scanner sc=new Scanner(System.in);
        System.out.print("Enter the Number of Books: ");
        int n=sc.nextInt();
        Book[] books=new Book[n];
        for(int i=0;i<n;i++){
            System.out.println("Book ID: ");
            int bookid=sc.nextInt();
            sc.nextLine();
            System.out.println("Book Name: ");
            String bookname=sc.nextLine();
            System.out.println("Author :");
            String author=sc.nextLine();
            System.out.println("Quantity :");
            int quantity=sc.nextInt();
            books[i]=new Book(bookid,bookname,author,quantity);
        }
        sc.nextLine();
        System.out.println("Enter the Name of Book to Search :");
        String searchBookname=sc.nextLine();
        boolean bookFound=false;
        for(Book book:books){
            if(book.bookname.equalsIgnoreCase(searchBookname)){
                System.out.println("Quantity of "+book.bookname+":
"+book.quantity);
                bookFound=true;
                break;
            }
        }
    }
}
```

```
    }  
    if(!bookFound){  
        System.out.println("Book not found..!");  
    }  
}  
}
```

Output:

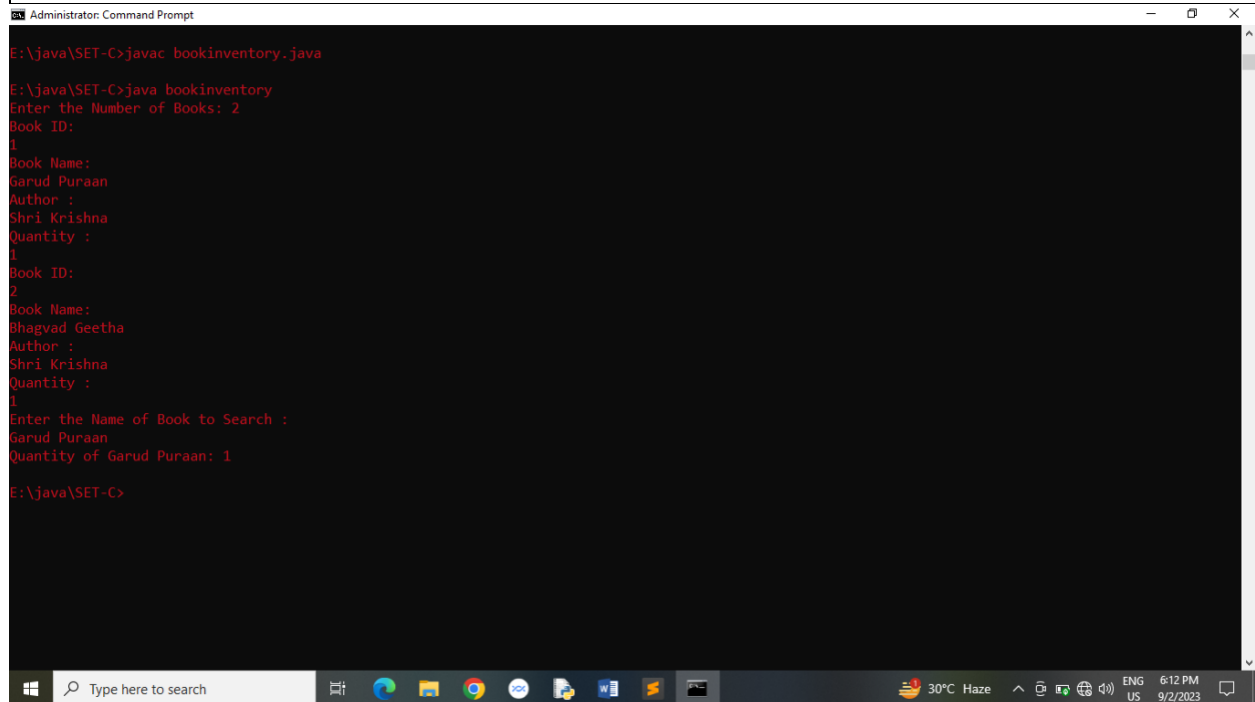

```
Administrator: Command Prompt  
E:\java\SET-C>javac bookinventory.java  
E:\java\SET-C>java bookinventory  
Enter the Number of Books: 2  
Book ID:  
1  
Book Name:  
Garud Puraan  
Author :  
Shri Krishna  
Quantity :  
1  
Book ID:  
2  
Book Name:  
Bhagvad Geetha  
Author :  
Shri Krishna  
Quantity :  
1  
Enter the Name of Book to Search :  
Garud Puraan  
Quantity of Garud Puraan: 1  
E:\java\SET-C>
```

GT