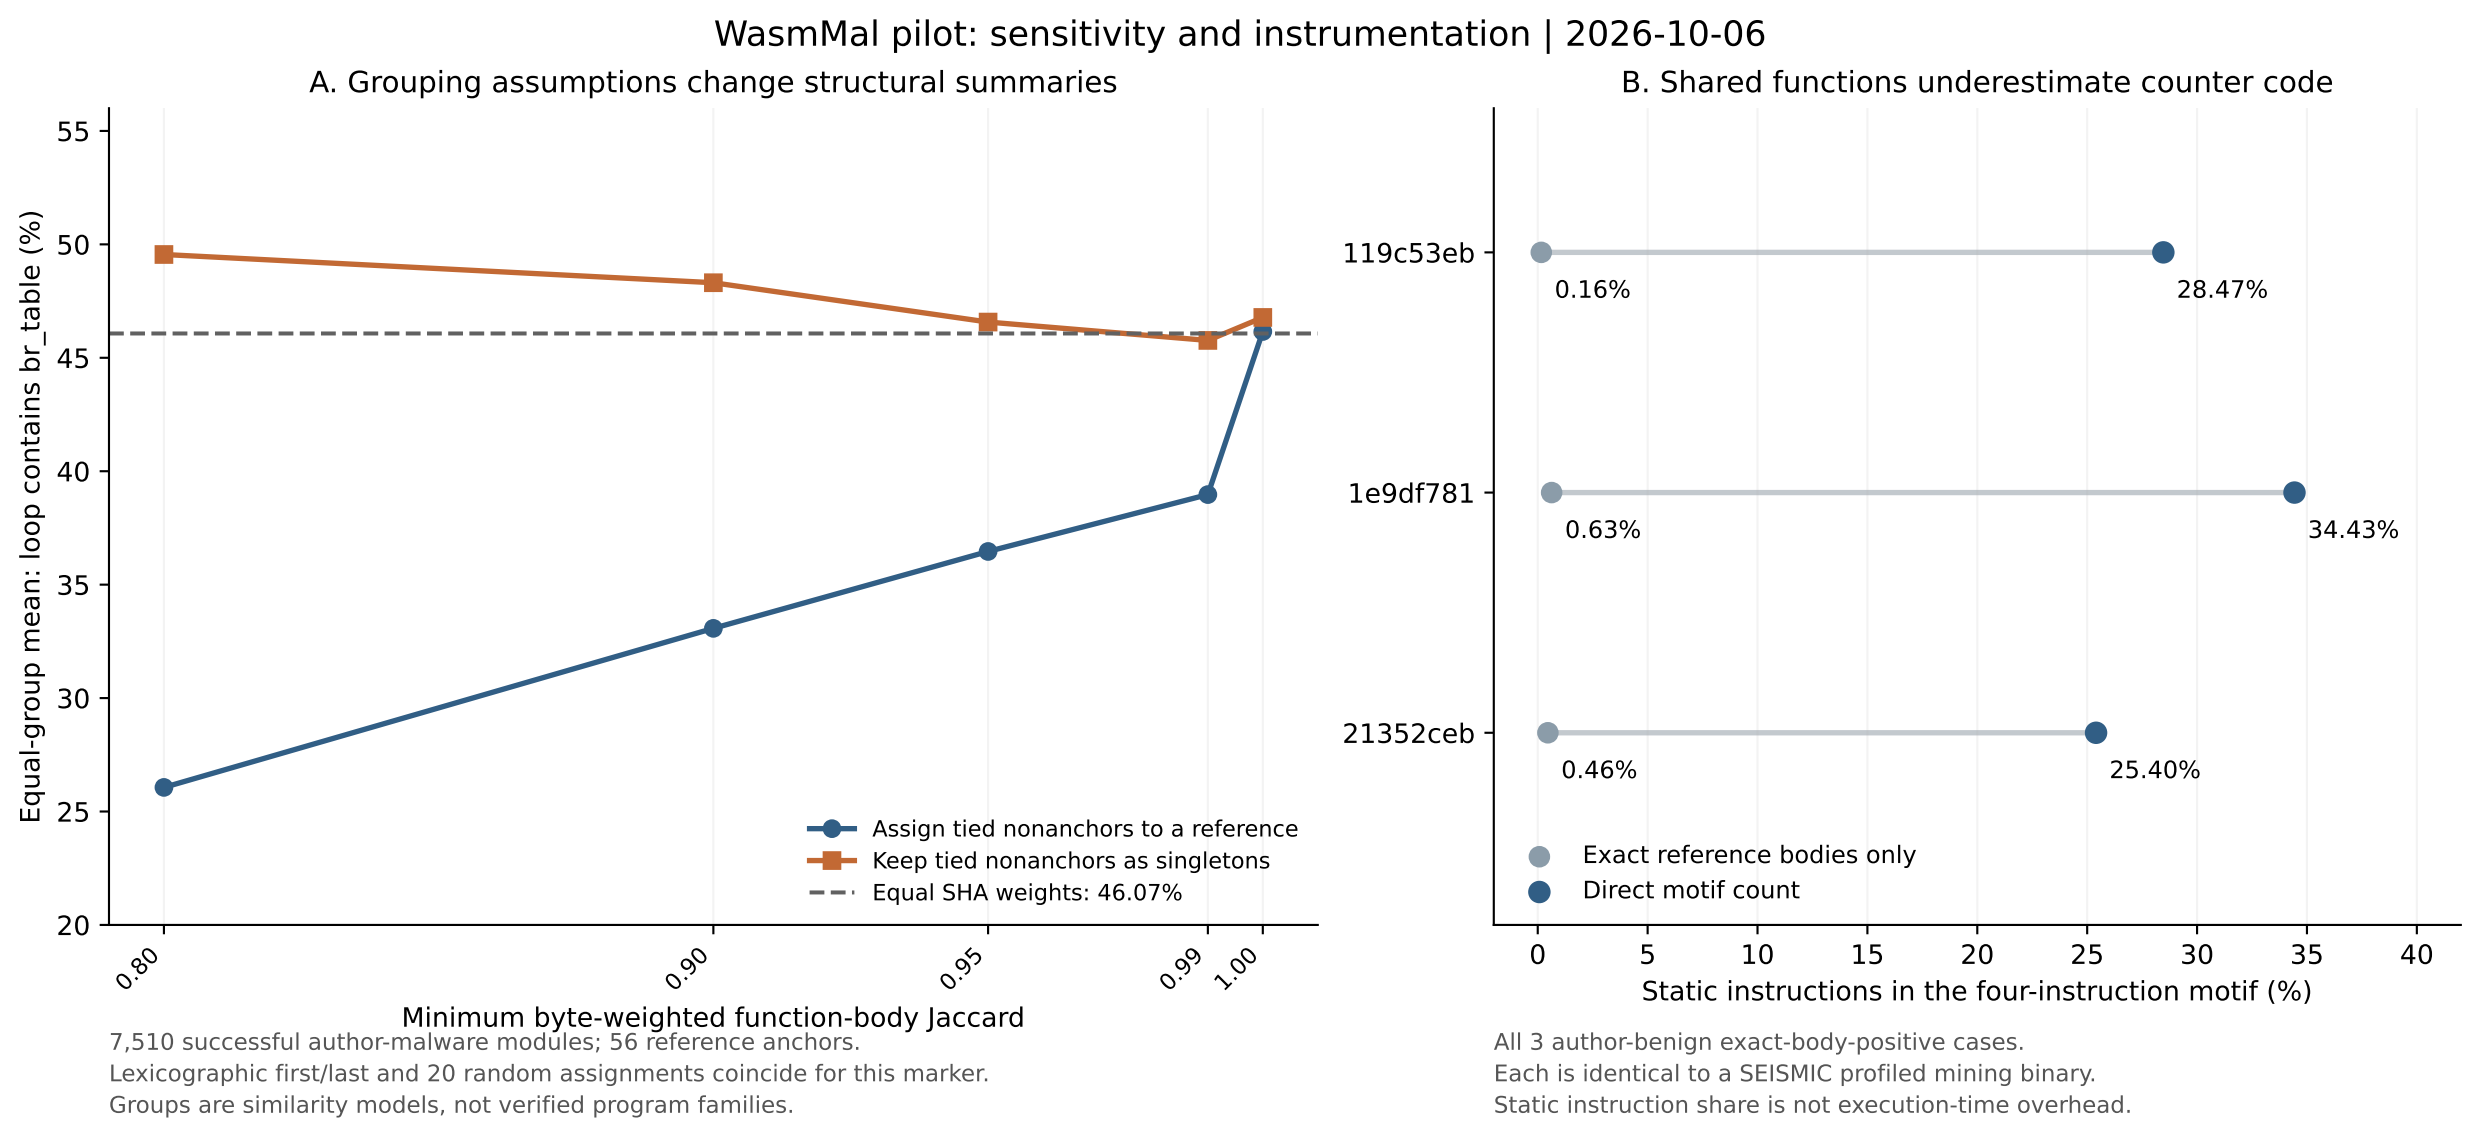
WasmMal pilot: sensitivity and instrumentation | 2026-10-06
A. Grouping assumptions change structural summaries
Equal-group mean: loop contains br_table (%)
55
50
45
40
35
30
25
20
0.80
0.90
0.95
0.99
1.00
Minimum byte-weighted function-body Jaccard
Assign tied nonanchors to a reference
Keep tied nonanchors as singletons
Equal SHA weights: 46.07%
7,510 successful author-malware modules; 56 reference anchors.
Lexicographic first/last and 20 random assignments coincide for this marker.
Groups are similarity models, not verified program families.
B. Shared functions underestimate counter code
119c53eb
0.16%
28.47%
1e9df781
0.63%
34.43%
21352ceb
0.46%
25.40%
Exact reference bodies only
Direct motif count
0
5
10
15
20
25
30
35
40
Static instructions in the four-instruction motif (%)
All 3 author-benign exact-body-positive cases.
Each is identical to a SEISMIC profiled mining binary.
Static instruction share is not execution-time overhead.