


detail_downloads family tree

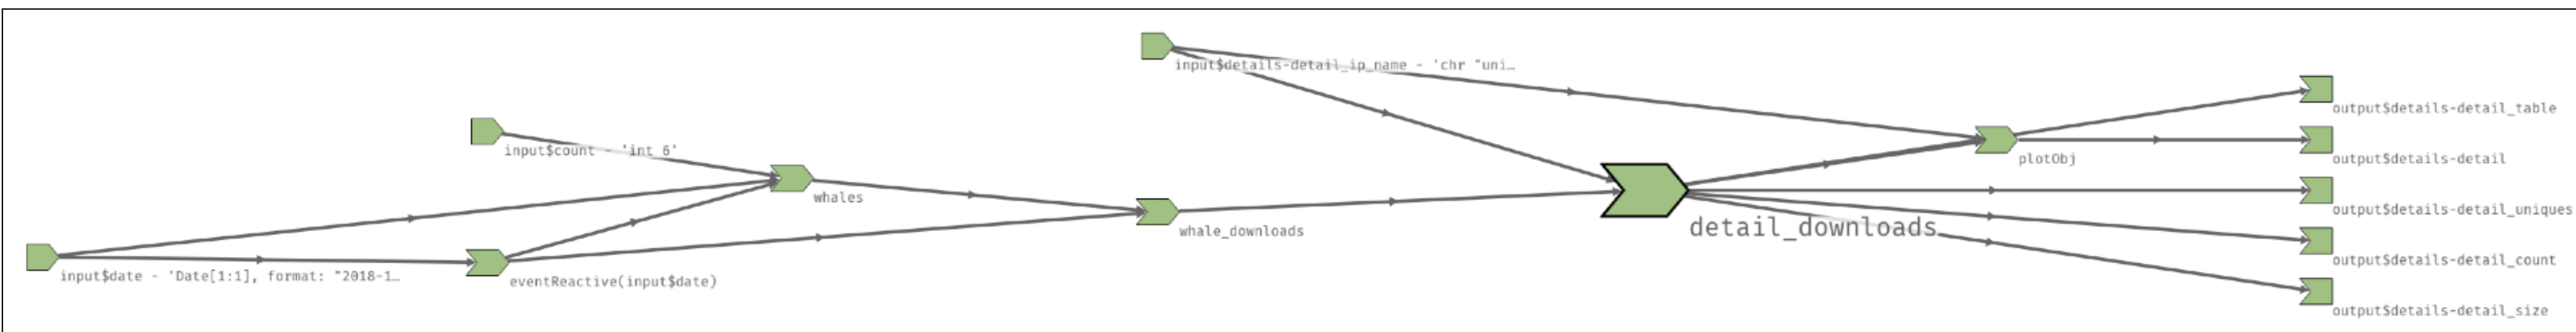

Anti-pattern Coding

- Anti-pattern: When new reactive objects are created for every user interaction
 - Typically happens when a `render* ()` is called within an `observe* ()`
- Correct pattern: Change the established reactive values' *values*
- Note: Anti-pattern is only encouraged for newly created content. Ex: `insertTab ()`