# 리액트 애플리케이션 배포하기

Netlify와 Vercel

### 배포(Deployment)

: 다른 사용자들이 인터넷을 통해 사용할 수 있게 만드는 것









+ 사내 자체 서버들

## 배포(Deployment)

: 다른 사용자들이 인터넷을 통해 사용할 수 있게 만드는 것











+ 사내 자체 서버들




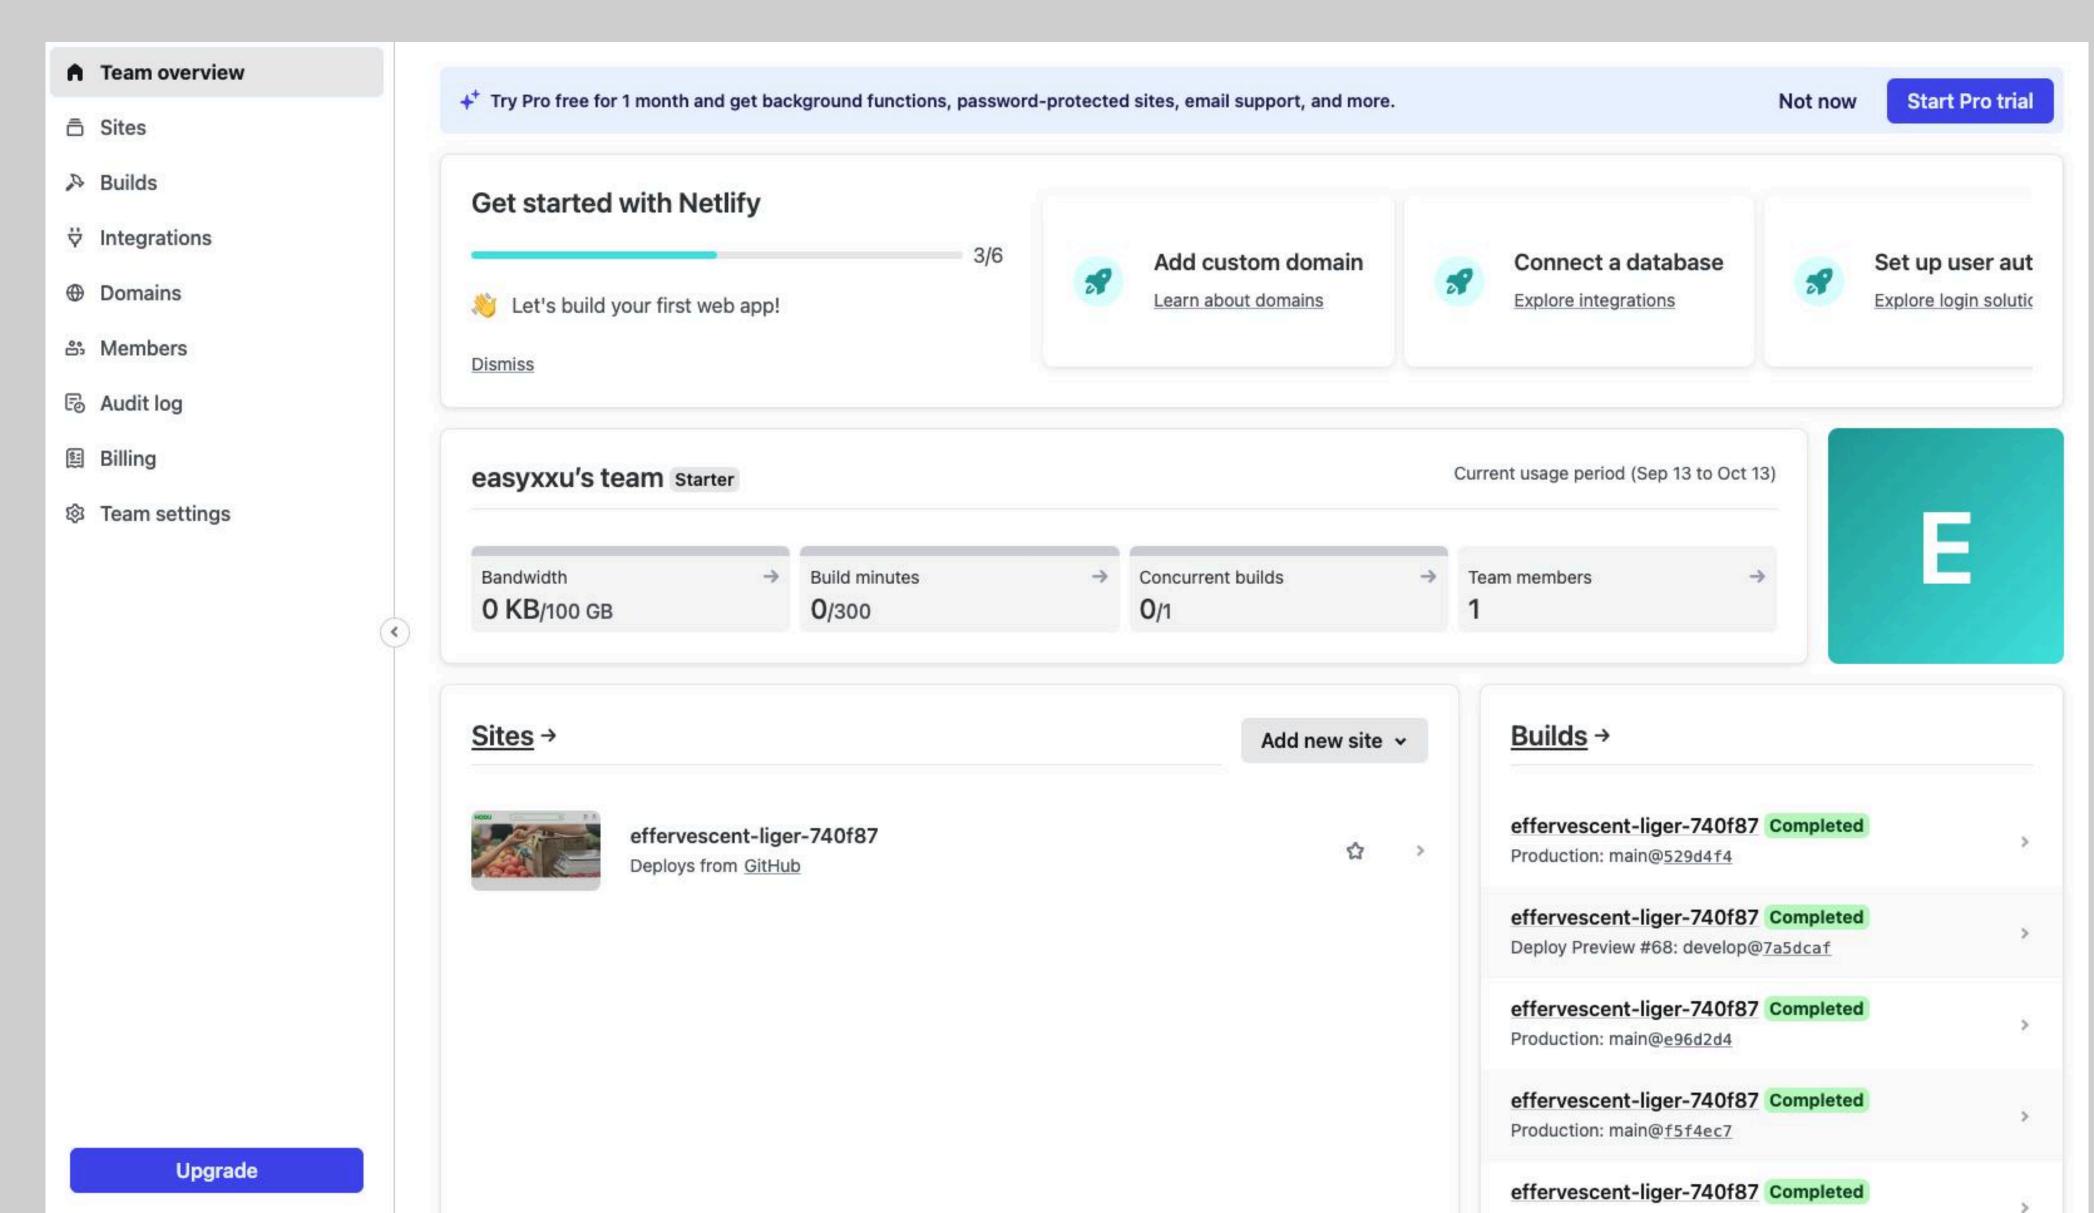




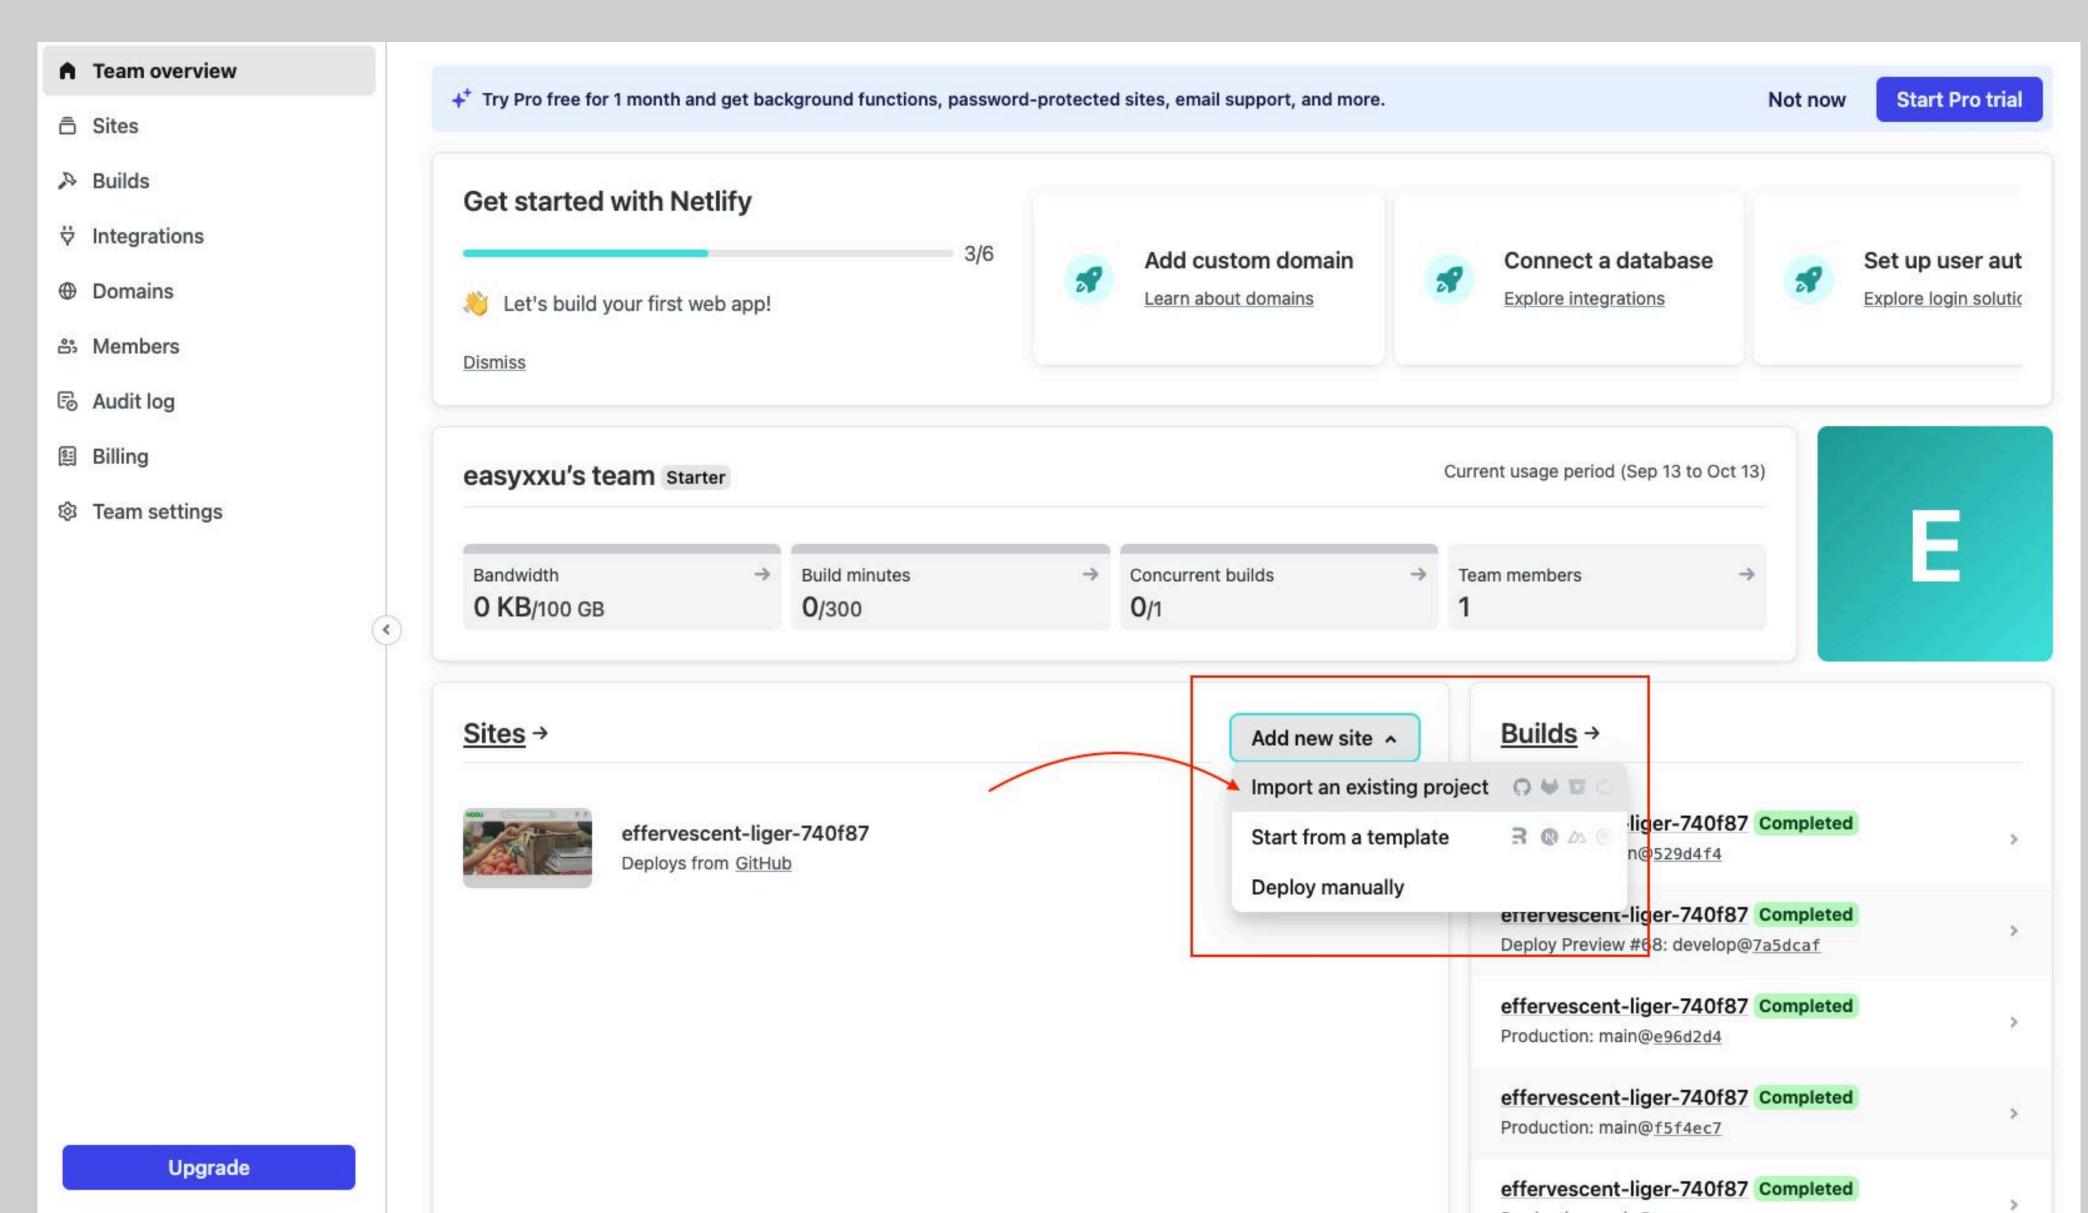



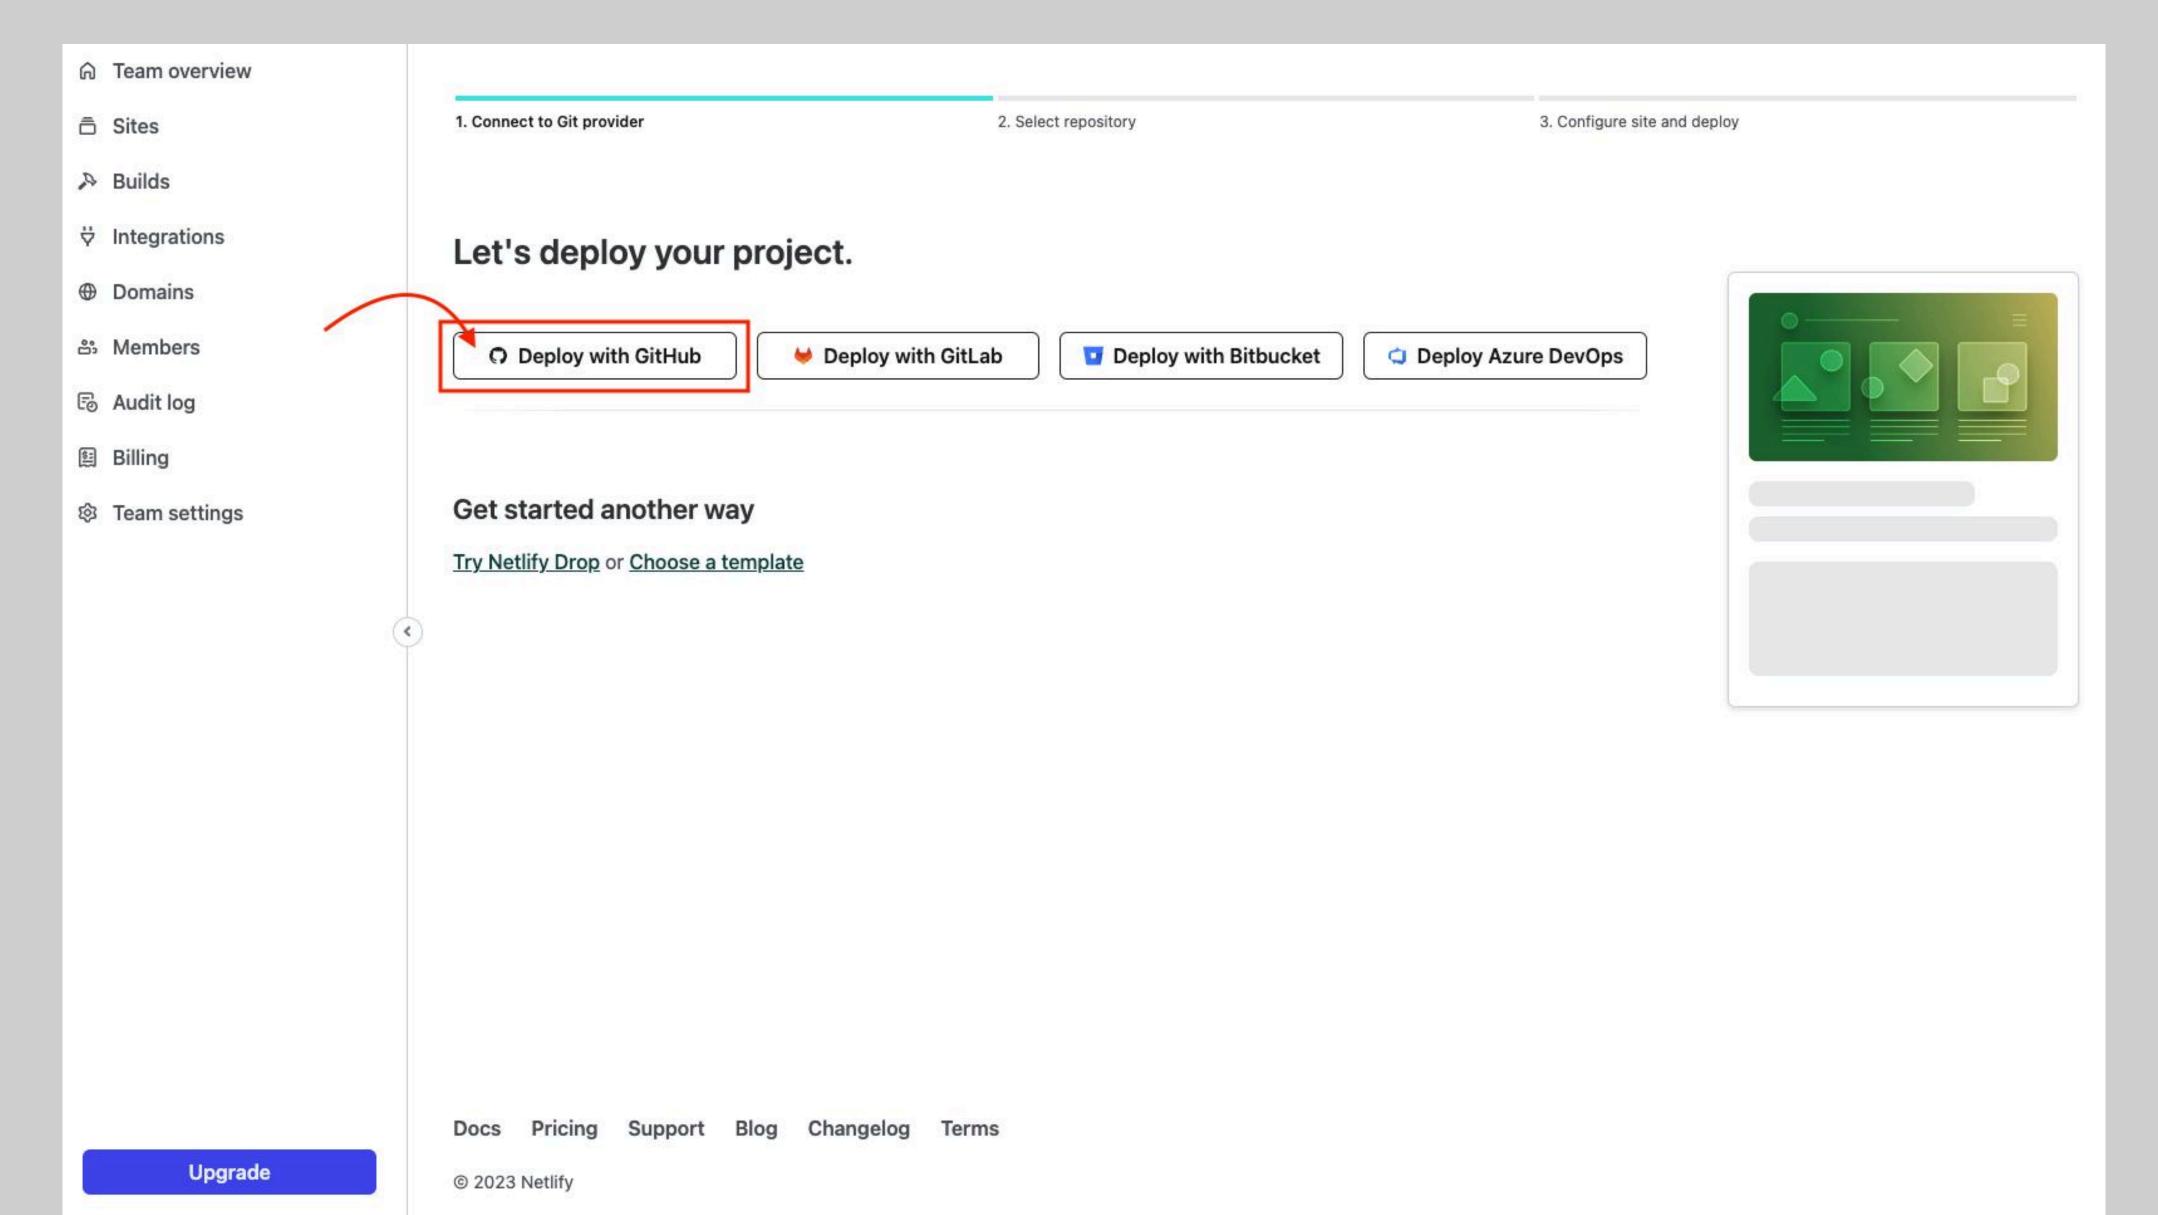



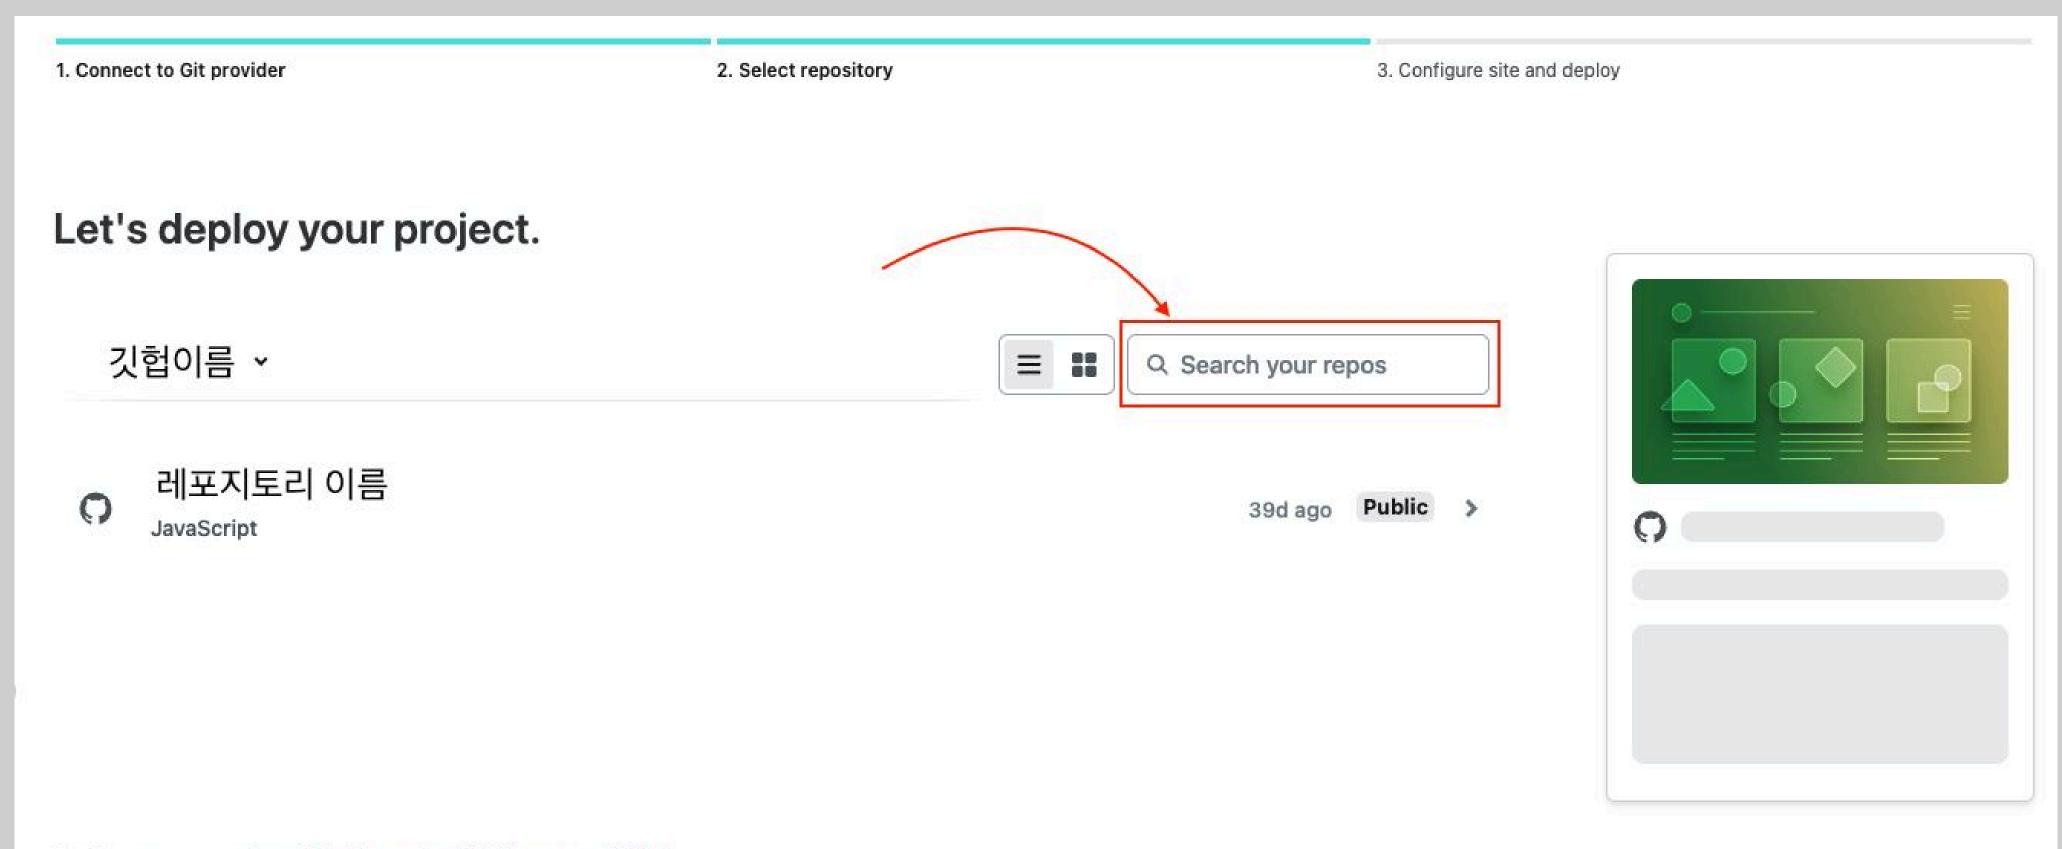

Can't see your repo here? Configure the Netlify app on GitHub.





#### **Deploy notifications**

- -O- Add deploy state commit checks when Deploy Preview starts
- Add deploy summary commit checks when Deploy Preview starts
- Add deploy state commit checks when Deploy Preview succeeds
- Add deploy summary commit checks when Deploy Preview succeeds
- Add deploy state commit checks when Deploy Preview fails
- Add deploy summary commit checks when Deploy Preview fails

Add notification ^

Email notification

Send notifications via email

GitHub commit checks

Add deploy summary commit checks

GitHub commit status

Add deploy state commit checks

GitHub pull request comment


Add Deploy Preview links to pull request comments

HTTP POST request


Send notifications as POST requests to external services

Options ~



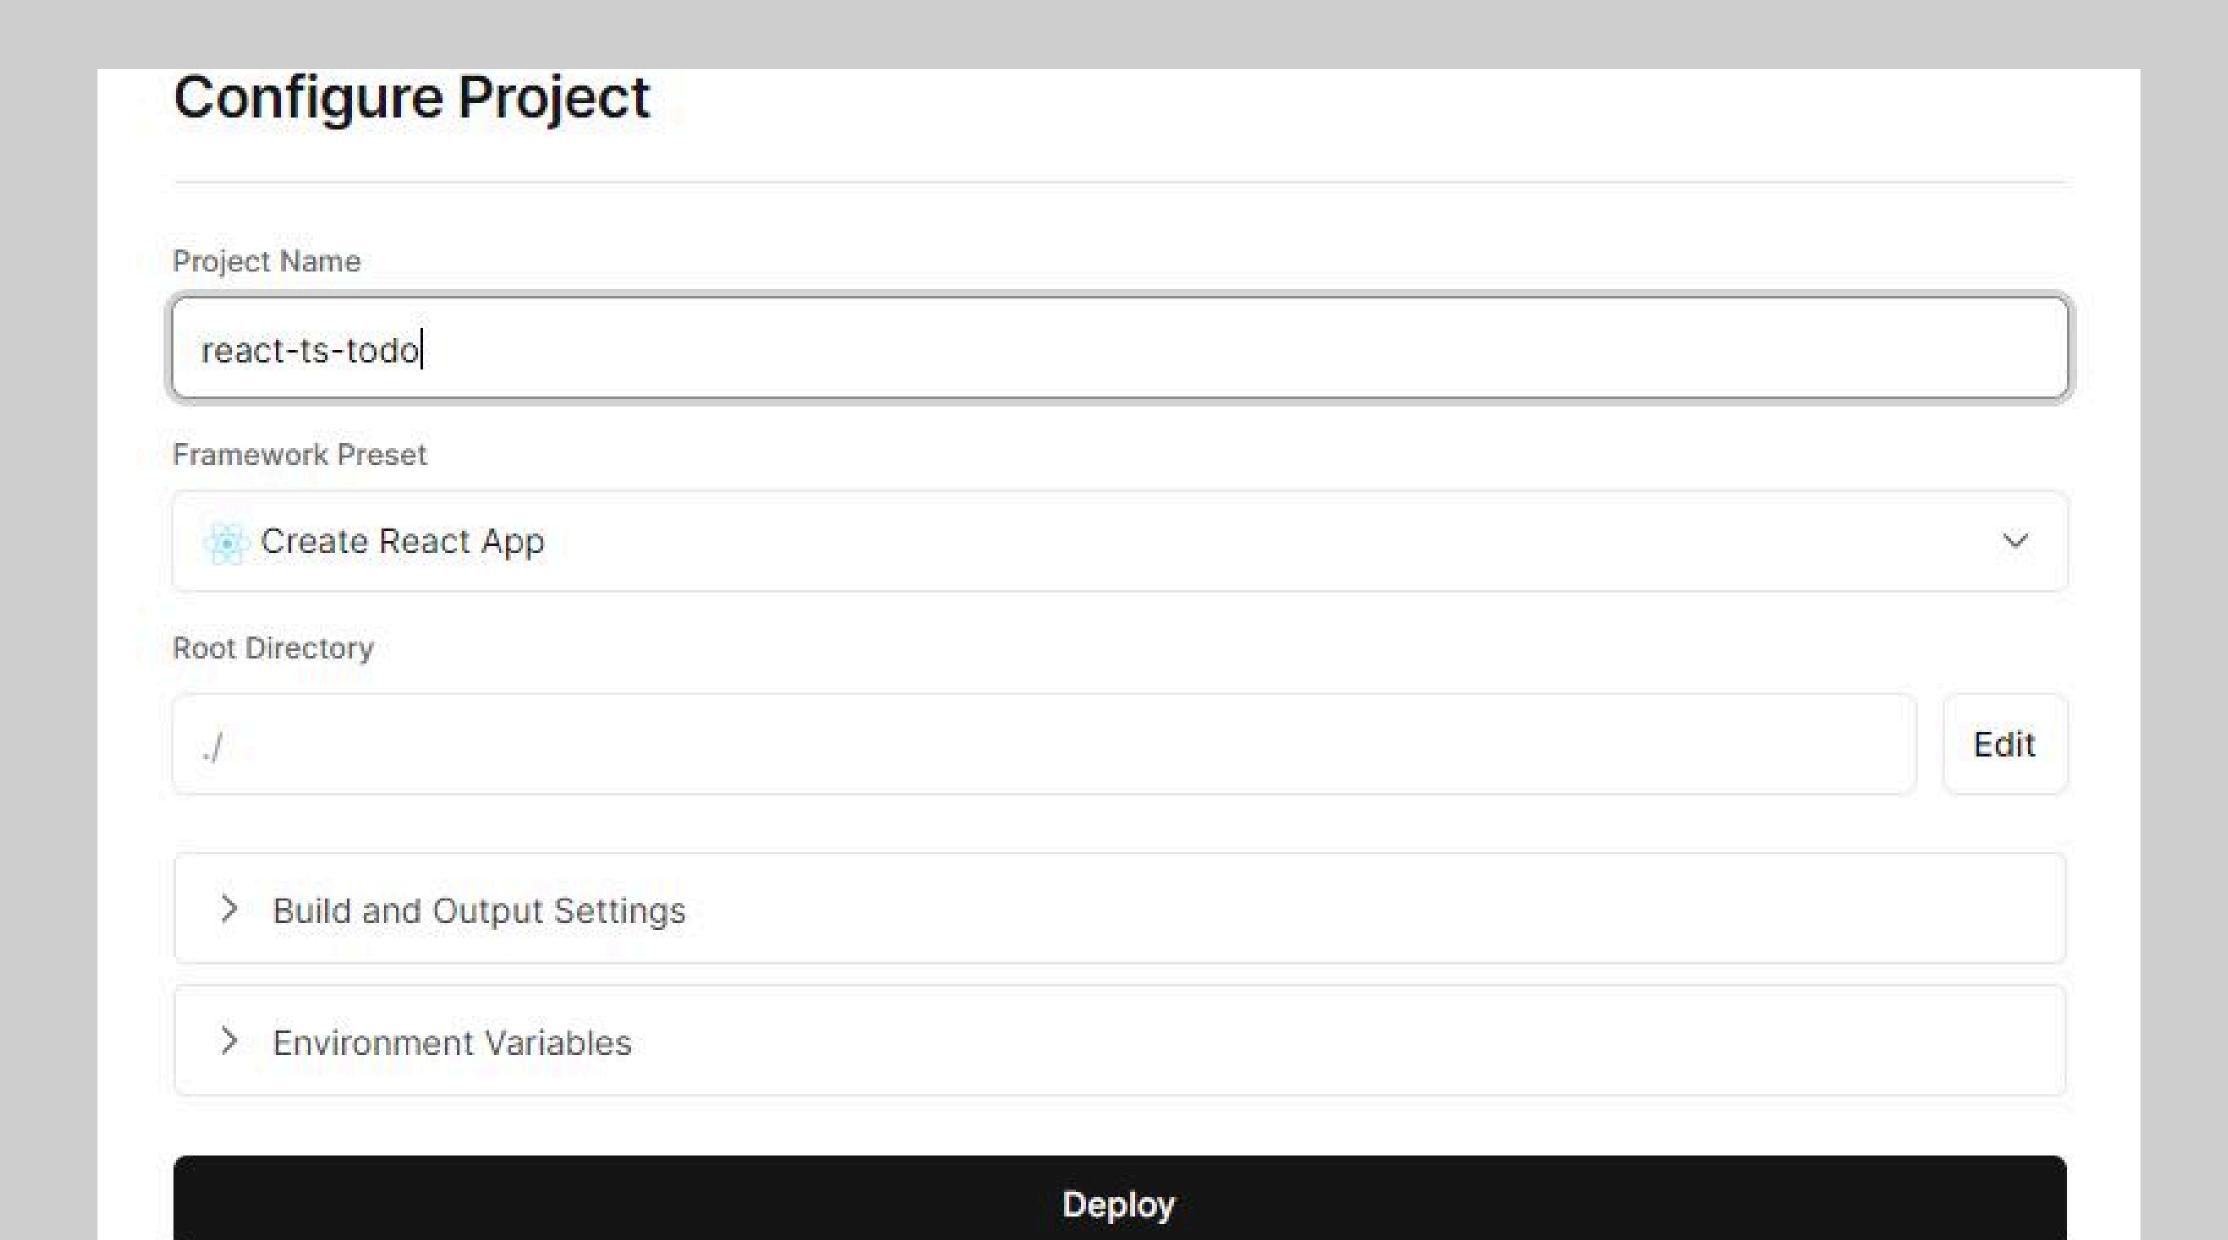



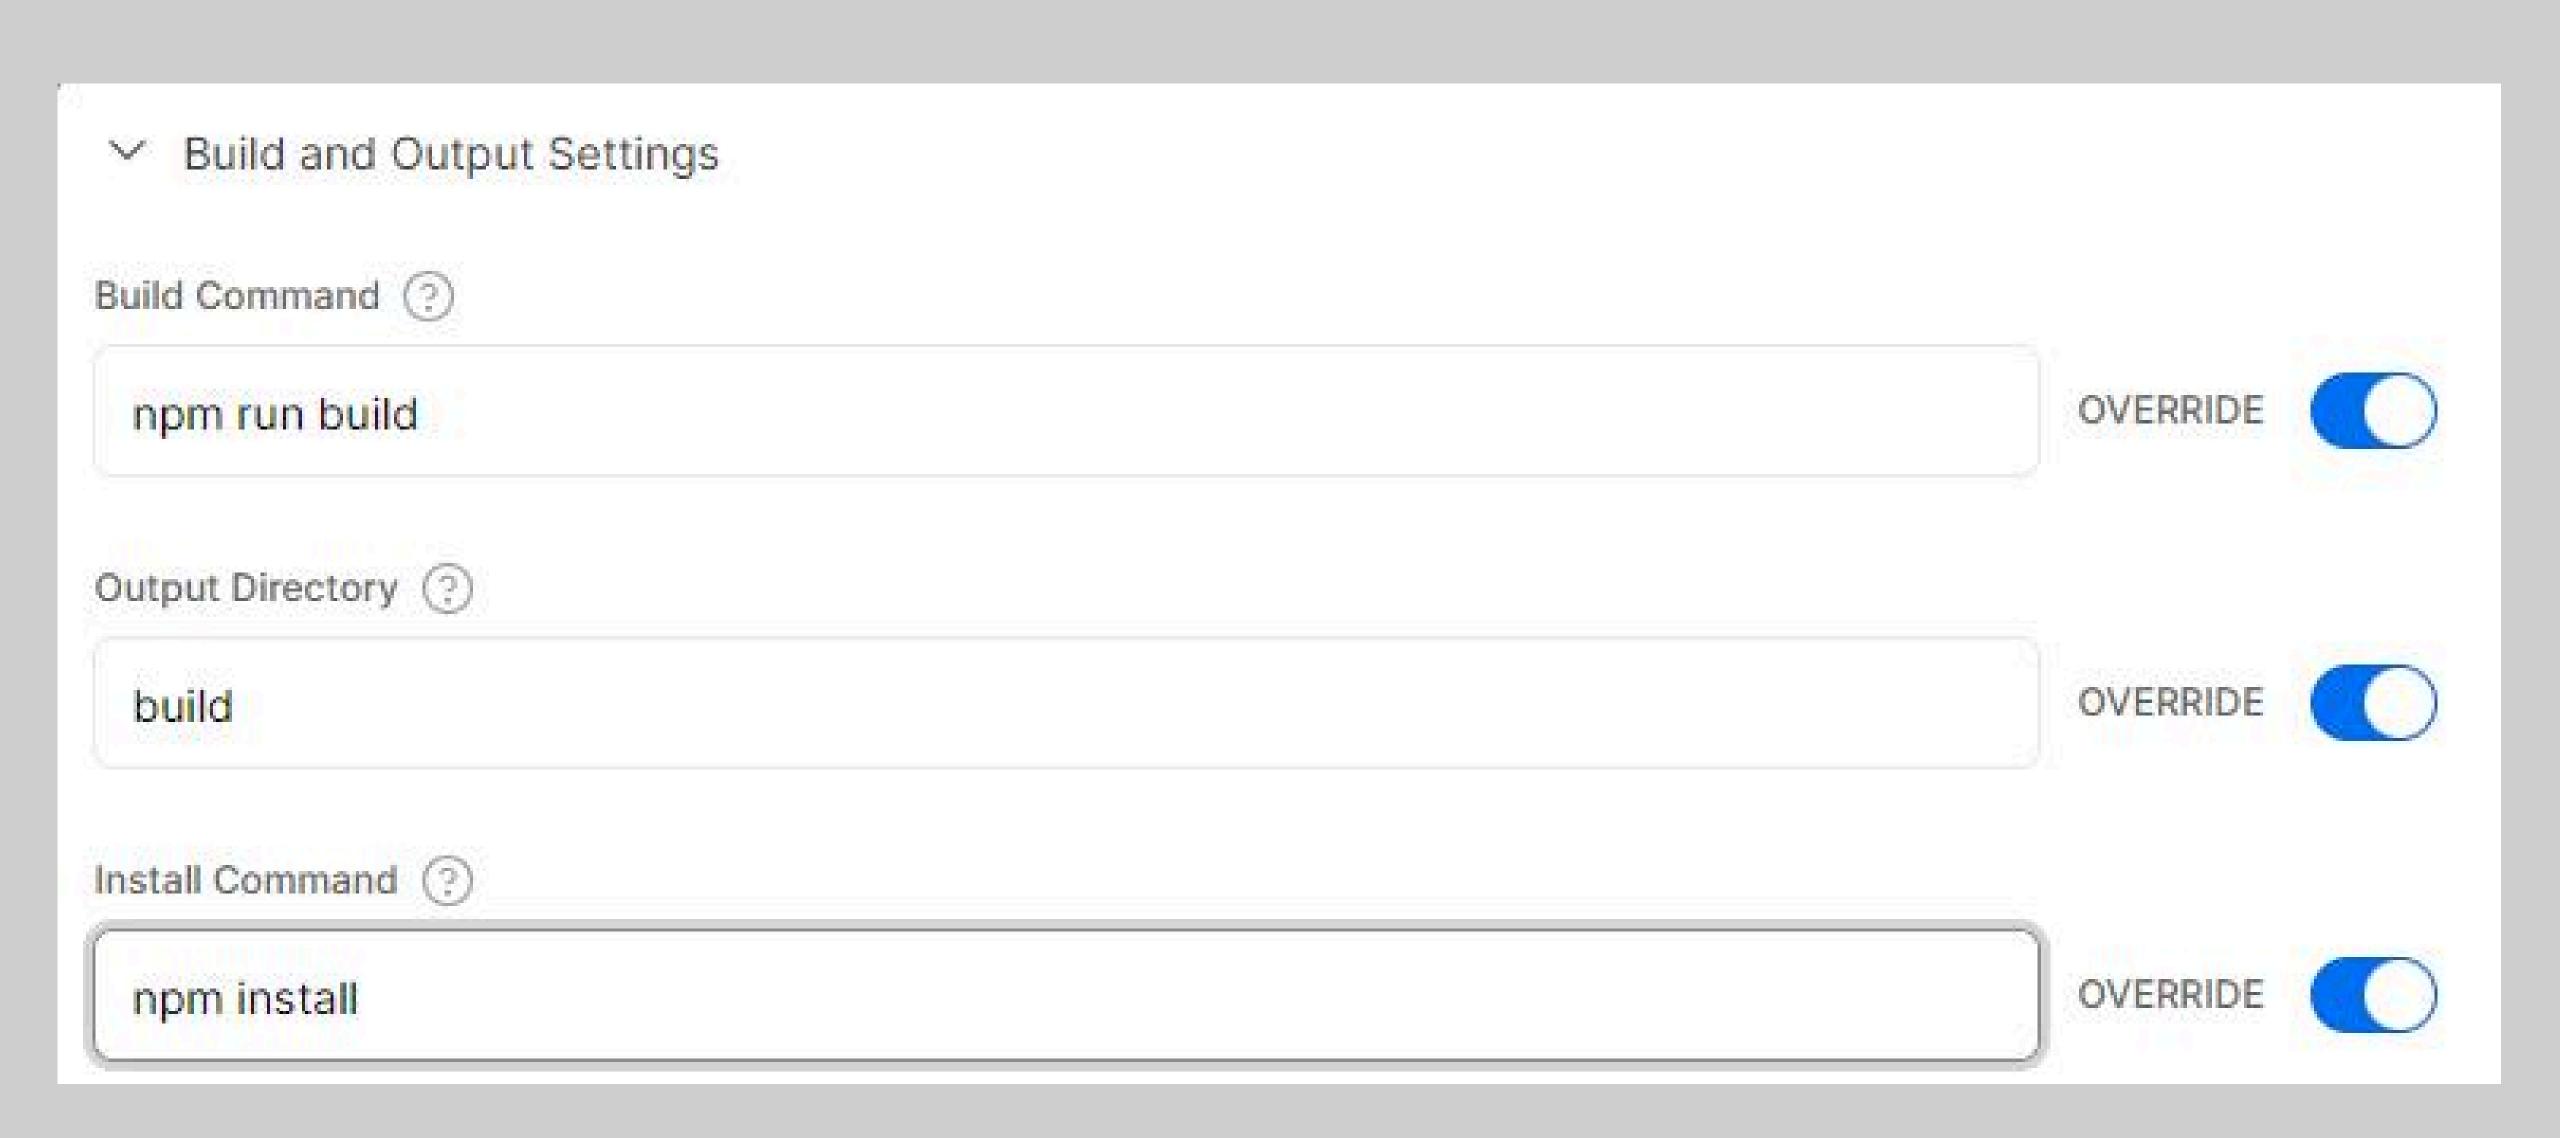



 Value (Will Be Encrypted)

 REACT\_APP\_API
 https://www.pre-onboarding-selection-task.s
 Add


 TIP: Paste a .env above to populate the form
 Learn more about Environment Variables ☑

#### **Environment Variables** General In order to provide your Deployment with Environment Variables at Build and Runtime, you may enter them right here, for the Environment of your choice. Learn more 2 Domains Environment Variables A new Deployment is required for your changes to take effect. Git Link Shared Environment Variables Integrations Deployment Protection Sensitive If enabled, you and your team will not be able to read the values after creation. Learn more Functions Disabled Data Cache Cron Jobs Environment Production Security Advanced Preview Select custom branch Development Key Value 2 O e.g. CLIENT\_KEY Add another


✓ Automatically expose System Environment Variables






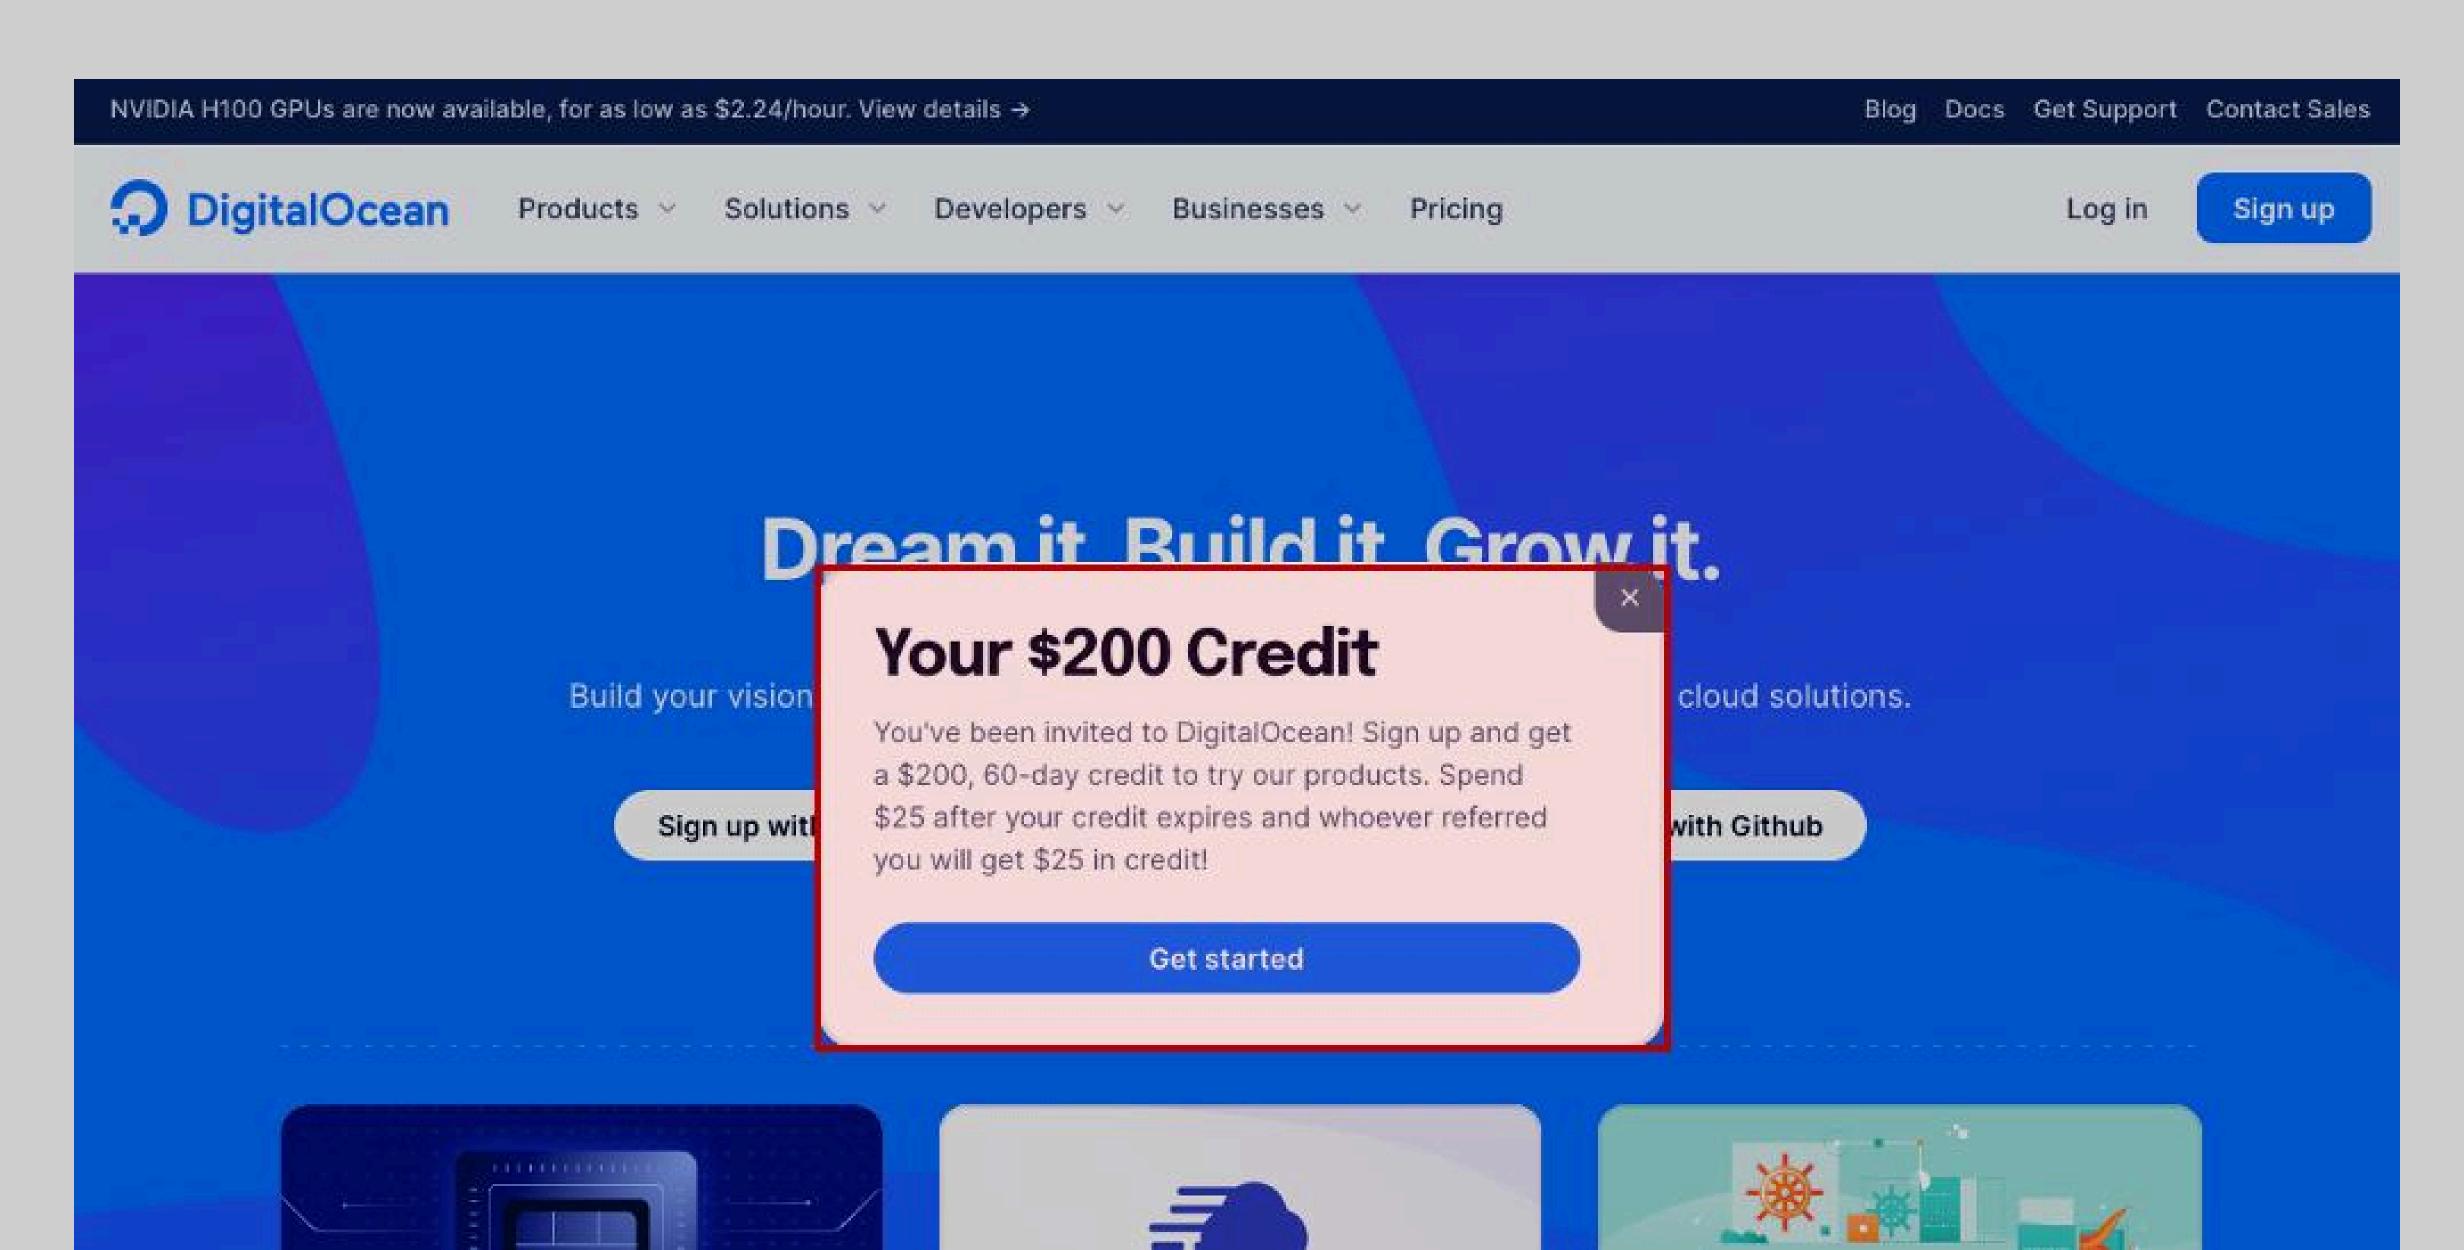




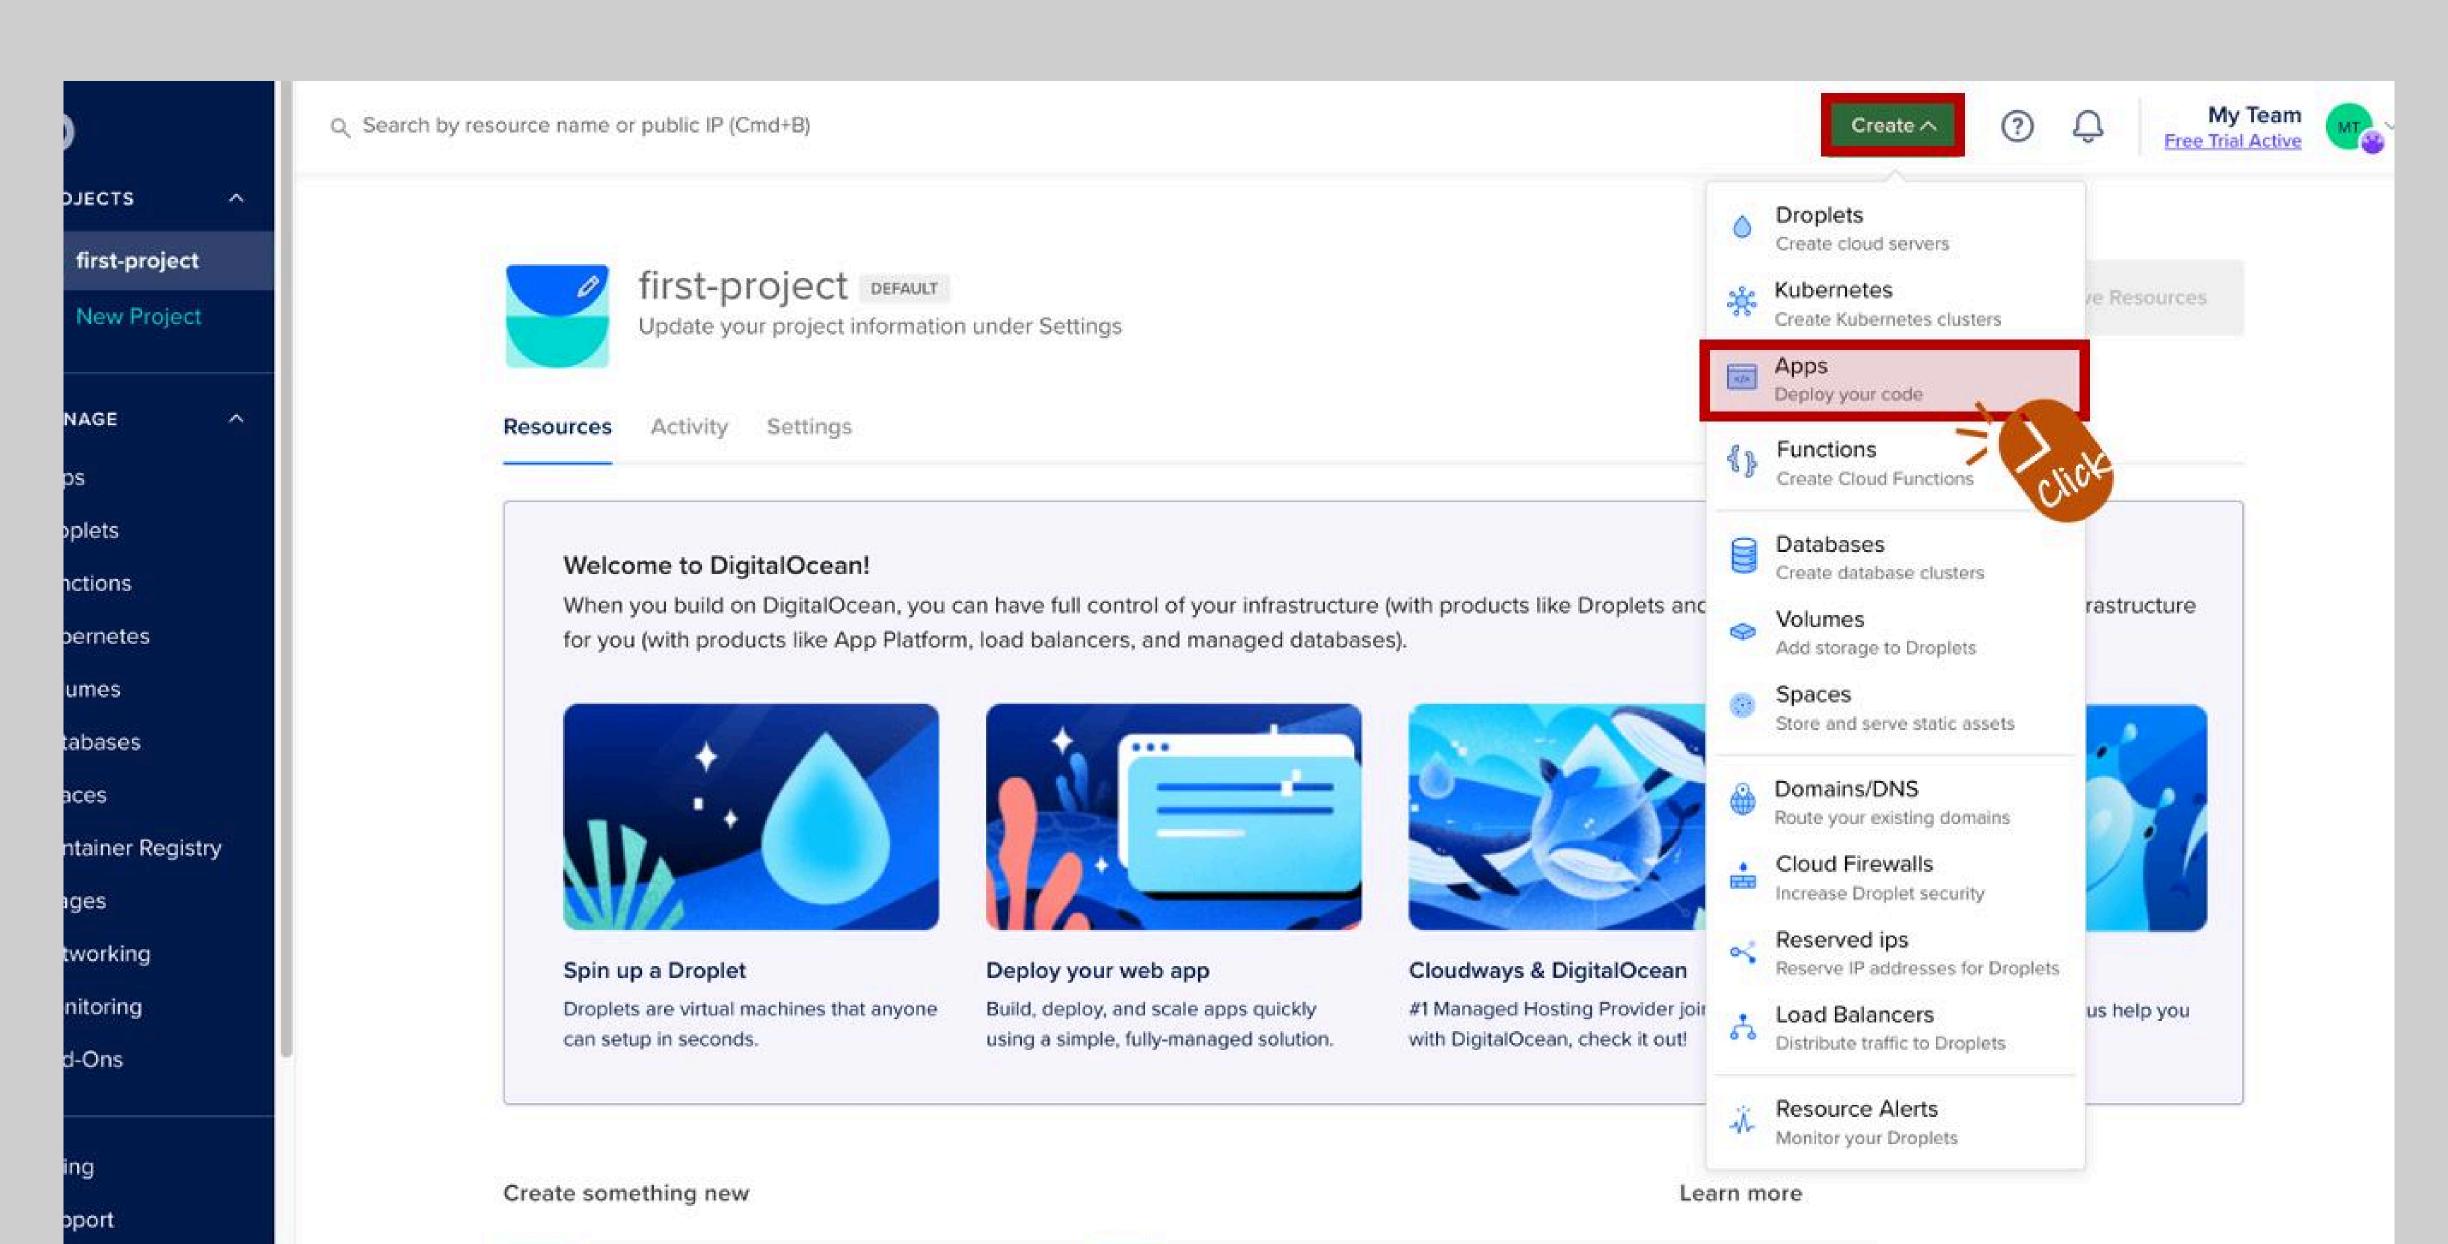




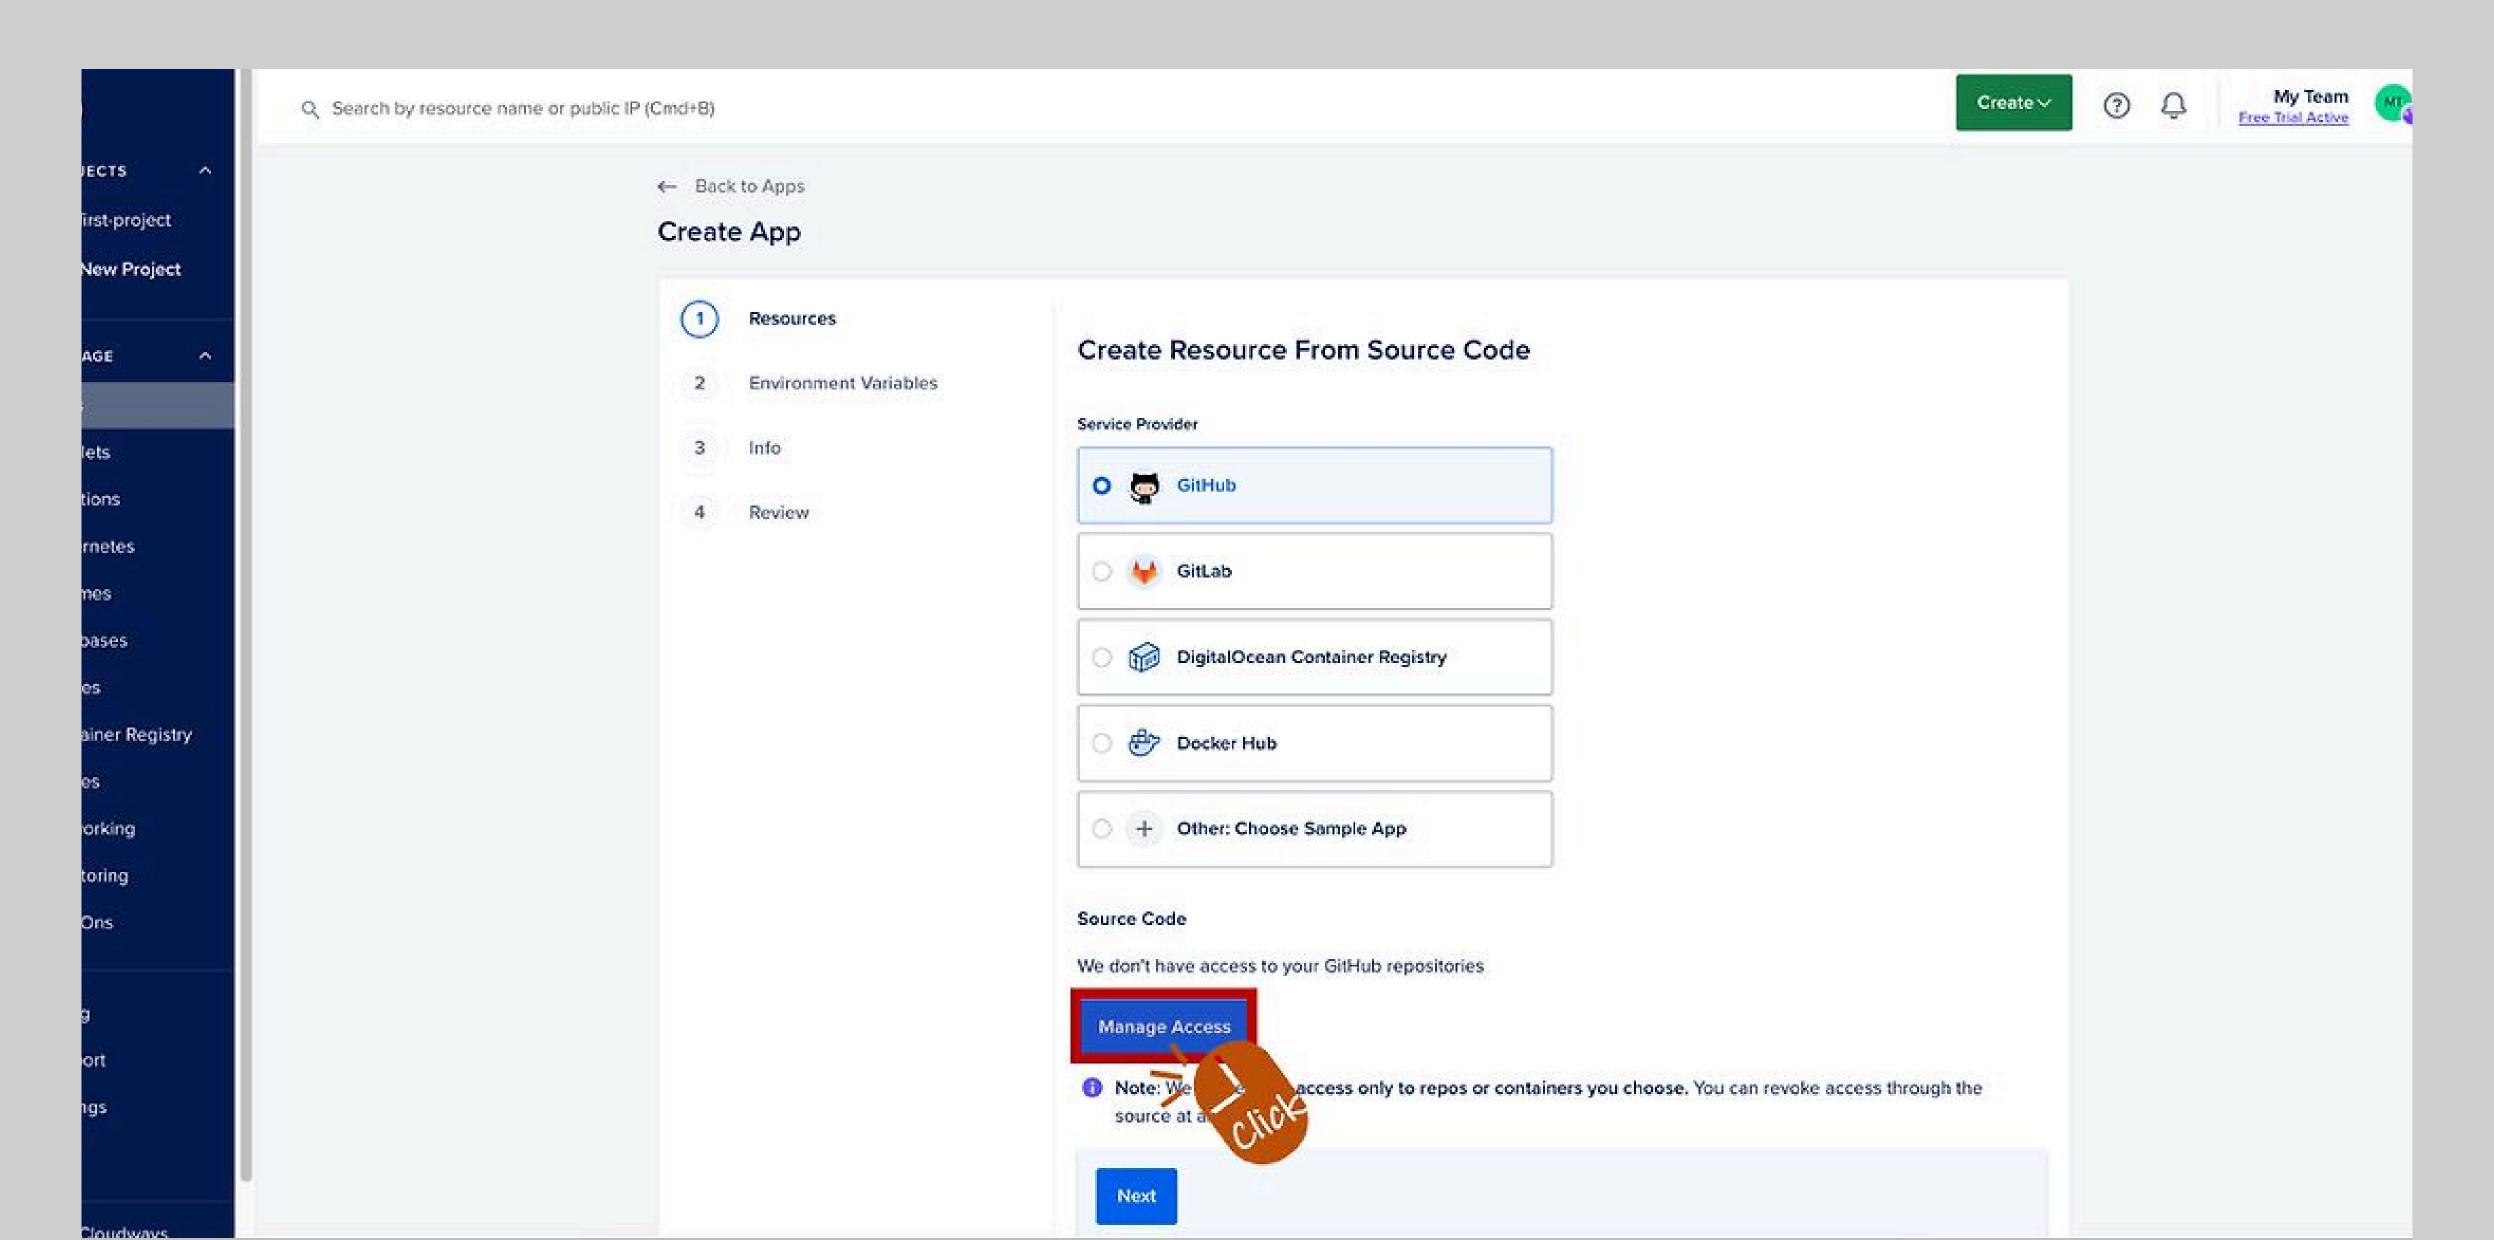




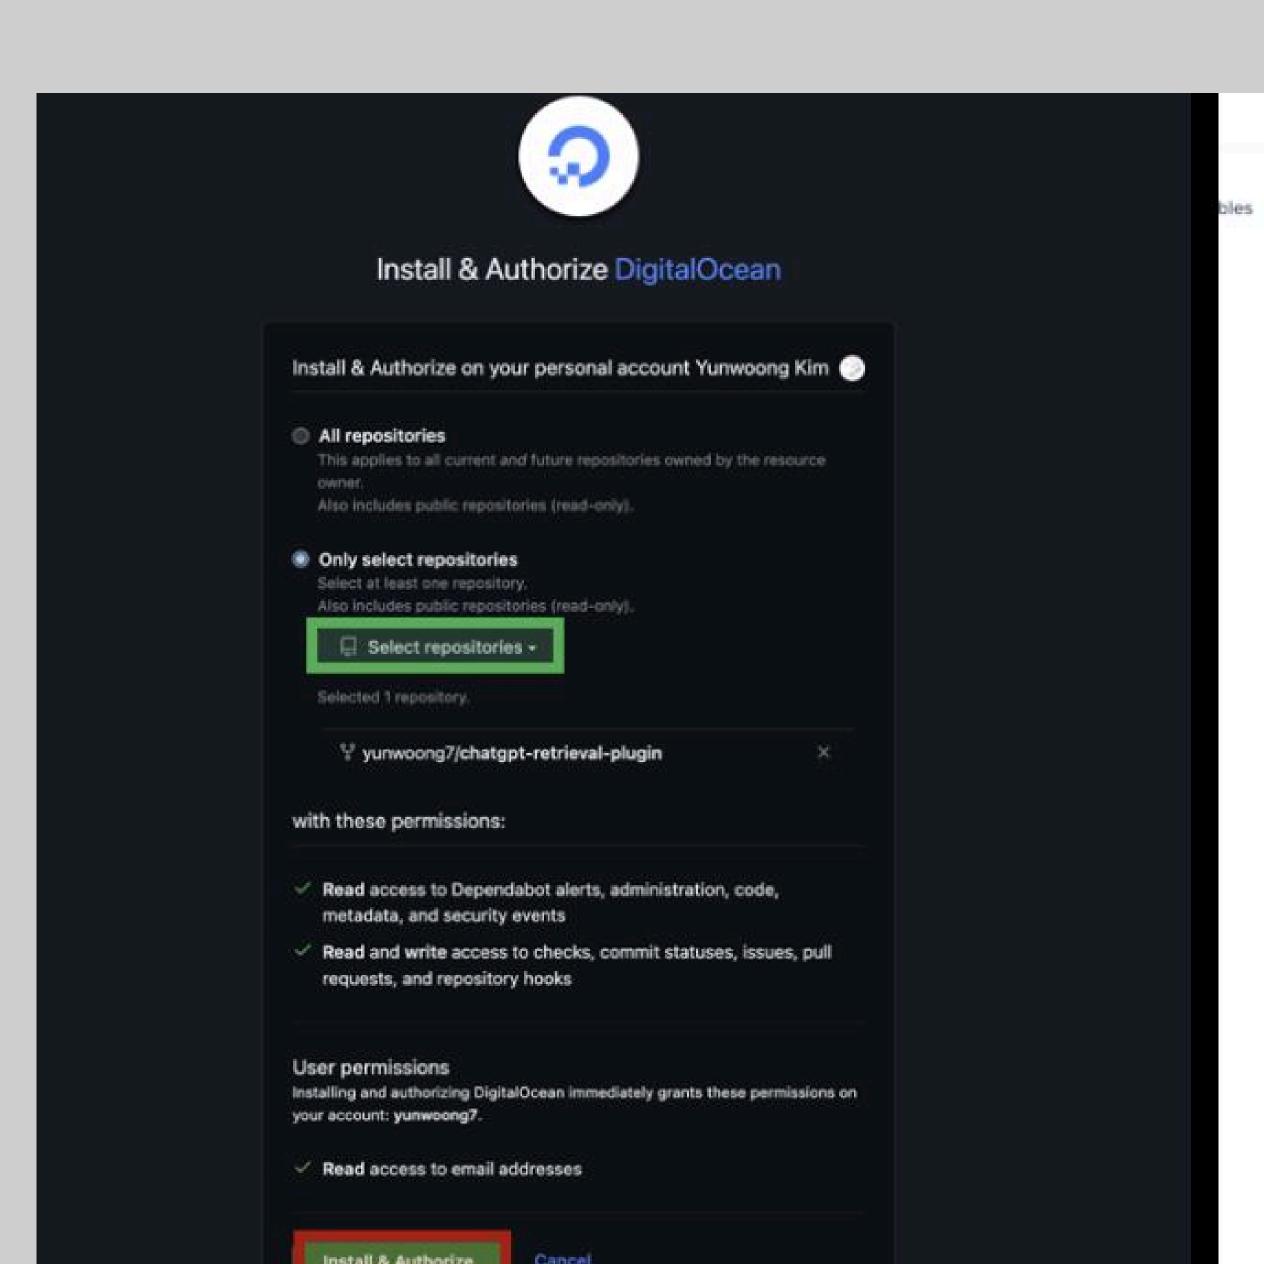

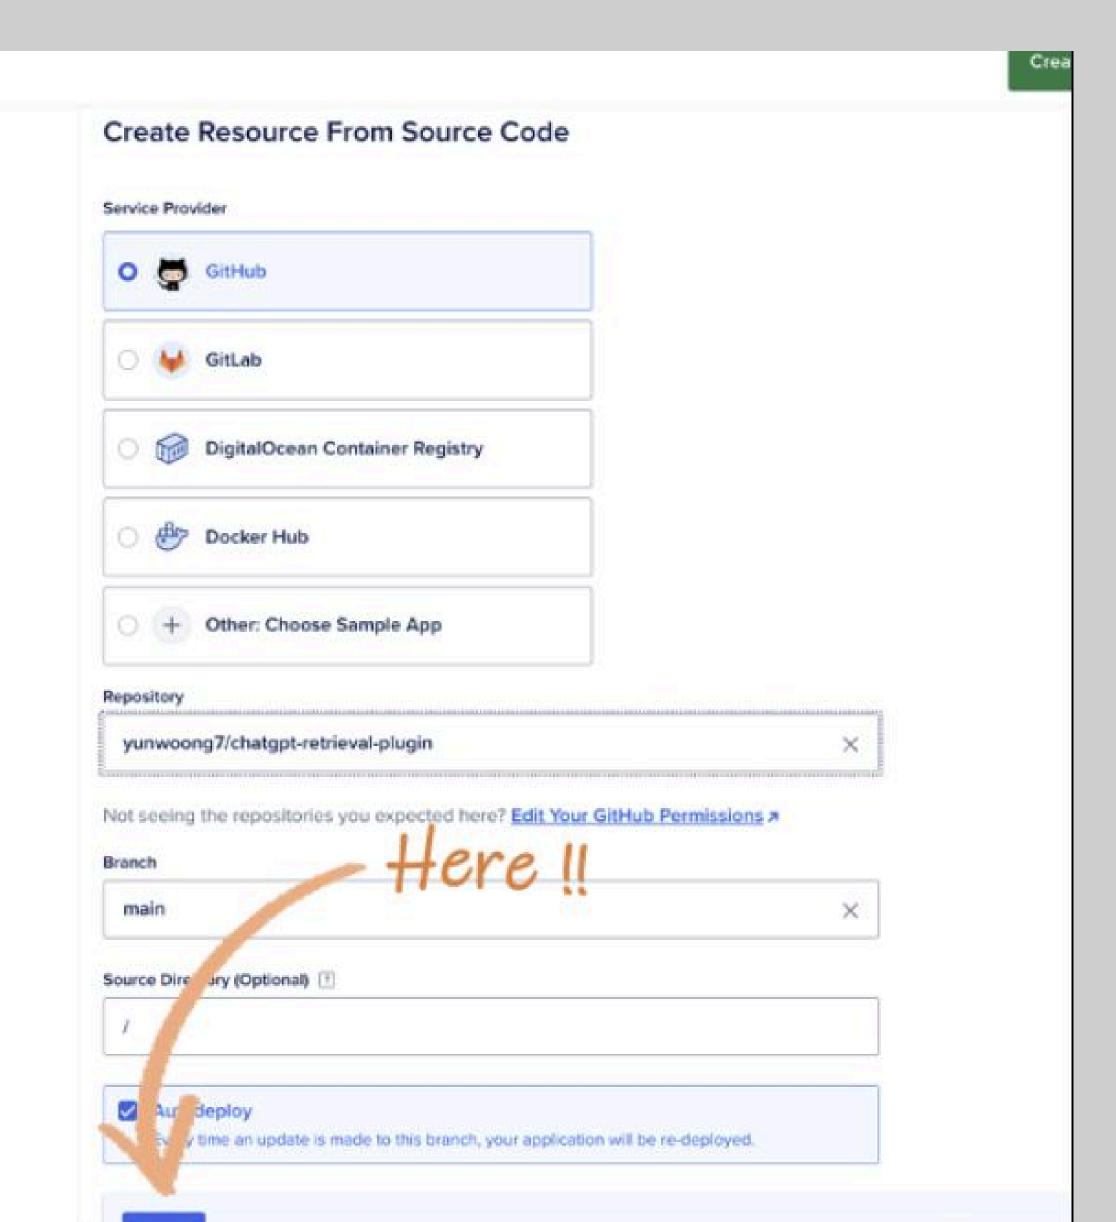



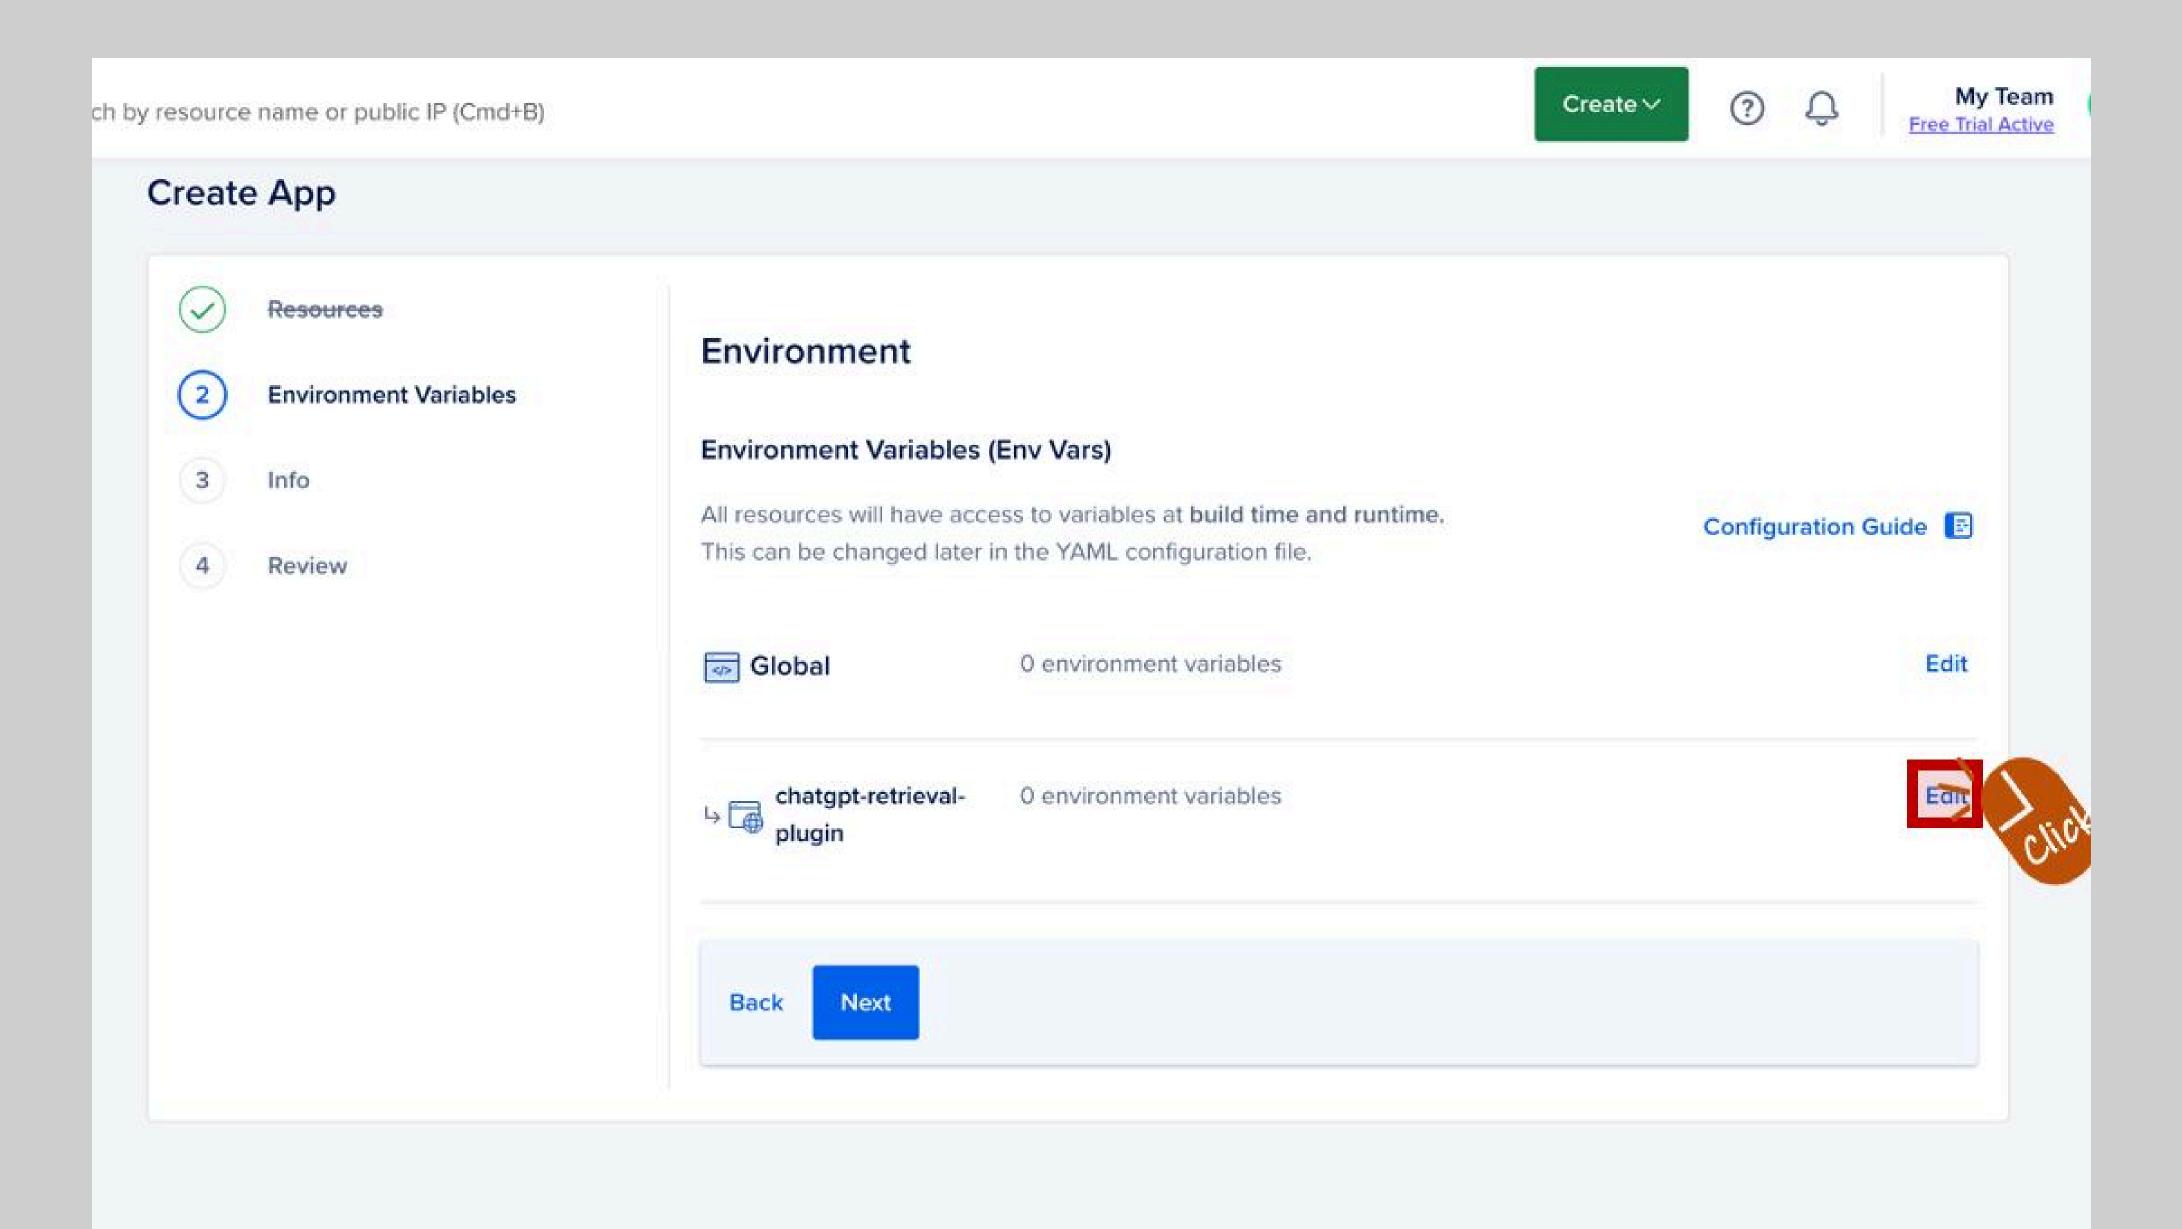



DATASTORE	pinecone		Encrypt ?
BEARER_TOKEN	560 (1) (0) 3 m 348 3 (4) 168 2 (4)		Encrypt ?
OPENAI_API_KEY	PROCESTANTENESS STATEMENTS OF BANKS FOR STANDERS SANDE SANDERS OF		Encrypt ?
PINECONE_API_KEY	250:24554 1250 4503 5235 250:140257225		Encrypt ?
PINECONE_ENVIRONMENT	As existed gaps from		Encrypt ?
PINECONE_INDEX	prec-liners	+	☐ Encrypt 👩

CI/CD = 자동 배포

: 지속적 통합(Continuous Integration)

: 지속적 제공/배포(Continuous Delivery/Deployment)







https://github.com/enzenior/SO-GO

