CSE370 : Database Systems

Assignment 01/02/03 | Spring 2026

ID : <8 Digit Student ID> | Name : Full Official Name

No 1 Query (as Plain Text)	CREATE TABLE runners (student_id INT, student_name VARCHAR(100), email VARCHAR(100), distance_covered INT, time_taken_mins INT);
No 1 SS (of Query & Output in Shell)	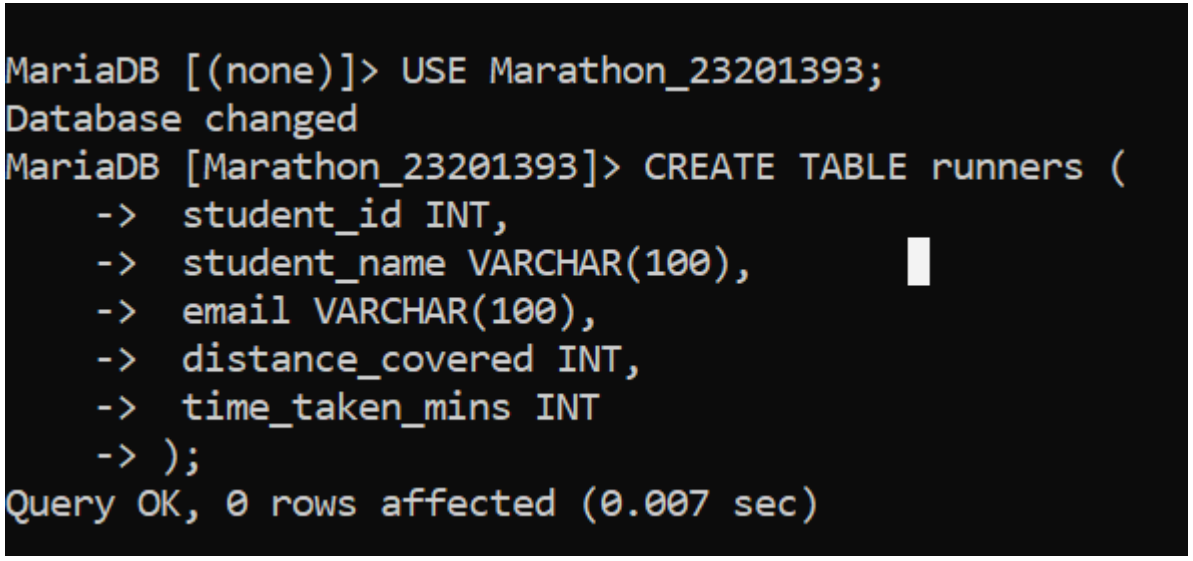 MariaDB [(none)]> USE Marathon_23201393; Database changed MariaDB [Marathon_23201393]> CREATE TABLE runners (-> student_id INT, -> student_name VARCHAR(100), -> email VARCHAR(100), -> distance_covered INT, -> time_taken_mins INT ->); Query OK, 0 rows affected (0.007 sec)
No 2 Query (as Plain Text)	INSERT INTO runners (student_id, student_name, email, distance_covered, time_taken_mins) VALUES (101, 'Mikasa Ackerman', 'mikasa.a@g.bracu.ac.bd', 5, 35), (102, 'Edward Elric', 'e.elric@iub.ac.bd', 10, 59),

	(103, 'Riza Hawkeye', 'riza.h@ewu.ac.bd', 5, 38), (104, 'Bruce Wayne', 'b.wayne@g.bracu.ac.bd', 10, 63), (105, 'Peter Parker', 'p.parker@iub.ac.bd', 5, 33), (106, 'Alphonse Elric', 'a.elric@iub.ac.bd', 10, 55), (107, 'Son Goku', 'son.goku@g.bracu.ac.bd', 5, 46), (108, 'Gon Freecss', 'gon.f@g.bracu.ac.bd', 10, 68), (109, 'Tanjiro Kamado', 'tanjiro.k@g.bracu.ac.bd', 5, 29), (110, 'Roy Mustang', 'roy.m@ewu.ac.bd', 10, 83);
No 2 SS (of Query & Output in Shell)	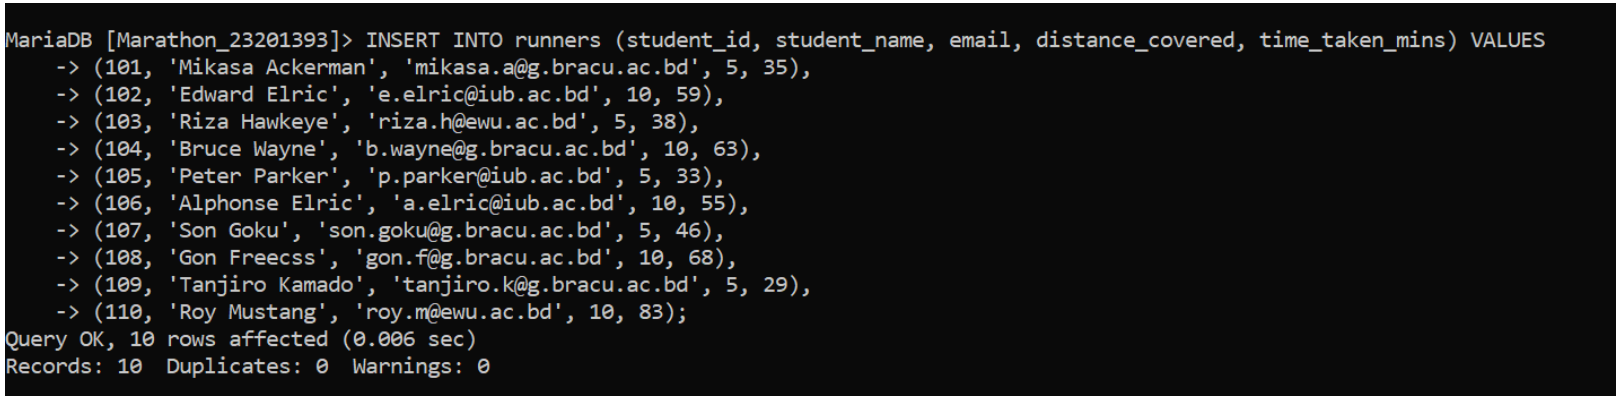
No 3 Query (as Plain Text)	SELECT * FROM runners WHERE distance_covered > 6;

No 3 SS (of Query & Output in Shell)	

```
MariaDB [Marathon_23201393]> SELECT *
    -> FROM runners
    -> WHERE distance_covered > 6;
+------------+----------------+-----------------------+------------------+-----------------+
| student_id | student_name   | email                 | distance_covered | time_taken_mins |
+------------+----------------+-----------------------+------------------+-----------------+
|        102 | Edward Elric   | e.elric@iub.ac.bd     |               10 |              59 |
|        104 | Bruce Wayne    | b.wayne@g.bracu.ac.bd |               10 |              63 |
|        106 | Alphonse Elric | a.elric@iub.ac.bd     |               10 |              55 |
|        108 | Gon Freecss    | gon.f@g.bracu.ac.bd   |               10 |              68 |
|        110 | Roy Mustang    | roy.m@ewu.ac.bd       |               10 |              83 |
+------------+----------------+-----------------------+------------------+-----------------+
5 rows in set (0.001 sec)
```

No 4 Query (as Plain Text)	SELECT UPPER(student_name) FROM runners ORDER BY time_taken_mins DESC;

No 4 SS (of Query & Output in Shell)	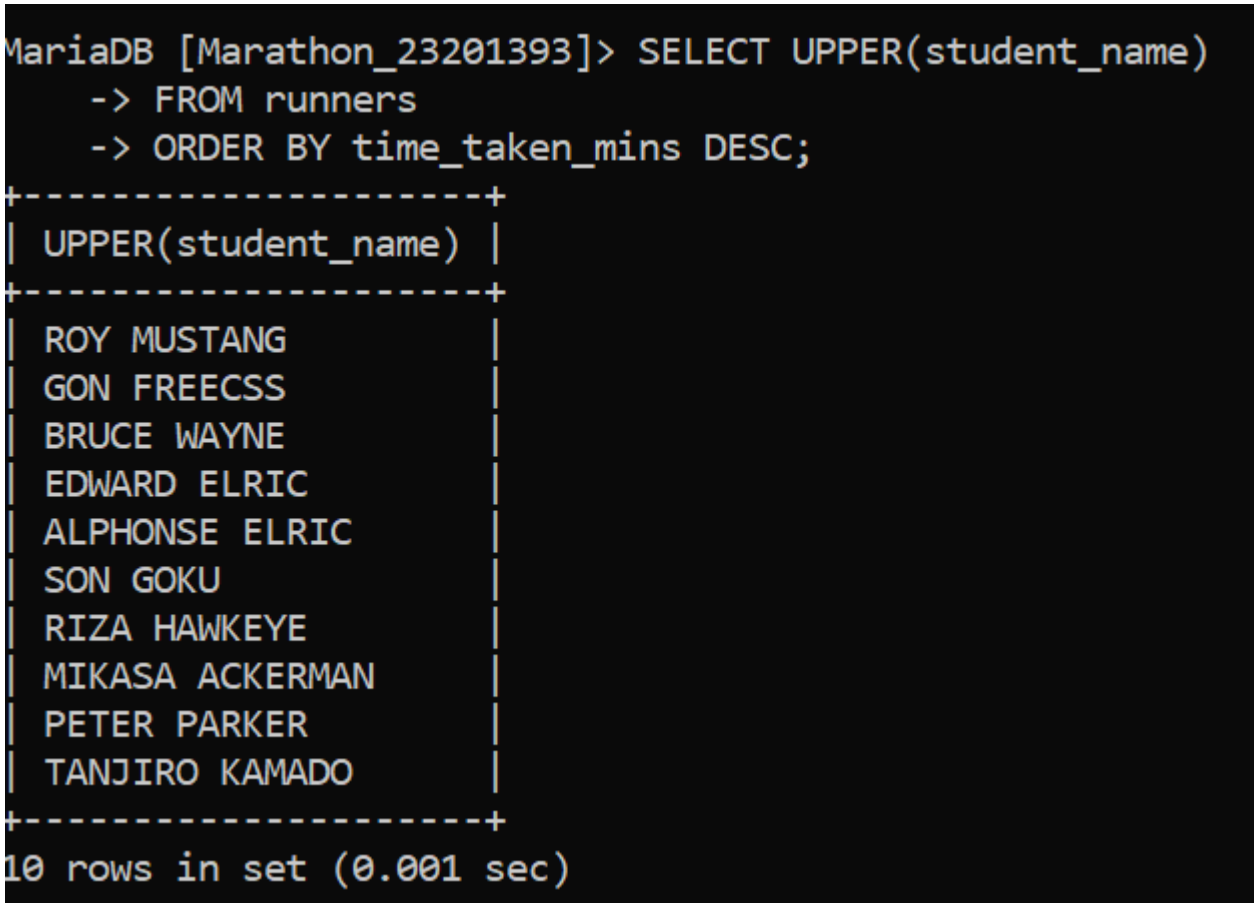

```
MariaDB [Marathon_23201393]> SELECT UPPER(student_name)
    -> FROM runners
    -> ORDER BY time_taken_mins DESC;
+---------------------+
| UPPER(student_name) |
+---------------------+
| ROY MUSTANG         |
| GON FREECSS         |
| BRUCE WAYNE         |
| EDWARD ELRIC        |
| ALPHONSE ELRIC      |
| SON GOKU            |
| RIZA HAWKEYE        |
| MIKASA ACKERMAN     |
| PETER PARKER        |
| TANJIRO KAMADO      |
+---------------------+
10 rows in set (0.001 sec)
```

No 5 Query (as Plain Text)	ALTER TABLE runners CHANGE distance_covered total_distance DECIMAL(3,1);

No 5 SS (of Query & Output in Shell)	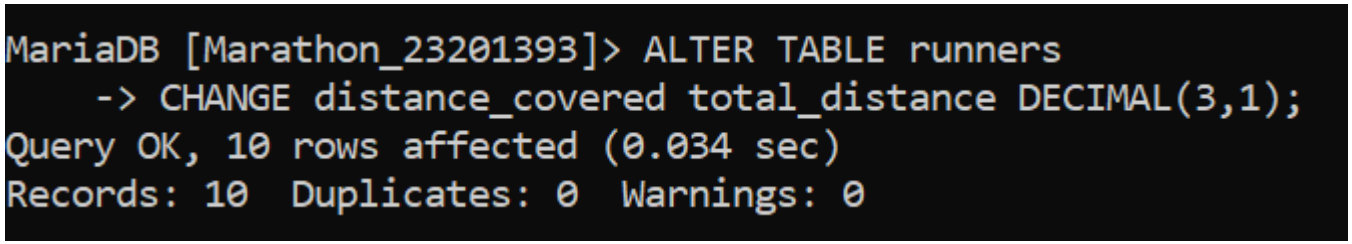
No 6 Query (as Plain Text)	ALTER TABLE runners ADD kmh DECIMAL(3,1);
No 6 SS (of Query & Output in Shell)	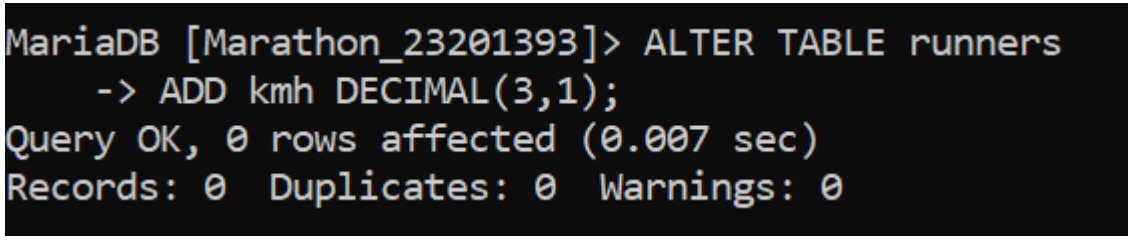
No 7 Query (as Plain Text)	UPDATE runners SET kmh = (total_distance * 60) / time_taken_mins;
No 7 SS (of Query & Output in Shell)	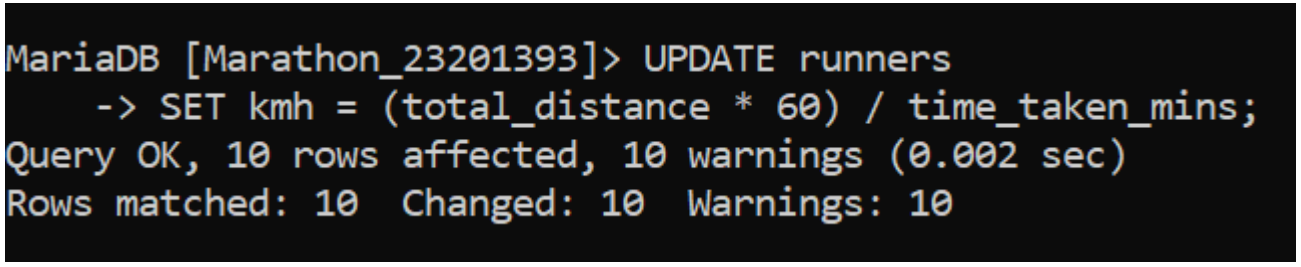

No 8 Query (as Plain Text)	SELECT student_id, student_name, kmh, (total_distance / 10) * (time_taken_mins / 60) * 100 AS points FROM runners
No 8 SS (of Query & Output in Shell)	

```
MariaDB [Marathon_23201393]> SELECT student_id, student_name, kmh,
    ->  (total_distance / 10) * (time_taken_mins / 60) * 100 AS points
    -> FROM runners;
+------------+-----------------+------+---------------+
| student_id | student_name    | kmh  | points        |
+------------+-----------------+------+---------------+
|        101 | Mikasa Ackerman |  8.6 |  29.166666650 |
|        102 | Edward Elric    | 10.2 |  98.333333300 |
|        103 | Riza Hawkeye    |  7.9 |  31.666666650 |
|        104 | Bruce Wayne     |  9.5 | 105.000000000 |
|        105 | Peter Parker    |  9.1 |  27.500000000 |
|        106 | Alphonse Elric  | 10.9 |  91.666666600 |
|        107 | Son Goku        |  6.5 |  38.333333300 |
|        108 | Gon Freecss     |  8.8 | 113.333333300 |
|        109 | Tanjiro Kamado  | 10.3 |  24.166666650 |
|        110 | Roy Mustang     |  7.2 | 138.333333300 |
+------------+-----------------+------+---------------+
10 rows in set (0.000 sec)
```

No 9 Query (as Plain Text)	SELECT student_name FROM runners WHERE total_distance = 10 AND time_taken_mins BETWEEN 40 AND 60;
No 9 SS (of Query & Output in Shell)	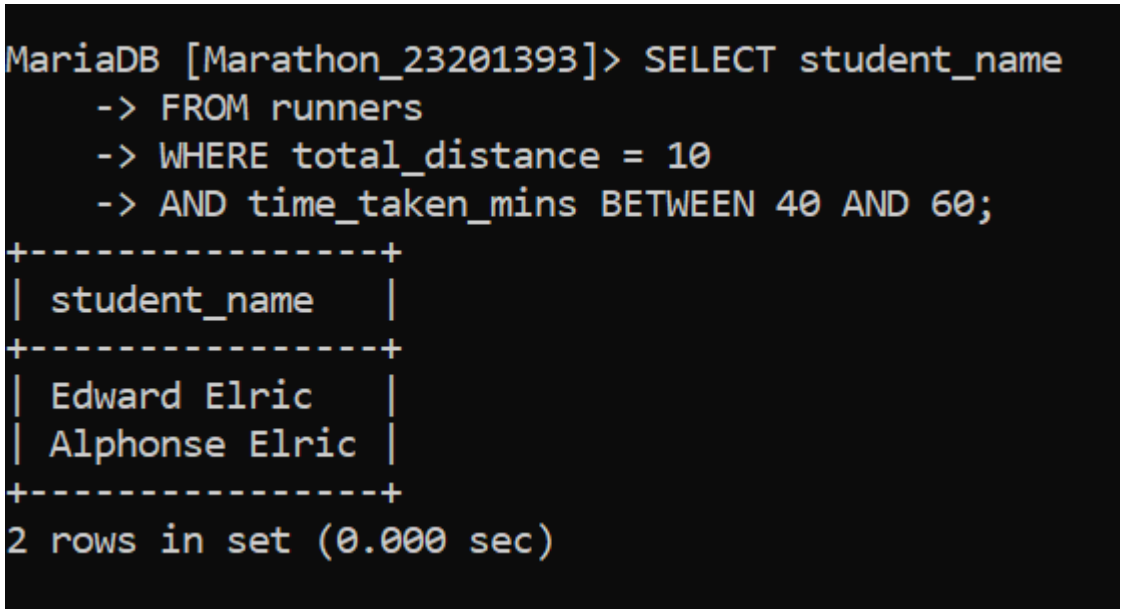

```
MariaDB [Marathon_23201393]> SELECT student_name
    -> FROM runners
    -> WHERE total_distance = 10
    -> AND time_taken_mins BETWEEN 40 AND 60;
+----------------+
| student_name   |
+----------------+
| Edward Elric   |
| Alphonse Elric |
+----------------+
2 rows in set (0.000 sec)
```

	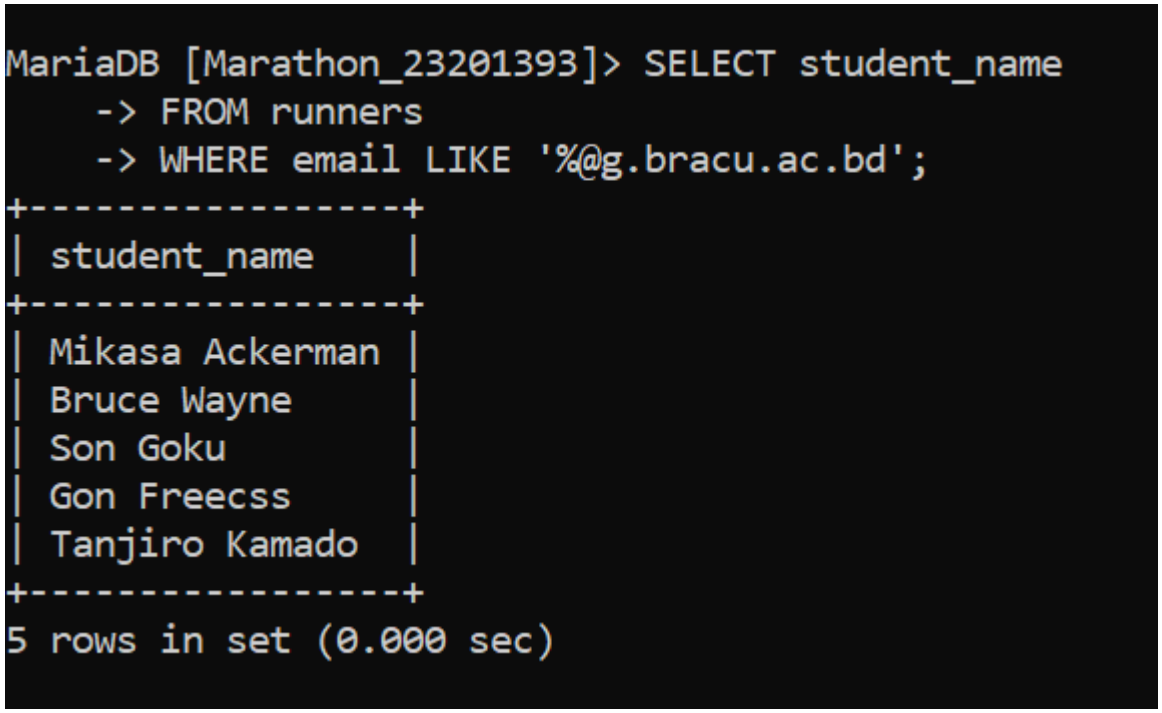 MariaDB [Marathon_23201393]> SELECT student_name -> FROM runners -> WHERE email LIKE '%@g.bracu.ac.bd'; +----------+ | student_name | +----------+ | Mikasa Ackerman | | Bruce Wayne | | Son Goku | | Gon Freecss | | Tanjiro Kamado | +----------+ 5 rows in set (0.000 sec)
No 10 Query (as Plain Text)	SELECT student_name FROM runners WHERE email LIKE '%@g.bracu.ac.bd';
No 10 SS (of Query & Output in Shell)	