

CSCI 3060U Phase 1: AI Use Acknowledgement

Team Members: Evan Harder, Muhammad Niazi, Maheen Zahir

Generative AI was used in this project phase. As required by the Phase 1 handout, the complete responses for AI conversation used on this phase is attached after this page, unedited and in full.


What the AI was used for:

- Conversation 1: Asked to review run_tests.sh for bugs and suggest where comments should go, before committing and pushing
- Conversation 2: Asked whether any delete test cases were missing. The suggestion (users with "active dependencies") is not in the project requirements, so it was not added.

Decisions made by the team:

- Creating test cases with each respected feature.
- Test folder structure: feature, then success/failure, then one folder per test with input.txt, expected_output.txt and daily_transaction.txt
- Labeled input format (label: value) and the Status / Message result-block output format
- Adding email and password to create, based on the in-class slide
- Repository layout: TestCases/ (with data/ inside), scripts/, results/, docs/
- Creation of test list and test phase documents.

Conversation 1 image(s):

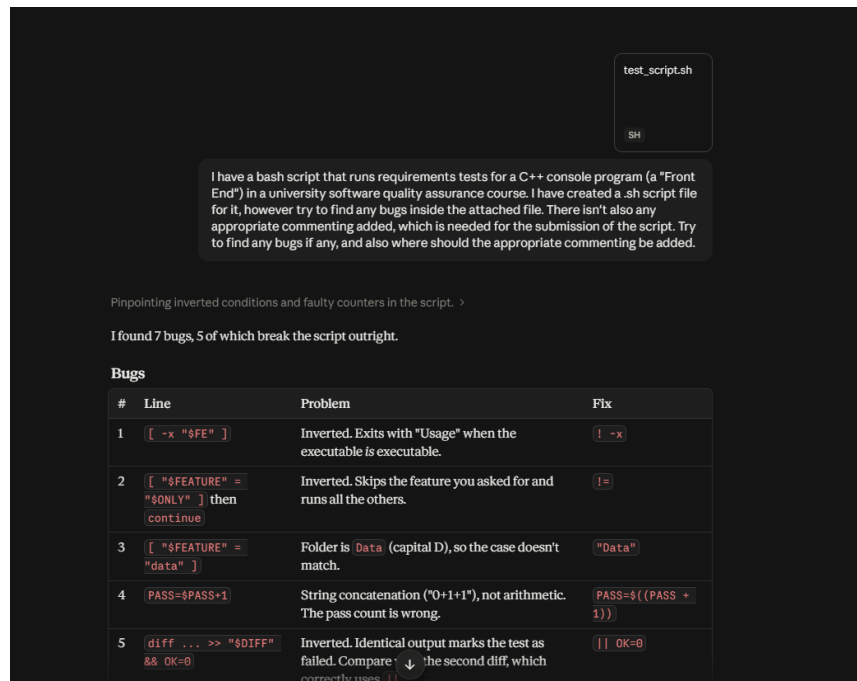

6	<code>rm -f "\$DIFF"</code> in the FAIL branch	Deletes the diff of failing tests, but the report points to it. Passing tests should be the ones cleaned up.	Move <code>rm</code> to the PASS branch
7	<code>[-f "\$ATF"] && touch "\$ATF"</code>	Does nothing useful. If the Front End writes no transaction file (e.g. a failed login test), <code>diff</code> errors out and the test fails wrongly.	Create an empty file if missing

Smaller hardening items: the glob can match a literal string when nothing exists, `input.txt` isn't checked, and a hanging Front End would freeze the whole run. Both are covered in the version below.

Fixed and commented script

```
bash

#!/bin/bash
# -----
# run_tests.sh
# Runs the requirements tests for the Front End (console program).
#
# Usage: ./run_tests.sh <path-to-frontend-executable> [feature]
# feature (optional): only run tests in this feature folder.
#
# Expected layout of each test: TestCases/<feature>/<group>/<test>/
#   input.txt          stdin given to the Front End
#   expected_output.txt expected terminal output
#   daily_transaction.txt expected daily transaction file
#
# Results are saved in results/run_<timestamp>/ and results/latest links to
# the most recent run. Exit code is 0 only if every test passes.
# -----

# --- Command line arguments -----
FE="$1" # Front End executable under test
ONLY="$2" # Optional: restrict the run to one feature folder

# Executable must be given and must be executable
if [ -z "$FE" ] || [ ! -x "$FE" ]; then
    echo "Usage: $0 <path-to-frontend-executable> [feature]"
    exit 1
fi

# Convert to an absolute path so it still works after any cd
FE="$(cd "$(dirname "$FE")" && pwd)/$(basename "$FE")"

# --- Locate test and data directories -----
ROOT="$(cd "$(dirname "$0")/.." && pwd)" # project root (parent of script dir)
TESTS="$ROOT/TestCases"
DATA="$TESTS/Data" # shared input files for the Front End
if [ ! -d "$TESTS" ] || [ ! -f "$DATA/current_user_accounts.txt" ]; then
    echo "Cannot find $TESTS or $DATA/current_user_accounts.txt"
    exit 1
fi

# --- Per-run output setup -----
RUN_ID="run_$(date +%Y%m%d_%H%M%S)" # unique, timestamped run name
RUN="$ROOT/results/$RUN_ID"
REPORT="$RUN/report.txt"

mkdir -p "$RUN"
PASS=0
FAIL=0

# Report header
{
    echo "Front End requirements test run: $RUN_ID"
    echo "Executable: $FE"
    echo "-----"
} > "$REPORT"

# --- Main loop: one iteration per test ---
for TEST_DIR in "$TESTS"/*/*/*; do
    if [ -d "$TEST_DIR" ] || [ -f "$TEST_DIR" ]; then
        # glob matched nothing
    fi
done
```

```
ONLY="$2" # Optional: restrict the run to one feature folder

# Executable must be given and must be executable
if [ -z "$FE" ] || [ ! -x "$FE" ]; then
    echo "Usage: $0 <path-to-frontend-executable> [feature]"
    exit 1
fi

# Convert to an absolute path so it still works after any cd
FE="$(cd "$(dirname "$FE")" && pwd)/$(basename "$FE")"


# --- Locate test and data directories -----
ROOT="$(cd "$(dirname "$0")/.." && pwd)" # project root (parent of script dir)
TESTS="$ROOT/TestCases"
DATA="$TESTS/Data" # shared input files for the Front End
if [ ! -d "$TESTS" ] || [ ! -f "$DATA/current_user_accounts.txt" ]; then
    echo "Cannot find $TESTS or $DATA/current_user_accounts.txt"
    exit 1
fi

# --- Per-run output setup -----
RUN_ID="run_$(date +%Y%m%d_%H%M%S)" # unique, timestamped run name
RUN="$ROOT/results/$RUN_ID"
REPORT="$RUN/report.txt"

mkdir -p "$RUN"
PASS=0
FAIL=0

# Report header
{
    echo "Front End requirements test run: $RUN_ID"
    echo "Executable: $FE"
    echo "-----"
} > "$REPORT"

# --- Main loop: one iteration per test ---
for TEST_DIR in "$TESTS"/*/*/*; do
    if [ -d "$TEST_DIR" ] || [ -f "$TEST_DIR" ]; then
        # glob matched nothing
    fi
done
```

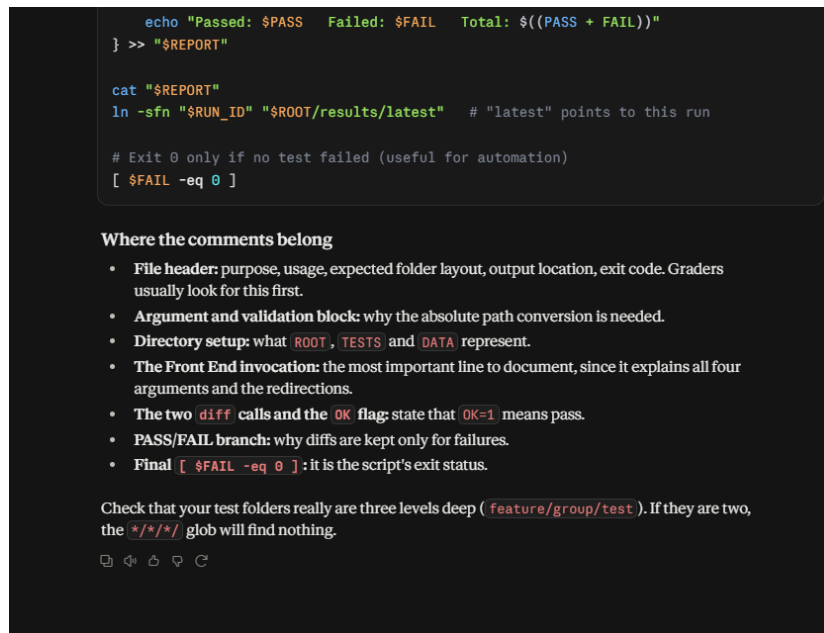

Conversation 2 image:

