


MICROSOFT AZURE


After Creating a Resource group ,Storage Account and data factory follow these steps

Step 1: Create Source and Destination Containers

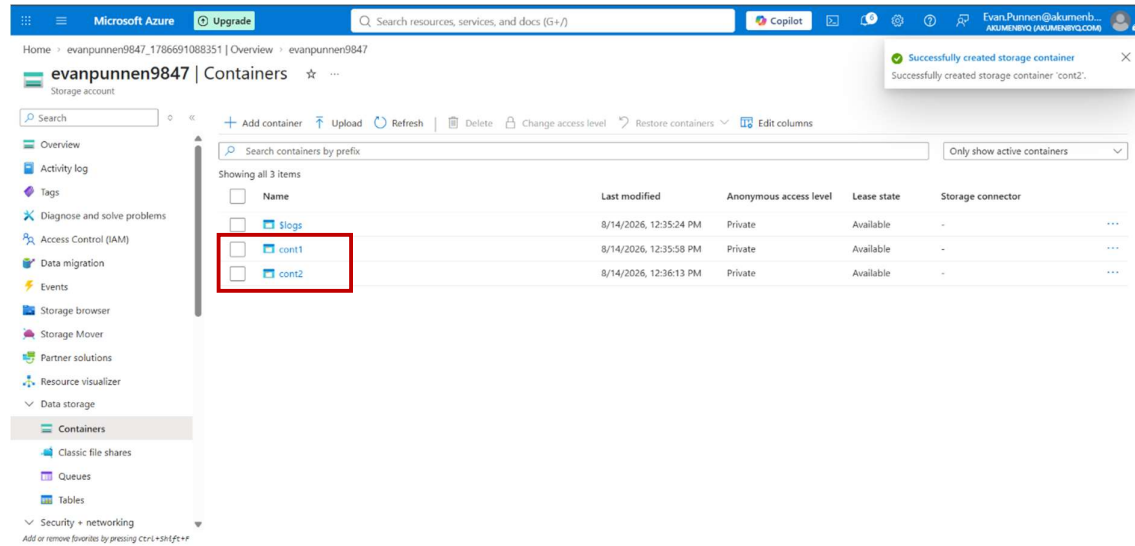


Upload the required source files into the source container to perform the pipeline operations.

- Open the Containers section of the storage account.
- Create the Source Container.
- Create the Destination Container.
- Upload the required files into the Source Container.

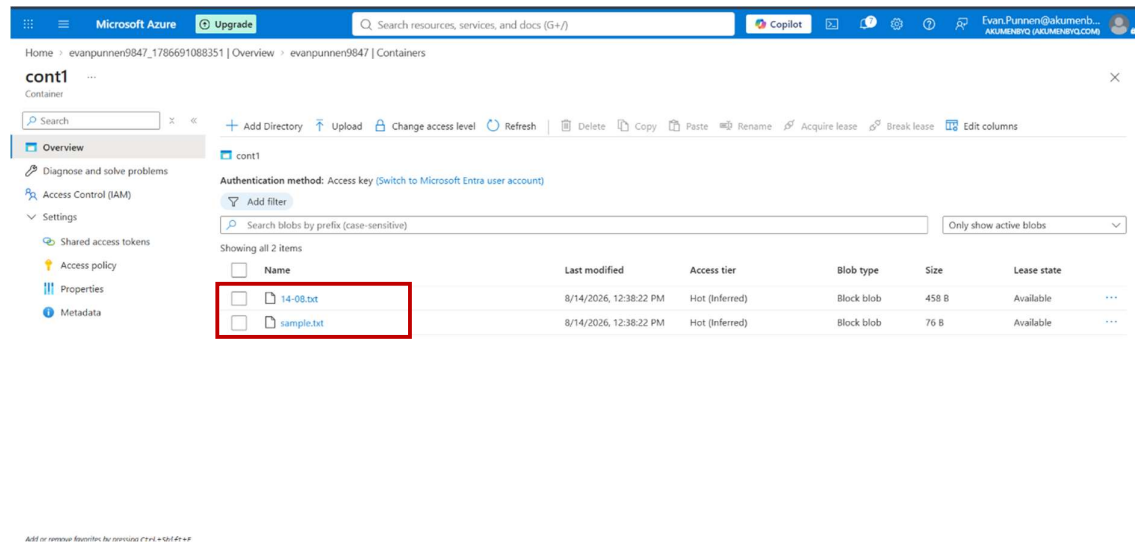


Configure the Source File Path:

- Open the Source settings of the Copy Data activity.
- Select the source dataset.
- Set the file path option as shown in the screenshot.
- Browse and select the required source file from the source container.

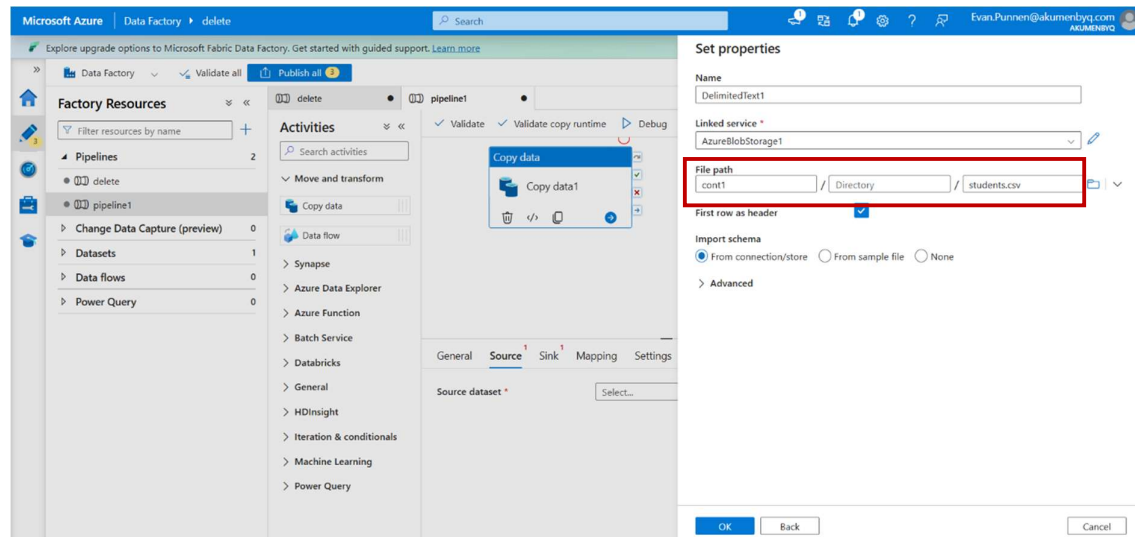


Configure the Destination:

- Open the Sink/Destination settings of the Copy Data activity.
- Select the destination dataset or linked service.
- Browse and select the destination container/folder.

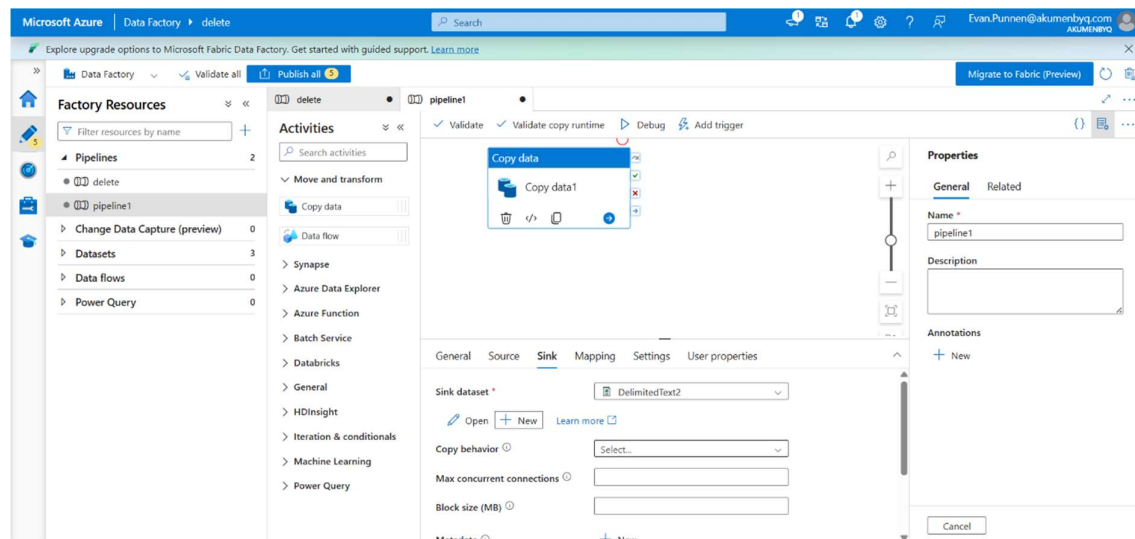


Configure Column Mapping and Data Types:

- Open the Mapping section of the Copy Data activity.
- Add or verify the source and destination columns.
- Set the appropriate data type for each mapped column.
- Ensure all required source fields are mapped to the corresponding destination fields.

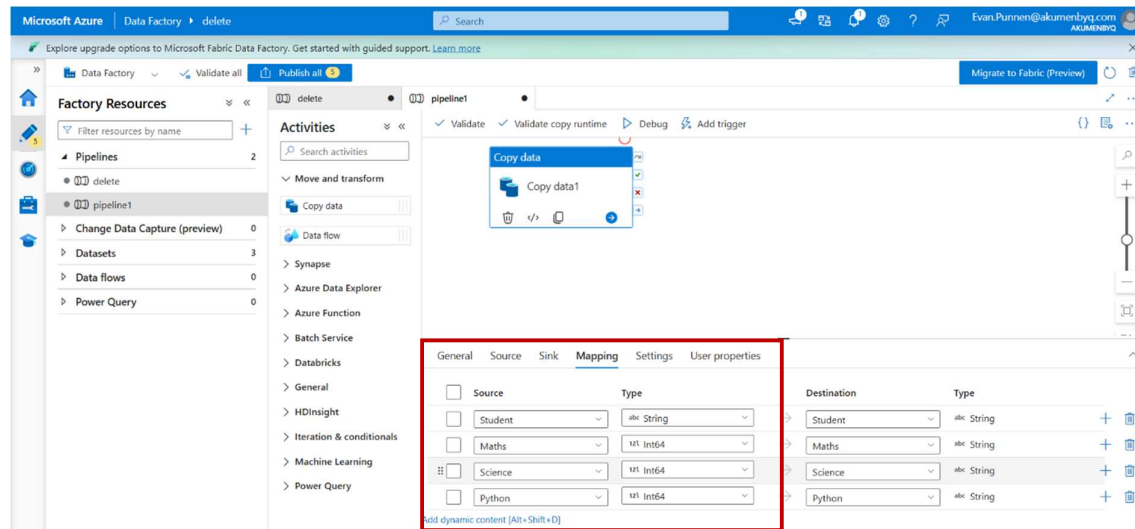


Validate and Debug the Pipeline:

- Click Validate to check the pipeline configuration.
- Click Debug to execute the pipeline.
- Check the Output/Monitor section and confirm that the activity status is Successful.

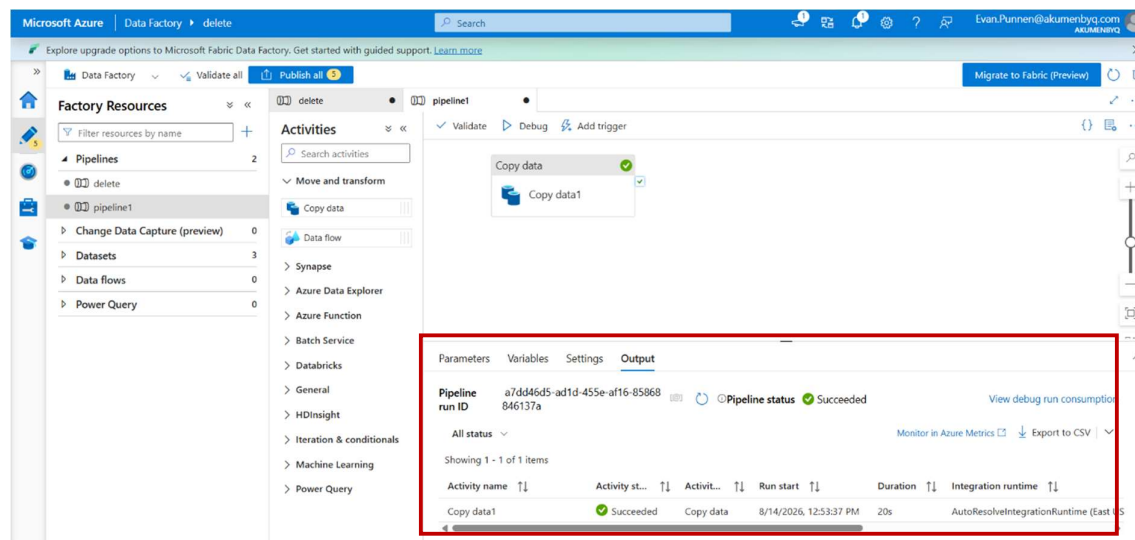

Verify the Mapping Result:


- Open the destination file after the successful pipeline run.
- Verify that the mapped data and data types have been copied correctly.

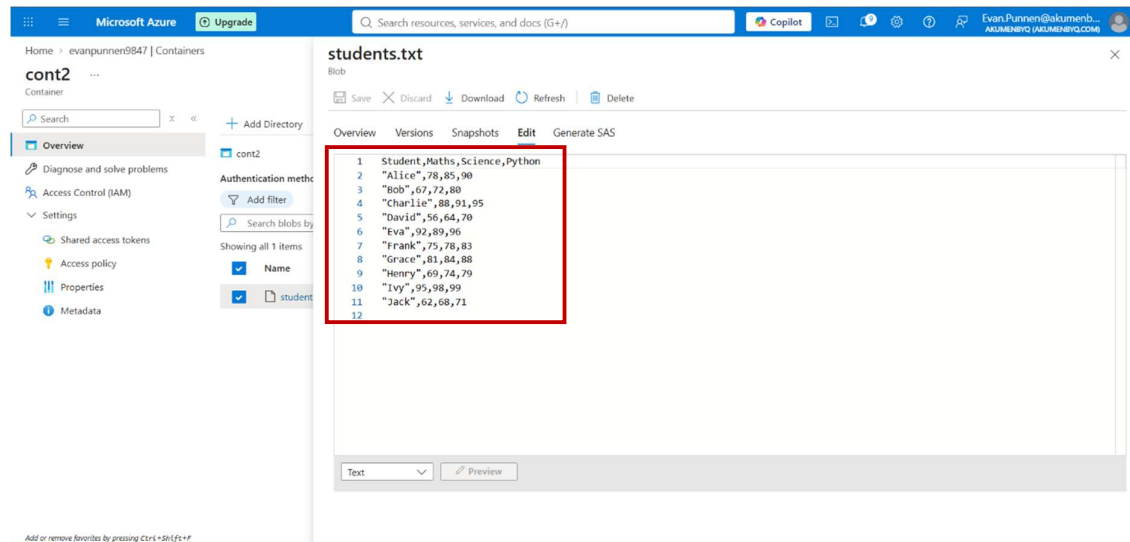

Step 4: Deletion Operation With Logging


Configure the Delete activity by selecting the source file path and enabling logging.

- Add a Delete activity to the pipeline.
- Select the source dataset/file path that needs to be deleted.
- Open the Logging settings for the Delete activity.
- Enable logging and specify the logging location/path as shown in the screenshot.
- Validate and run/debug the pipeline.

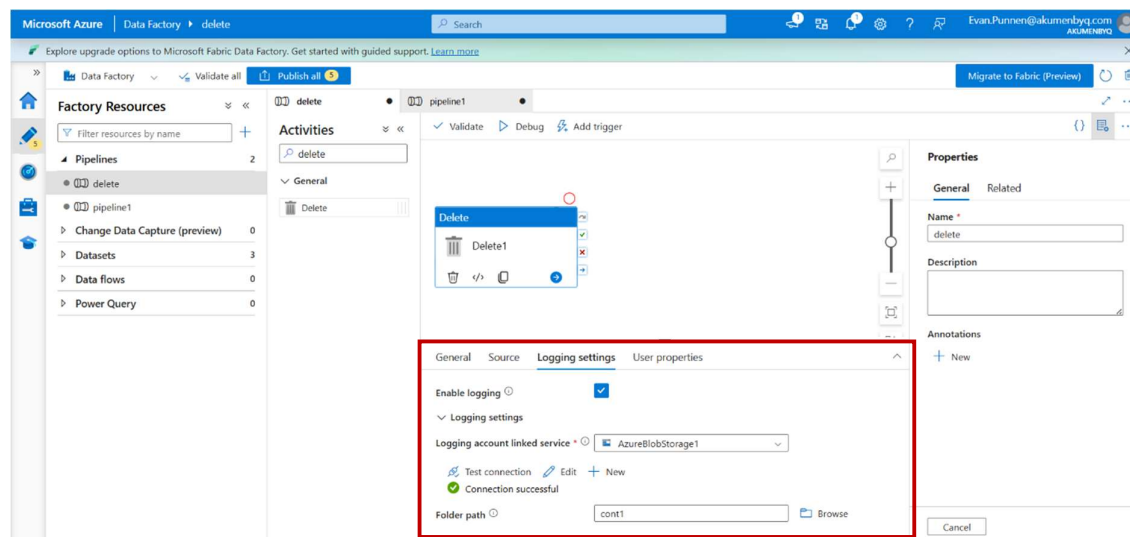


Verify the Deletion Log:


- After the Delete activity completes successfully, check the configured logging location.
- Confirm that the deleted file is recorded in the generated log.

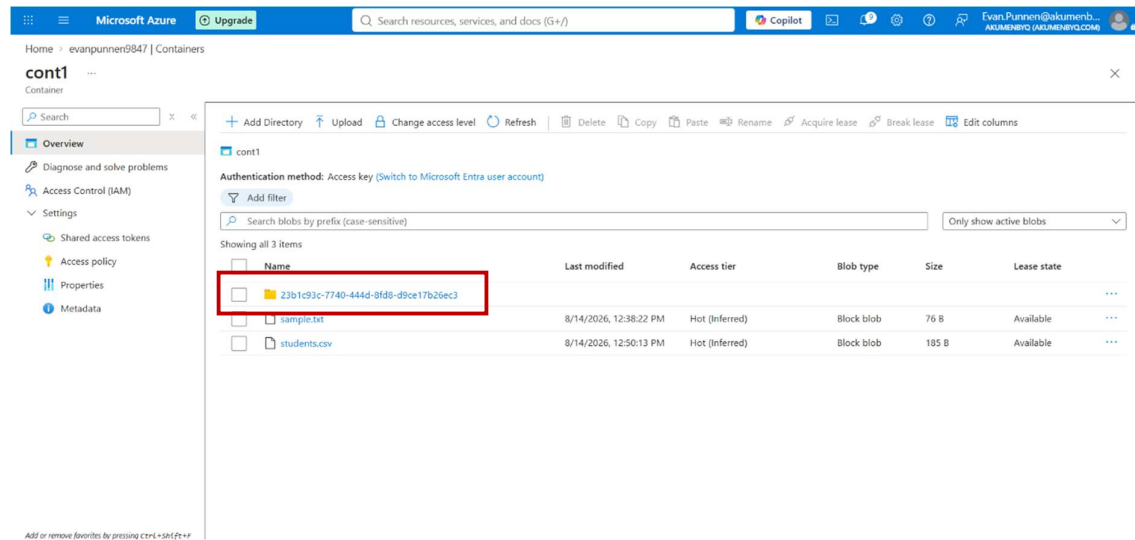


- Select File for Deletion

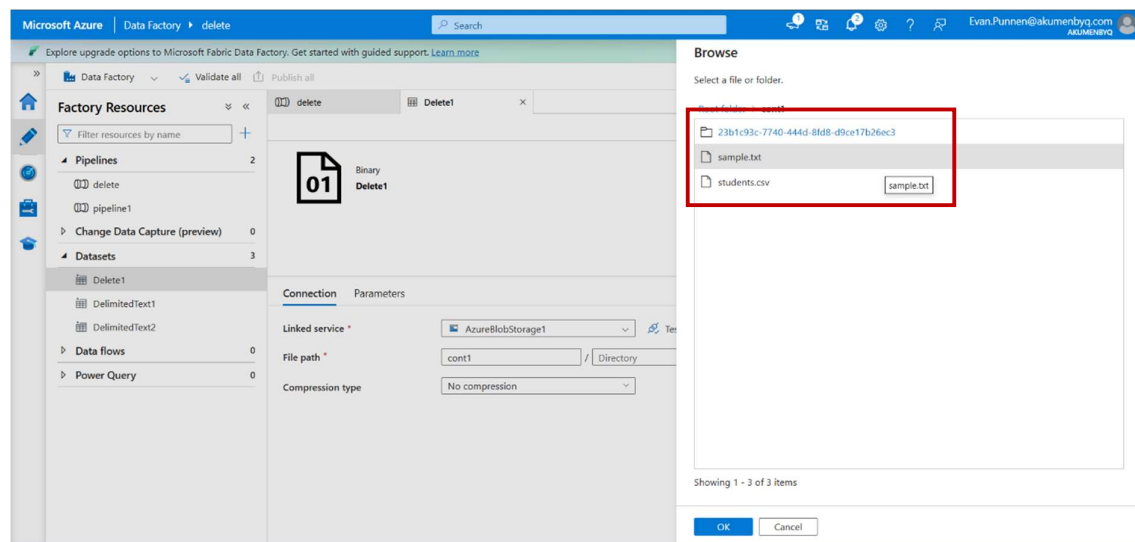

- Configure Delete Activity without log

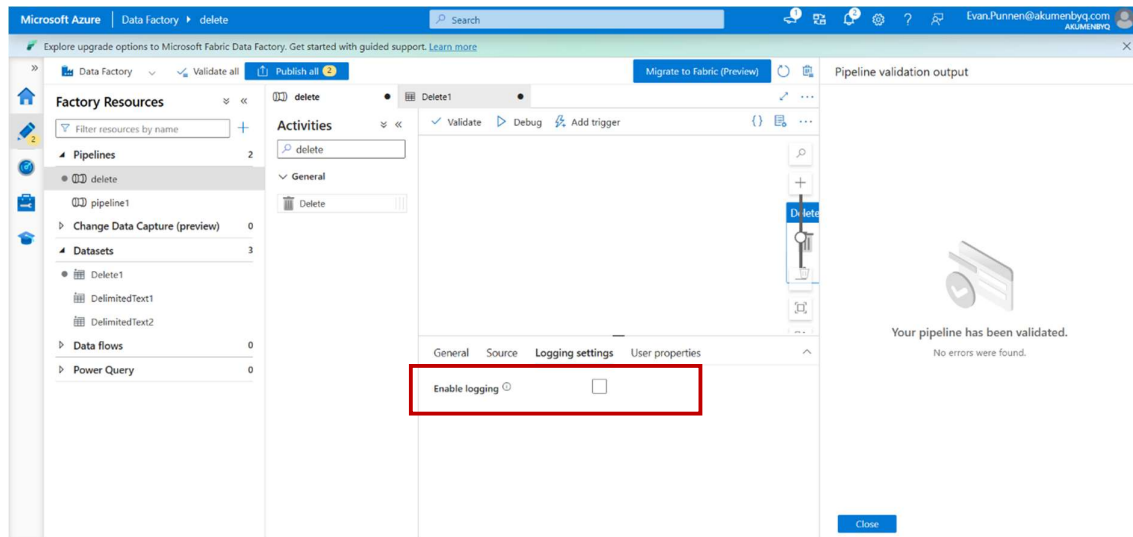


- Validate delete Pipeline and check if the file has been deleted

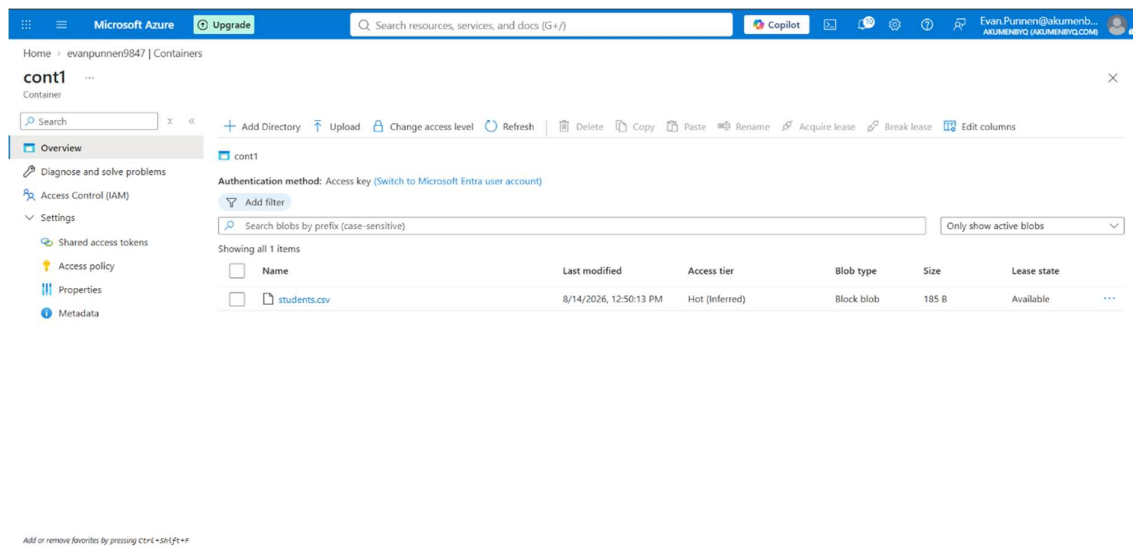


Pipeline/Trigger Configuration

- Configure the Copy Data activity.

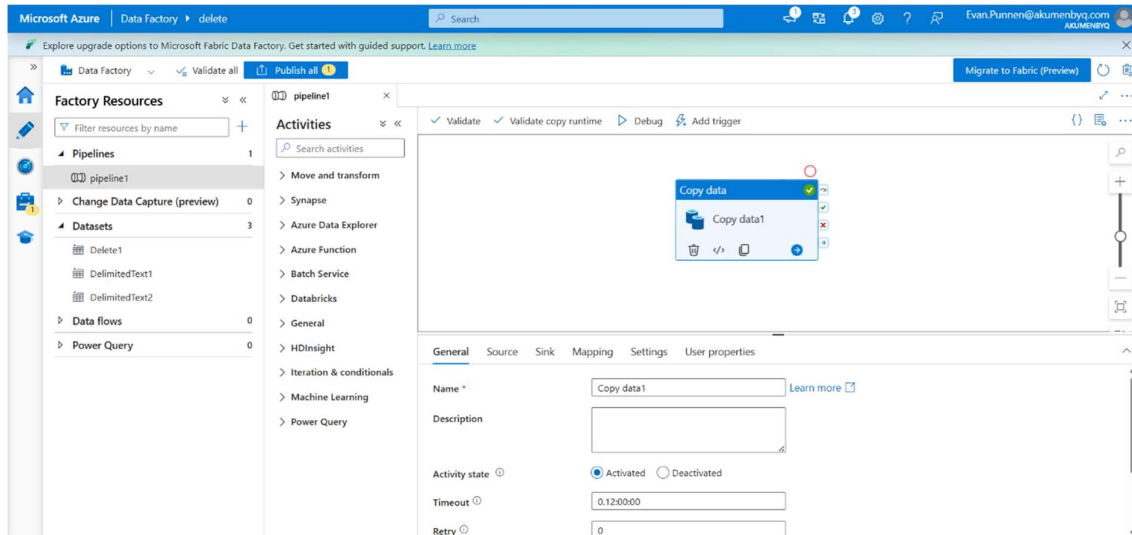

- Set the activity source/settings.

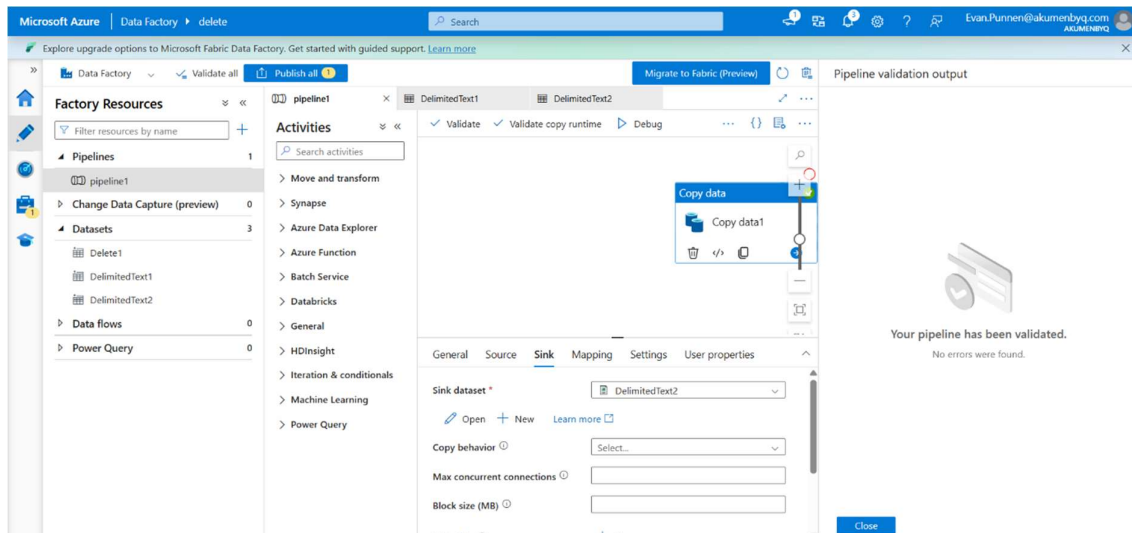

- View the pipeline run history and execution status.

Microsoft Azure | Data Factory | data6574

Explore upgrade options to Microsoft Fabric Data Factory. Get started with guided support. [Learn more](#)

Pipeline runs

Triggered Debug Rerun Cancel options Refresh Edit columns List Gantt

Filter by run ID or name Chennai, Kolkata, Ma... Last 24 hours Pipeline name: All Status: All Runs: Latest runs Copy filters Export to CSV

Triggered by: All Add filter

Showing 1 - 5 items Last refreshed 0 minutes ago

☐	Pipeline name ↕	Run start ↕	Run end ↕	Duration	Triggered by	Status ↕	Run	Parameters
☐	pipeline1	8/14/2026, 2:25:00 PM	8/14/2026, 2:25:18 PM	19s	schedule	✓ Succeeded	Original	
☐	pipeline1	8/14/2026, 2:23:00 PM	8/14/2026, 2:23:22 PM	22s	schedule	✓ Succeeded	Original	
☐	pipeline1	8/14/2026, 2:21:00 PM	8/14/2026, 2:21:22 PM	23s	schedule	✓ Succeeded	Original	
☐	pipeline1	8/14/2026, 2:19:00 PM	8/14/2026, 2:19:20 PM	20s	schedule	✓ Succeeded	Original	
☐	pipeline1	8/14/2026, 2:15:59 PM	8/14/2026, 2:16:28 PM	29s	Manual trigger	✓ Succeeded	Original	

- Open and verify the pipeline trigger configuration.

Microsoft Azure | Data Factory | data6574

Explore upgrade options to Microsoft Fabric Data Factory. Get started with guided support. [Learn more](#)

Triggers

To execute a pipeline set the trigger. Triggers represent a unit of processing that determines when a pipeline execution needs to be kicked off.

+ New Refresh


Filter by name Annotations: Any

Showing 1 - 1 of 1 items


Name ↕	Type ↕	Status ↕	Related ↕	Annotations ↕
schedule	Schedule	✓ Started	1	

Finding the Area Using Set Variables (Parameters & Variables)

- Add Set Variable activities to the pipeline.

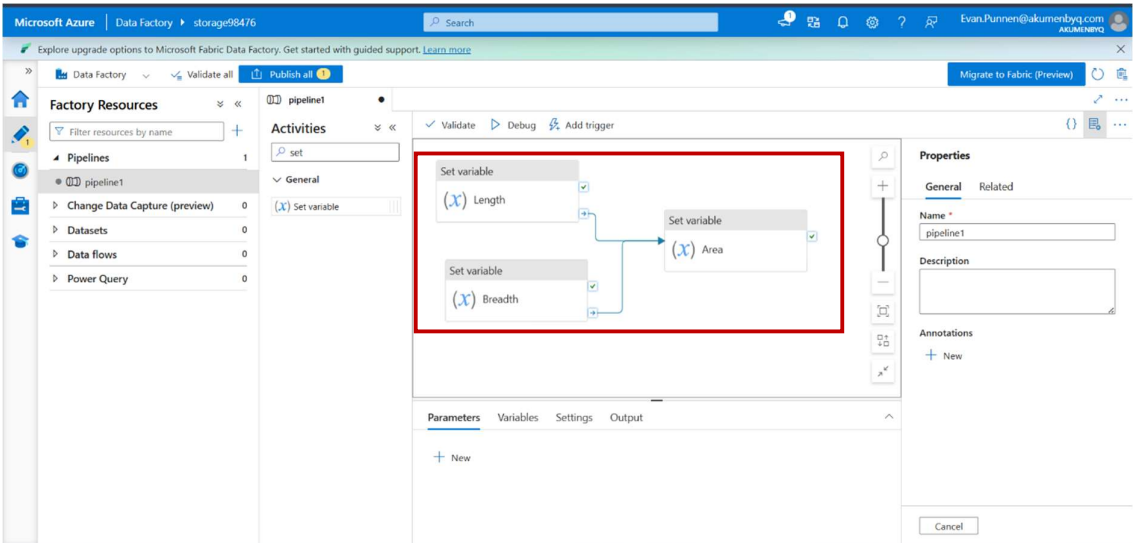

- Configure the first variable activity finding the area

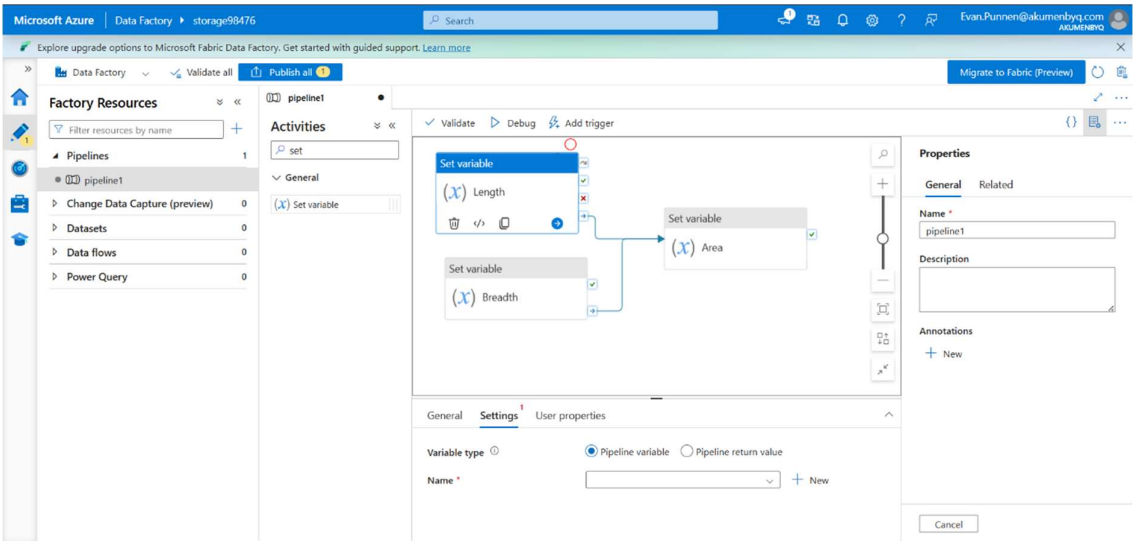

Microsoft Azure | Data Factory | storage98476

Explore upgrade options to Microsoft Fabric Data Factory. Get started with guided support. [Learn more](#)

Validate all Publish all

Migrate to Fabric (Preview)

Factory Resources

- Pipelines 1
 - pipeline1
- Datasets 0
- Data flows 0
- Power Query 0

Activities

- set
- Set variable

Set variable (X) Length

Set variable (X) Breadth

Set variable (X) Area

Properties

General Related

Name * pipeline1

Description

Annotations

+ New

Cancel

General Settings User properties

Name * Breadth Learn more

Description

Activity state ☒ Activated ☐ Deactivated

Microsoft Azure | Data Factory | storage98476

Explore upgrade options to Microsoft Fabric Data Factory. Get started with guided support. [Learn more](#)

Validate all Publish all

Migrate to Fabric (Preview)

Factory Resources

- Pipelines 1
 - pipeline1
- Datasets 0
- Data flows 0
- Power Query 0

Activities

- set
- Set variable

Set variable (X) Length

Set variable (X) Breadth

Set variable (X) Area

Properties

General Related

Name * pipeline1

Description

Annotations

+ New


Cancel

General Settings User properties


Name * Area Learn more


Description

Activity state ☒ Activated ☐ Deactivated

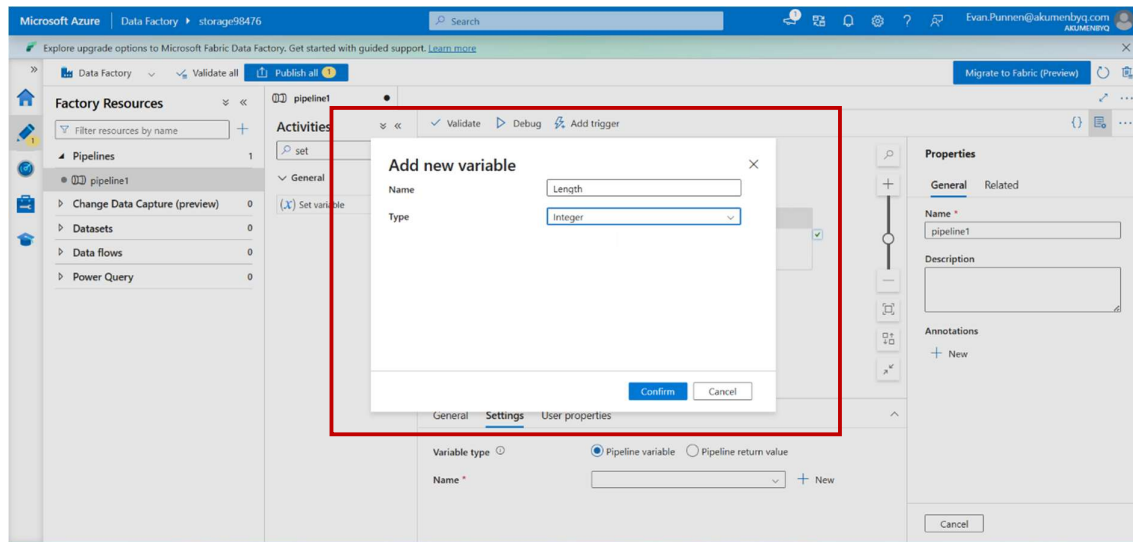


Set the variable value.



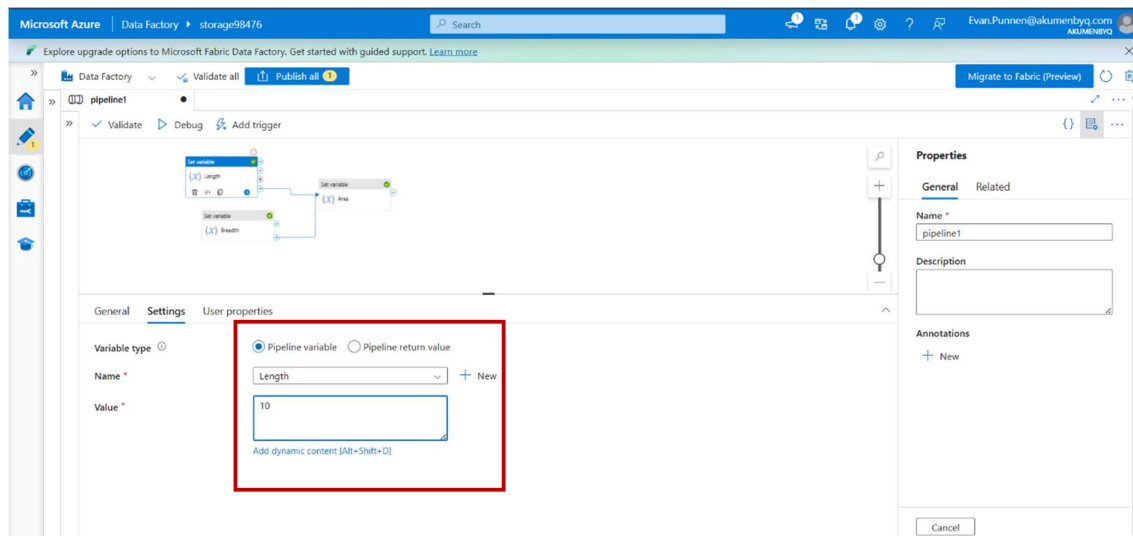


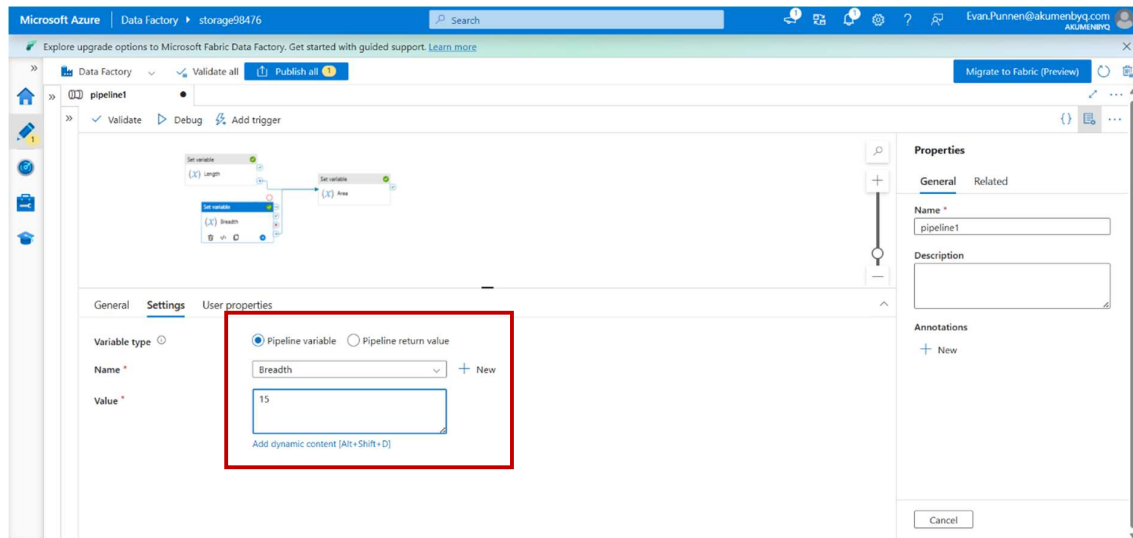

- Run the pipeline with the configured variables.
- Check the Output section and verify the variable values.

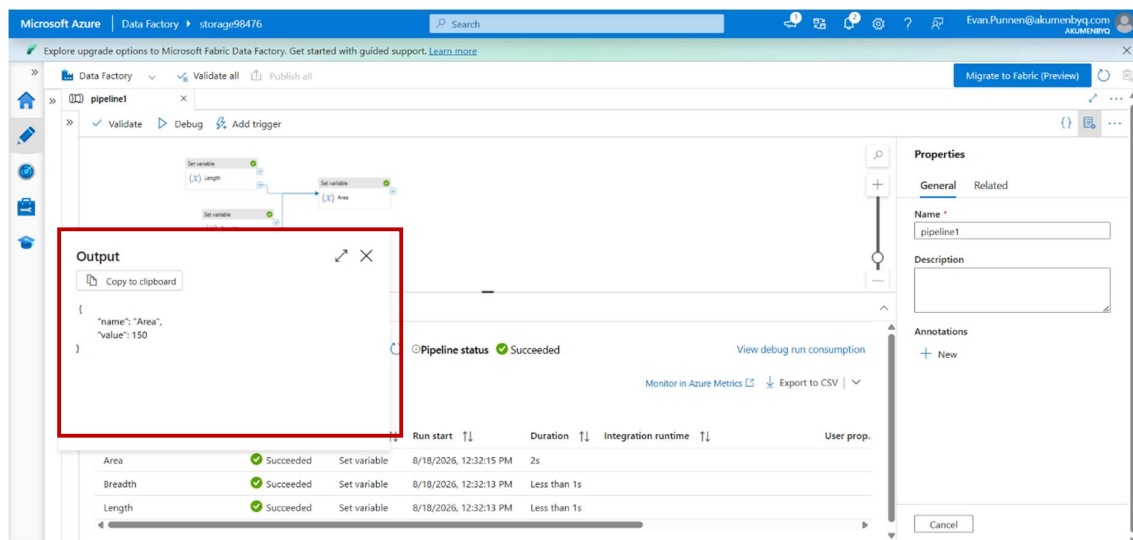

Finding Area in Data Factory using Parameters

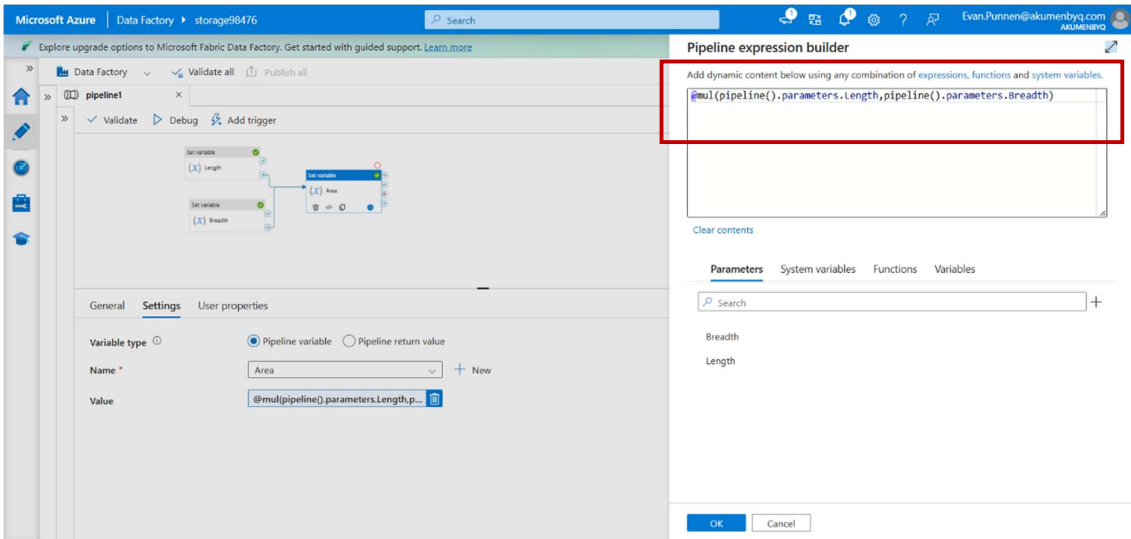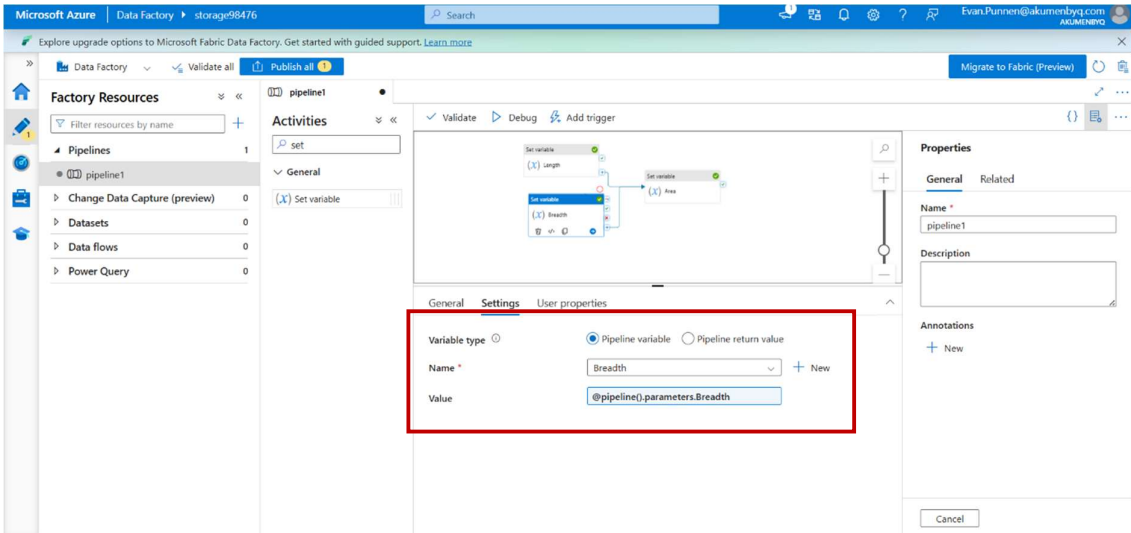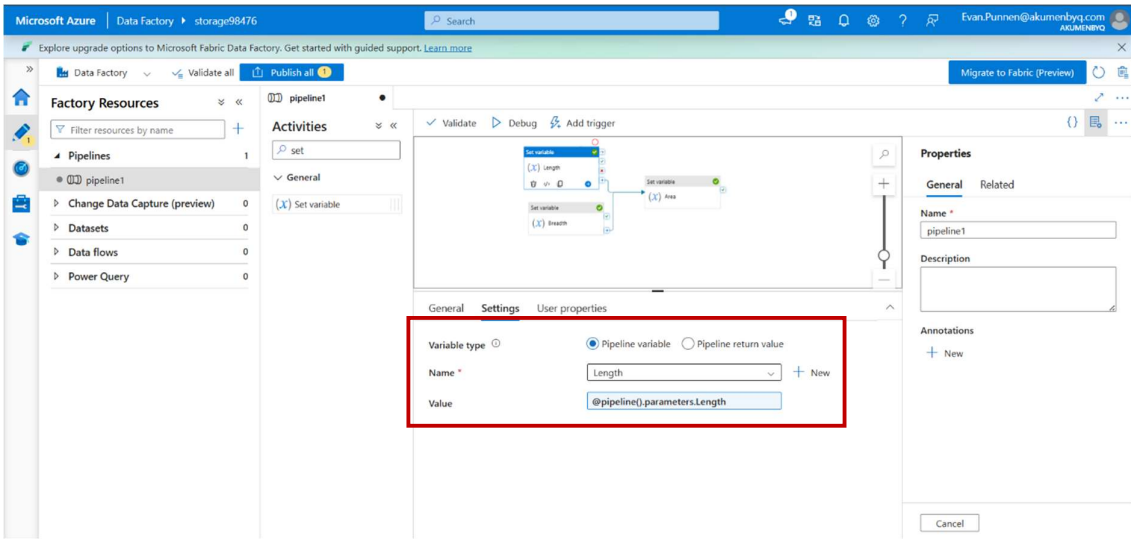

- Enter the expression parameters.

Microsoft Azure | Data Factory | storage98476

Explore upgrade options to Microsoft Fabric Data Factory. Get started with guided support. [Learn more](#)

pipeline1

Validating... Debug Add trigger

Set variable (X) Length

Set variable (X) Breadth

Set variable (X) Area

General Settings User properties

Variable type ☒ Pipeline variable ☐ Pipeline return value

Name * Area + New

Value @mul(pipeline().parameters.Length,p...

Pipeline run

Parameters

Name	Type	Value
Length	int	15
Breadth	int	14

OK Cancel

- Debug the pipeline and execute the expression.
- Verify the successful pipeline output.

Microsoft Azure | Data Factory | storage98476

Explore upgrade options to Microsoft Fabric Data Factory. Get started with guided support. [Learn more](#)

pipeline1

Validate Debug Add trigger

Set variable (X) Length

Set variable (X) Breadth

Set variable (X) Area

General Related

Name * pipeline1

Description

Annotations + New

Pipeline status Succeeded

View debug run consumption

Monitor in Azure Metrics Export to CSV

Run start Duration Integration runtime User prop.

Run start	Duration	Integration runtime	User prop.
Area	Succeeded	Set variable	8/18/2026, 12:27:21 PM Less than 1s
Breadth	Succeeded	Set variable	8/18/2026, 12:27:20 PM Less than 1s
Length	Succeeded	Set variable	8/18/2026, 12:27:20 PM Less than 1s

Output

Copy to clipboard

```
{
  "name": "Area",
  "value": 225
}
```

Cancel