

# When Does Graph Structure Help in Multi-Agent Reinforcement Learning? A Controlled Boundary

Anonymous authors

Paper under double-blind review

## Abstract

In cooperative multi-agent reinforcement learning (MARL), the coordination-graph design question is where to route communication, not whether to add it—the right edges, not more edges. We establish this by controlled attribution: on COORDGRID, whose graph is the experimental variable, we fix the encoder, mixer, optimiser, and parameter count and add two isolators—a no-graph control (structure vs. capacity) and a density-matched *wrong*-graph control. When an agent must act on private information held by a specific unobserved partner, the task-matched graph beats *all-to-all* communication—which carries the partner’s signal but must select it—the wrong graph, and the no-graph control (Cohen’s  $d \approx 5$ , complete separation at  $n=12$ , Holm-corrected). Learned attention recovers the signal only on the right graph: at  $5\times$  the budget the gap widens ( $d \approx 5 \rightarrow 12$ ). A pre-registered classical baseline sharpens this: a deep coordination graph (max-plus) reproduces the 1-hop result and shares its structure-dependence, so the active ingredient is task-matched topology, not the message-passing mechanism; on a 2-hop relay neither mechanism routes above a no-communication baseline, leaving multi-hop routing open. When coordination is instead full-information or convention-reducible, the same architecture confers *no benefit* over the parameter-matched baseline; its common *unstabilised* form is actively harmful, but stabilisation recovers parity. The rule applies only when the topology is known or estimable. These are constructed tasks; a pre-registered transfer onto a composed MPE vehicle found all graph arms diverging below the no-graph control, scoping the positive endpoint to the archetypes tested.

## 1 Introduction

Cooperative multi-agent reinforcement learning (MARL) underlies progress on team coordination problems from traffic signal control to multi-robot manipulation. Value-decomposition methods, in which a joint team Q-value  $Q_{\text{tot}}$  is factorised into per-agent utilities  $Q_i$  for centralised training and decentralised execution, have emerged as a workhorse: VDN (Sunehag et al., 2018) factorises  $Q_{\text{tot}}$  as a sum, QMIX (Rashid et al., 2018; 2020) as a monotonic mixture, and several recent methods extend the mixer with graph neural networks (GNNs) over an externally specified or learned coordination graph (Jiang et al., 2020; Liu et al., 2020; Böhmer et al., 2020; Naderializadeh et al., 2020).

The intuition for graph-based MARL is straightforward: a model whose architecture mirrors the agents’ coordination *structure* should generalise better and converge faster. Yet the conditions under which this holds are under-tested. Three specific gaps motivate the present study:

1. **The designer’s question is unanswered: when to wire an interaction graph, and what the wrong wiring costs.** A practitioner deciding whether to add a coordination graph—and which edges to wire—has little controlled guidance. Most empirical comparisons fix one environment with one (often implicit) coordination graph and vary neither the regime (sparse vs. dense, structured vs. random) nor the *correctness* of the wiring, so the cost of pointing the graph at the wrong neighbours—the mis-specification a designer actually risks—is never measured.

2. **Capacity is rarely controlled.** Adding a GNN adds parameters and depth as well as relational structure. Without a controlled comparison it is unclear whether the win comes from the graph or from the extra capacity.
3. **Receptive-field alignment is rarely studied.** A GNN of depth  $L$  propagates information across paths of length up to  $L$ . It is intuitive that  $L$  should grow with the graph’s diameter. The general depth/long-range trade-off is well studied for GNNs (over-squashing on long-range tasks (Alon & Yahav, 2021), over-smoothing with depth (Li et al., 2018)), but we found no empirical study of receptive-field-versus-diameter alignment for a GNN inserted into a value-factorisation mixer (CTDE), specifically in the cooperative MARL setting.

**A reusable attribution method, and the tension it resolves.** A graph module changes a model’s architecture and its capacity at once, so a measured win cannot be assigned to the graph’s *structure* without a control—which is why the intuition above is under-tested, and what our design targets. We make the coordination graph the experimental variable and hold the encoder, mixer, optimiser, and parameter count fixed, then read the graph’s contribution off two matched controls: a byte-identical *no-graph* control that isolates structure from capacity, and a density-matched *wrong-graph* control that isolates the right edges from merely more edges. These two controls are the paper’s reusable methodological contribution, and we apply the same design at both endpoints below. They also resolve a standing tension in the literature: DGN and G2ANET report gains in *partially observable* settings but are rarely tested against capacity-matched controls, whereas controlled negatives arise in full-information regimes—two sides of one boundary whose discriminator, we argue, is the task’s information structure, not the algorithm.

**A two-endpoint answer.** The title question is not a yes/no, and we answer it by locating *both* endpoints of a boundary under one controlled harness (Figure 1). At one endpoint—tasks that are full-information or *convention-reducible*—solvable by a fixed shared convention the agents can adopt without exchanging private state, in the offline social-laws sense of Shoham & Tennenholtz (1995) (e.g. COORDGRID’s edge-reward task, where meeting at a pre-agreed rendezvous solves coordination with no communication at all)—a graph-conditioned mixer confers no benefit over a parameter-matched no-graph control (and, in its common unstabilised form, is actively harmful, an optimisation pathology that stabilisation removes, Appendix I), with a capacity-matched control pinning the effect on the graph aggregation rather than on added parameters. At the other endpoint we *construct* the regime the first leaves unexplored: a task in which an agent must act on private information held by one specific partner it cannot observe, so the coordination graph is the only path for that information. There, message passing helps—but only when the communication topology matches the task’s coordination edges; pointing the same channel at the wrong neighbours leaves it at the no-communication floor, and broadcasting to everyone does at most weak, task-incidental routing far below the task-matched graph. The two endpoints *coexist*: the positive result completes the negative one into a single “when does it help” statement rather than overturning it.

**Contributions.** This paper makes the following contributions.

1. **The positive endpoint: when an agent needs private information held by a specific other, the task-matched graph wins decisively—and the win is the structure (§7).** On a pre-registered pair-routing task in which each agent must reach a partner’s *private* goal, the task-matched graph beats all-to-all communication—which carries the partner’s information but must select it—at byte-identical parameters and observations ( $d \approx 5$  at degree-1; Welch/Holm and Mann–Whitney  $p < 10^{-4}$ ), while a density-matched wrong graph floors alongside the no-graph control: the right edges, not more edges. Expressiveness does not substitute for structure (stabilisation-matched learned attention stays near the floor over all-to-all even at  $5\times$  the training budget, while an exploratory multi-head arm gains  $+5.4$  *given* the right graph), and the effect is significant at every  $N=4-10$  (non-monotone), robust to observability, survives attenuated at degree-2, and replicates out of harness in a non-spatial token-matching game. A pre-registered classical baseline extends the claim across mechanism families: a deep coordination graph (Böhmer et al., 2020) matches this result on the true graph and collapses on wrong or dense graphs (§7.7), so the active ingredient is the task-matched *topology*, not the message-passing mechanism. Both tasks are constructed archetypes, and a pre-registered attempt to carry the endpoint onto composed third-

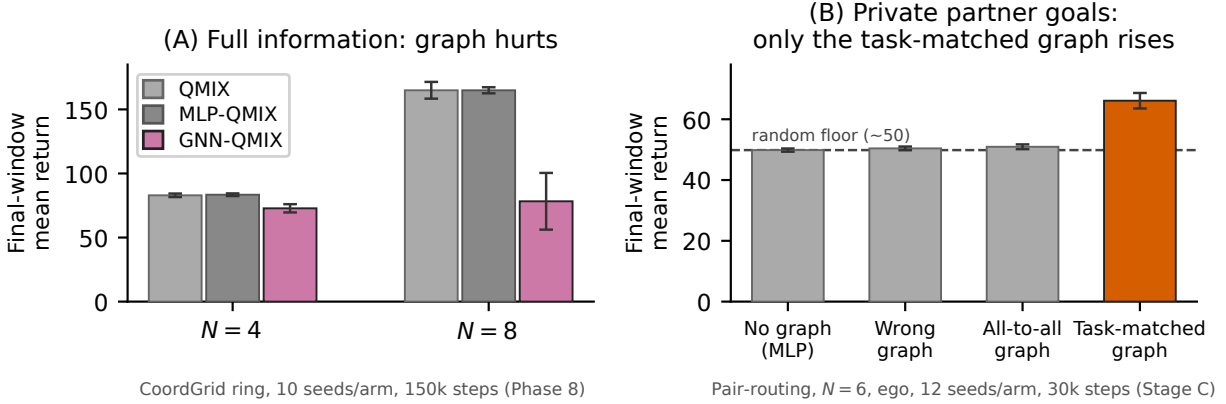


Figure 1: **Both boundary endpoints at a glance.** (A) **Negative endpoint:** on full-information COORDGRID (ring graph) the graph buys nothing—and the standard *unstabilised* GNN-QMIX (capacity-matched, +graph) shown here falls below both QMIX (no graph) and the parameter-matched MLP-QMIX (no graph) control at  $N=4$  and  $N=8$  (10 seeds, 150k steps; 95% CI). That deficit is an optimisation pathology: a *stabilised* GCN recovers to parity with the controls (Appendix I), still without any benefit. (B) **Positive endpoint:** on the pair-routing task, where each agent must act on a partner’s privately held goal, only the task-matched graph rises well above the random floor ( $\approx 50$ ); a density-matched wrong graph and the all-to-all graph stay at or within a point of the floor (12 seeds, 30k steps; 95% CI). The *same stabilised* graph-conditioned architecture is thus inert under full information (parity, panel A via Appendix I) yet a large asset when the task requires routing information the receiver cannot otherwise observe (panel B)—the discriminator is the task’s information structure, not the architecture.

party MPE dynamics failed (§7.9); we therefore scope this claim to task-structured routing under partial information.

2. **The negative endpoint: in full-information / convention-reducible settings the graph confers no benefit—and its common unstabilised form is actively harmful for an optimisation reason, not because of added capacity.** The standard GNN-QMIX is bested by QMIX in both mean return and seed-level variance, even on an edge-defined-reward task whose observations (under the non-ego obs mode used there) already expose neighbour displacements, so message passing is at best redundant; the non-trivial finding is the capacity-matched *identification* of the cause (§6.5: the no-graph MLP-QMIX matches QMIX while GNN-QMIX falls far below both). The unstabilised-graph deficit survives a  $5\times$  longer training budget at  $n=10$  seeds, grows monotonically with team size out to  $N=16$  (distinct from the positive structure effect of contribution 1, which is significant at every  $N$  but non-monotone), reappears under the capacity decomposition on MPE `simple_spread` (where the naive GNN-QMIX-vs-QMIX comparison is null; §6.3), and persists under graph attention—but stabilising the GCN recovers it to parity with the controls (Appendix I), so what survives for the stabilised operator is the weaker, robust *no-benefit* claim.
3. We implement IQL, VDN, QMIX, and GNN-QMIX in a single harness with shared encoder, mixer, optimiser, and exploration schedule (Figure 2B), so the only difference between GNN-QMIX and QMIX is the GNN. To isolate the graph from the capacity it adds (Gap 2) we include MLP-QMIX, a parameter-matched no-graph control (byte-identical parameter count, no neighbour aggregation); and GAT-QMIX, a graph-*attention* variant that tests whether the result is specific to the fixed GCN.
4. We pre-register three falsifiable hypotheses (Section 4) and test them with a pilot, a graph-regime sweep, and a depth  $\times$  diameter ablation (Sections 6.1–6.4).
5. We introduce COORDGRID (Figure 2A), a cooperative gridworld whose coordination graph is a tunable knob (ring, line, complete graph, lattice, Erdős–Rényi). The reward is defined edge-wise over this graph, so the graph is literally the coordination structure rather than a heuristic over a fixed task.

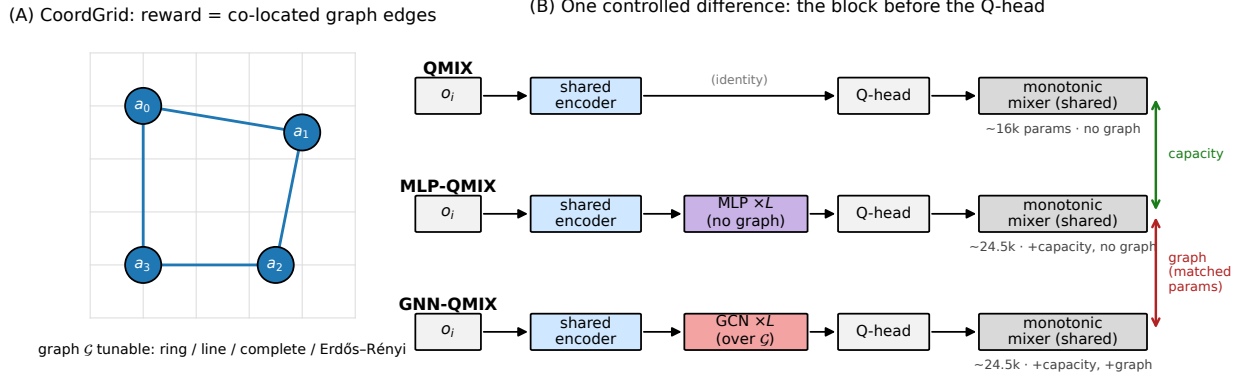


Figure 2: **Setup and controlled comparison.** (A) COORDGRID: agents act on a grid wired by a *tunable* coordination graph  $\mathcal{G}$ ; the reward is the number of graph edges whose endpoints are co-located, so the graph *is* the coordination structure. (B) All algorithms share an identical per-agent encoder and monotonic mixer and differ only in the block inserted before the Q-head. QMIX inserts nothing; GNN-QMIX inserts an  $L$ -layer GCN over  $\mathcal{G}$ ; MLP-QMIX inserts an  $L$ -layer MLP of *identical parameter count* but no graph. GNN-QMIX vs. MLP-QMIX isolates the *graph* (matched parameters); MLP-QMIX vs. QMIX isolates the *capacity*.

6. The depth-diameter alignment heuristic (H3) is falsified in favour of a sharper practitioner rule (§6.4): a hard over-depth cliff means GCN depth should not exceed two in small-team CTDE settings.

## 2 Background and Notation

**Decentralised partially observable Markov decision process (Dec-POMDP).** A cooperative MARL task is a tuple  $\langle \mathcal{N}, \mathcal{S}, \{\mathcal{A}_i\}, P, R, \{\mathcal{O}_i\}, \{O_i\}, \gamma \rangle$ , where  $\mathcal{N} = \{1, \dots, N\}$  are agents,  $\mathcal{S}$  the global state,  $\mathcal{A}_i$  the discrete action set of agent  $i$ ,  $P(s' | s, \mathbf{a})$  the transition kernel,  $R(s, \mathbf{a})$  a shared scalar reward, and  $O_i(s) \in \mathcal{O}_i$  the local observation function. Agents share the discount  $\gamma$  and select actions from  $\mathcal{O}_i$ ; centralised training (with access to  $s$ ) is permitted while execution is decentralised (Oliehoek & Amato, 2016).

**Centralised training with decentralised execution (CTDE) and value factorisation.** Value factorisation methods learn per-agent utilities  $Q_i(o_i, a_i)$  and a centralised mixer that combines them into  $Q_{\text{tot}}$ :

$$Q_{\text{tot}}(s, \mathbf{a}) = f_{\text{mix}}(Q_i(o_i, a_i); s),$$

trained against a Bellman target on the team reward. The decentralised greedy policy  $\pi_i(o_i) = \arg \max_{a_i} Q_i(o_i, a_i)$  recovers the joint greedy action when  $f_{\text{mix}}$  satisfies the Individual-Global-Max (IGM) condition (Son et al., 2019).

**Coordination graph.** We use a coordination graph  $\mathcal{G} = (\mathcal{N}, \mathcal{E})$  over the agents. The formalism was developed in the Guestrin–Koller–Parr factored-MDP line (Guestrin et al., 2001; 2002a; 2003), where an additively factored value function induces a graph over agents (edge  $A_i \rightarrow A_j$  iff  $A_i$ ’s action influences  $A_j$ ’s local payoff term; Guestrin et al., 2002b) and joint actions are computed by variable elimination over that graph; Kok & Vlassis (2004) and Kok & Vlassis (2006) developed the reinforcement-learning treatment, representing the joint  $Q$  over graph edges and selecting joint actions by max-plus payoff propagation. The idea descends from the constraint graph of distributed constraint optimization (Modi et al., 2005; Fioretto et al., 2018) and is the decision-theoretic sparse-coupling model of Melo & Veloso (2011). COORDGRID (Section 5.1) ties the per-step reward to  $\mathcal{E}$  directly: only *edges* contribute reward—a pairwise-factored payoff in the Guestrin / Kok–Vlassis sense—so the coordination structure is not a heuristic about the environment but a literal description of it. GNN-QMIX takes  $\mathcal{G}$  as side information; IQL/VDN/QMIX do not.

**Two uses of “coordination graph.”** The term names two distinct objects, and we are explicit about which we study. **(a)** The *classical* coordination graph is a factored-payoff structure over which a *joint* action is computed exactly by variable elimination or max-plus payoff propagation (Guestrin et al., 2003; Kok & Vlassis, 2006); DCG (Böhmer et al., 2020) inherits this reading in a deep setting. **(b)** We supply the *same edge set* as a message-passing substrate for a GNN inside an otherwise-unchanged monotonic mixer with per-agent arg max execution—no variable elimination, no joint-action inference over the graph. Our *primary* claims concern object (b): whether handing a fixed edge set to a learned deep aggregator helps. We do, however, also test object (a) directly—as a pre-registered baseline (§7.7), we run DCG (Böhmer et al., 2020), the neural max-plus descendant of the classical solver, over the same factored payoff, to ask whether payoff propagation reproduces object (b)’s routing result. It does at 1-hop and shares its structure-dependence, which is why we frame our positive finding as a property of the task’s topology rather than of any one mechanism.

### 3 Related Work

**Value-decomposition MARL.** IQL (Tan, 1993) ignores agent interaction and trains independent Q-learners on the shared reward, which is biased but a useful no-coordination baseline. VDN (Sunehag et al., 2018) sums per-agent utilities. QMIX (Rashid et al., 2018; 2020) learns a monotonic state-conditioned mixer via a hypernetwork, enforcing  $\partial Q_{\text{tot}}/\partial Q_i \geq 0$  so decentralised greedy execution is consistent with the centralised argmax. QTRAN (Son et al., 2019) and MAVEN (Mahajan et al., 2019) relax or extend the monotonicity assumption; QPLEX (Wang et al., 2021) reformulates it through a duplex dueling architecture. Beyond value-factorisation, MAPPO (Yu et al., 2022) shows that vanilla PPO with centralised critics is a surprisingly strong cooperative baseline; we restrict scope to value-decomposition methods to keep the architectural contrast with GNN-QMIX clean.

**Learned and pre-specified inter-agent communication.** Pre-dating the graph-MARL literature, RIAL/DIAL (Foerster et al., 2016) and COMMNET (Sukhbaatar et al., 2016) learn pairwise or all-to-all communication channels between agents. These methods can be viewed as implicitly learning a (typically dense) coordination graph rather than taking one as input. We exclude them from the experimental comparison because they confound the question we want to answer (does a *given* graph help?) with the orthogonal question (can the agents learn a useful graph?).

**Graph-based MARL.** DGN (Jiang et al., 2020) applies graph convolution over a  $k$ -NN agent graph, evaluated on both discrete and continuous cooperative tasks. G2ANET (Liu et al., 2020) uses attention to abstract a game graph. DEEP COORDINATION GRAPHS (Böhmer et al., 2020) factor  $Q_{\text{tot}}$  over a hyperedge structure. GRAPHMIX (Naderializadeh et al., 2020) interleaves a GNN with a QMIX-style monotonic mixer, closest in spirit to the GNN-QMIX baseline we evaluate here. Our GNN-QMIX is a deliberately *minimal* instantiation of this GraphMIX-style “GNN + monotonic mixer” family rather than a re-implementation of GraphMIX’s full pipeline: it takes the coordination graph as an *external input* (rather than learning it), inserts a fixed-GCN encoder *before* an otherwise-unchanged QMIX mixer, and leaves the mixer untouched—so the GCN is the only structural variable, which is what makes the wrong-graph/all-to-all contrasts clean isolators (and is not intended as a strawman: it is chosen to isolate the GCN, not to weaken the baseline).

It is useful to separate these methods along a *fixed-vs-learned-graph* axis, because that axis is exactly what our controls exploit. At one end, DCG and our GNN-QMIX/GraphMIX take the interaction graph as an explicit input. DGN sits between: its graph is a *fixed*  $k$ -NN-by-proximity rule, recomputed as agents move but not learned. At the other end the graph is *inferred*—G2ANET’s learned attention graph, DICG (Li et al., 2021), which infers a dynamic coordination graph for a GNN, and the context-aware sparse coordination graphs of CASEC (Wang et al., 2022) and NON-LINEAR COORDINATION GRAPHS (Kang et al., 2022). Of these, CASEC is the closest *deep* qualitative precedent for our headline: it argues and shows that *sparse* coordination graphs outperform dense/static ones. But “sparse beats dense” is much older: Kok & Vlassis (2004) established it for tabular payoff propagation—representing the joint  $Q$  only over graph edges—with known factored payoffs, and Melo & Veloso (2009) showed agents can *learn* where the sparse interactions are without a pre-given model. We credit that “sparse beats complete” is thus long-established; our delta

is the controlled *attribution* of that effect inside a deep function approximator under partial observability and private state, at byte-matched capacity and with a wrong-graph control—none of which the tabular precedents run. CASEC (and the learned-graph line generally) *learns* the sparse topology and measures task return, so its gain entangles sparsity, learned selection, and capacity. We instead *fix* the topology and contrast a task-matched graph against a *density-matched wrong* graph and all-to-all at byte-identical parameters and observations—the density-matched wrong graph is what isolates the effect to *which* edges rather than to sparsity or to the act of learning a graph. Even DCG, the closest fixed-graph relative, defines payoffs over *given* hyperedges but never runs a wrong-graph control, so it cannot separate topology-correctness from the mere presence of a graph. We engage this lineage directly rather than only by contrast: we run DCG (Böhmer et al., 2020)—the neural max-plus descendant of Kok & Vlassis (2006)—as a pre-registered baseline under our own true/wrong/complete isolators (§7.7), and find its 1-hop behaviour shares the same structure-dependence as the GNN’s. More generally these methods combine three design choices (a graph, a message-passing mechanism, and a value mixer) in ways that make it difficult to attribute observed gains to any single component; our study isolates the GNN encoder by inserting it into an otherwise-identical QMIX architecture.

**Recent coordination-graph and relational MARL (2023–2026).** The learned-topology line has continued past CASEC. GACG (Duan et al., 2024a) infers *group-level* (higher-order) coordination edges, and LTS-CG (Duan et al., 2024b) learns a latent *temporally sparse* graph; both report gains from sparser learned topology and so inherit the same attribution gap we target—sparsity, learned selection, and capacity move together, so a return improvement cannot be credited to topology alone. EXPOCOMM (Li et al., 2025) reaches a conclusion adjacent to our headline from the opposite direction: small-diameter *exponential* communication graphs scale better than all-to-all broadcast, reinforcing that *which* edges exist matters more than how many—though it designs the topology for scalability rather than isolating topology-correctness against a wrong-graph control. Closest in spirit, Utke et al. (2025) ask directly when *relational* state abstraction helps cooperative agents and find it improves sample efficiency on spatially structured tasks; they use a learned relational critic and measure return, however, and run neither a density-matched wrong-graph nor a parameter-matched no-graph control. Our positioning relative to this lineage is therefore specific rather than a claim of first-ever: Kok & Vlassis (2004) and Kok & Vlassis (2006) established that sparse task structure beats dense for tabular payoff propagation with *known* payoffs; our contribution is the byte-matched-capacity isolation of that structure effect inside a deep function approximator under partial observability and private state, together with the density-matched wrong-graph control that separates *which* edges carry the effect from sparsity, from learned graph selection, and from the act of having a graph at all. That specific combination of controls is, to our knowledge, what the graph-MARL literature through 2026 leaves open, and is the gap this study fills.

**Communication under partial observability.** A parallel line of work motivates inter-agent message passing precisely by partial observability: when an agent cannot see what it needs, a learned channel can carry it. COMMNET (Sukhbaatar et al., 2016) and DIAL (Foerster et al., 2016) learn such channels; DGN (Jiang et al., 2020) and G2ANET (Liu et al., 2020) make the channel graph-structured (a fixed  $k$ -NN graph and a learned attention graph, respectively). A closely related line argues specifically that *targeted* communication beats one-size-fits-all broadcast: TARMAC (Das et al., 2019) learns signature-based targeted messages, IC3NET (Singh et al., 2019) learns *when* to communicate, and ATOC (Jiang & Lu, 2018) learns an attentional communication group. This qualitatively anticipates our finding that all-to-all is worse than the right targeted edges—but those works *learn* the targeting and run no density-matched wrong-graph or parameter-matched no-graph control. We revisit this in §7.6: a learned attention head over all-to-all does not recover the matched-graph advantage *within our training budget*, which is consistent with—not contradictory to—TARMAC/ATOC succeeding, since those methods invest substantial training in learning to target, and is not a claim that attention cannot learn the targeting in principle. Our delta is distinct and complementary: we *fix* the topology and contrast a task-matched graph against a density-matched wrong graph and all-to-all at byte-identical parameters, isolating the contribution of *structure* from that of the channel and of the learned routing—a control these works do not run. The positive endpoint we identify sits squarely in this regime—private information that no agent can observe locally—and is what reconciles it with our negative result: a coordination graph earns its keep exactly when the task makes some agent’s information unavailable

to the others, and not in the full-information settings where prior controlled comparisons (and ours) find it inert. Where these methods entangle “does a graph help?” with “can the agents *learn* a useful graph?”, we hold the graph fixed and vary only its *topology* relative to the task, which isolates the contribution of structure from that of the channel.

**Foundational GNNs.** We use a textbook graph convolutional network (Kipf & Welling, 2017); Veličković et al. (2018) and Xu et al. (2019) characterise alternatives. Battaglia et al. (2018) surveys the broader graph-network family.

**Evaluation methodology.** Our protocol follows the recommendations of Henderson et al. (2018) and Agarwal et al. (2021): multiple seeds, confidence intervals, an explicit sample-efficiency metric, and Holm-corrected pairwise tests in place of  $p < 0.05$  readings off a forest plot. We additionally report effect sizes (mean differences) so readers do not have to infer them from CI overlap. Controlled comparisons of value decomposition versus independent learning already exist: Papoudakis et al. (2021) benchmark tuned IQL/VDN/QMIX across MPE/LBF/SMAC and find independent learning *competitive* on the fully-observable MPE/LBF tasks while value decomposition wins where coordination is genuinely required—squarely the territory of our negative endpoint. They do not, however, include a graph-conditioned mixer or a parameter-matched no-graph control; our contribution is to isolate the graph *aggregation* itself and attribute the penalty to it.

**Benchmarks.** The Multi-agent Particle Environment (Lowe et al., 2017) and PettingZoo (Terry et al., 2021) provide canonical cooperative tasks; SMAC (Samvelyan et al., 2019) is a heavier StarCraft micro-management benchmark. We use COORDGRID as the primary test bed because it lets us *set* the coordination graph rather than infer it, and report a restricted MPE replication in Section 6.3.

## 4 Hypotheses

We test three pre-registered hypotheses:

### H1 (structure beats no-structure):

On a cooperative task whose reward is graph-edge-defined, GNN-QMIX achieves a higher final return and crosses a fixed performance threshold sooner than IQL, VDN, and QMIX when the underlying coordination graph is sparse and structured.

### H2 (structure > matched-density random):

The advantage of GNN-QMIX over QMIX is larger on a structured graph (ring) than on an Erdős–Rényi graph of the same edge density. This rules out the explanation that GNN-QMIX wins simply by having more inputs.

### H3 (depth–diameter inverted-U):

Final return as a function of GNN depth  $L$  peaks near  $L \approx d$ , where  $d$  is the graph diameter, and degrades when  $L$  is either substantially smaller (insufficient receptive field) or substantially larger (over-squashing, optimisation noise). *Falsifiability criterion (pre-registered)*: for each diameter  $d$  tested, we declare a per-row match if (a) the mean depth–return curve is non-flat (relative range  $(\max - \min)/\max \geq 0.10$ ), and (b)  $|L^* - d| \leq 1$  where  $L^*$  is the empirical argmax depth. We declare the family-level H3 confirmed if at least  $\lceil 2n/3 \rceil$  of the  $n$  tested diameters pass the per-row criterion.

## 5 Experimental Design

### 5.1 The CoordGrid environment

COORDGRID is a cooperative gridworld parameterised by the team size  $N$ , the grid side  $G$ , the episode length  $T$ , and a coordination graph  $\mathcal{G}$ . The grid is toroidal. Each agent occupies a cell and chooses one of

five actions per step: stay, up, down, left, right. The reward at step  $t$  is

$$r_t = \sum_{(i,j) \in \mathcal{E}} \mathbf{1}[p_i^{(t)} = p_j^{(t)}],$$

where  $p_i^{(t)}$  is agent  $i$ 's grid position at  $t$ . Reward is therefore the count of *graph edges* whose endpoints are co-located—a pairwise-factored payoff over  $\mathcal{G}$  in the Guestrin / Kok–Vlassis sense (Guestrin et al., 2002a; Kok & Vlassis, 2004), decomposing exactly into per-edge terms. Agents not linked by an edge have no reason to coordinate spatially: the graph is literally the coordination structure. Each agent observes its own normalised position, the relative displacement to each of its graph neighbours (zero-padded to a fixed slot count), and an agent-id one-hot. The global state used by the mixer is the concatenation of all agents' normalised positions.

**Tunable graph regimes.** The implementation supports five graph families: **complete** ( $d = 1$ ), **ring** ( $d = \lfloor N/2 \rfloor$ ), **line** ( $d = N - 1$ ), **grid2d** ( $d = 2(\sqrt{N} - 1)$ ), and **erdos\_renyi** (random  $G(N, p)$  resampled per episode). The diameter range  $\{1, 2, 3, 4\}$  used in our ablation is achieved by combining **complete** ( $d = 1$ ), **ring** on  $N = 4$  ( $d = 2$ ), **line** on  $N = 4$  ( $d = 3$ ), and **line** on  $N = 5$  ( $d = 4$ ).

## 5.2 Algorithms

The five core algorithms below (IQL, VDN, QMIX, GNN-QMIX, and the MLP-QMIX control; a sixth, the graph-attention variant GAT-QMIX, is introduced for the robustness check in §6.5) share a per-agent Q-network, an MLP of the form  $\mathcal{A}_i \mapsto \text{ReLU}(\text{Linear}_{64}) \rightarrow \text{ReLU}(\text{Linear}_{64}) \rightarrow \text{Linear}_{|\mathcal{A}_i|}$  with parameters shared across agents and an agent-id one-hot appended to the observation. They share a  $5 \times 10^{-4}$  Adam optimiser,  $\gamma = 0.99$ , replay capacity  $5 \times 10^4$ , batch size 32, target hard updates every 200 gradient steps, Huber loss with Double-DQN targets (van Hasselt et al., 2016), and gradient norm clipping at 10.

- IQL: per-agent TD on the shared reward, no mixer.
- VDN:  $Q_{\text{tot}} = \sum_i Q_i(o_i, a_i)$ .
- QMIX:  $Q_{\text{tot}} = f_{\text{mix}}(s)(Q_i)$  where  $f_{\text{mix}}$  is the standard hypernet mixer with absolute-value weights producing non-negative monotonicity, embedding dimension 32.
- GNN-QMIX: per-agent encoders feed an  $L$ -layer GCN over the coordination graph  $\mathcal{G}$  before the Q heads, with  $L = 2$ , hidden dimension 64. The mixer is *identical* to QMIX; the GCN is the only structural change.
- MLP-QMIX (parameter-matched no-graph control): identical to GNN-QMIX in every respect except that the  $L$ -layer GCN is replaced by an  $L$ -layer MLP of the same per-layer shape, i.e. the neighbour-aggregation step  $\hat{A}H$  is removed, leaving  $\text{ReLU}(HW)$ . MLP-QMIX has a byte-identical parameter count to GNN-QMIX at matched  $(L, \text{width})$ , so the only difference between the two is whether information crosses the coordination graph.

**Execution cost: decentralised-with-local-communication.** One asymmetry the return comparison does not price is worth stating up front. The no-graph arms (IQL/VDN/QMIX/MLP-QMIX) execute with *zero* runtime communication: each agent acts from its own observation. GNN-QMIX (and the attention variants) instead run an  $L$ -layer message pass over  $\mathcal{G}$  at *every* timestep, so each agent must exchange embeddings with its  $L$ -hop neighbours to compute its own  $Q_i$ . “Decentralised execution” for the graph arms therefore means decentralised-*with*-local-communication, and the graph arm pays an  $L$ -hop per-step bandwidth cost the MLP control does not. At the negative endpoint this only strengthens the conclusion—the graph arm buys no return while incurring a communication cost the no-graph arm avoids—so we do not attempt to charge for it in the metrics; we flag it because the “decentralised execution” label is not equivalent across arms.

**Why this matters: isolating graph from capacity.** The mixer, optimiser, exploration schedule and per-agent encoder *stem* are identical across QMIX, GNN-QMIX, and MLP-QMIX. GNN-QMIX inserts



an  $L$ -layer GCN of width 64 between the encoder and the Q head, adding  $L \cdot (64^2 + 64) \approx 4.2L$  thousand parameters that QMIX does not have (e.g.  $\sim 8.3k$  at  $L = 2$ , against  $\sim 16k$  for QMIX). A comparison of GNN-QMIX against QMIX alone therefore confounds two explanations: the relational inductive bias of the *graph*, or the extra *capacity*. MLP-QMIX removes the confound by construction: it carries exactly the same extra parameters but no graph. This yields a three-way decomposition (verified to identical parameter counts in Section 6.5): QMIX (no capacity, no graph), MLP-QMIX (capacity, no graph), GNN-QMIX (capacity and graph). The fully-identified test of “does the graph help?” is GNN-QMIX vs. MLP-QMIX at matched capacity; MLP-QMIX vs. QMIX separately measures whether the capacity alone matters. The depth-vs-diameter ablation (Section 6.4, H3) additionally isolates depth effects within GNN-QMIX.

The full shared training loop (CTDE, off-policy, Double-DQN; identical across algorithms modulo the IQL per-agent loss) is given as Algorithm 1 in Appendix A.

### 5.3 Evaluation protocol

Each run trains for a fixed number of environment steps and logs one CSV row per episode (return, length,  $\epsilon$ , mean loss, gradient norm, wall-clock). We report two metrics:

1. **Final-window return:** mean return over the last 10% of episodes of a run. This is a coarse capacity measure. (The Stage C/D cells of Section 7 use the last-20% window pre-registered for them; the difference is disclosed and checked in that section’s preamble.)
2. **Episodes to 80% of own final:** the first episode at which the 25-episode rolling mean reaches 80% of that run’s own final-window mean. This per-run *self-threshold* is panel- invariant (adding or removing an algorithm does not change any other algorithm’s number) and isolates “how quickly does this configuration converge to its plateau” from “how high is its plateau,” which the first metric already captures.

Across-seed aggregates use the sample mean and the Student- $t$  95% confidence interval. Pairwise algorithm comparisons use Welch’s two-sample  $t$ -test as the primary and Mann–Whitney  $U$  as a non-parametric robustness check, with Holm–Bonferroni step-down correction. We define the multiple-test families explicitly: within a single condition (fixed  $N$ , fixed graph) Holm corrects across all algorithm pairs—6 pairs in the four-algorithm phases (1–4) and 10 pairs in the five-algorithm phases (3 and 8, which add MLP-QMIX); Phase 8’s decisive conclusions additionally use the separately declared three-contrast decisive family (§6.5); H1 (within-condition GNN-QMIX vs. QMIX) is one one-sided test per condition and is not corrected within H1; H2 (interaction across graph regimes) is a single one-sample  $t$  on the per-seed difference-of-differences  $\Delta_{\text{ring}} - \Delta_{\text{ER}}$  against zero and is therefore uncorrected. Confidence intervals use the Student- $t$  95% interval across the 10 seeds run per condition; we report effect sizes (mean differences) alongside  $p$ -values so readers do not have to back-fit power from CI overlap. Number of seeds and step budget per phase are listed in Table 8; deviations from the originally pre-registered budget were forced by compute constraints and are noted explicitly.

## 6 Results

**Roadmap.** The negative-endpoint evidence arrives in five experiments, named by the identifiers of the project’s registered experiment log: Phase 1 is the *pilot* (harness sanity check), Phase 2 the *scale-and-graph-regime sweep* (H1, H2), Phase 3 the *MPE external-validity replication*, Phase 4 the *depth-diameter ablation* (H3), and Phase 8 the *capacity control* that identifies the cause and rules out undertraining. The numbering is non-contiguous because the intermediate identifiers were infrastructure and analysis stages that produce no reported comparisons; we keep the log’s numbering so that the paper, the pre-registration documents, and the artifact’s `results/` directories agree.

### 6.1 Phase 1: Pilot

**Setup.** 4 agents, ring graph (diameter  $d = 2$ ), 10 seeds,  $5 \times 10^4$  environment steps per run. This phase is a harness sanity check: per `docs/PHASES.md`, the acceptance criterion is that the coordinated baselines (VDN,

QMIX) clearly outperform IQL on a task with obvious coordination demand, and GNN-QMIX runs to completion.

**Findings.** Figure 15 and Table 17 show the per-algorithm learning curves and final-window returns. Three results:

1. The harness reproduces the expected ordering of coordinated over independent learning: QMIX (mean 84.02, 95% CI [83.41, 84.62]) > VDN (mean 66.02, CI [62.57, 69.48]) > IQL (mean 34.62, CI [32.61, 36.64]).<sup>1</sup> The IQL vs. VDN gap is Holm-significant ( $p_{\text{Holm}} < 0.001$ ) and the IQL vs. QMIX gap strongly so ( $p_{\text{Holm}} < 0.001$ ). The Phase-0 acceptance criterion is met.
2. GNN-QMIX is markedly *worse* than QMIX on this condition (mean 66.02 vs. 84.02), and the gap is not attributable to capacity overhead (GNN-QMIX has the extra GCN parameters; if anything, that would predict a small *advantage* due to added expressiveness). Instead, GNN-QMIX exhibits elevated seed-level variance: its 95% CI spans [57.11, 74.92], more than an order of magnitude wider than QMIX’s [83.41, 84.62], with the weakest seeds stalling in the low-return regime of IQL (Figure 15).
3. This finding is the first sign that “does graph structure help?” is not a simple yes/no. On the easy case (small team, small diameter, abundant coordination signal), the simpler QMIX mixer is both more accurate and more stable. The remainder of the paper asks under what conditions the extra graph machinery in GNN-QMIX does pay for itself.

## 6.2 Phase 2: Scale and graph regime (H1, H2)

**Setup.**  $N \in \{4, 8\} \times \{\text{ring, Erdős-Rényi with matched density}\} \times 4 \text{ algorithms} \times 10 \text{ seeds}$  at  $3 \times 10^4$  env steps per run. We shorten the pre-registered  $2 \times 10^5$  steps and drop the  $N=16$  cell—the original  $N \in \{4, 8, 16\} \times 5\text{-seed} \times 2 \times 10^5$  design needed  $\sim 24$  M env steps, beyond the single-CPU envelope we committed to (commodity CPU, no GPU)—while *raising* the seed count to 10. See Table 8.

**Findings (H1, H2).** H1 (GNN-QMIX > QMIX on a structured graph) is *not supported*: GNN-QMIX is below QMIX in every cell (one-sided  $p = 1.0$ ; Table 20). H2 (structure > matched-density random, tested as the difference-of-differences  $\Delta_{\text{ring}} - \Delta_{\text{ER}}$ ) is *mixed*: it is supported at  $N=4$  (DiD +26.9, one-sided  $p < 0.001$ ) but reverses and is non-significant at  $N=8$  (DiD −10.0,  $p = 0.70$ ; Table 21). We therefore declare H2 mixed—the structured-vs-random gap is not monotone in team size—rather than supported. Per-condition returns and both tests are in Appendix L. The shortened budget here cannot be accused of underpowering a positive H1 into a null: the capacity-controlled Phase 8 sweep at  $5 \times$  this budget (150,000 steps; Section 6.5) reaches the *same* verdict with the gap *growing*, so longer training does not rescue H1.

## 6.3 Phase 3: External validity on MPE `simple_spread`

Every number so far comes from COORDGRID, where the coordination graph is the experimental instrument. To test whether the identified graph penalty is an artefact of that one synthetic environment, we replicate the entire capacity control on a canonical cooperative benchmark: PettingZoo `simple_spread`, where  $N$  agents cover  $N$  landmarks while avoiding collisions. We change *only* the environment: the five algorithms, the locked hyperparameters, the 150,000-step / 10-seed budget, and the Welch / Holm / Mann–Whitney protocol are identical to the capacity-control protocol of Section 6.5. Two scope limits are stated plainly rather than footnoted. First, this executes at 15% of the pre-registered  $\geq 10^6$ -step budget (Table 8), a compute-forced reduction. Second, at this budget the QMIX mixer family has not converged on `simple_spread`: the mixer-free IQL and VDN baselines lead it outright (Table 10). What this phase can and does test is therefore the *within-family decomposition at a fixed budget*—whether the graph helps or hurts relative to its own matched control—not converged final performance. `simple_spread` exposes no graph, so GNN-QMIX runs on a  $k$ -nearest-neighbour graph over agent positions ( $k=2$ , the DGN convention). At  $N=3$  this graph is necessarily complete (each agent links to both others);  $N=6$  is the genuinely sparse, larger-team test. The decomposition table (Table 9) is in Appendix E.

<sup>1</sup>VDN and GNN-QMIX round to the same 66.02 at two decimals (66.023 and 66.015 respectively; Table 17); this is a coincidence of two independent runs, not a duplicated row—their CIs differ markedly ([62.57, 69.48] vs. [57.11, 74.92]).



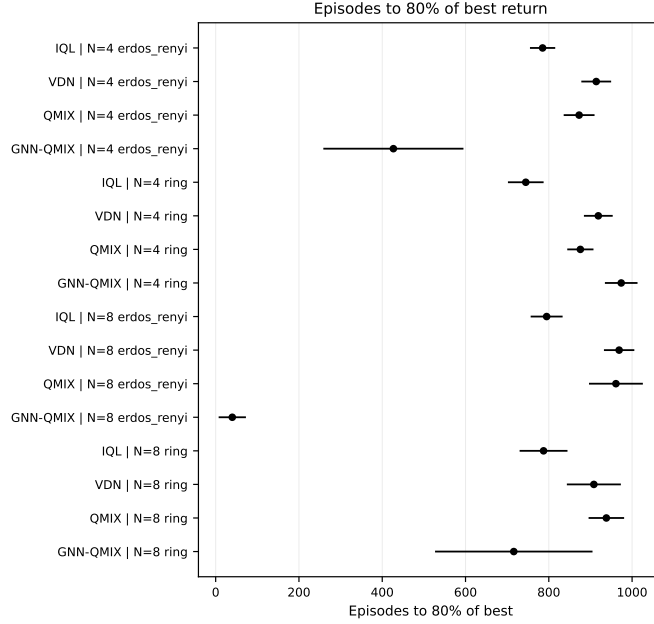


Figure 3: Phase 2 forest plot: episodes to 80% of each run’s *own* final-window return, per algorithm  $\times$  condition (the panel-invariant self-threshold metric of Section 5.3). Lower is better. Bars are 95% Student- $t$  CIs across seeds. Per-condition returns and the H1/H2 hypothesis tests are in Appendix L (Tables 18, 20, 21).

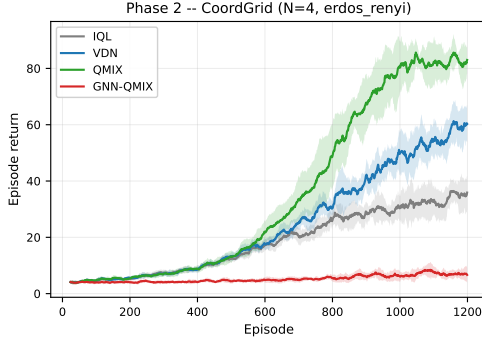

(a)  $N = 4$ , Erdős–Rényi (matched density).

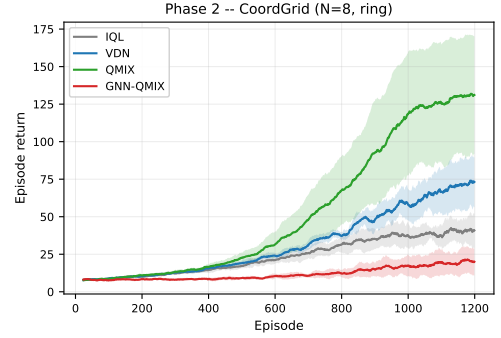

(b)  $N = 8$ , ring.

Figure 4: Phase 2 per-condition learning curves, the two most extreme cells of the scale/graph sweep. GNN-QMIX flat-lines near random-play return on the  $N=4$  Erdős–Rényi cell, while QMIX climbs to  $\sim 130$  on the  $N=8$  ring, its strongest Phase 2 cell (cross-seed mean of the rolling mean peaks at 131.9; the best individual seeds pass 150).

**The graph penalty replicates, and the control is what reveals it.** At  $N=3$  all three decisive contrasts are null (graph effect  $+2.0$ , 95% CI  $[-7.0, +10.9]$ ; capacity  $+0.6$ , CI  $[-4.9, +6.1]$ ; both  $p > 0.6$ ): on a small team with a complete graph we detect no effect in either direction—though the intervals are wide enough that this is a no-detection at  $n=10$ , not an equivalence claim. At  $N=6$  the COORDGRID pattern reappears: the graph effect is  $-20.8$  (Cohen’s  $d = -1.46$ ), significant under both Holm ( $p = 0.014$ ) and Mann–Whitney ( $p = 0.009$ ). The naive GNN-QMIX-vs-QMIX comparison is *not* significant here (net  $-6.2$ ,  $p = 0.41$ ): a single-comparison study would call the graph harmless. The control explains why: the extra parameters *appear to help* here (capacity  $+14.6$ ,  $d = +1.03$ ; Mann–Whitney  $p = 0.045$ , marginal after Holm—suggestive rather than confirmed, and we lean on it only as arithmetic), nearly cancelling the graph

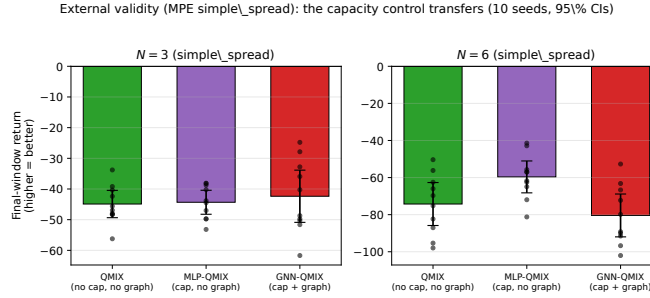


Figure 5: External validity on MPE `simple_spread` (10 seeds, 95% CIs; less negative is better). At  $N=6$ , MLP-QMIX (matched parameters, no graph) sits above QMIX while GNN-QMIX falls below both: the positive capacity effect and the negative graph effect the decomposition (Table 9) separates.

Table 1: H3 (depth–diameter alignment) per-diameter test, pre-registered criteria: (a) the depth curve must be non-flat (relative range  $\geq 10\%$  of peak), AND (b) the argmax depth  $L^*$  must satisfy  $|L^* - d| \leq 1$ . Per-diameter passes: 1/3.

| $d$ | $L^*$ (argmax) | Peak return | rel. range | pass |
|-----|----------------|-------------|------------|------|
| 1   | 3              | 6.77        | 0.09       | ×    |
| 2   | 2              | 16.03       | 0.72       | ✓    |
| 3   | 1              | 20.71       | 0.73       | ×    |

penalty (+14.6+−20.8  $\approx$  −6.2). Only MLP-QMIX separates the two, exposing a graph liability the headline comparison masks: on a standard benchmark, the confound this paper warns about.

**What transfers, and what does not.** The graph penalty grows with team size (null at  $N=3$ ,  $d = -1.46$  at  $N=6$ ), mirroring COORDGRID. One effect is environment-specific: capacity is inert on COORDGRID but helpful on `simple_spread`, itself evidence that the controlled decomposition is necessary, since “GNN vs. no-GNN” means different things on different tasks. Destabilisation is milder here (GNN-QMIX/MLP-QMIX SD ratio  $\sim 1.3\text{--}2.2\times$  vs. roughly an order of magnitude on COORDGRID), so we do not claim it as general. Per-condition curves and the full five-algorithm table are in Appendix E.

#### 6.4 Phase 4: Depth–diameter ablation (H3)

**Setup.** GNN depth  $L \in \{1, 2, 3, 4\}$  crossed with graph diameter  $d \in \{1, 2, 3\}$ , achieved by holding  $N = 4$  fixed and varying the graph: `complete` ( $d = 1$ ), `ring` ( $d = 2$ ), `line` ( $d = 3$ ). Ten seeds,  $2 \times 10^4$  env steps per run.  $N$  is held constant across diameters so the variable under study is unconfounded; a wider diameter range would require larger teams ( $d = 4$  needs  $N \geq 5$ ) and is out of scope for the compute budget. `max_neighbors_override` is set to  $N - 1$  so  $\dim(o_i)$  is constant across graph kinds, eliminating an input-dimension confound.

**Predictions (pre-registered, from H3).** For each diameter  $d$  we predict the row-wise argmax of the final-window return to lie within  $\pm 1$  of  $d$ . Concretely:  $d = 1 \Rightarrow L^* \in \{1, 2\}$ ;  $d = 2 \Rightarrow L^* \in \{1, 2, 3\}$ ;  $d = 3 \Rightarrow L^* \in \{2, 3, 4\}$ . Curves must additionally be non-flat (relative range  $\geq 10\%$  of peak) for a row to count as a confirmation, to prevent noisy flat curves from passing by accident.

**Findings.** Figure 6 reveals a cleaner and more concerning pattern than H3 predicted:

1. **H3 is not confirmed at the family level** (1/3 diameters pass). Only the ring ( $d = 2$ ) shows the predicted argmax-at- $L = d$  behaviour ( $L^* = 2$ , non-flat: pass). The complete graph ( $d = 1$ ) is essentially flat in  $L$  (relative range 9%, below the pre-registered 10% non-flatness floor—which is exactly why it fails the per-row criterion) and the line ( $d = 3$ ) shows the *opposite* of the prediction:  $L^* = 1$ , with a monotone decrease as  $L$  grows.

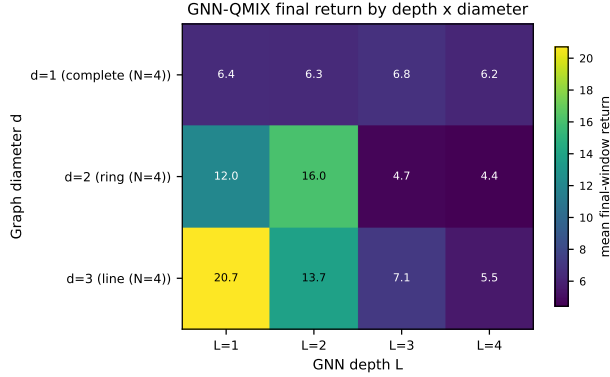


Figure 6: Phase 4: GNN-QMIX final-window mean return as a function of GNN depth  $L$  and coordination graph diameter  $d$ . Cells along the diagonal correspond to depth–diameter alignment ( $L \approx d$ ), the H3 prediction. Outcome: H3 is *not* confirmed at the family level (1/3 diameters pass); on the structured diameters ( $d = 2, 3$ ) the two rightmost columns ( $L = 3, 4$ ) collapse—an over-depth cliff—while the complete graph ( $d = 1$ ) is flat in  $L$ .

2. Reading the heatmap column-wise rather than row-wise exposes a sharp *over-depth cliff* on the structured diameters:  $L = 3$  and  $L = 4$  collapse on  $d \in \{2, 3\}$ , while the complete graph ( $d = 1$ ) stays flat in  $L$ . Mean returns at  $L \in \{3, 4\}$  are 4.4–7.1 across the grid, while  $L \in \{1, 2\}$  deliver 6.3–20.7. Whatever benefit additional message-passing layers contribute in principle, on the structured graphs it is dominated by an optimisation or over-squashing penalty that kicks in immediately past  $L = 2$  in this regime.
3. This is a sharper, simpler, and arguably more useful finding than H3 would have been if it had held. The practitioner rule is not “set  $L \approx d$ ,” but rather “do not exceed  $L = 2$  in a setting like ours, a small team with small replay buffer and seed budget, on tasks whose diameter is already small.” Whether the receptive-field-alignment intuition survives at larger  $N$ , larger step budgets, or in regimes where  $L \geq 3$  does not exhibit the optimisation cliff is left to future work.

## 6.5 Phase 8: Capacity control and the undertraining confound

The Phase 1–2 comparison of GNN-QMIX against QMIX leaves two explanations open, both flagged in our own limitations: the gap could be the graph, or it could be the  $\sim 8.3\text{k}$  extra parameters the GCN adds; and the short ( $3 \times 10^4$ -step) budget could have undertrained the larger model. Phase 8 closes both. We run the parameter-matched no-graph control MLP-QMIX (Section 5.2) alongside QMIX and GNN-QMIX on the decisive **ring** cells at  $N \in \{4, 8\}$ , for 10 seeds at 150,000 env steps each,  $5\times$  the Phase 2 budget and double the seed count Agarwal et al. (2021) recommend.

**Setup.** Five algorithms  $\times \{N=4, N=8\}$  ring  $\times 10$  seeds at 150,000 steps. GNN-QMIX and MLP-QMIX use the locked  $L=2$ , width-64 encoder and are verified to have identical parameter counts, so the only difference is the neighbour-aggregation step. Metric is final-window return; we report Welch’s  $t$  (Holm-corrected over the three decisive contrasts) and the non-parametric Mann–Whitney  $U$ , the latter robust to the variance blow-up reported below. Figure 7 summarises the result (full per-cell numbers in Table 22, Appendix M); the findings below state the decisive values inline.

**Finding 1: the penalty is the graph, not capacity, and it is significant.** MLP-QMIX matches QMIX in mean at both scales (capacity gap 0.0 at  $N = 8$ ; negligible at  $N = 4$ ), so the extra parameters alone add nothing on average. For completeness: a rank test does detect a small MLP-QMIX-below-QMIX median deficit at  $N=8$  (Mann–Whitney  $p = 0.045$ ;  $\sim 2$  points, under 1.5% of QMIX’s return, driven by equal means with unequal spreads)—an order of magnitude smaller than the graph effect, so we describe capacity as approximately inert rather than exactly zero. GNN-QMIX (the standard, unstabilised GCN), with identical parameters but the graph added, is far worse: the graph effect is  $-10.6$  at  $N = 4$  and  $-86.6$  at  $N = 8$  (Cohen’s  $d = -3.2$  and  $-3.9$ ). Both decisive contrasts are significant under the non-parametric

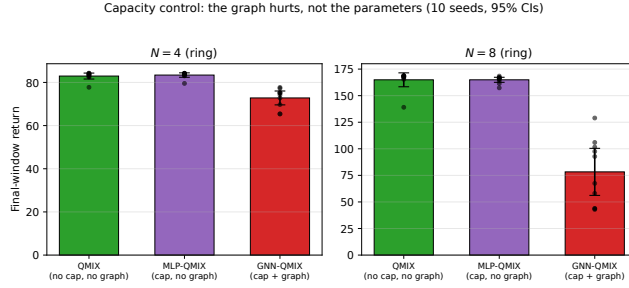


Figure 7: Capacity control on COORDGRID ring. MLP-QMIX (same parameter count as GNN-QMIX, no graph) tracks QMIX, while GNN-QMIX falls far below both at both team sizes: the penalty is the graph aggregation, not the added capacity. Means over 10 seeds; 95% Student- $t$  CIs.

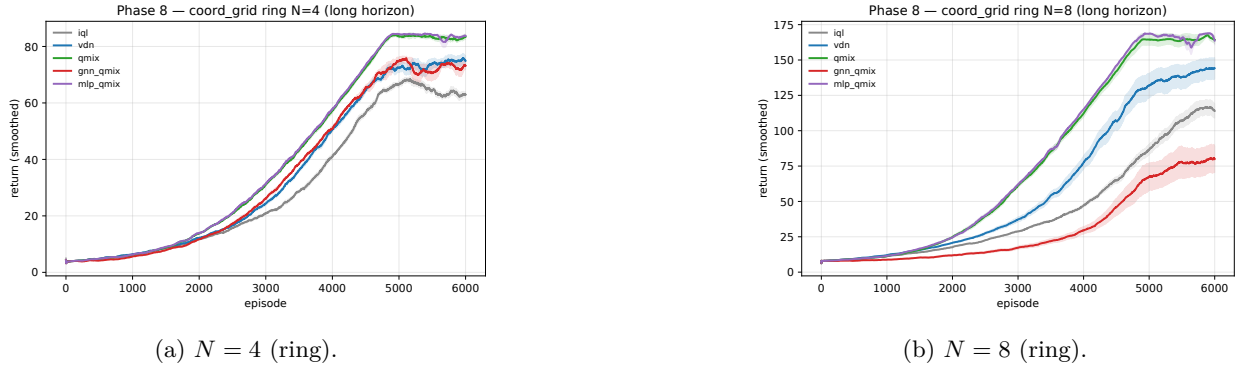


Figure 8: Phase 8 training curves ( $n=10$  seeds, 150,000 steps). MLP-QMIX (the parameter-matched no-graph control) tracks QMIX at both scales, while GNN-QMIX is both lower and visibly more variable across seeds: the destabilisation of Finding 3.

test (MWU  $p = 0.0002$ ) and under Holm correction over the decisive family. The capacity control thus *identifies* the source: not the added parameters (MLP-QMIX matches QMIX) but the graph aggregation, and the deficit *grows* with team size—the opposite of the “graphs help coordination as teams grow” intuition. *An important scope note, established in Appendix I:* this large deficit is a property of the *unstabilised* GCN. Adding the same residual+LayerNorm stabilisation used at the positive endpoint recovers GNN-QMIX to parity with the no-graph controls (164.3 vs. 164.9 at  $N=8$ ,  $d \approx -0.1$ ; the  $\sim 9\times$  variance inflation below also vanishes). So the harm is an optimisation pathology of the common operator, not an intrinsic cost of graph aggregation—but even the stabilised graph confers *no benefit* in this full-information regime (it matches the control, never beats it), which is the robust negative-endpoint conclusion.

**Finding 2: undertraining is ruled out.** At 150,000 steps ( $5\times$  Phase 2), QMIX still dominates GNN-QMIX by roughly  $2\times$  in return at  $N = 8$  (164.9 vs. 78.3). The gap is not a transient of insufficient training; it persists and widens at the larger budget.

**Finding 3: the unstabilised graph destabilises learning.** Beyond the lower mean, the plain GNN-QMIX is far less reliable across seeds: at  $N = 8$  its seed standard deviation is 30.9, against 3.3 for the parameter-matched MLP-QMIX control and 9.1 for QMIX, roughly a  $9\times$  inflation. The plain graph does not merely fail to help on average; it injects seed-level instability that the parameter-matched no-graph control does not (Figure 8). This instability is exactly what the stabilised GCN removes (Appendix I: seed SD 7.0 vs. 30.9), which is why we read the destabilisation as an optimisation pathology of the operator rather than an inevitable consequence of message passing.

**Finding 4: the pattern is not specific to the ring.** Repeating the full capacity control on the higher-diameter line topology (10 seeds, 150,000 steps; Appendix H, Table 13) reproduces every effect: the graph

The graph penalty is not GCN-specific: single- and multi-head attention beat the GCN but still lose to no-graph (10 seeds, 95% CIs)

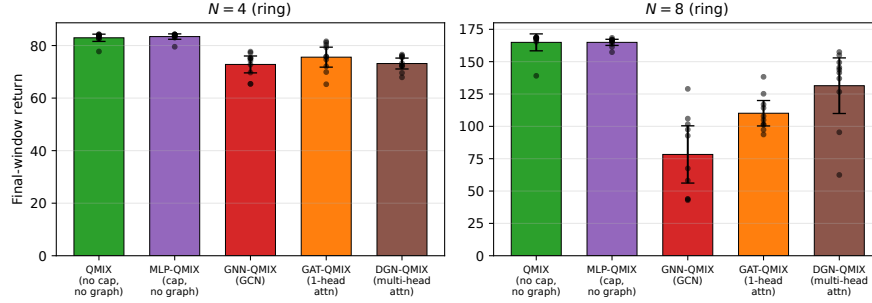


Figure 9: Second GNN family. Single-head (GAT-QMIX) and multi-head (DGN-QMIX, the DGN/G2ANet operator) graph attention both sit above GNN-QMIX (the fixed GCN), more expressive attention helps *within* graph methods, but still below the parameter-matched no-graph control MLP-QMIX at both team sizes on CoordGrid: no unstabilised graph operator recovers a benefit here (cf. Appendix I, where the *stabilised* GCN reaches parity but still does not exceed the control).

penalty is  $-10.0$  at  $N = 4$  and  $-65.8$  at  $N = 8$  (both significant under Holm and Mann–Whitney,  $p = 0.0002$ ), the capacity contrast is again null, and GNN-QMIX again carries by far the largest seed variance (SD 29.5 vs. 2.7 for MLP-QMIX at  $N = 8$ ). The identified graph penalty thus holds across two distinct coordination-graph topologies.

**Finding 5: the penalty survives a stronger GNN and grows with scale.** Two robustness checks (Appendices J–K). (i) *GNN family*. The learned attention these methods use (Jiang et al., 2020; Liu et al., 2020) does not rescue the graph. Beyond the GCN we run single-head (GAT-QMIX) and multi-head (DGN-QMIX, the DGN/G2ANet operator, our largest variant) attention; on CoordGrid *both* lose to the no-graph control at  $N = 8$  ( $d = -5.5$  and  $-1.6$ ; Holm + MWU significant, likewise  $N = 4$ ). More attention climbs *within* graph methods (DGN-QMIX > GAT-QMIX > GNN-QMIX at  $N = 8$ ) yet never beats no-graph; on MPE it only narrows the gap (non-significant at  $N=6$ ). Better attention helps the graph *approach*, not overtake, the control. (ii) *Scale*. Extending to  $N \in \{12, 16\}$ , the graph effect grows *monotonically*:  $-10.6$ ,  $-86.6$ ,  $-153.4$ ,  $-267.4$ ; at  $N = 16$  GNN-QMIX reaches only  $\sim 18\%$  of QMIX’s return. The “graphs help as the team grows” intuition is exactly inverted.

**Operator scope of Findings 1–5.** All five findings above use the standard *unstabilised* GCN (and its attention analogues). As Appendix I establishes, the large deficits, the variance inflation, and the growth with  $N$  are properties of that operator: stabilising the GCN (residual+LayerNorm) recovers it to parity with the no-graph controls on both the ring and line cells. The conclusion that survives for the stabilised operator, and that we carry forward as the negative endpoint, is the weaker but robust one—in this full-information regime the graph confers *no benefit over a parameter-matched no-graph control*. The “actively harmful / destabilising” language is scoped throughout to the common unstabilised operator.

## 7 When the graph earns its keep: a structure boundary

Everything so far is the *negative* endpoint: where any agent could infer what it needs without the graph, the graph aggregation is neutral to harmful. This section identifies the *positive* endpoint. We construct a task in which the coordination graph is the only path for task-relevant private information, and ask whether—channel, capacity, and observations held fixed—the graph’s *structure* (which edges) earns a measurable, reproducible advantage. It does. We are precise about what was pre-registered: the hypotheses, metric, seeds, and decision rules for the core pair sweep, the team-size sweep, the degree-2 cell, and the attention-over-complete test were fixed before those runs (docs/STAGE\_C.md in the artifact), following an exploratory 3-seed pilot; the full-observability cell (§7.4), the `dgn_true` arm, and the TOKENMATCH replication (§7.8) are post-hoc robustness/replication cells run under the same protocol and thresholds but not themselves pre-



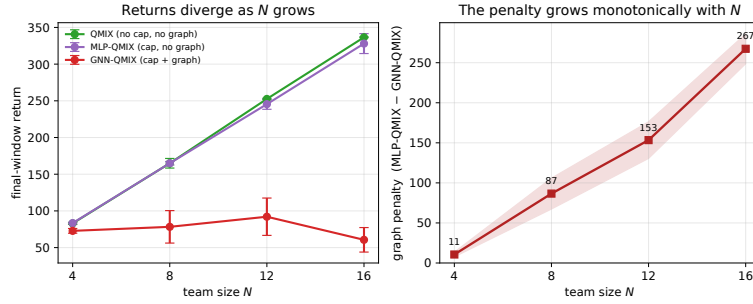


Figure 10: Scaling the graph penalty. *Left*: final-window return vs. team size: the graph-free curves (QMIX, MLP-QMIX) climb together while GNN-QMIX flatlines. *Right*: the graph penalty (MLP-QMIX – GNN-QMIX) grows monotonically with  $N$ , to  $\sim 18\%$  of QMIX’s return at  $N=16$ .

registered. We flag one limit on how independently this ordering can be checked: three of the pre-registrations are timestamp-verifiable because they were committed to version control before their results existed—the F1 attention robustness check (`results/phaseC_150k/PREREGISTRATION.md`, committed before any 150k-step result), the classical-baseline pre-registration of §7.7 (`results/phaseC_classical/PREREGISTRATION.md`, commit `d7b8dd3`, before any DCG run), and the transfer-attempt pre-registration of §7.9 (`results/phaseD_external/PREREGISTRATION.md`, commit `568e759`, which also carries the relay addendum, before either run)—whereas the earlier structure-sweep pre-registrations rest on the documented protocol rather than on commit-order evidence. All confirmatory cells use  $\geq 12$  seeds and the same Welch / Holm and Mann–Whitney tests of Section 5.3. One protocol difference is disclosed rather than hidden: the cells of this section use the final window pre-registered for them—the last 20% of episodes—whereas Section 5.3 defines the last 10% for Phases 1–8; recomputing every contrast of this section at the 10% window leaves every conclusion unchanged with slightly *larger* gaps (e.g. `gnn_true` vs. `gnn_complete` +15.8,  $d = 5.8$ ). The Holm family here is the registered `gnn_true`-vs-each-rival family—three contrasts in the core sweep (`gnn_true` vs. `gnn_wrong`/`gnn_complete`/`mlp`), six in the attention sweep (adding the `gat`/`dgn` arms)—not the six-algorithm-pairs family of Section 5.3, so the same contrast can carry slightly different  $p_{\text{Holm}}$  across the two sweeps (both correct per family).

### 7.1 A task where structure is load-bearing by construction

PAIRROUTING abstracts a recurring multi-agent-systems pattern—distributed task allocation / routing under partial observability with private goals, where each agent’s target is known only to a specific counterpart. Concretely it is COORDGRID with a single change to the reward: every agent privately observes *its own* goal and is rewarded (dense toroidal proximity) for reaching its *partner’s* goal, where a fixed perfect matching defines partners. Partners must therefore exchange goals across their edge; the information an agent needs is held by *one specific other agent*, so the communication graph must match the task structure for routing to be possible at all. We hold  $\dim(o_i)$  constant across communication graphs by setting `max_neighbors_override = N – 1` (unit-tested), so no arm sees more inputs than another. The arms are the *same* GNN-QMIX architecture, in a *stabilised* (“repaired”) variant: a residual connection and LayerNorm around each GCN layer ( $L=2$ , width 64). The repair exists because the plain GCN of Sections 6.1–6.5 does not train on this routing task at all (exploratory Stage-A runs); the negative-endpoint phases use the plain GCN, and Appendix I shows that giving that endpoint the *same* stabilisation recovers GNN-QMIX to parity with the no-graph controls—so the full-information “harm” is an optimisation pathology of the unstabilised operator, while the graph’s *lack of benefit* there holds for the stabilised operator too. The positive-endpoint effect below therefore compares the stabilised operator against itself under different adjacencies, and cannot be an artefact of the plain-vs-stabilised difference. Only `env.adjacency()` differs across the graph arms: `gnn_true` (the matching), `gnn_wrong` (a *different* matching of identical 1-regular density), and `gnn_complete` (all-to-all, the most communication). `mlp` is the no-communication parameter-matched control—the same control as MLP-QMIX in Section 5.2; this section uses the short arm names of



the pre-registration throughout. Because `gnn_wrong` and `gnn_complete` are byte-identical to `gnn_true` in architecture and parameter count—only the adjacency changes—the `gnn_true` vs. `gnn_complete` contrast isolates *structure* from channel, capacity, and observability simultaneously (the next paragraph explains why `gnn_complete`, and not `gnn_wrong`, is the load-bearing rival).

**Which contrast carries the claim.** On a routing task, an agent cannot route information it is barred from observing, so a graph beating the no-graph control is close to *a priori*. Two of our four arms carry zero partner information by construction and are therefore a-priori at the floor: `mlp` (no channel), and—we concede this to be the same information state—`gnn_wrong`, because a wrong matching links agent  $i$  to a non-partner, so the partner’s private goal never reaches  $i$  (verified in `coord_grid.py`; the data agree, `gnn_wrong`  $\approx$  `mlp`  $\approx$  floor). We therefore treat both `gnn_true` vs. `mlp` and `gnn_true` vs. `gnn_wrong` as sanity checks confirming that mis-wired or absent channels cannot route, and rest the headline structure claim on the one genuinely non-a-priori contrast: `gnn_true` vs. `gnn_complete`. All-to-all is the only rival in which the partner’s information *is* present in the inputs and the model must *select* it from the  $N-1$  neighbours; that it nonetheless floors is the load-bearing evidence that the win is which edges carry messages, not whether the channel can in principle reach the partner. (For a fixed mean-aggregating GCN, averaging  $N$  node embeddings dilutes any single partner’s goal to  $\sim 1/N$ , so this floor is partly structural for that aggregator class. Two pieces of evidence make the claim non-trivial despite this. First, §7.6 shows a *learned* attention head over all-to-all—which could in principle up-weight the partner rather than dilute it—also floors within budget. Second, §7.8 shows that the diluted all-to-all signal *is* usable when the task permits: there all-to-all rises +12 above the floor, demonstrating mean-pooling does not simply destroy the partner’s signal—yet the matched graph still beats it by +33. So the all-to-all floor is not merely a mechanical dilution artefact; it reflects the absence of the right edges.)

**How we found this task (failed constructions disclosed).** PAIRROUTING was not the first construction we tried, and the search matters for scope. An exploratory stage first tested whether restricting observability alone (making agents depend on the channel) or stabilising the GCN alone would surface a graph advantage on the convention-reducible tasks of Sections 6.1–6.5: neither did. A pre-registered goal-*broadcast* construction (one agent observes a shared secret goal that must relay over ring/line graphs; 10 seeds  $\times$  3 diameters  $\times$  4 arms) then failed its primary hypothesis: the matched graph’s advantage at diameter 5 was +3.2 (Welch  $p_{\text{Holm}} = 0.60$ ), so multi-hop *relay* did not produce a significant structure win for these operators. PAIRROUTING moves the private information a single edge away (one specific partner), and that is where the advantage becomes large and clean; the degree-2 cell (§7.5) shows it surviving, attenuated, when the needed information is a two-neighbour *set* rather than a single partner. The positive rule of this paper is accordingly scoped to short-range, task-matched routing; making multi-hop relay work is an open problem these operators did not solve, not a suppressed null. The failed sweeps ship with the artifact (`results/phaseB/`).

## 7.2 Headline: it is the structure, not the channel

**Setup.**  $N=6$ ,  $3\times 3$  grid, ego observations, 12 seeds, 30k steps. Two reference points anchor the scale, both measured on this task (script and CSV in the artifact: `scripts/phaseC/reference_points.py`, `results/phaseC/reference_points.csv`): the random / do-nothing return is 49.9 ( $\approx 50$ ), and a full-information greedy *oracle*—every agent handed its partner’s goal—reaches 148.7 ( $\approx 149$ , against the analytic ceiling of  $N \cdot T = 150$ ). So the floor is literally the random policy, and the achievable routing headroom is  $\sim 50 \rightarrow \sim 149$ .

**More communication did not help; the right communication did.** Table 2 foregrounds the controls; Figure 11 shows the same result at a glance. The no-graph control (`mlp`), the wrong graph (`gnn_wrong`), and *all-to-all* communication (`gnn_complete`) all sit at or within a point of the random floor—49.85, 50.42, and 50.94 respectively, more than 15 points below `gnn_true`. Only `gnn_true`, routing along the task’s own edges, rises, to 66.10 [63.56, 68.65]. The decisive arm is `gnn_complete`: it is the only rival that actually *carries* the partner’s information (the partner is one of the  $N-1$  broadcast neighbours), yet on PAIRROUTING it recovers almost none of it. The pre-registered comm-insufficiency check quantifies “almost none”: `gnn_complete` ends +1.1 above the no-communication control (Cohen’s  $d=1.0$ ; Welch  $p=0.020$ , Mann–Whitney  $p=0.030$ )—a statistically detectable sliver of task-incidental routing amounting to  $\approx 7\%$  of the `gnn_true` gap. So the

Table 2: **The structure boundary** (PAIRROUTING,  $N=6$ , ego, 12 seeds, 30k steps). *Top*: the wrong graph and the no-graph control sit at the random floor ( $\approx 50$ , measured); all-to-all sits one point above it; only the task-matched graph rises. *Bottom*: the three registered contrasts (same repaired GCN and parameter count; only the adjacency differs). The headline rests on **gnn\_true** vs. **gnn\_complete**, the only rival that carries the partner’s information but must select it; **gnn\_true** vs. **gnn\_wrong** and **gnn\_true** vs. **mlp** are a-priori sanity checks (neither carries partner information).  $d$  is Cohen’s  $d$ ;  $p_{\text{Holm}}$  is Welch’s  $t$  with Holm correction over the registered three-contrast family (actual  $\sim 3 \times 10^{-8}$ ); Mann–Whitney is at its small-sample floor under complete separation. What the matched graph does and does not deliver of the  $\sim 50 \rightarrow \sim 149$  headroom is discussed at the end of §7.2.

| Arm          | comm. graph                   | final return [95% CI]       |
|--------------|-------------------------------|-----------------------------|
| mlp          | none                          | 49.85 [49.33, 50.38]        |
| gnn_wrong    | wrong matching (same density) | 50.42 [49.81, 51.02]        |
| gnn_complete | all-to-all (most comms)       | 50.94 [50.16, 51.73]        |
| gnn_true     | <b>the task matching</b>      | <b>66.10</b> [63.56, 68.65] |

*Contrasts (only the adjacency differs; all hold capacity, architecture, obs. fixed):*

|                                                                                 |                                                                  |
|---------------------------------------------------------------------------------|------------------------------------------------------------------|
| <b>gnn_true–gnn_complete</b> (decisive: partner info present, must be selected) | +15.2, $d = 5.1$ , $p_{\text{Holm}} < 10^{-4}$ , MWU $< 10^{-4}$ |
| <b>gnn_true–gnn_wrong</b> (a-priori: wrong matching carries no partner info)    | +15.7, $d = 5.4$ , $p_{\text{Holm}} < 10^{-4}$ , MWU $< 10^{-4}$ |
| <b>gnn_true–mlp</b> (a-priori: no channel)                                      | +16.3, $d = 5.6$ , $p_{\text{Holm}} < 10^{-4}$ , MWU $< 10^{-4}$ |

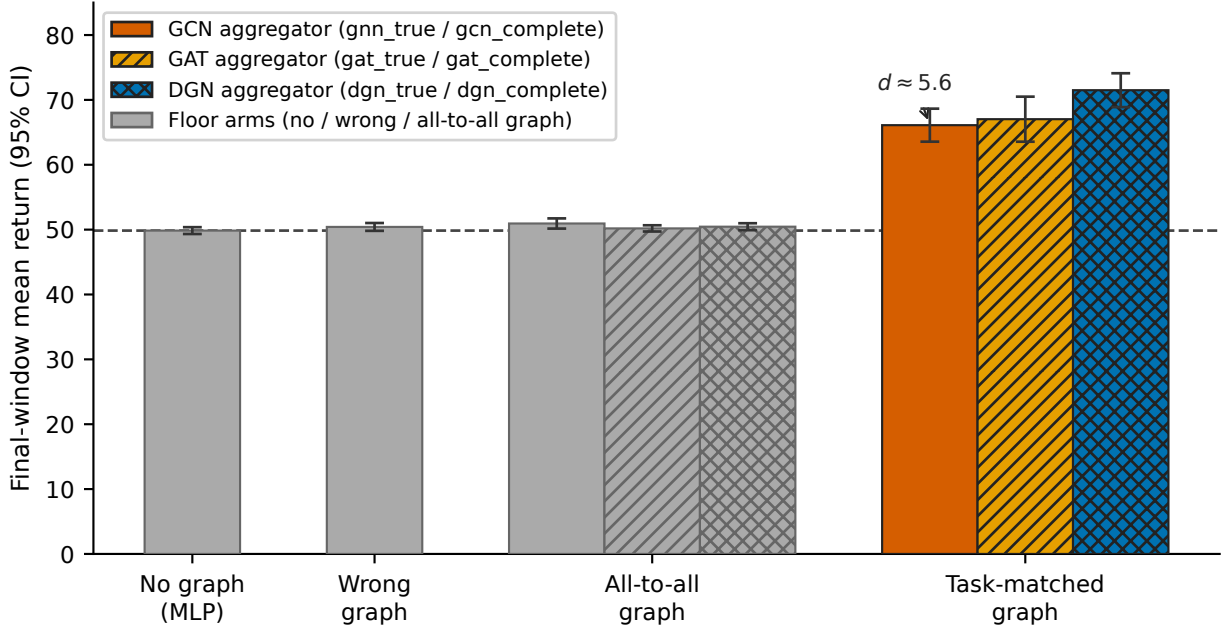


Figure 11: **It is the structure, not the channel.** Final-window mean return (95% CI, 12 seeds) on the pair-routing task ( $N=6$ , ego observations, 30k steps). Only the *task-matched* graph rises well above the random floor ( $\sim 50$ ): the no-graph control (mlp) and a density-matched wrong graph sit at the floor, the all-to-all graph (the *most* communication) one point above it, while the task-matched graph reaches 66–71 depending on the aggregator ( $d \approx 5$  vs. the floor). Learned attention (GAT, DGN) helps only *on* the matched graph; over all-to-all it floors like the fixed GCN. The right edges, not more edges, carry the advantage.

arm with the *most* communication is distinguishable from no communication only by a point, while the arm with the *right* communication clears both by more than fifteen. (The size of the sliver is task-dependent: in TOKENMATCH, §7.8, the same arm manages real partial routing, +12 over the floor, yet still falls –33 short of the matched graph. In neither task does broadcasting approach the right edges.) The advantage is which edges carry messages, not how many.

**The decisive contrast.** The headline rests on `gnn_true` vs. `gnn_complete` (all-to-all): +15.2 ( $d = 5.1$ ,  $p_{\text{Holm}} < 10^{-4}$ , Mann–Whitney  $p < 10^{-4}$ ). This is the only contrast in which the partner’s information *is* present in the inputs yet must be selected, so its near-floor result cannot be explained by the channel being unable to reach the partner. The other two contrasts are a-priori sanity checks, as established above: `gnn_true` vs. `mlp` (+16.3,  $d = 5.6$ ; no channel) and `gnn_true` vs. `gnn_wrong` (+15.7,  $d = 5.4$ ; a wrong matching carries no partner information by construction), both also at  $p_{\text{Holm}} < 10^{-4}$  and Mann–Whitney  $p < 10^{-4}$ . Distributional separation is complete across all three: the worst `gnn_true` seed (61.5) exceeds the best rival seed (52.6) over 12 seeds. (The Mann–Whitney  $p$ -values sit at their small-sample floor under complete separation: they indicate non-overlap, not additional effect magnitude.)

**Parameter matching, precisely.** `gnn_wrong` and `gnn_complete` are *exactly* parameter- and architecture-identical to `gnn_true` (only `adjacency()` differs), which is what carries the structure claim. The `mlp` control matches the *plain*-GCN parameter count; against the as-run *repaired* GCN it differs by the 256 LayerNorm parameters ( $< 2\%$  of  $\sim 14\text{k}$ ), far too few to explain a  $d \approx 5$  effect—and `gnn_wrong/gnn_complete` carry the same LayerNorm yet floor, so stabilisation is not the source of the win. **The graph helps; it does not solve the task:** `gnn_true` captures only  $\sim 16\%$  of the routing headroom (66 of 149 against a 50 floor).

### 7.3 Robustness across team size: significant everywhere, but non-monotone

We pre-registered that the advantage would *grow* with  $N$  (a dose-response). It does not (Figure 12, left). Sweeping  $N \in \{4, 6, 8, 10\}$  (ego, 12 seeds, 30k), the task-matched advantage over the no-graph control is significant at *every*  $N$  under both tests and Holm correction—and the structure-isolating `gnn_true` vs. `gnn_wrong/gnn_complete` contrasts are likewise significant at every  $N$ —but the standardised and relative effect form an inverted-U and then *attenuate*:

|                                    | $N=4$ | $N=6$ | $N=8$ | $N=10$ |
|------------------------------------|-------|-------|-------|--------|
| <code>gnn_true-mlp</code> (return) | +11.8 | +16.3 | +16.4 | +11.0  |
| Cohen’s $d$                        | 3.3   | 5.6   | 3.0   | 1.6    |
| fractional lift                    | 35.5% | 32.6% | 24.7% | 13.1%  |

Effect size and fractional lift decline past  $N=6$ . We therefore report the “grows-with- $N$ ” hypothesis as **not supported**, and treat  $N$  as a robustness axis (the boundary holds across team sizes) rather than as a dose-response. *A caveat on the cross- $N$  rows:* total reward, and hence the floor, grows with team size (the `mlp` floor is 33.3, 49.9, 66.6, 83.7 at  $N=4, 6, 8, 10$  as more agents earn incidental co-location reward), so neither the absolute return gap nor the “fractional lift” denominator is directly comparable across columns. We lean on Cohen’s  $d$  (scale-invariant) as the primary attenuation evidence; the non-monotone conclusion holds under either.

### 7.4 Robustness to observability

The partner’s goal is private under *any* observation mode, so the win should not be a partial-observability artefact—and it is not. Under *full* observations ( $N=6$ , 12 seeds) the effect is *larger*: `gnn_true` beats the no-graph control by +22.6 ( $d = 5.4$ ), with the `gnn_true` vs. `gnn_wrong` and `gnn_true` vs. `gnn_complete` contrasts at the same magnitude. Adding observability does not let the rival arms route the private information; only the matched edges do. One input caveat is disclosed: under the full-observation mode the neighbour-displacement block of each agent’s observation follows its arm’s communication graph (`coord_grid.py`), so—unlike the ego-mode cells, where all arms’ inputs are byte-identical—the graph arms here differ in inputs as well as edges. The input-matched contrast in this cell is `gnn_true` vs. `mlp` (both observe the true-matching neighbour block), which is the ++ 22.6 comparison we quote; we rest the full-obs robustness claim on it.

### 7.5 Genuine topology: the effect survives at degree-2, much smaller

A matching is degree-1 (point-to-point), which tests *routing* more than *topology*. To test topology we use `nbr_routing` (degree-2 ring): each agent must reach the *centroid of its two ring neighbours’* goals, with

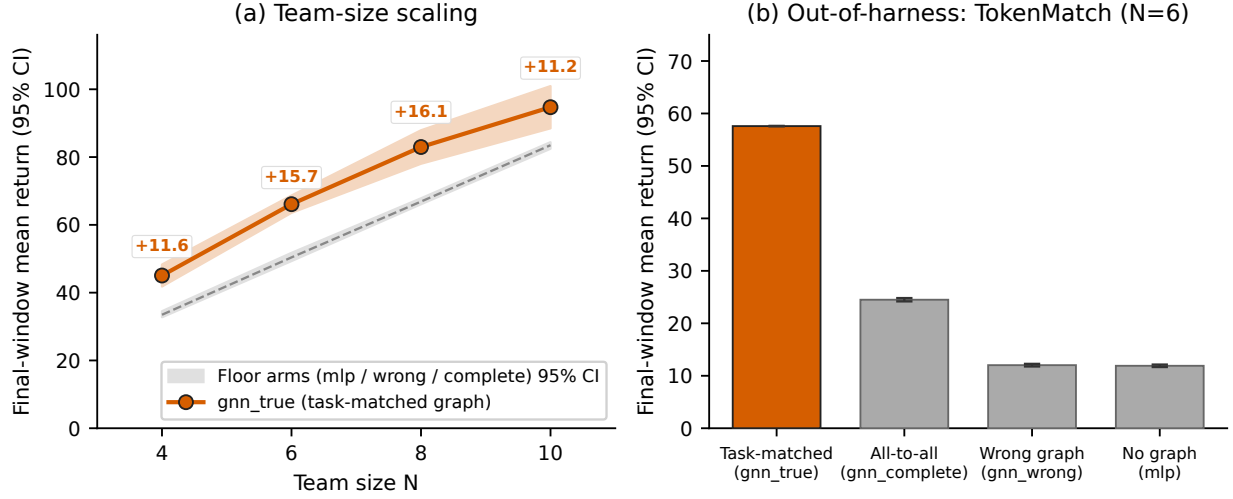


Figure 12: **Left: the advantage holds across team size but is non-monotone.** Task-matched `gnn_true` (solid line) stays above the control floor (shaded band: `mlp`/`wrong`/`all-to-all` 95% CI) at every  $N \in \{4, 6, 8, 10\}$ ; the gap over the no-graph floor (labelled) peaks near  $N=8$  rather than growing monotonically. **Right: out-of-harness replication** on TOKENMATCH (shown standalone, with discussion, as Figure 14 in §7.8). All bars/points are 95% CIs over 12 seeds.

`gnn_true` = ring, `gnn_wrong` = skip-ring ( $\pm 2$ , matched degree), and `gnn_complete` = all-to-all. Under the matched protocol ( $N=6$ , 12 seeds, 30k), `gnn_true` (52.67) significantly beats the wrong topology ( $+2.6$ ,  $d = 1.7$ ), all-to-all ( $+2.2$ ,  $d = 1.4$ ), and no communication ( $+2.4$ ,  $d = 1.5$ ), all at  $p_{\text{Holm}} < 0.005$  and Mann-Whitney  $p < 0.005$ . So the structure/topology effect *survives* when the receptive field is a neighbourhood set rather than a single partner—but at the pre-registered 30k budget it is about  $7\times$  smaller than at degree-1 ( $+2.4$  /  $\sim 5\%$  vs.  $+16$  /  $\sim 33\%$ ; Figure 13). We treat  $7\times$  as an *upper bound* on the attenuation: as the footnote records, exploratory longer-budget runs widen the degree-2 gap, so the genuine-topology effect may be materially less attenuated than the 30k cell shows. A fixed mean-aggregating GCN exploits a neighbourhood-set (centroid) task far less efficiently than single-partner routing.<sup>2</sup>

## 7.6 Learned attention does not substitute for structure either

A natural question is whether an expressive *learned* aggregator over the *complete* graph could rediscover the right edges and thus substitute for fixed structure. We add single-head (GAT) and multi-head (DGN/G2ANet-style) attention arms, **stabilisation-matched** to the GCN (the same residual+LayerNorm),  $N=6$ , 12 seeds—so the earlier confound, attention arms lacking the GCN’s stabilisation, is removed. All quoted  $p$ -values are Holm-corrected over the six-member `gnn_true`-vs-each-rival family (the artefact `struct_verdict_pair_N6_ego_attention.csv`; we label raw vs. Holm-corrected explicitly). Because this attention sweep re-corrects over its own six-member family, the `gnn_true` vs. `gnn_complete` contrast’s  $p_{\text{Holm}}$  here ( $6.6 \times 10^{-8}$ ) differs slightly from the core three-contrast value in Table 2 ( $3.3 \times 10^{-8}$ ); both are the correct per-family Holm value and the conclusion is identical. Two facts settle the question. (i) *The attention arms are not under-trained on the true graph*: given the *right* graph, learned attention is at least as good as the GCN—single-head GAT is statistically indistinguishable (`gat_true` 67.03 vs. `gnn_true` at 66.10; gap  $+0.9$ , n.s., raw Welch  $p = 0.64$ ; 95% CI on the gap  $[-3.2, +5.0]$ , so equivalence is bounded rather than proven), and multi-head DGN actually *exceeds* it (`dgn_true` 71.50,  $+5.4$  over `gnn_true`, Welch  $p_{\text{Holm}} = 0.007$ ; we flag this last comparison as *exploratory*—the pre-registered H-attn asked only whether attention-over-complete *reaches* `gnn_true`, not whether attention-over-true exceeds it, so the  $+5.4$  direction is reported descriptively, not as a confirmatory finding). (ii) *Over all-to-all, both attention mechanisms still floor within budget*:

<sup>2</sup>Exploratory (non-confirmatory) 3-seed runs at 80k steps show the same arm ordering with a larger gap ( $\sim +5$ ), suggesting the 30k confirmatory cell is not at plateau; only the pre-registered 12-seed / 30k cell above is treated as the measurement.

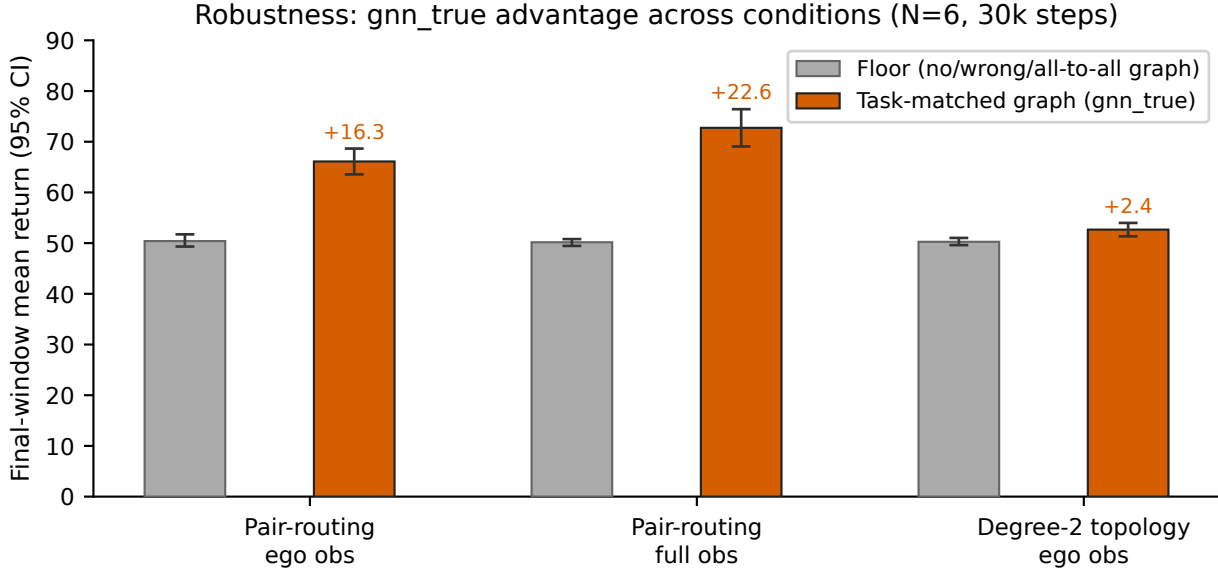


Figure 13: **The advantage is robust across conditions.** Task-matched `gnn_true` (orange) versus the control floor (gray: no/wrong/all-to-all graph), 95% CI over 12 seeds at  $N=6$  (30k steps). The structure advantage holds under ego observations (+16.3) and is *larger* under full observability (+22.6); at genuine degree-2 topology it survives but shrinks sharply (+2.4), consistent with a fixed mean-aggregator exploiting a neighbourhood-set (centroid) task far less efficiently than single-partner routing.

`gnn_true` beats `gat_complete` (50.19) and `dgn_complete` (50.45) by +15.9 and +15.7 respectively (Cohen’s  $d \approx 5.5$ ,  $p_{\text{Holm}} < 10^{-4}$ ). One asymmetry qualifies this clause: the complete-graph attention arms face a *strictly harder* optimisation than their true-graph siblings—under the true graph the partner is the only neighbour and attention has nothing to discover, whereas under all-to-all the head must learn to attend to one partner out of  $N-1$  from agent-id one-hots. Because that harder optimisation could in principle just be *slower*, we pre-registered and ran the decisive robustness check: the identical attention sweep at the  $5 \times$  (150k-step) budget *matched to the negative endpoint*, so no budget asymmetry favours either side (`results/phaseC_150k/`, 12 seeds; decision rule frozen before results). The conclusion does not merely survive—it strengthens. At 150k the complete-graph attention arms rise only *marginally* above the no-communication floor—`gat_complete` 51.08 and `dgn_complete` 53.26 vs. the 49.96 floor, i.e. +1.1/+3.3, under a tenth of the 45-point gain the task-matched arms make—while `gnn_true` itself keeps learning (66.10  $\rightarrow$  94.96), so the gap *grows* from  $d \approx 5.5$  at 30k to  $d \approx 12$  at 150k (`gnn_true` over `gat_complete/dgn_complete` by +43.9/+41.7,  $p_{\text{Holm}} < 10^{-4}$ , complete seed separation). That the complete arms move *at all* (`dgn_complete` climbs 50.1  $\rightarrow$  53.3 across quintiles) is itself informative: gradients do flow through the all-to-all path, so this is a *live* control that plateaus far below—not a silently broken one—which rules out the “the complete-graph arm never optimised” objection. The *same* attention architectures train well at this budget *given the right graph*—`gat_true` 96.71, `dgn_true` 112.49, both far above the floor—which is the validity gate that licenses the reading: the complete-arm floor is structural, not a lack of budget. The learning curves make this direct (Table 3): across all five training quintiles the complete arms stay within a few points of the floor while every true-graph arm climbs steeply, so “attention over all-to-all merely needs more training” is refuted by measurement, not deferred. We bound the claim to the budgets we tested (30k and 150k) rather than asserting impossibility in principle. Stated as a sample-efficiency comparison—the register these results support—a fixed task-matched structure is dramatically more sample-efficient than learning to target over all-to-all: at *both* tested budgets the matched graph wins, and the gap *widens* rather than closes ( $d \approx 5$  at 30k to  $d \approx 12$  at 150k). The result stands: an expressive, well-trained attention aggregator does *not* recover the routing advantage from the wrong structure within the same budget that suffices given the right graph—so expressiveness *amplifies* structure (DGN exceeds the

Table 3: **Attention over all-to-all stays near the floor—at the  $5\times$  budget matched to the negative endpoint.** Mean return by training-progress quintile (Q1–Q5), averaged over 12 seeds, on PAIRROUTING ( $N=6$ , ego), 150k steps (`results/phaseC_150k/`; pre-registered F1 check). Every *true-graph* aggregator—GCN, GAT, and multi-head DGN—climbs steeply; the *same* attention architectures over the *complete* graph rise only marginally above the no-communication floor (49.96) over the entire budget (`gat_complete` +1.1, `dgn_complete` +3.3), remaining 40+ points below the task-matched arms. The all-to-all deficit is therefore structural, not under-training.

| Arm                         | Graph      | Q1   | Q2   | Q3   | Q4   | Q5           |
|-----------------------------|------------|------|------|------|------|--------------|
| <code>gnn_true</code>       | matching   | 50.9 | 57.5 | 68.5 | 83.4 | <b>95.0</b>  |
| <code>gat_true</code>       | matching   | 51.0 | 57.9 | 68.9 | 83.3 | <b>96.7</b>  |
| <code>dgn_true</code>       | matching   | 51.2 | 64.9 | 82.7 | 99.7 | <b>112.5</b> |
| <code>gat_complete</code>   | all-to-all | 50.0 | 50.1 | 50.1 | 50.4 | 51.1         |
| <code>dgn_complete</code>   | all-to-all | 50.1 | 50.1 | 50.3 | 51.3 | 53.3         |
| <code>mlp</code> (no comm.) | —          | 50.0 | 50.1 | 50.1 | 49.9 | 50.0         |

GCN by +5.4 given the right edges) but does not *substitute* for it. The advantage is the structure, not the channel or the capacity, and is not recovered by expressiveness alone.<sup>3</sup>

## 7.7 A classical coordination-graph baseline: is the routing effect unique to message passing?

The controls so far vary the graph handed to *one* mechanism (a GNN). The classical coordination-graph lineage (§3) poses a sharper question: does the 1-hop benefit require message passing at all, or would payoff propagation over the *same* factored payoff reproduce it? We answer with a pre-registered baseline whose design, arms, and four decision rules were frozen and git-committed (commit `d7b8dd3`) before any result was observed (`results/phaseC_classical/`). The steelman is a *deep* coordination graph—DCG (Böhmer et al., 2020), the neural, function-approximated descendant of Kok–Vlassis max-plus—whose pairwise factor  $Q_{ij}(o_i, o_j, a_i, a_j)$  conditions on the joint edge observation and whose greedy joint action is computed by max-plus over `env.adjacency()`. It is granted  $\geq$  GNN-QMIX parameters, 12 seeds, 150k steps, and generosity (max-plus iterations, payoff-net width, learning rate) tuned only in its own favour; a `dcg_canonical` control drops cross-agent observation from the pairwise factor to isolate action-coupling from observation-routing. Three pre-registered cells follow (Table 4), together with the two within-GNN control arms added to the third of them later under a separate pre-registered addendum; we transcribe the frozen analysis throughout.

**Cell A (full information): validity, and no GNN advantage.** On the full-information co-location ring ( $N=4$ ), the steelman DCG is fully competent: 83.57 [82.98, 84.16], tying the no-graph MLP-QMIX (83.65; advantage -0.08, Welch  $p=0.83$ , MWU  $p=0.44$ ,  $d=-0.09$ ) and the stabilised GNN-QMIX (83.93; advantage +0.36, Welch  $p_{\text{Holm}}=0.47$ , MWU  $p=0.51$ ), all far above the random floor of 4.02 ( $p=4\times 10^{-23}$ ). Crucially the stabilised GNN-QMIX shows *no* advantage over MLP-QMIX here (+0.27, Welch  $p_{\text{Holm}}=0.47$ , MWU  $p=0.84$ ): the same no-full-information-benefit endpoint the rest of the paper reports (Appendix I), now reproduced against a competent classical baseline rather than only against the no-graph control. Dropping cross-agent observation from the pairwise factor (`dcg_canonical`, 74.87) costs  $\sim 9$  points ( $-9.06$  vs. the GNN,  $d=1.97$ ,  $p_{\text{Holm}}=1.5\times 10^{-3}$ ) even on DCG’s home turf, though it stays far above floor.

**Cell B (1-hop routing): the benefit is observation-routing, reproducible by a deep CG.** On PAIRROUTING-ego ( $N=6$ , the 1-hop task of §7.2), the steelman DCG on the *true* graph *matches* `gnn_true`: 90.50 [80.02, 100.97] vs. 94.96 (advantage +4.47,  $d=0.37$ , Welch  $p_{\text{Holm}}=0.386$ , MWU  $p=0.707$ —not significant). Every DCG variant lacking correct observation-routing collapses to the  $\approx 50$  no-routing floor (`dcg_canonical_true` 50.09, `dcg_jointobs_wrong` 49.89, `dcg_jointobs_complete` 50.30; each  $\sim 45$  points

<sup>3</sup>The degree-2 (`nbr_routing`) attention cell tells the same story at 12 seeds: `gnn_true` 52.7, `gat_true` 52.3, and `dgn_true` 53.4 all sit together above the floor, while `gat_complete/dgn_complete` floor at  $\sim 50.4$  alongside the no-communication control (50.2)—so on the degree-2 topology too, attention helps only on the right graph and floors over all-to-all. (An earlier 3-seed run of this cell was underpowered; the 12-seed cell reported here is the confirmatory measurement.)

below `gnn_true`,  $d > 12$ ,  $p_{\text{Holm}} < 10^{-10}$ ). The 1-hop benefit is therefore an *observation-routing* effect, reproducible by a deep coordination graph, not action-coordination; as pre-registered, we concede that message passing is not the *unique* mechanism for it. What *does* replicate across both mechanism families is the structure-dependence: the right edges route, and wrong, action-only, or all-to-all edges floor. The upgraded reading of the 1-hop positive is thus “the right edges, not more edges” as a property of the *task*, holding for message passing and payoff propagation alike—mechanism choice is secondary in this regime.

**Cell C (2-hop relay): an honest pre-registered negative for both mechanisms.** Cell C is a constructed 2-hop relay—a source’s private goal must reach a sink two hops away, with the relay agent occupied by its own goal so it cannot double as a signalling channel (random floor 33.37, no-comms MLP-QMIX reference 61.11, privileged oracle 99.11). It was built to probe multi-hop routing, the one regime where a 2-layer GNN might separate from a pairwise-factored DCG. *Neither method demonstrates it.* `gnn_true` does *not* significantly exceed the honest no-comms MLP-QMIX baseline: 64.00 [63.26, 64.75] vs. 61.11 [58.69, 63.53], advantage +2.89 but  $d=1.03$ , Welch  $p_{\text{Holm}}=0.052$ , MWU  $p=0.078$ —failing both pre-registered tests. The mean advantage is a tail artifact of four unstable MLP-QMIX seeds; the *medians* nearly coincide (`gnn_true` 63.84 vs. MLP-QMIX 63.33, gap 0.51), and GAT-QMIX likewise fails to beat MLP-QMIX (+2.04, MWU  $p=0.51$ ). By the frozen success criterion, no method routes here. `gnn_true` *does* significantly beat every DCG arm (vs. `dcg_jointobs_true` +7.50,  $d=2.03$ ,  $p_{\text{Holm}}=1.5 \times 10^{-3}$ , MWU  $p=3.7 \times 10^{-5}$ ), but only because the DCG arms fall *below* the no-comms MLP-QMIX baseline (`dcg_jointobs_true` 56.51, −12% of the routing headroom relative to MLP-QMIX)—not because the GNN routes *above* it. That ordering is informative for GNN-vs-DCG, not evidence of routing. We report cell C as a pre-registered negative: at 150k steps, neither message passing nor payoff propagation demonstrates multi-hop information routing above the no-routing baseline. (A 30k, 3-seed smoke had suggested a GNN lead that the 12-seed, 150k confirmatory run did not confirm—smoke-to-confirmatory optimism we flag rather than bury.)

**Cell C completed: a within-GNN null on the relay.** As run, cell C carried no `gnn_wrong`/`gnn_complete` arms, so it spoke only to GNN-vs-DCG and GNN-vs-MLP. A pre-registered addendum (committed at 568e759 before either arm was run) adds both at byte-identical parameters, 12 seeds, 150k steps. The three graph arms are statistically indistinguishable from one another—`gnn_true` 64.00 [63.26, 64.75] (median 63.84), `gnn_complete` 63.98 [63.70, 64.27] (median 63.94), `gnn_wrong` 63.28 [62.93, 63.63] (median 63.15); `gnn_true`–`gnn_wrong` +0.73 ( $p_{\text{Holm}}=0.16$ , MWU  $p=0.069$ ), `gnn_true`–`gnn_complete` +0.02 ( $p_{\text{Holm}}=0.95$ , MWU  $p=0.62$ )—and none clears the no-comms MLP-QMIX control under both pre-registered tests (against MLP-QMIX’s median 63.33 the graph arms are level). On the relay, graph structure does not matter *among* the graph arms, because none of them routes: a within-GNN null. Adding the arms grows cell C’s Holm family from six contrasts to eight, which moves `gnn_true`–MLP-QMIX from  $p_{\text{Holm}}=0.052$  to 0.10; since the uncorrected Mann–Whitney test ( $p=0.078$ ) already fails, the “`gnn_true`  $\approx$  MLP-QMIX” conclusion is invariant to the family size, and all four DCG contrasts remain significant in both families. Cell C’s committed result is unchanged.

## 7.8 Out-of-harness replication: not a gridworld artefact

Everything above is COORDGRID, a navigation task; the effect could be a gridworld artefact. To rule that out we replicate the structure test in a *completely different* environment—TOKENMATCH, a referential coordination / signalling game (the abstraction of agents that must communicate private symbols to act jointly) with *no grid, no movement, no navigation*: each agent privately holds a token and must *output its partner’s token*, which can reach it only over the graph. The structure-isolating arms carry over unchanged (only `env.adjacency()` differs): `gnn_true` (the matching), `gnn_wrong` (a wrong matching), `gnn_complete` (all-to-all), and the no-communication `mlp` control. With  $N=6$ ,  $K=5$  tokens, and 12 seeds (Table 5; Figure 14), `gnn_true` *near-solves* the task (57.59 of a maximum 60,  $\approx 96\%$ ) and is completely separated from every rival—it beats the wrong matching by +45.6, all-to-all by +33.1, and no communication by +45.7 ( $p < 10^{-4}$  on both tests, variance near zero). All-to-all does *partial* routing here (24.50,  $\approx +12$  over the  $\approx 12$  floor)—the partner’s token is one of the inputs the mean aggregator averages—but it remains +33.1 below the task-matched graph. The structure effect therefore reproduces, more cleanly, in a structurally unrelated

Table 4: **Classical (deep) coordination-graph baseline**, three pre-registered cells (commit d7b8dd3; `results/phaseC_classical/`), each  $n=12$  seeds, 150k steps. Steelman `dcg_jointobs.` is a deep max-plus CG on the joint edge observation; `dcg_canonical` drops cross-agent observation; `gnn_true`’s cell-B row is the frozen 150k anchor (§7.6). *A*: the classical steelman ties both MLP-QMIX and the stabilised GNN-QMIX on full-information home turf, and the GNN has no full-information advantage. *B*: on 1-hop routing the deep CG on the *true* graph matches `gnn_true` (n.s.), while every mis-routed DCG arm floors—the structure-dependence replicates across mechanism families. *C*: on the 2-hop relay neither the GNN nor any DCG arm significantly exceeds the no-comms MLP-QMIX reference (61.11); the GNN beats the DCG arms only because those fall *below* that reference. Cell C: report medians (mean gap is a 4-seed MLP-QMIX tail artifact). †Added later under a separate pre-registered addendum (commit 568e759; `results/phaseD_external/`), same budget and byte-identical parameters, to supply the within-GNN controls cell C originally lacked; the three graph arms are mutually indistinguishable.

| Arm                                                                                                  | mean  | median | sd    | 95% CI          |
|------------------------------------------------------------------------------------------------------|-------|--------|-------|-----------------|
| <i>Cell A — full-info co-location ring</i> ( $N=4$ , full obs; random floor 4.02).                   |       |        |       |                 |
| <code>dcg_canonical</code>                                                                           | 74.87 | 75.97  | 6.48  | [70.76, 78.99]  |
| <code>dcg_jointobs</code>                                                                            | 83.57 | 83.85  | 0.93  | [82.98, 84.16]  |
| <code>mlp</code>                                                                                     | 83.65 | 84.08  | 0.93  | [83.06, 84.25]  |
| <code>gnn_true</code>                                                                                | 83.93 | 83.89  | 0.36  | [83.70, 84.16]  |
| <i>Cell B — 1-hop routing</i> (PAIRROUTING-ego, $N=6$ ; floor $\approx 50$ , oracle $\approx 149$ ). |       |        |       |                 |
| <code>dcg_canonical_true</code>                                                                      | 50.09 | 50.12  | 0.44  | [49.81, 50.37]  |
| <code>dcg_jointobs_wrong</code>                                                                      | 49.89 | 49.83  | 0.44  | [49.61, 50.17]  |
| <code>dcg_jointobs_complete</code>                                                                   | 50.30 | 50.24  | 0.30  | [50.11, 50.49]  |
| <code>dcg_jointobs_true</code>                                                                       | 90.50 | 95.42  | 16.49 | [80.02, 100.97] |
| <code>gnn_true</code>                                                                                | 94.96 | 96.28  | 5.05  | [91.75, 98.18]  |
| <i>Cell C — 2-hop relay</i> ( $N=6$ , ego; floor 33.37, no-comms MLP-QMIX ref 61.11, oracle 99.11).  |       |        |       |                 |
| <code>dcg_canonical_true</code>                                                                      | 51.17 | 49.65  | 7.46  | [46.44, 55.91]  |
| <code>dcg_jointobs_wrong</code>                                                                      | 56.44 | 58.32  | 6.17  | [52.52, 60.37]  |
| <code>dcg_jointobs_complete</code>                                                                   | 57.09 | 58.68  | 6.06  | [53.25, 60.94]  |
| <code>dcg_jointobs_true</code>                                                                       | 56.51 | 56.41  | 5.08  | [53.28, 59.74]  |
| <code>mlp</code> (no comm.)                                                                          | 61.11 | 63.33  | 3.81  | [58.69, 63.53]  |
| <code>gat_true</code>                                                                                | 63.16 | 63.42  | 0.84  | [62.62, 63.69]  |
| <code>gnn_wrong</code> †                                                                             | 63.28 | 63.15  | 0.55  | [62.93, 63.63]  |
| <code>gnn_complete</code> †                                                                          | 63.98 | 63.94  | 0.45  | [63.70, 64.27]  |
| <code>gnn_true</code>                                                                                | 64.00 | 63.84  | 1.17  | [63.26, 64.75]  |

Table 5: **Out-of-harness replication** (TOKENMATCH, a non-spatial referential matching game;  $N=6$ ,  $K=5$  tokens, 12 seeds). Same structure-isolating arms as PAIRROUTING (only `adjacency()` differs). The task-matched graph near-solves the task; the wrong graph and no-communication sit at the random floor ( $\approx 12$ ); all-to-all routes only partially because the partner’s token is one of the averaged inputs. We report this as complete distributional separation (the `gnn_true` seeds do not overlap any rival); under the near-zero within-arm variance of this near-deterministic constructed task, a Cohen’s  $d$  is astronomically large and *uninformative* as an effect magnitude, so we do not headline it.

| Arm                       | comm. graph                  | final return [95% CI]       |
|---------------------------|------------------------------|-----------------------------|
| <code>mlp</code>          | none                         | 11.90 [11.67, 12.14]        |
| <code>gnn_wrong</code>    | wrong matching               | 12.03 [11.78, 12.27]        |
| <code>gnn_complete</code> | all-to-all (partial routing) | 24.50 [24.18, 24.81]        |
| <code>gnn_true</code>     | <b>the task matching</b>     | <b>57.59</b> [57.55, 57.63] |

task: it is **not** a COORDGRID artefact. For reproducibility, the PAIRROUTING  $N=6$  headline is *bit-identical* across two independent runs spanning a script refactor—genuine seed determinism, not relabelled copies.



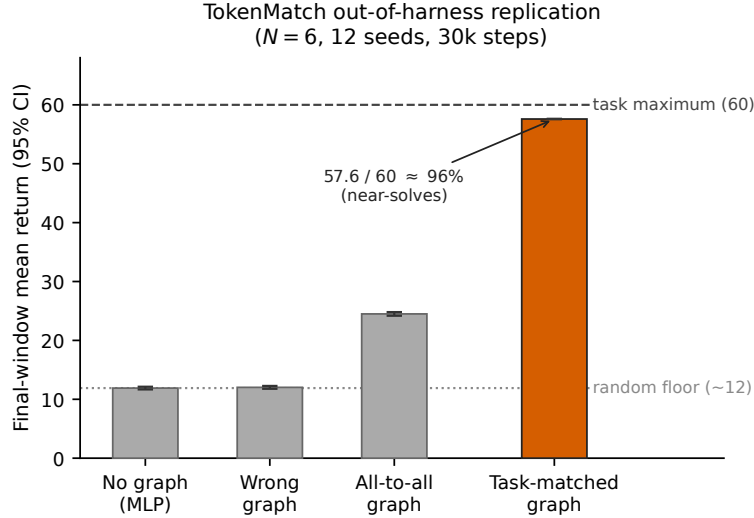


Figure 14: **Out-of-harness replication.** Final-window mean return (95% CI, 12 seeds, 30k steps) on TOKENMATCH ( $N=6$ ,  $K=5$  tokens), a non-spatial referential game with no grid, movement, or navigation. The task-matched graph near-solves the task (57.6 of a 60 maximum,  $\approx 96\%$ ), completely separating from the wrong-matching graph (12.0) and the no-graph control (11.9), both at the random floor. All-to-all achieves partial routing (24.5; the partner’s token is one of the averaged inputs) but remains far below the task-matched graph. Confirms the structure effect of Figure 11 is not a gridworld artefact.

## 7.9 A pre-registered transfer attempt onto a third-party vehicle

Both positive-endpoint tasks are ours. The obvious next question—does the structure effect survive physics and a reward we did not write?—we attempted rather than deferred, and we report the outcome as it landed.

**The vehicle, and what stays author-imposed.** We compose  $K=3$  independent pairs of `mpe2`’s `simple_reference` into a single  $N=6$  task with continuous physics and the environment’s own reward. The private-partner-goal structure is *native* rather than injected: in `simple_reference` an agent’s own target never appears in its own observation—only its partner holds it—so with the environment’s communication slot zeroed, the coordination graph is the only path by which an acting agent can receive it. (The centralised mixer’s state input does carry every pair’s goal block, but identically for all four confirmatory arms, so it cannot separate them; only the decentralised actors differ.) The structure-isolating arms carry over unchanged: `gnn_true` (the  $K$  native pair edges), `gnn_wrong` (a disjoint matching of identical 1-regular density), `gnn_complete` (all-to-all), `mlp` (no graph), and an `oracle` arm that receives the routed payload—the partner-held identity of its own target—directly in its observation, as a headroom anchor pre-registered outside the contrast family rather than a rival. The three graph arms are byte-identical at 38,534 parameters and differ only in `adjacency()`. Three things are ours by construction and remain so whatever the result: the composition into pairs, the pairing graph, and disabling the native channel. We therefore never describe this cell as a replication on an unmodified benchmark, or on coordination structure we did not design—a guardrail frozen in the pre-registration before the runs and binding regardless of outcome.

**Provenance, including the detour.** The arms, metric, the three-contrast Holm family (`gnn_true` vs. `gnn_wrong/gnn_complete/mlp`), the oracle gate and five decision branches were git-committed at 568e759 before any run. What follows is a disclosed detour rather than a straight line. At a 30k budget the oracle-headroom gate *failed*—the arm handed the routed information did not separate from the no-graph control—and the pre-registration’s own kill-switch stopped the confirmatory launch. A dated amendment (b00e26b) then authorised one 150k re-smoke, which passed the gate, and froze the confirmatory budget at 150k. The same amendment recorded in writing, before the confirmatory grid ran, that `gnn_true` had diverged below the random-policy floor in that re-smoke: the outcome below was anticipated and disclosed

in advance, not discovered afterwards. Both commits precede every datum reported here in wall-clock time and in git ancestry (all runs land at b5d76f9).

**The gate: the task is solvable when routed.** At 150,000 steps and 12 seeds the `oracle` arm reaches  $-43.36$   $[-45.90, -40.82]$  against the no-graph control’s  $-73.42$   $[-85.67, -61.16]$  (advantage  $+30.06$   $[+17.67, +42.45]$ ,  $d=2.16$ , Welch  $p=1.9\times 10^{-4}$ , MWU  $p=3.7\times 10^{-5}$ ), so the task is learnable when the information is routed and the metric has headroom. Privacy holds at the same budget: `mlp`’s median ( $-63.58$ ) sits below a hand-scripted *identity-blind* ceiling ( $-53.74$ ) and nowhere near a position-omniscient one ( $-31.64$ )—the blind band, which is where an agent that cannot observe its own target belongs.

**The result: no graph arm exceeds the no-graph control.** Each falls below it. `gnn_true` finishes at  $-109.38$   $[-123.41, -95.35]$  (median  $-108.73$ ),  $-35.96$   $[-53.53, -18.40]$  against `mlp` ( $d=-1.73$ , Welch  $p_{\text{Holm}}=1.0\times 10^{-3}$ , MWU  $p=7.3\times 10^{-4}$ —significant on both pre-registered tests, in the negative direction), and separates from neither the density-matched wrong graph ( $+2.78$ ,  $d=0.14$ ,  $p_{\text{Holm}}=0.74$ , MWU  $p=0.62$ ) nor all-to-all ( $+14.61$ ,  $d=0.60$ ,  $p_{\text{Holm}}=0.31$ , MWU  $p=0.13$ ; at  $d=0.60$  and  $n=12$  this contrast is underpowered rather than a confident tie, and we read no direction into it). The pre-registered mean-based statistic is the conservative one here: `mlp`’s mean is itself depressed by three unstable seeds, so on medians the deficit is *larger* ( $-45.15$ ). The mandated headroom fractions  $(\text{arm} - \text{mlp})/(\text{oracle} - \text{mlp})$  are  $-1.20$ ,  $-1.29$  and  $-1.68$  (mean-based; median-based values are more negative still, Appendix F)—the graph arms consume the routing headroom rather than capture it. This is the pre-registered Branch 3, published as pre-committed. One note on how that branch applies: its antecedent as frozen reads “`gnn_true` ties `mlp`,” which is not literally what happened—`gnn_true` is significantly *below* `mlp`. We apply it by entailment, because its operative consequence, “`gnn_true` does not exceed the no-graph control,” follows *a fortiori* from the stronger negative result, while Branches 0, 1, 2a and 2b are each excluded on their own antecedents. The claim we take stays inside Branch 3’s boundary; the excess—significantly below, and below the random floor—is reported next as a characterised instability, not as a claim that graph structure is harmful.

**The failure is not a converged null.** All three graph arms diverged during training. 8 of 12 (`gnn_true`), 9 (`gnn_wrong`) and 10 (`gnn_complete`) seeds show a sustained gradient-norm blow-up—24 of those 27 beginning *before* exploration annealing completes, at a median onset of 42–65% of the budget—and 10–11 of 12 seeds in each graph arm finish below the random-policy floor ( $-84.81$ ). The no-graph control is affected more mildly and later (2 of 12 seeds, onset  $\geq 92\%$  of the budget) and the `oracle` arm not at all (0 of 12). No return series contains a NaN or Inf; the metric reproduces from the raw episode logs, the trainer signature and parameter counts were audited across all runs, a read-only diagnostic found no implementation defect, and the same stack trains stably on COORDGRID at identical hyperparameters. We therefore do *not* read this cell as “graph structure does not help on MPE”—the graph arms did not converge. What it supports is the narrow statement that on this vehicle at this budget they do not exceed the no-graph control, accompanied by a characterised but *unexplained* training instability of this stack on this environment family. Candidate mechanisms exist—the stabilised operator’s residual+LayerNorm path is one—but we could not test them here: the diagnostic was read-only, and the no-graph control, which has neither residual nor LayerNorm, destabilised in 2 of 12 seeds as well. We label mechanism a hypothesis, not a finding (Section 9).

**Does the divergence explain the result away? (exploratory)** The obvious objection is that `gnn_true` would have beaten `mlp` had it not diverged. In a post-hoc, non-pre-registered check we re-read every run at its *best* 100-episode window instead of the frozen final window—a maximally generous readout for a diverging arm, and one biased in `gnn_true`’s favour, since a maximum over a noisier curve is inflated more. `gnn_true` still falls short of `mlp` ( $-8.39$ ,  $d=-3.29$ , Welch  $p=1.7\times 10^{-7}$ , MWU  $p=3.7\times 10^{-5}$ ): it did not exceed the no-graph control at any point in training, in any seed aggregate. This is exploratory support for the frozen conclusion, not a substitute for it.

A second, non-confirmatory cell (the unmodified  $N=2$  task with the native channel left on, 6 seeds) was pre-registered alongside the confirmatory cell above as a harness sanity anchor. It failed its own validity gate—both arms learn mid-run and then lose it, ending at or below that cell’s random floor—so we rest nothing on it and report it, with the per-arm instability characterisation, in Appendix F.

Table 6: **The pre-registered transfer attempt:** composed `simple_reference` pairs ( $K=3$ ,  $N=6$ , native communication disabled), final-window mean return over  $n=12$  seeds at 150,000 steps (pre-registration 568e759; budget freeze and gate verdict b00e26b; data b5d76f9; `results/phaseD_external/`). Reference policies measured on the same configuration: uniform random  $-84.81$ , do-nothing  $-78.14$ , identity-blind scripted ceiling  $-53.74$ , position-omniscient scripted ceiling  $-31.64$ . `oracle` is a pre-registered headroom anchor outside the contrast family, which is the three `gnn_true`-centred contrasts. The oracle gate passes ( $+30.06$  over `mlp`,  $d=2.16$ ), so the task is learnable when routed—yet every graph arm finishes below `mlp` and below the random floor, having diverged during training (Appendix F). Medians are reported alongside means because the arms are tail-heavy.

| Arm                          | mean      | median    | sd      | 95% CI               |
|------------------------------|-----------|-----------|---------|----------------------|
| <code>oracle</code> (anchor) | $-43.36$  | $-42.81$  | $4.00$  | $[-45.90, -40.82]$   |
| <code>mlp</code> (no graph)  | $-73.42$  | $-63.58$  | $19.28$ | $[-85.67, -61.16]$   |
| <code>gnn_true</code>        | $-109.38$ | $-108.73$ | $22.08$ | $[-123.41, -95.35]$  |
| <code>gnn_wrong</code>       | $-112.16$ | $-117.94$ | $18.10$ | $[-123.66, -100.67]$ |
| <code>gnn_complete</code>    | $-123.99$ | $-128.68$ | $26.55$ | $[-140.86, -107.13]$ |

**Scope of the positive endpoint.** These tasks are *built* so that routing is necessary—the right design to isolate structure from capacity, convention, and observability, and the pre-registered plan. The result *coexists with* the negative endpoint; it does not show the negative was wrong. The positive effect reproduces out of harness in a structurally unrelated, non-spatial environment (TOKENMATCH, §7.8), so it is not a gridworld artefact—but TOKENMATCH and PAIRROUTING are both purpose-built cooperative tasks with a private-partner-routing structure, and the one transfer we attempted onto third-party dynamics did not carry the effect there. We therefore do *not* claim external validity for the structure effect on that vehicle. The positive endpoint stands on the constructed archetypes on which it was measured—PAIRROUTING, TOKENMATCH, and the deep-coordination-graph comparison of §7.7—and we rescope the claim to those, generalising no further than “task-structured routing under partial information.” Whether the effect survives on a third-party benchmark remains open: our one pre-registered attempt did not settle it in favour of the graph, and settling it requires a vehicle on which this operator remains stable at a comparable budget—bounded observations, or an aggregator and optimisation setting chosen for stability rather than transplanted from the gridworld—which we leave to future work.

## 8 Discussion

**When does graph structure help? The boundary.** The answer is neither “always” nor “never” but a boundary with two identified endpoints. *At the negative endpoint*—full-information or convention-reducible tasks, Sections 6.2–6.5—the GNN-QMIX encoder does *not* outperform the structurally identical QMIX. The capacity control (Section 6.5) shows this is not because the extra parameters are wasted: MLP-QMIX, carrying the same parameters without the graph, matches QMIX, isolating the effect on the graph aggregation, which confers no benefit and—in its common *unstabilised* form—is actively harmful on COORDGRID and MPE, survives graph attention, and grows out to  $N=16$ . That active harm is an optimisation pathology of the unstabilised operator, not an intrinsic cost: a stabilised GCN recovers to parity with the controls (Appendix I), so the claim that survives for the stabilised operator is the weaker “no benefit” rather than “harm.” On standard benchmarks usually credited to graph methods the picture is the same *no-benefit-to-harm* one: on Level-Based Foraging the effect tracks team size—neutral at two agents but significantly below QMIX at three ( $d = -2.24$ , Welch  $p = 0.014$ ; Appendix G). We note that this significant LBF result is the (confounded) GNN-QMIX-vs-QMIX comparison; the parameter-matched GNN-QMIX-vs-MLP-QMIX contrast that our method relies on points the same way ( $d = -1.11$ ) but is not powered for significance at  $n=5$ , so on LBF we treat the identified penalty as directional, not confirmed. (A single-seed StarCraft II 3m check is reported in Appendix G as a non-inferential anecdote, not as evidence—one seed admits no variance estimate.) In this full-information / convention-reducible regime the measured effect ranges from neutral to harmful and is never positive. *At the positive endpoint* (Section 7), where the task forces an agent to act on private information held by one specific partner it

cannot observe, the stabilised graph operator helps—and decisively so ( $d \approx 5$ )—*but only when its topology matches the task’s coordination edges*. This is the *same* stabilised operator that Appendix I shows is neutral (parity with the no-graph control) at the negative endpoint: so the boundary is not an artefact of comparing two different operators. The same stabilised GCN is inert under full information and a large asset under task-structured routing—the discriminator is the task’s information structure, not the architecture. The two readings coexist: a graph earns its keep exactly when it is the only path for task-structured information *and* points at the right neighbours, and is neutral (or, unstabilised, harmful) otherwise. Both endpoints are measured on tasks we constructed, and we tried to move the positive one onto third-party dynamics: a composed `simple_reference` vehicle with a native private-partner-goal structure, pre-registered with an oracle gate and decision branches before the runs (§7.9). It did not transfer. The oracle gate passed—the task is solvable when the information is routed—yet all three graph arms diverged during training and finished below both the no-graph control and the random floor. That is a pre-registered failure to transfer accompanied by a characterised instability, and it bounds where we have *measured* the effect rather than showing the effect absent on third-party benchmarks: on that vehicle the graph arms never converged.

**The active ingredient is topology, not the mechanism.** A pre-registered classical baseline (§7.7) sharpens what “structure” means. On the 1-hop routing task, a deep coordination graph (DCG, max-plus payoff propagation over the same factored payoff) *matches* the GNN on the true graph (90.50 vs. 94.96, n.s.) and *floors* on every mis-routed variant, exactly as the GNN does—so the 1-hop benefit is not unique to message passing but is a property of the task’s topology, reproduced across two mechanism families. The upgraded rule is therefore “the right edges, not more edges” as a statement about the task: both message passing and payoff propagation succeed given the correct edges and collapse given wrong or action-only ones (the GNN’s positive claims at matched parameters, §7.2, are unchanged; what changes is that mechanism choice is secondary to topology in the tested regime). This completes—rather than dilutes—the paper’s thesis: it moves the burden from “which architecture” to “which edges,” where the controls place it. Honesty about the boundary of this rule: on a constructed 2-hop *relay*, *neither* mechanism demonstrated routing above a no-comms MLP-QMIX baseline at the budgets tested (`gnn_true` vs. MLP-QMIX: Welch  $p_{\text{Holm}}=0.052$ , MWU  $p=0.078$ ; medians coincident; every DCG arm below MLP-QMIX)—multi-hop information routing remains open for both, and the GNN’s advantage over DCG there reflects DCG falling below the baseline, not the GNN routing above it. Completing that cell with its two missing within-GNN controls sharpens the negative rather than softening it: `gnn_true`, `gnn_wrong` and `gnn_complete` are mutually indistinguishable on the relay and none clears the no-comms control, a within-GNN null consistent with none of them routing it (§7.7). *This is a claim about a mechanism, not a verdict on any system*: we test the relational operators these methods rely on (a fixed GCN and learned graph attention) inside one controlled QMIX-style harness on small-to-moderate cooperative tasks, not the full published systems at SMAC scale. Within that scope it is a far more constrained reading of graph-based value factorisation than a *regime-agnostic* reading of these results (Jiang et al., 2020; Liu et al., 2020; Naderializadeh et al., 2020) would suggest. As stressed in the introduction, DGN and G2ANET report their gains in *partially-observable* settings—precisely the regime our *positive* endpoint endorses—so our constraint falls on the *full-information* generalisation of those results, not on the regimes those papers actually evaluate; this is consistent with the evaluation-rigour concerns of Henderson et al. (2018) and Agarwal et al. (2021).

**The practical rule.** Add a coordination graph, and route along *task-relevant* edges rather than all-to-all, only when agents must act on information held by specific others they cannot observe. The controls make the rule sharp, and we state it in the form the data support rather than as an absolute: a fixed task-matched structure is dramatically more sample-efficient than learning to target over all-to-all (at both the 30k and 150k budgets the matched graph wins and the gap widens,  $d \approx 5 \rightarrow 12$ ). Within budget, all-to-all recovers *at most partial* routing and never approaches the task-matched graph ( $\approx 7\%$  of the gap on PAIRROUTING—about one point above the no-communication floor, a statistically detectable sliver of routing, §7.2—and  $\sim 27\%$  on TOKENMATCH, where the partner’s token is one of the averaged inputs)—and a density-matched wrong graph never beats no graph at all. The difference between the two tasks is exactly that in TOKENMATCH the partner’s signal survives mean-pooling enough to be partly usable, yet even there broadcasting loses by  $-33$ . Pointing the channel at the wrong neighbours wastes it; broadcasting to everyone does not rescue it. Where the task is full-information or convention-reducible, prefer a state-conditioned mixer (QMIX) and

add no graph—the relational bias there is at best inert, and if implemented as the standard unstabilised GCN, a liability.

*An important caveat on actionability.* This rule presupposes the practitioner *knows* (or can reliably estimate) the task’s true coordination graph; learning the graph from scratch is out of scope here. A complementary line of work attacks exactly this gap by *learning* the coordination graph rather than assuming it—e.g. DICG (Li et al., 2021) and CASEC (Wang et al., 2022)—and our controls quantify the cost of the mis-specification those methods aim to avoid; characterising whether such learned-graph methods recover the task-matched structure under our wrong-graph/all-to-all isolation is natural future work. That is not a minor proviso, because our all-to-all result shows the obvious fallback fails: a learned dense channel does *not* trivially recover the benefit (all-to-all, and even a learned attention head over all-to-all, stay near the floor even at  $5\times$  the training budget—§7.2, §7.6), and a wrong graph is no better than no graph. Graph *mis-specification* therefore carries a real cost, and the safe default where the coordination structure is unknown or uncertain is the no-graph state-conditioned mixer: in that regime the negative endpoint dominates. A further practical bound: even a near-perfectly specified graph leaves most of the task on the table—`gnn_true` captures only  $\sim 16\%$  of the routing headroom on PAIRROUTING versus  $\sim 96\%$  on TOKENMATCH (§7.2, §7.8), because PAIRROUTING layers gridworld navigation and credit assignment on top of routing while TOKENMATCH removes navigation; the gap a graph closes is the *routing* bottleneck, not the whole task. Finally, expressiveness does not let you skip specifying the graph: the most expressive aggregator we test (multi-head attention) trains *better* given the right edges (`dgn_true` 71.50, an exploratory  $+5.4$  over the GCN,  $p_{\text{Holm}} = 0.007$ ) yet still floors over all-to-all (`dgn_complete` 50.45)—the cleanest single rebuttal to “the GCN just under-fits” and “mean-pooling dilutes the signal,” since the strongest aggregator both fits better and still needs the right graph.

**The depth–diameter heuristic does not survive the data.** The pre-registered H3 prediction (choose GNN depth  $L$  near the graph diameter  $d$ ) is falsified at the family level (1 of 3 diameters passes; Section 6.4) and replaced by a sharper pattern:  $L \in \{1, 2\}$  beats  $L \in \{3, 4\}$  by a wide margin across every diameter, consistent with over-smoothing (Li et al., 2018) and over-squashing (Alon & Yahav, 2021) but more aggressive here than the receptive-field intuition predicts. The rule: in small-team CTDE with modest replay budgets, do not stack more than two GCN layers before a QMIX-style mixer.

**When *not* to use a GNN mixer.** Three cases. (i) The task has no real coordination graph, so the bias buys nothing and pays the cost of representing (or mis-specifying) one. (ii) The diameter  $d$  exceeds the feasible depth  $L$ , so the GNN cannot route information across the team and a state-conditioned mixer (QMIX) fits better. (iii) The case our experiments document mechanistically: when the task is full-information or reducible to a global convention, so no agent depends on another’s private information, the graph mixer buys nothing over a parameter-matched no-graph control—and if implemented as the standard unstabilised GCN it is *worse*, both less accurate and far less stable across seeds than QMIX (the capacity control pins this on the graph aggregation, not the parameters; stabilisation removes the instability but not the futility, Appendix I). (The discriminator is the information structure, not team size or diameter: our positive endpoint is equally small-team and low-diameter, yet there the graph helps.) Practitioners should not assume “a coordination graph exists” implies “a graph-conditioned mixer will help.”

**When *to* use one.** The positive endpoint marks out the complementary case: a graph mixer pays off when (i) the task requires an agent to act on information held by a specific other it cannot observe, so the graph is the only route for that information, *and* (ii) the communication topology is aligned with the task’s coordination structure. Our controls show both conditions are necessary, not just sufficient: in the gridworld headline (Section 7.2), removing alignment (the wrong graph) or flooding the channel (all-to-all) each collapsed the advantage to near zero, and in the token-matching task all-to-all retained only weak, task-incidental routing—far below the matched graph in both. The same stabilised aggregation that is merely *inert* in the convention-reducible regime (parity with the control, Appendix I; and a liability only in its unstabilised form) becomes a large, reproducible asset here ( $d \approx 5$ ), so the design question is not “graph or no graph” but “do the task’s information dependencies match the edges I wire in.”

**Implications for benchmark design.** Because which algorithm wins is a function of the graph regime rather than of the algorithm, single environment / single-graph comparisons are condition-dependent; future

cooperative-MARL benchmarks should expose the coordination graph as a controllable axis, in the spirit of COORDGRID.

## 9 Limitations

We list explicit limitations rather than burying them.

1. **Scale.** Our largest team is  $N=16$  on a tabular-flavoured gridworld;  $N \gg 16$  and visually complex tasks (SMAC-scale) are out of scope. The penalty *grows* out to  $N=16$  (Appendix K), so scale within our range strengthens rather than threatens the result. (Step budget is also moot: decisive cells run at 150,000 steps,  $5 \times$  the main sweep.)
2. **Coordination-graph design.** COORDGRID ties reward to graph edges directly, the cleanest but most graph-favourable test. The MPE `simple_spread` replication (Section 6.3), where the graph is an unprivileged  $k$ -NN proximity graph, mitigates this; but tasks whose true coordination structure matches no observable graph may differ.
3. **GNN family and operator variants.** We test a fixed GCN (plain and stabilised), single-head (GAT-QMIX) and multi-head dot-product (DGN-QMIX) attention (Appendices I, J); at the negative endpoint no variant recovers a benefit over the no-graph control. We isolate one operator effect (residual+LayerNorm converts the plain GCN’s active harm to mere parity) but do not sweep the full stabilisation/normalisation design space, and learned message passing (GIN) and edge-feature GNNs remain open. The stabilised operator also has a *stability* boundary of its own, which we can locate but not explain: on the composed third-party vehicle of §7.9 all three graph arms diverged during 150k-step training, while the same stack trains stably on COORDGRID at identical hyperparameters. We characterise that divergence (Appendix F) but did not ablate its cause; residual+LayerNorm is a candidate we could not test—the no-graph control, which has neither, destabilised in 2 of 12 seeds too—so mechanism remains a hypothesis rather than a finding, and a controlled ablation (residual/LayerNorm  $\times$  gradient clipping  $\times$  learning rate) is the experiment that would settle it.
4. **Positive endpoint is a boundary result on constructed archetypes.** The positive boundary (Section 7) is an existence/boundary result on two deliberately constructed tasks, each an abstraction of a canonical multi-agent-systems problem: PAIRROUTING of distributed task allocation / routing under partial observability with private goals, and TOKENMATCH of referential coordination / signalling. Using purpose-built tasks is the design that isolates structure from capacity, convention, and observability; the effect is not confined to one environment, replicating across the structurally unrelated, non-spatial TOKENMATCH (Section 7.8), so it is not a COORDGRID artefact. Both tasks nonetheless share a private-partner-routing structure by construction. We attempted the extension to third-party dynamics rather than deferring it—a composed `simple_reference` vehicle whose private-partner-goal structure is native, pre-registered with an oracle gate and decision branches before the runs (§7.9)—and it failed: the oracle gate passed, so the task is solvable when routed, but every graph arm diverged during training and finished below the no-graph control. We therefore rescope the positive endpoint to the constructed archetypes measured here and do not generalise beyond “task-structured routing under partial information.” Note what the attempt does *not* show: because the graph arms never converged there, it is not evidence that the structure effect is absent on third-party tasks. Testing that needs a vehicle on which this operator remains stable at a comparable budget—bounded observations, or an aggregator and optimisation setting chosen for stability rather than transplanted from the gridworld—and remains open. Three further things stay ours by construction on that vehicle regardless of outcome (the composition into pairs, the pairing graph, and disabling the native communication channel), so it is not an unmodified benchmark either.
5. **Mis-specification is sampled only at the endpoints.** We contrast an exactly-correct graph against a fully-wrong matching and all-to-all, but not the intermediate case a practitioner faces—a graph with a *fraction* of its partner edges correct. We therefore cannot say whether the benefit degrades gracefully or cliffs as the graph drifts from correct; a partial-correctness sweep (edges correct in  $\{0, 0.25, 0.5, 0.75, 1\}$ ) would turn the binary right-vs-wrong contrast into a graded mis-specification-cost curve and is the cheapest decision-relevant extension.

6. **Multi-hop routing is unresolved, and the relay cell is narrow.** The 2-hop relay (cell C of §7.7) returned a pre-registered *negative*: neither the GNN nor the deep coordination graph exceeded the no-comms MLP-QMIX reference at 150k steps, so we make no multi-hop routing claim. The within-GNN controls that cell originally lacked have since been added (12 seeds, 150k steps, byte-identical parameters, pre-registered as an addendum): `gnn_true`, `gnn_wrong` and `gnn_complete` are mutually indistinguishable and none clears the no-comms MLP-QMIX control, a within-GNN null consistent with none of them routing the relay. Two limits remain: it was run at a single (150k) budget, so we cannot rule out that either mechanism routes with more training; and it is one constructed relay task. Whether message passing separates from payoff propagation on genuine multi-hop routing, and at what budget, remains open.
7. **Single-CPU training.** We did not retune learning-rate / batch-size choices for GPU throughput.
8. **Seed count.** The main CoordGrid and MPE sweep runs at 10 seeds, at or above the  $\geq 5$  recommended (Henderson et al., 2018; Agarwal et al., 2021); the LBF check uses five seeds and the preliminary SMAC check a single seed (Appendix G).
9. **Fixed-horizon bootstrap.** Episodes are truncated with `done=True`, biasing the boundary value toward zero, the standard QMIX choice, applied identically to every algorithm, so cross-algorithm comparisons are unaffected.

## 10 Conclusion

We presented a controlled study of graph-based value factorisation in cooperative MARL that locates *both* endpoints of a boundary, holding the per-agent encoder, mixer, optimiser, and exploration schedule fixed and adding a parameter-matched no-graph control (MLP-QMIX). *Negative endpoint*: in full-information / convention-reducible tasks GNN-QMIX does not beat QMIX, and the control *identifies* the source as the graph aggregation rather than the added capacity. In its common unstabilised form the graph is actively harmful ( $d = -3.9$  at  $N=8$ ; significant under Mann–Whitney and Holm-corrected Welch)—the deficit survives  $5\times$  training, grows monotonically to  $N=16$ , and inflates across-seed variance by roughly an order of magnitude—but this harm is an optimisation pathology: stabilising the GCN (residual+LayerNorm) recovers it to parity with the control (Appendix I), so the robust claim is *no benefit*, with active harm scoped to the unstabilised operator. The graph is never significantly positive on MPE `simple_spread` (penalty visible under the capacity decomposition; naive comparison null) or on Level-Based Foraging (significantly below QMIX at three agents; matched-control contrast directional at  $n=5$ ), and does not recover a benefit under graph attention; the pre-registered  $L \approx d$  heuristic is falsified in favour of the blunt rule “keep GCN depth  $\leq 2$ .” *Positive endpoint*: on a constructed pair-routing task where each agent must reach a partner’s private goal, the task-matched graph beats all-to-all communication—the only rival that carries the partner’s information, yet it recovers almost none of it—at byte-identical parameters and observations ( $d \approx 5$  at degree-1; Welch/Holm and Mann–Whitney  $p < 10^{-4}$ , complete seed-level separation at  $n=12$ ), while a density-matched wrong graph (which carries no partner information by construction) floors with the no-graph control—more communication did not help, the *right* communication did. The advantage is structure, not the channel or the capacity, and is not recovered by expressiveness alone: neither the fixed mean-aggregator nor a stabilisation-matched learned attention head recovers the signal from all-to-all, even at  $5\times$  the training budget, while given the right graph a more expressive aggregator helps (+5.4), so expressiveness amplifies structure but cannot substitute for it. The effect is significant at every  $N=4\text{--}10$  (non-monotone), robust to observability, survives at degree-2 about  $7\times$  smaller at the 30k budget (an upper bound on the attenuation), and replicates out of harness in a non-spatial token-matching game (TOKENMATCH), so it is not a gridworld artefact. The practical rule that unifies the two: route along task-relevant edges, not all-to-all, only when agents must act on information held by specific others they cannot observe. The positive endpoint is a boundary result on constructed archetypes of distributed routing and referential signalling. We attempted to extend it to a third-party vehicle with a native private-partner-goal structure under a pre-registered protocol: the task proved solvable when routed (an oracle arm beat the no-graph control by +30.06,  $d=2.16$ ), but all three graph arms diverged during training and finished below that control, so we rescope the positive endpoint to the archetypes measured here and leave open whether it survives on a vehicle where this operator stays stable. We release the harness and the MLP-QMIX control to make such measurements cheaper.

## Broader Impact Statement

This work is a controlled empirical study of when coordination-graph structure helps cooperative multi-agent reinforcement learning, conducted entirely in synthetic environments (gridworlds, a referential game, and standard research benchmarks). Its contribution is measurement and methodology—matched controls and pre-registered comparisons for evaluating graph-based coordination—rather than a deployable capability, and we foresee no direct societal risk beyond those generic to improved multi-agent coordination. If anything, the negative endpoint cautions practitioners against adding relational machinery on the assumption that it helps, which may reduce wasted computation.

## References

- Rishabh Agarwal, Max Schwarzer, Pablo Samuel Castro, Aaron C. Courville, and Marc G. Bellemare. Deep reinforcement learning at the edge of the statistical precipice. In *Advances in Neural Information Processing Systems 34 (NeurIPS)*, 2021. arXiv:2108.13264.
- Uri Alon and Eran Yahav. On the bottleneck of graph neural networks and its practical implications. In *International Conference on Learning Representations (ICLR)*, 2021. arXiv:2006.05205.
- Peter W. Battaglia, Jessica B. Hamrick, Victor Bapst, Alvaro Sanchez-Gonzalez, Vinicius Zambaldi, Mateusz Malinowski, Andrea Tacchetti, David Raposo, Adam Santoro, Ryan Faulkner, Caglar Gulcehre, Francis Song, Andrew Ballard, Justin Gilmer, George Dahl, Ashish Vaswani, Kelsey Allen, Charles Nash, Victoria Langston, Chris Dyer, Nicolas Heess, Daan Wierstra, Pushmeet Kohli, Matt Botvinick, Oriol Vinyals, Yujia Li, and Razvan Pascanu. Relational inductive biases, deep learning, and graph networks. arXiv preprint, 2018. arXiv:1806.01261.
- Wendelin Böhmer, Vitaly Kurin, and Shimon Whiteson. Deep coordination graphs. In *Proceedings of the 37th International Conference on Machine Learning (ICML)*, pp. 980–991, 2020. arXiv:1910.00091.
- Abhishek Das, Théophile Gervet, Joshua Romoff, Dhruv Batra, Devi Parikh, Michael Rabbat, and Joelle Pineau. TarMAC: Targeted multi-agent communication. In *Proceedings of the 36th International Conference on Machine Learning (ICML)*, pp. 1538–1546, 2019. arXiv:1810.11187.
- Wei Duan, Jie Lu, and Junyu Xuan. Group-aware coordination graph for multi-agent reinforcement learning. In *Proceedings of the 33rd International Joint Conference on Artificial Intelligence (IJCAI)*, 2024a. arXiv:2404.10976.
- Wei Duan, Jie Lu, and Junyu Xuan. Inferring latent temporal sparse coordination graph for multi-agent reinforcement learning. *IEEE Transactions on Neural Networks and Learning Systems*, 2024b. arXiv:2403.19253.
- Ferdinando Fioretto, Enrico Pontelli, and William Yeoh. Distributed constraint optimization problems and applications: A survey. *Journal of Artificial Intelligence Research*, 61:623–698, 2018. arXiv:1602.06347.
- Jakob Foerster, Yannis M. Assael, Nando de Freitas, and Shimon Whiteson. Learning to communicate with deep multi-agent reinforcement learning. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2016. arXiv:1605.06676.
- Carlos Guestrin, Daphne Koller, and Ronald Parr. Multiagent planning with factored MDPs. In *Advances in Neural Information Processing Systems 14 (NIPS)*, pp. 1523–1530, 2001.
- Carlos Guestrin, Michail G. Lagoudakis, and Ronald Parr. Coordinated reinforcement learning. In *Proceedings of the 19th International Conference on Machine Learning (ICML)*, pp. 227–234, 2002a.
- Carlos Guestrin, Shobha Venkataraman, and Daphne Koller. Context-specific multiagent coordination and planning with factored MDPs. In *Proceedings of the 18th National Conference on Artificial Intelligence (AAAI)*, pp. 253–259, 2002b.



- Carlos Guestrin, Daphne Koller, Ronald Parr, and Shobha Venkataraman. Efficient solution algorithms for factored MDPs. *Journal of Artificial Intelligence Research*, 19:399–468, 2003. arXiv:1106.1822.
- Peter Henderson, Riashat Islam, Philip Bachman, Joelle Pineau, Doina Precup, and David Meger. Deep reinforcement learning that matters. In *Proceedings of the Thirty-Second AAAI Conference on Artificial Intelligence*, pp. 3207–3214, 2018. arXiv:1709.06560.
- Jiechuan Jiang and Zongqing Lu. Learning attentional communication for multi-agent cooperation. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2018. arXiv:1805.07733.
- Jiechuan Jiang, Chen Dun, Tiejun Huang, and Zongqing Lu. Graph convolutional reinforcement learning. In *International Conference on Learning Representations (ICLR)*, 2020. arXiv:1810.09202.
- Yipeng Kang, Tonghan Wang, Xiaoran Wu, Qianlan Yang, and Chongjie Zhang. Non-linear coordination graphs. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2022. arXiv:2211.08404.
- Thomas N. Kipf and Max Welling. Semi-supervised classification with graph convolutional networks. In *International Conference on Learning Representations (ICLR)*, 2017. arXiv:1609.02907.
- Jelle R. Kok and Nikos Vlassis. Sparse cooperative Q-learning. In *Proceedings of the 21st International Conference on Machine Learning (ICML)*, pp. 481–488, 2004.
- Jelle R. Kok and Nikos Vlassis. Collaborative multiagent reinforcement learning by payoff propagation. *Journal of Machine Learning Research*, 7:1789–1828, 2006.
- Qimai Li, Zhichao Han, and Xiao-Ming Wu. Deeper insights into graph convolutional networks for semi-supervised learning. In *Proceedings of the 32nd AAAI Conference on Artificial Intelligence (AAAI)*, pp. 3538–3545, 2018. arXiv:1801.07606.
- Sheng Li, Jayesh K. Gupta, Peter Morales, Ross Allen, and Mykel J. Kochenderfer. Deep implicit coordination graphs for multi-agent reinforcement learning. In *Proceedings of the 20th International Conference on Autonomous Agents and Multiagent Systems (AAMAS)*, pp. 764–772, 2021. arXiv:2006.11438.
- Xinran Li, Xiaolu Wang, Chenjia Bai, and Jun Zhang. Exponential topology-enabled scalable communication in multi-agent reinforcement learning. In *International Conference on Learning Representations (ICLR)*, 2025. arXiv:2502.19717.
- Yong Liu, Weixun Wang, Yujing Hu, Jianye Hao, Xingguo Chen, and Yang Gao. Multi-agent game abstraction via graph attention neural network. In *Proceedings of the AAAI Conference on Artificial Intelligence (AAAI)*, pp. 7211–7218, 2020. arXiv:1911.10715.
- Ryan Lowe, Yi Wu, Aviv Tamar, Jean Harb, Pieter Abbeel, and Igor Mordatch. Multi-agent actor-critic for mixed cooperative-competitive environments. In *Advances in Neural Information Processing Systems 30 (NeurIPS)*, pp. 6379–6390, 2017. arXiv:1706.02275.
- Anuj Mahajan, Tabish Rashid, Mikayel Samvelyan, and Shimon Whiteson. MAVEN: Multi-agent variational exploration. In *Advances in Neural Information Processing Systems 32 (NeurIPS)*, 2019. arXiv:1910.07483.
- Francisco S. Melo and Manuela Veloso. Learning of coordination: Exploiting sparse interactions in multi-agent systems. In *Proceedings of the 8th International Conference on Autonomous Agents and Multiagent Systems (AAMAS)*, pp. 773–780, 2009.
- Francisco S. Melo and Manuela Veloso. Decentralized MDPs with sparse interactions. *Artificial Intelligence*, 175(11):1757–1789, 2011.
- Pragnesh Jay Modi, Wei-Min Shen, Milind Tambe, and Makoto Yokoo. ADOPT: Asynchronous distributed constraint optimization with quality guarantees. *Artificial Intelligence*, 161(1–2):149–180, 2005.
- Navid Naderializadeh, Fan H. Hung, Sean Soleyman, and Deepak Khosla. Graph convolutional value decomposition in multi-agent reinforcement learning. arXiv preprint, 2020. arXiv:2010.04740.

- Frans A. Oliehoek and Christopher Amato. *A Concise Introduction to Decentralized POMDPs*. Springer International Publishing, 2016. ISBN 978-3-319-28929-8.
- Georgios Papoudakis, Filippos Christianos, Lukas Schäfer, and Stefano V. Albrecht. Benchmarking multi-agent deep reinforcement learning algorithms in cooperative tasks. In *Advances in Neural Information Processing Systems (NeurIPS), Datasets and Benchmarks Track*, 2021. arXiv:2006.07869.
- Tabish Rashid, Mikayel Samvelyan, Christian Schroeder de Witt, Gregory Farquhar, Jakob N. Foerster, and Shimon Whiteson. QMIX: Monotonic value function factorisation for deep multi-agent reinforcement learning. In *Proceedings of the 35th International Conference on Machine Learning (ICML)*, pp. 4295–4304, 2018. arXiv:1803.11485.
- Tabish Rashid, Mikayel Samvelyan, Christian Schroeder de Witt, Gregory Farquhar, Jakob N. Foerster, and Shimon Whiteson. Monotonic value function factorisation for deep multi-agent reinforcement learning. *Journal of Machine Learning Research*, 21(178):1–51, 2020. arXiv:2003.08839.
- Mikayel Samvelyan, Tabish Rashid, Christian Schroeder de Witt, Gregory Farquhar, Nantas Nardelli, Tim G. J. Rudner, Chia-Man Hung, Philip H. S. Torr, Jakob Foerster, and Shimon Whiteson. The StarCraft multi-agent challenge. In *Proceedings of the 18th International Conference on Autonomous Agents and Multiagent Systems (AAMAS)*, pp. 2186–2188, 2019. arXiv:1902.04043.
- Yoav Shoham and Moshe Tennenholtz. On social laws for artificial agent societies: Off-line design. *Artificial Intelligence*, 73(1–2):231–252, 1995.
- Amanpreet Singh, Tushar Jain, and Sainbayar Sukhbaatar. Learning when to communicate at scale in multiagent cooperative and competitive tasks. In *International Conference on Learning Representations (ICLR)*, 2019. arXiv:1812.09755.
- Kyunghwan Son, Daewoo Kim, Wan Ju Kang, David Earl Hostallero, and Yung Yi. QTRAN: Learning to factorize with transformation for cooperative multi-agent reinforcement learning. In *Proceedings of the 36th International Conference on Machine Learning (ICML)*, pp. 5887–5896, 2019. arXiv:1905.05408.
- Sainbayar Sukhbaatar, Arthur Szlam, and Rob Fergus. Learning multiagent communication with backpropagation. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2016. arXiv:1605.07736.
- Peter Sunehag, Guy Lever, Audrunas Gruslys, Wojciech Marian Czarnecki, Vinicius Zambaldi, Max Jaderberg, Marc Lanctot, Nicolas Sonnerat, Joel Z. Leibo, Karl Tuyls, and Thore Graepel. Value-decomposition networks for cooperative multi-agent learning based on team reward. In *Proceedings of the 17th International Conference on Autonomous Agents and Multiagent Systems (AAMAS)*, pp. 2085–2087, 2018. arXiv:1706.05296.
- Ming Tan. Multi-agent reinforcement learning: Independent versus cooperative agents. In *Proceedings of the Tenth International Conference on Machine Learning (ICML)*, pp. 330–337. Morgan Kaufmann, 1993.
- J. K. Terry, Benjamin Black, Nathaniel Grammel, Mario Jayakumar, Ananth Hari, Ryan Sullivan, Luis S. Santos, Clemens Dieffendahl, Caroline Horsch, Rodrigo Perez-Vicente, Niall L. Williams, Yashas Lokesh, and Praveen Ravi. PettingZoo: Gym for multi-agent reinforcement learning. In *Advances in Neural Information Processing Systems 34 (NeurIPS), Datasets and Benchmarks Track*, 2021. arXiv:2009.14471.
- Sharlin Utke, J  r  mie Houssineau, and Giovanni Montana. Investigating relational state abstraction in collaborative multi-agent reinforcement learning. In *Proceedings of the AAAI Conference on Artificial Intelligence (AAAI)*, volume 39, pp. 20947–20955, 2025. arXiv:2412.15388.
- Hado van Hasselt, Arthur Guez, and David Silver. Deep reinforcement learning with double Q-learning. In *Proceedings of the Thirtieth AAAI Conference on Artificial Intelligence*, pp. 2094–2100, 2016. arXiv:1509.06461.
- Petar Veli  kovi  , Guillem Cucurull, Arantxa Casanova, Adriana Romero, Pietro Li  , and Yoshua Bengio. Graph attention networks. In *International Conference on Learning Representations (ICLR)*, 2018. arXiv:1710.10903.

Jianhao Wang, Zhizhou Ren, Terry Liu, Yang Yu, and Chongjie Zhang. QPLEX: Duplex dueling multi-agent Q-learning. In *International Conference on Learning Representations (ICLR)*, 2021. arXiv:2008.01062.

Tonghan Wang, Liang Zeng, Weijun Dong, Qianlan Yang, Yang Yu, and Chongjie Zhang. Context-aware sparse deep coordination graphs. In *Proceedings of the 10th International Conference on Learning Representations (ICLR)*, 2022. arXiv:2106.02886.

Keyulu Xu, Weihua Hu, Jure Leskovec, and Stefanie Jegelka. How powerful are graph neural networks? In *International Conference on Learning Representations (ICLR)*, 2019. arXiv:1810.00826.

Chao Yu, Akash Velu, Eugene Vinyals, Jiaxuan Gao, Yu Wang, Alexandre Bayen, and Yi Wu. The surprising effectiveness of PPO in cooperative multi-agent games. In *Advances in Neural Information Processing Systems (NeurIPS) Datasets and Benchmarks Track*, 2022. arXiv:2103.01955.

## A Training loop

---

**Algorithm 1** Shared training loop (CTDE, off-policy, Double-DQN). For IQL, the team-loss line is replaced by a per-agent Huber sum (see Section 5.2).

---

**Require:** environment ENV, algorithm ALG (online + target nets, mixer), total steps  $T$ , batch size  $B$ , target-update interval  $\tau$ , exploration schedule  $\epsilon(t)$ , update period  $k$ , warmup  $t_w$ . (ENV and ALG are set apart in small caps so that  $\mathcal{A}$  and  $\mathcal{E}$  keep their body-text meanings: action set and edge set.)

```

1: Initialise replay buffer  $\mathcal{D}$ , target net  $\theta^- \leftarrow \theta$ .
2:  $(o, s) \leftarrow \text{ENV.RESET}()$ ;  $A \leftarrow \text{ENV.ADJACENCY}()$ 
3: for  $t = 1, \dots, T$  do
4:    $a \leftarrow \text{ALG.ACT}(o, A, \epsilon(t))$  ▷  $\epsilon$ -greedy per-agent, params shared
5:    $(o', s', r, \text{done}) \leftarrow \text{ENV.STEP}(a)$ 
6:    $\mathcal{D}.\text{ADD}((o, s, a, r, o', s', \text{done}, A))$ 
7:   if  $t \geq t_w$  and  $t \bmod k = 0$  then
8:     batch  $\sim \mathcal{D}$  (size  $B$ )
9:      $\mathbf{Q} \leftarrow \text{ALG.Q}(o, A; \theta) \in \mathbb{R}^{B \times N \times |\mathcal{A}|}$  ▷ per-agent Q over all actions
10:     $q_a \leftarrow \text{gather}(\mathbf{Q}, a) \in \mathbb{R}^{B \times N}$ ;  $Q_{\text{tot}} \leftarrow f_{\text{mix}}(q_a; s)$ 
11:     $a^* \leftarrow \arg \max_{a'} \text{ALG.Q}(o', A; \theta)$  ▷ Double-DQN action selection, online net
12:     $\bar{q} \leftarrow \text{gather}(\text{ALG.Q}(o', A; \theta^-), a^*)$ ;  $Q_{\text{tot}}^- \leftarrow f_{\text{mix}}^-(\bar{q}; s')$ 
13:     $y \leftarrow r + \gamma(1 - \text{done}) \cdot Q_{\text{tot}}^-$ 
14:     $\theta \leftarrow \theta - \eta \nabla_{\theta} \text{Huber}(Q_{\text{tot}}, y)$  ▷ Adam, grad-norm clip 10
15:    if  $t \bmod \tau = 0$  then  $\theta^- \leftarrow \theta$ 
16:    end if
17:  end if
18:  if  $\text{done}$  then  $(o, s) \leftarrow \text{ENV.RESET}()$ ;  $A \leftarrow \text{ENV.ADJACENCY}()$ 
19:  else  $(o, s) \leftarrow (o', s')$ 
20:  end if
21: end for
```

---

## B Hyperparameters and compute

**Compute envelope.** All experiments ran on a single CPU (commodity hardware, PyTorch CPU build). No GPU was used. CoordGrid is light enough that this is not a bottleneck for the team sizes we report; it does cap the feasible  $N$  at the upper end (see Section 9). Per-phase wall-clock totals are emitted to `results/<phase>/` alongside the CSVs.

**Execution environment.** Experiments and analysis ran CPU-only on commodity x86-64 Windows hosts (primary machine: 24-thread Intel Raptor-Lake desktop CPU, 64 GiB RAM, Windows 11) under Python 3.13

Table 7: Shared training hyperparameters across all algorithms and all phases. Values were chosen once at Phase 0 and held fixed; no algorithm-specific tuning was performed. Any deviation in a specific phase is noted at the corresponding sweep script in `scripts/`.

| Hyperparameter              | Value                                                               |
|-----------------------------|---------------------------------------------------------------------|
| Optimizer                   | Adam                                                                |
| Learning rate $\eta$        | $5 \times 10^{-4}$                                                  |
| Discount factor $\gamma$    | 0.99                                                                |
| Loss                        | Smooth-L1 (Huber, $\beta = 1.0$ )                                   |
| Per-agent encoder hidden    | $64 \times 64$ ReLU MLP                                             |
| QMIX mixer embedding        | 32                                                                  |
| QMIX hypernet hidden        | 32                                                                  |
| GCN hidden dimension        | 64                                                                  |
| GCN normalization           | Symmetric $\hat{D}^{-1/2}(A + I)\hat{D}^{-1/2}$ (per batch element) |
| Replay buffer capacity      | $5 \times 10^4$ transitions                                         |
| Batch size                  | 32                                                                  |
| Warmup before first update  | 200 env steps                                                       |
| Update frequency            | every 4 env steps                                                   |
| Target hard-update interval | every 200 gradient steps                                            |
| Gradient norm clip          | 10.0                                                                |
| Exploration ( $\epsilon$ )  | linear $1.0 \rightarrow 0.05$ over 80% of run                       |
| Double-DQN target           | yes                                                                 |
| Parameter sharing           | yes (agent-id one-hot appended to obs)                              |
| Random seeds per condition  | 10 (Phases 1–4, 8–11); 12 (Stage C / positive endpoint)             |

with the CPU build of PyTorch 2.12, NumPy 2.5, SciPy 1.18, and pandas 3.0; the per-run `config.json` files in the artifact record the exact configuration of every run. Statistical note: Mann–Whitney  $U$   $p$ -values are SciPy’s asymptotic (normal-approximation) values; the exact two-sided floor at 12-vs-12 seeds is  $2/\binom{24}{12} \approx 7.4 \times 10^{-7}$ , so quoted MWU values at or below  $10^{-4}$  indicate complete rank separation rather than a precise tail probability.

## C Reproducibility

The complete source code (environments, algorithms, training loop, tests), the per-run configuration of every run (seed, hyperparameters, budget), all aggregate and per-contrast statistics CSVs, and the exact commands used to produce every table and figure in this paper (`docs/REPRO.md`) are provided as anonymized supplementary material. Each run is fully seeded and deterministic on CPU; the CSVs under `results/` are the direct inputs to the analysis and figure scripts under `scripts/`. Where a lower-seed smoke directory coexists with the confirmatory data, the canonical directories are the ones the paper reads: `results/phase1_s10`, `results/phase2_s10`, and `results/phase4_s10` (10 seeds) rather than the 3-seed `results/phase1`, `phase2`, `phase4` smoke sets, and `results/phaseC/phaseD` for the Stage C/D cells; `docs/REPRO.md` lists the mapping per table and figure.

## D Compute scaling decisions

## E MPE external validity: full results

This appendix supports the external-validity replication of Section 6.3. Figure 5 is the MPE analogue of the COORDGRID capacity-control figure (Figure 7): at  $N=3$  the three algorithms are indistinguishable, while at  $N=6$  MLP-QMIX pulls above QMIX (capacity helps) and GNN-QMIX drops below both (the graph penalty). The interaction graph here is a  $k=2$  proximity (nearest-neighbour) graph over agent positions—an *estimated* interaction graph, not a task-defined coordination graph in the sense of Section 5.1—recomputed

Table 8: Compute budget per experiment: pre-registered vs. actually executed (steps  $\times$  seeds  $\times$  algorithms/arms  $\times$  conditions). Wall-clock totals, where measured, are on a single commodity CPU (PyTorch CPU build); no GPU was used. The Phase 3 MPE row is the one large executed-below-registration deviation; its consequences are discussed in Section 6.3.

| Experiment                          | Pre-registered                                     | Executed                                            | Reason for deviation                     |
|-------------------------------------|----------------------------------------------------|-----------------------------------------------------|------------------------------------------|
| 1 (pilot)                           | $5 \cdot 10^4 \times 3 \times 4$                   | $5 \cdot 10^4 \times 10 \times 4$                   | seeds raised $3 \rightarrow 10$ .        |
| 2 (E1 sweep)                        | $2 \cdot 10^5 \times 5 \times 4 \times 3 \times 2$ | $3 \cdot 10^4 \times 10 \times 4 \times 2 \times 2$ | CPU envelope; seeds $5 \rightarrow 10$ . |
| 3 (MPE)                             | $\geq 10^6 \times 5 \times 4 \times 2$             | $1.5 \cdot 10^5 \times 10 \times 5 \times 2$        | CPU envelope (15% of registered steps).  |
| 4 (ablation)                        | $\geq 5 \cdot 10^4 \times \dots$                   | $2 \cdot 10^4 \times 10 \times 4 \times 3$          | CPU envelope; seeds $\rightarrow 10$ .   |
| 8 (capacity control, ring)          | $\geq 10^5 \times 5$                               | $1.5 \cdot 10^5 \times 10 \times 5 \times 2$        | seeds and steps <i>raised</i> .          |
| 8 (line topology)                   | — (post-hoc robustness)                            | $1.5 \cdot 10^5 \times 10 \times 5 \times 2$        | as ring.                                 |
| 10 (attention, CoordGrid+MPE)       | — (post-hoc robustness)                            | $1.5 \cdot 10^5 \times 10 \times 2 \times 4$        | as Phase 8.                              |
| 11 (scaling $N \in \{12, 16\}$ )    | — (post-hoc robustness)                            | $1.5 \cdot 10^5 \times 10 \times 3 \times 2$        | as Phase 8.                              |
| C (pair core + $N$ -sweep)          | $3 \cdot 10^4 \times 12 \times 4 \times 4$         | $3 \cdot 10^4 \times 12 \times 4 \times 4$          | as registered.                           |
| C (degree-2 <b>nbr</b> core)        | $3 \cdot 10^4 \times 12 \times 4$                  | $3 \cdot 10^4 \times 12 \times 4$                   | as registered.                           |
| C (attention over complete, pair)   | $3 \cdot 10^4 \times 12 \times 7$                  | $3 \cdot 10^4 \times 12 \times 7$                   | as registered.                           |
| C (attention, degree-2 <b>nbr</b> ) | $3 \cdot 10^4 \times 12 \times 7$                  | $3 \cdot 10^4 \times 12 \times 7$                   | as registered.                           |
| R (stabilised GCN, neg. endpoint)   | — (post-hoc control)                               | $1.5 \cdot 10^5 \times 10 \times 2 \times 2$        | operator-asymmetry check, App. I.        |
| C (full-obs robustness)             | — (post-hoc)                                       | $3 \cdot 10^4 \times 12 \times 4$                   | robustness cell.                         |
| D (TOKENMATCH replication)          | — (post-hoc)                                       | $3 \cdot 10^4 \times 12 \times 4$                   | out-of-harness replication.              |

each episode and held fixed within it (Section 6.3); the trainer reads it once per episode exactly as for COORDGRID.

Table 9: Phase 3 graph-vs-capacity decomposition on MPE **simple\_spread** (mean final-window return over 10 seeds; less negative is better). At  $N=6$  the *capacity* effect (MLP-QMIX – QMIX) is positive and the *graph* effect (GNN-QMIX – MLP-QMIX) is sharply negative, so they cancel and the naive GNN-QMIX-vs-QMIX comparison looks null; only the matched control exposes the graph penalty.  $d$  is Cohen’s  $d$ ; \* significant under Holm and Mann–Whitney.

|         | QMIX  | MLP-QMIX | GNN-QMIX | capacity effect<br>MLP-QMIX – QMIX | graph effect<br>GNN-QMIX – MLP-QMIX |
|---------|-------|----------|----------|------------------------------------|-------------------------------------|
| $N = 3$ | -44.9 | -44.3    | -42.4    | +0.6 (ns)                          | +2.0 (ns)                           |
| $N = 6$ | -74.3 | -59.6    | -80.4    | +14.6 ( $d = +1.03$ )              | -20.8* ( $d = -1.46$ )              |

Table 10: Full Phase 3 results: final-window return (mean [95% CI] over 10 seeds) for all five algorithms on MPE **simple\_spread**. The graph-vs-capacity decomposition (Table 9) concerns the QMIX family (QMIX/MLP-QMIX/GNN-QMIX), which share the monotonic mixer. The mixer-free IQL and VDN baselines lead outright at this budget (15% of the registered steps), which is exactly why Section 6.3 scopes Phase 3’s evidence to the within-family decomposition at a fixed budget rather than to converged final performance.

| Algorithm | $N = 3$              | $N = 6$              |
|-----------|----------------------|----------------------|
| IQL       | -19.4 [-19.8, -19.0] | -33.2 [-33.5, -32.8] |
| VDN       | -21.5 [-22.9, -20.1] | -34.9 [-36.0, -33.9] |
| QMIX      | -44.9 [-49.4, -40.5] | -74.3 [-85.9, -62.7] |
| MLP-QMIX  | -44.3 [-48.2, -40.4] | -59.6 [-68.2, -51.0] |
| GNN-QMIX  | -42.4 [-50.9, -33.9] | -80.4 [-92.0, -68.9] |

## F The composed-MPE transfer attempt: instability characterisation and the $N=2$ cell

This appendix supports §7.9. Every number is transcribed from the frozen analysis in `results/phaseD_external/`. The confirmatory content of that cell is the three `gnn_true`-centred contrasts reported in the main text; everything in this appendix is descriptive or explicitly exploratory.

**Headroom fractions.** The pre-registration mandates reporting  $(\text{arm} - \text{mlp})/(\text{oracle} - \text{mlp})$ . On the mean-based denominator (+30.06) the three graph arms score  $-1.20$  (`gnn_true`),  $-1.29$  (`gnn_wrong`) and  $-1.68$  (`gnn_complete`); on the median-based denominator (+20.77) they score  $-2.17$ ,  $-2.62$  and  $-3.14$ . All six are negative. The mean-based figures are the conservative ones, for the same reason the mean-based contrast is: `mlp`’s own mean is depressed by its three unstable seeds.

**Instability characterisation (exploratory, not pre-registered).** Onset is the first episode at which the rolling-50-episode median gradient norm exceeds five times its own baseline (the median over episodes 1000–2000); exploration annealing completes at 120k of the 150,000 steps, i.e. 80% of the budget. Table 11 summarises. On a separate, return-based criterion (rolling-100 return falling 10 points below its own peak), 11 of 12 `gnn_true` seeds turn over before annealing completes. The severity ordering tracks aggregation density (`gnn_complete` > `gnn_wrong` > `gnn_true`), but we do not read that ordering as a mechanism: it is exploratory and unablated, and the no-graph control—which has neither residual connection nor LayerNorm—shows the same signature in 2 of 12 seeds. No return series in any arm contains a NaN or Inf; losses and gradient norms grow large but stay finite.

Table 11: Instability characterisation on the composed `simple_reference` vehicle ( $n=12$  seeds per arm, 150,000 steps). “Blow-ups” counts seeds whose rolling gradient norm exceeds five times its own baseline; “onset” is the median first such step across those seeds; “drop” is the median loss from each run’s peak rolling-100 return to its final window. Descriptive and exploratory: no mechanism is claimed.

| Arm                       | blow-ups | median onset (steps) | % of budget | median peak→final drop |
|---------------------------|----------|----------------------|-------------|------------------------|
| <code>oracle</code>       | 0 / 12   | n/a                  | n/a         | 3.0                    |
| <code>mlp</code>          | 2 / 12   | 140 750              | 94          | 4.7                    |
| <code>gnn_true</code>     | 8 / 12   | 98 025               | 65          | 36.5                   |
| <code>gnn_wrong</code>    | 9 / 12   | 83 250               | 56          | 45.9                   |
| <code>gnn_complete</code> | 10 / 12  | 62 350               | 42          | 59.5                   |

**The  $N=2$  cell, reported without leaning on it.** A cheap non-confirmatory cell (cell E0) was pre-registered alongside the main one: the *unmodified*  $N=2$  `simple_reference` task with its native communication channel left on, graph vs. no-graph, 6 seeds. Its purpose was an honesty anchor—with the environment supplying its own channel, a graph should be superfluous. The two arms do not differ significantly ( $-12.62$ ,  $[-28.97, +3.74]$ ,  $d=-1.05$ , Welch  $p=0.11$ , MWU  $p=0.24$ ; graph  $-45.86$ , median  $-48.33$ ; no-graph  $-33.25$ , median  $-26.93$ ), but that tie cannot carry the intended reading, because the cell fails its own pre-registered validity gate: non-degenerate learning by both arms. Both arms do learn mid-run—peaks of  $-22.9$  to  $-26.2$  (graph) and  $-17.5$  to  $-22.5$  (no-graph), all above this cell’s random floor of  $-28.25$  (do-nothing  $-26.00$ )—and then lose it, the graph arm in 6 of 6 seeds and the no-graph arm in 3 of 6, ending with both arm means at or below that floor. A tie between two post-divergence states is shared failure, not redundancy. We therefore withdraw the redundancy sentence this cell was pre-registered to supply, and report the cell as a second, independent instance of the same instability—at  $N=2$ , with communication on, in a setting where no routing is required.

## G External validity on standard benchmarks: LBF and a SMAC check

To test whether the graph penalty is specific to our harness, we ported the controlled contrast into EPyMARL (Papoudakis et al., 2021), a standard cooperative-MARL codebase, and ran it on tasks outside CO-ORDGRID. We add two agent variants to EPyMARL’s tuned recurrent QMIX: a *graph* agent that applies

inter-agent attention over the per-agent recurrent states (the message-passing operator of DGN/G2ANet) before the  $Q$ -head, and a *parameter-matched control* with the identical network but the inter-agent attention fixed to the identity (each agent uses only its own value vector). The two have byte-identical parameter counts, so their gap isolates the graph exactly as GNN-QMIX vs. MLP-QMIX does in the main text. Note this replication uses a *different* relational operator from the main text—inter-agent *attention* over *recurrent* states, rather than the feedforward GCN of GNN-QMIX—so it is a *conservative* check: if the penalty appears even with a different, separately-parameterised graph mechanism, the mechanism finding is at least as robust as a same-operator replication would show.

**Level-Based Foraging.** We run two cooperative LBF tasks (Papoudakis et al., 2021) at 5 seeds and  $2 \times 10^6$  steps (final-window mean return; Table 12); the pattern tracks team size. On **8x8-2p-2f-coop** (2 agents) no pairwise difference is significant—the two-agent “graph” is a single neighbour and seed variance dominates. On **10x10-3p-3f** (3 agents), GNN-QMIX is *significantly worse* than QMIX ( $\Delta = -0.071$ , Cohen’s  $d = -2.24$ , Welch  $p = 0.014$ , Mann–Whitney  $p = 0.032$ ), while MLP-QMIX matches QMIX (capacity neutral). The GNN-QMIX-vs-control contrast points the same way ( $d = -1.11$ ) but is *not* significant at  $n=5$ , so we report it as direction-only and do not lean on it. The graph is thus *neutral with two agents and harmful with three*—an independent, standard-benchmark echo of the team-size scaling of the penalty on COORDGRID (Appendix K). *Data provenance:* these runs were executed in the external EPYMARL framework rather than in this paper’s harness; Table 12 reports their summary statistics in full, and the raw EPYMARL logs are not part of the anonymized code artifact.

Table 12: LBF: final-window mean return, mean (SD) over 5 seeds at  $2 \times 10^6$  steps. The graph is neutral at 2 agents and significantly below QMIX at 3 agents ( $d = -2.24$ , Welch  $p = 0.014$ , MWU  $p = 0.032$ ).

| Map                       | QMIX        | MLP-QMIX (control) | GNN-QMIX (graph)   |
|---------------------------|-------------|--------------------|--------------------|
| 8x8-2p-2f-coop (2 agents) | 0.65 (0.23) | 0.48 (0.01)        | 0.66 (0.24)        |
| 10x10-3p-3f (3 agents)    | 0.21 (0.03) | 0.22 (0.10)        | <b>0.14 (0.03)</b> |

**StarCraft II (3m), preliminary.** As a single-seed check on the benchmark where graph-based methods are most often credited with gains (Samvelyan et al., 2019), we trained the same trio on SMAC 3m ( $2 \times 10^6$  steps) and evaluated each over 100 test episodes. QMIX and the matched control both reach a 1.00 win rate; the graph agent reaches 0.92. The map is near-saturated and this is a single seed with no variance estimate, so we report it as a *non-inferential anecdote only*—it cannot support “neutral” or “directionally consistent” as evidence, and we do not carry it into the Discussion’s evidence chain. A full multi-seed SMAC study is left to future work, as it is GPU-bound beyond our compute budget.

**Takeaway.** On both standard benchmarks the inter-agent graph is never positive: it shows no significant advantage over a parameter-matched no-graph control anywhere, and sits significantly below QMIX at three agents on LBF. With the unstabilised-graph deficit on COORDGRID and MPE (Section 6.5), the graph’s measured effect *in these full-information / convention-reducible settings* ranges from neutral (or, in its unstabilised form, harmful) and is never positive—in direct contrast with Section 7, where the task-matched graph is decisively beneficial once the task forces routing of private information.

## H Robustness across graph topologies

The headline capacity control (Section 6.5, Table 22) uses the **ring** graph. To check that the identified graph penalty is not an artefact of that one topology, we repeat the entire control (same five-vs-three algorithms, same 10 seeds, same 150,000-step budget, same locked hyperparameters) on the **line** graph, whose larger diameter is the harder case for a shallow ( $L=2$ ) GNN to cover. Table 13 reports the result: the capacity contrast (MLP-QMIX – QMIX) is null at both team sizes, while the graph contrast (GNN-QMIX – MLP-QMIX) is sharply negative and grows with  $N$ , exactly as on the ring. Both decisive contrasts are significant under Holm correction over the three-contrast family and under the non-parametric Mann–Whitney test ( $p = 0.0002$ ). As on the ring, GNN-QMIX also carries the largest seed-to-seed variance.

Table 13: Capacity control on the **line** topology (mean final-window return over 10 seeds, 150k steps). Parallel to Table 22: MLP-QMIX tracks QMIX (capacity null) while GNN-QMIX falls far below both (graph penalty), reproducing the ring result on a higher-diameter graph.

|         | QMIX<br>no cap, no graph | MLP-QMIX<br>cap, no graph | GNN-QMIX<br>cap + graph | graph effect<br>GNN-QMIX – MLP-QMIX |
|---------|--------------------------|---------------------------|-------------------------|-------------------------------------|
| $N = 4$ | 62.4                     | 63.0                      | 52.9                    | −10.0                               |
| $N = 8$ | 143.0                    | 144.2                     | 78.5                    | −65.8                               |

## I The full-information penalty is an optimisation pathology of the unstabilised GCN, not of graph aggregation

The negative-endpoint phases (1–2, 8, 10, 11) run the *plain* GCN—no residual connection, no LayerNorm—whereas every positive-endpoint arm runs the *stabilised* (“repaired”) GCN (§7.1). This appendix asks the question that asymmetry raises directly: does the full-information penalty survive when the negative-endpoint GCN is given the *same* stabilisation as the positive-endpoint one? We rerun GNN-QMIX with residual+LayerNorm on the decisive Phase 8 cells of *both* topologies (CoordGrid **ring** and **line**,  $N \in \{4, 8\}$ , 10 seeds, 150,000 steps; identical to Tables 22 and 13 otherwise).

Table 14: Stabilised GCN at the negative endpoint (CoordGrid **ring** and **line**, mean final-window return over 10 seeds, 150k steps). Adding residual+LayerNorm recovers GNN-QMIX to *parity* with the no-graph controls on both topologies—the  $d \approx -4$  penalty and the  $\sim 9\times$  variance inflation of the plain GCN both vanish. The graph is now *neutral*, not harmful; it still confers no benefit.

|      |         | QMIX           | MLP-QMIX       | GNN-QMIX (plain) | GNN-QMIX (stabilised) |
|------|---------|----------------|----------------|------------------|-----------------------|
| ring | $N = 4$ | 83.0 (sd 1.9)  | 83.4 (sd 1.4)  | 72.8 (sd 4.5)    | 84.1 (sd 0.3)         |
|      | $N = 8$ | 164.9 (sd 9.2) | 164.9 (sd 3.3) | 78.3 (sd 30.9)   | 164.3 (sd 7.0)        |
| line | $N = 4$ | 62.4 (sd 0.8)  | 63.0 (sd 0.4)  | 52.9 (sd 7.3)    | 62.7 (sd 1.5)         |
|      | $N = 8$ | 143.0 (sd 6.4) | 144.2 (sd 2.7) | 78.5 (sd 29.5)   | 143.5 (sd 4.0)        |

Table 14 is unambiguous, and the recovery replicates across both coordination-graph topologies. On the **ring**, the stabilised GCN matches both no-graph controls at both team sizes: at  $N=8$  it reaches 164.3 against MLP-QMIX’s 164.9 (Welch  $p = 0.79$ , Mann–Whitney  $p = 0.19$ , Cohen’s  $d = -0.12$ ) and QMIX’s 164.9 ( $p = 0.86$ ); at  $N=4$ , 84.1 vs 83.4/83.0 ( $p = 0.19/0.10$ ). On the higher-diameter **line** the picture is identical: 143.5 vs 144.2/143.0 at  $N=8$  ( $|d| \leq 0.22$ , Welch  $p \geq 0.62$ , MWU  $p \geq 0.85$ ) and 62.7 vs 63.0/62.4 at  $N=4$  ( $|d| \leq 0.29$ ,  $p \geq 0.16$  on all tests). The plain-GCN gaps of Tables 22 and 13 (−86.6 and −65.8 at  $N=8$ ,  $d \approx -4$ ) collapse to statistical noise, and the seed-standard-deviation inflation (30.9/29.5 plain vs 3.3/2.7 for MLP-QMIX) is gone (7.0/4.0 stabilised). Two conclusions follow, and we fold both into the main text. (i) The dramatic full-information harm—the  $d \approx -4$  deficit, the  $\sim 9\times$  variance, the growth to  $N=16$ —is an *optimisation pathology of the standard unstabilised GCN*, not an intrinsic cost of graph aggregation: the same aggregation, stabilised, trains fine on both topologies. (ii) Even stabilised, the graph delivers *no benefit* in this full-information regime—it merely matches the no-graph control, never beats it, on every cell tested. The negative endpoint is therefore, precisely stated, “the graph does not help here,” with the stronger “actively harmful” reserved for the common unstabilised operator. *Scope*: this recovery is demonstrated on the CoordGrid **ring** and **line** cells; the MPE **simple\_spread** and Level-Based Foraging negatives (§6.3, Appendix G) use the plain / standard operator and were not rerun under stabilisation, so we claim the *no-benefit* result—not the specific stabilisation-recovery mechanism—as the cross-environment finding.



## J Graph attention: single- and multi-head (GAT-QMIX, DGN-QMIX)

To test whether the graph penalty is specific to the fixed Kipf–Welling GCN aggregation, we add two graph-*attention* variants that share GNN-QMIX’s encoder and monotonic mixer but replace the degree-normalized aggregation with learned attention: GAT-QMIX (single-head additive attention; Veličković et al., 2018) and DGN-QMIX (multi-head scaled-dot-product attention, the relational “convolution” of the attention-based graph-MARL methods we discuss, Jiang et al., 2020; Liu et al., 2020). Both carry *more* parameters than the MLP-QMIX control (DGN-QMIX, with per-head Q/K/V/output projections, by 1.5–2.2× depending on the cell’s input dimensions: 2.2× at CoordGrid  $N=4$ , 2.0× at  $N=8$ , 1.5× on MPE  $N=6$ ), so an attention-below-MLP-QMIX result is conservative. We run both on the decisive cells under the identical protocol (10 seeds, 150,000 steps).

Table 15: Attention variants vs the QMIX family (mean final-window return, 10 seeds). Both single-head (GAT-QMIX) and multi-head dot-product (DGN-QMIX, the DGN/G2ANet operator) attention land above GNN-QMIX, more expressive attention helps *within* graph methods, but below the no-graph control MLP-QMIX on CoordGrid (the graph still hurts). Last two columns: the attention-graph effects vs the matched no-graph control. \* Holm- and Mann–Whitney-significant; † Mann–Whitney-significant only. Holm here is over the per- $N$  attention family (the attention-vs-control contrasts of this appendix), not the six-pair family of Section 5.3; the per-contrast verdict CSVs ship with the artifact.

| Env              | Cell    | QMIX  | MLP-QMIX | GNN-QMIX | GAT-QMIX | DGN-QMIX | GAT-QMIX–MLP-QMIX | DGN-QMIX–MLP-QMIX |
|------------------|---------|-------|----------|----------|----------|----------|-------------------|-------------------|
| CoordGrid (ring) | $N = 4$ | 83.0  | 83.4     | 72.8     | 75.6     | 73.2     | −7.8*             | −10.3*            |
|                  | $N = 8$ | 164.9 | 164.9    | 78.3     | 110.1    | 131.4    | −54.8*            | −33.5*            |
| MPE spread       | $N = 3$ | −44.9 | −44.3    | −42.4    | −52.5    | −40.2    | −8.1†             | +4.1              |
|                  | $N = 6$ | −74.3 | −59.6    | −80.4    | −71.9    | −68.7    | −12.2             | −9.1              |

## K Scaling the graph penalty to larger teams

Finding 5 (Section 6.5) reports that the graph effect grows with team size. The full scaling sweep adds CoordGrid **ring** at  $N \in \{12, 16\}$  for QMIX, MLP-QMIX, and GNN-QMIX (10 seeds, 150,000 steps), combined with the  $N \in \{4, 8\}$  cells from Table 22. Figure 10 and Table 16 give the result.

Table 16: Larger- $N$  scaling on CoordGrid **ring** (mean final-window return, 10 seeds). The graph effect GNN-QMIX – MLP-QMIX grows monotonically; the no-graph MLP-QMIX control stays within a few points of QMIX at every  $N$ , so essentially the entire (and growing) gap is the graph. Both *graph* contrasts are significant at every  $N$  under Holm and Mann–Whitney. The *capacity* contrast (MLP-QMIX – QMIX) is not always exactly null: at  $N=12$  it is −7.1 (significant under both tests) and at  $N=16$  −8.6 (Mann–Whitney only)—about 3% of QMIX’s return and an order of magnitude smaller than the graph effect at those scales.

|          | QMIX  | MLP-QMIX | GNN-QMIX | graph effect (GNN-QMIX – MLP-QMIX) |
|----------|-------|----------|----------|------------------------------------|
| $N = 4$  | 83.0  | 83.4     | 72.8     | −10.6                              |
| $N = 8$  | 164.9 | 164.9    | 78.3     | −86.6                              |
| $N = 12$ | 252.6 | 245.5    | 92.1     | −153.4                             |
| $N = 16$ | 336.6 | 328.0    | 60.6     | −267.4                             |

## L Full per-condition tables

The main text reports Phase 2 via the forest plot and per-condition curves (Figures 3, 4) and the hypothesis tests. The Phase 1 pilot curves, the per-algorithm Phase 1 summary, the full Phase 2 per-condition returns, and the Phase 1 pairwise sanity check are collected here.

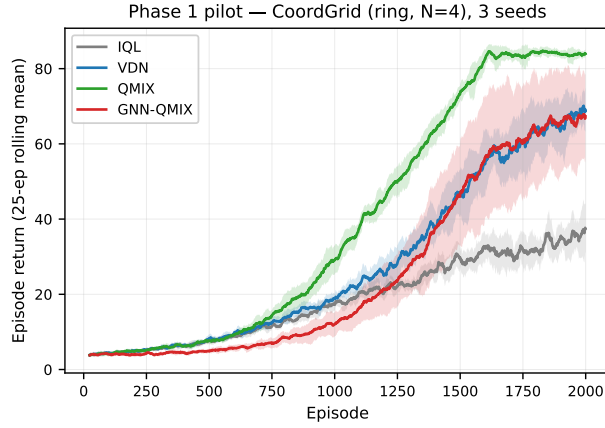


Figure 15: Phase 1 pilot learning curves on COORDGRID ( $N = 4$ , ring), ten seeds. Shaded bands are  $\pm 1$  s.d. across seeds of the 25-episode rolling mean. The coordinated baselines (VDN, QMIX) clearly separate from IQL, and GNN-QMIX runs to completion, the Phase-0 harness sanity check (Section 6.1).

Table 17: Phase 1 final-window mean return ( $N = 4$ , ring, 10 seeds). Confidence intervals are Student- $t$  95% across seeds; episodes-to-80% is reported only for seeds that crossed the threshold within  $5 \times 10^4$  steps.

| Algorithm | $n_{\text{seeds}}$ | Final mean | 95% CI         | Episodes to 80% |
|-----------|--------------------|------------|----------------|-----------------|
| IQL       | 10                 | 34.62      | [32.61, 36.64] | 1375            |
| VDN       | 10                 | 66.023     | [62.57, 69.48] | 1528            |
| QMIX      | 10                 | 84.015     | [83.41, 84.62] | 1431            |
| GNN-QMIX  | 10                 | 66.015     | [57.11, 74.92] | 1552            |

Table 18: Phase 2 final-window mean return by condition. Edge density is matched between `ring` and `erdos_renyi` by construction.

| graph       | $N$ | algorithm | Final mean | 95% CI           | Episodes to 80% |
|-------------|-----|-----------|------------|------------------|-----------------|
| erdos_renyi | 4   | GNN-QMIX  | 7.05       | [6.29, 7.81]     | 427             |
| erdos_renyi | 4   | IQL       | 34.05      | [31.99, 36.10]   | 785             |
| erdos_renyi | 4   | QMIX      | 82.52      | [80.35, 84.70]   | 873             |
| erdos_renyi | 4   | VDN       | 57.32      | [54.59, 60.05]   | 914             |
| erdos_renyi | 8   | GNN-QMIX  | 9.18       | [8.37, 9.98]     | 40              |
| erdos_renyi | 8   | IQL       | 43.26      | [40.47, 46.05]   | 795             |
| erdos_renyi | 8   | QMIX      | 108.79     | [82.73, 134.84]  | 961             |
| erdos_renyi | 8   | VDN       | 69.19      | [53.99, 84.39]   | 969             |
| ring        | 4   | GNN-QMIX  | 34.76      | [24.96, 44.56]   | 974             |
| ring        | 4   | IQL       | 28.86      | [27.10, 30.61]   | 745             |
| ring        | 4   | QMIX      | 83.29      | [81.43, 85.15]   | 876             |
| ring        | 4   | VDN       | 52.64      | [46.74, 58.54]   | 919             |
| ring        | 8   | GNN-QMIX  | 19.52      | [13.88, 25.17]   | 716             |
| ring        | 8   | IQL       | 40.10      | [34.47, 45.73]   | 787             |
| ring        | 8   | QMIX      | 129.13     | [100.90, 157.36] | 938             |
| ring        | 8   | VDN       | 70.53      | [59.12, 81.94]   | 908             |

## M Supplementary figures

This appendix collects the per-condition depth-diameter curves that accompany the Phase 4 heatmap (Figure 6) in the main text.

Table 19: Phase 1 sanity check: IQL vs. each coordinated baseline on final-window mean return ( $N = 4$ , ring, 10 seeds). Welch’s  $t$ , Holm-corrected over the 6-pair family.

| Comparison       | $\Delta$ mean return | $p_{\text{raw}}$ | $p_{\text{Holm}}$ |
|------------------|----------------------|------------------|-------------------|
| IQL vs. VDN      | 31.40                | < 0.001          | < 0.001           |
| IQL vs. QMIX     | 49.39                | < 0.001          | < 0.001           |
| IQL vs. GNN-QMIX | 31.39                | < 0.001          | < 0.001           |

Table 20: H1 (within-condition): GNN-QMIX minus QMIX in mean final-window return.  $p$ -values are one-sided Welch  $t$  ( $H_a$ : GNN-QMIX > QMIX), not corrected (single test per condition). The ordering is negative in every cell.

| $N$ | graph       | $\Delta = \text{GNN-QMIX} - \text{QMIX}$ | $p$ (1-sided) |
|-----|-------------|------------------------------------------|---------------|
| 4   | erdos_renyi | -75.47                                   | 1.000         |
| 4   | ring        | -48.54                                   | 1.000         |
| 8   | erdos_renyi | -99.61                                   | 1.000         |
| 8   | ring        | -109.61                                  | 1.000         |

Table 21: H2 (difference-of-differences): the GNN-QMIX vs. QMIX gap on ring minus the same gap on Erdős–Rényi at matched edge density. One-sample  $t$  on per-seed DiD against 0 ( $H_a$ : DiD > 0).

| $N$ | $\Delta_{\text{ring}}$ | $\Delta_{\text{ER}}$ | DiD    | $p$ (1-sided) |
|-----|------------------------|----------------------|--------|---------------|
| 4   | -48.54                 | -75.47               | 26.93  | < 0.001       |
| 8   | -109.61                | -99.61               | -10.00 | 0.701         |

Table 22: Phase 8 final-window return (mean over 10 seeds) on the **ring** graph (the numbers behind Finding 1, Section 6.5). MLP-QMIX is the parameter-matched no-graph control (identical parameter count to GNN-QMIX). *Capacity* effect = MLP-QMIX – QMIX; *graph* effect = GNN-QMIX – MLP-QMIX.

|         | QMIX<br>no cap, no graph | MLP-QMIX<br>cap, no graph | GNN-QMIX<br>cap + graph | graph effect<br>GNN-QMIX – MLP-QMIX |
|---------|--------------------------|---------------------------|-------------------------|-------------------------------------|
| $N = 4$ | 83.0                     | 83.4                      | 72.8                    | −10.6 ( $d = -3.2$ )                |
| $N = 8$ | 164.9                    | 164.9                     | 78.3                    | −86.6 ( $d = -3.9$ )                |

## N Reproducibility checklist

Select the answers that apply to this research – one per item.

### All articles:

1. All claims investigated in this work are clearly stated. **[yes]**
2. Clear explanations are given how the work reported substantiates the claims. **[yes]**
3. Limitations or technical assumptions are stated clearly and explicitly. **[yes]**
4. Conceptual outlines and/or pseudo-code descriptions of the AI methods introduced in this work are provided, and important implementation details are discussed. **[yes]**
5. Motivation is provided for all design choices, including algorithms, implementation choices, parameters, data sets and experimental protocols beyond metrics. **[yes]**

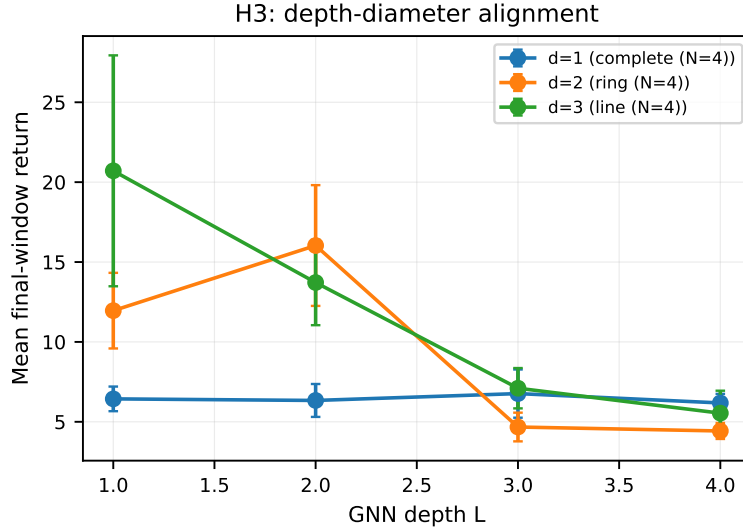


Figure 16: Phase 4 depth–diameter curves (companion to the heatmap in Section 6.4). Final-window return vs. GCN depth  $L$  for each graph diameter  $d$ ; the over-depth cliff at  $L \geq 3$  is visible on the structured diameters ( $d = 2, 3$ ), while the complete graph ( $d = 1$ ) is flat in  $L$ .

#### Articles containing theoretical contributions:

Does this paper make theoretical contributions? **[no]**

#### Articles reporting on computational experiments:

Does this paper include computational experiments? **[yes]**

1. All source code required for conducting experiments is included in an online appendix or will be made publicly available upon publication of the paper. The online appendix follows best practices for source code readability and documentation as well as for long-term accessibility. **[yes]**
2. The source code comes with a license that allows free usage for reproducibility purposes. **[yes]**
3. The source code comes with a license that allows free usage for research purposes in general. **[yes]**
4. Raw, unaggregated data from all experiments is included in an online appendix or will be made publicly available upon publication of the paper. The online appendix follows best practices for long-term accessibility. **[yes]**
5. The unaggregated data comes with a license that allows free usage for reproducibility purposes. **[yes]**
6. The unaggregated data comes with a license that allows free usage for research purposes in general. **[yes]**
7. If an algorithm depends on randomness, then the method used for generating random numbers and for setting seeds is described in a way sufficient to allow replication of results. **[yes]**
8. The execution environment for experiments, the computing infrastructure (hardware and software) used for running them, is described, including GPU/CPU makes and models; amount of memory (cache and RAM); make and version of operating system; names and versions of relevant software libraries and frameworks. **[yes]**
9. The evaluation metrics used in experiments are clearly explained and their choice is explicitly motivated. **[yes]**

10. The number of algorithm runs used to compute each result is reported. [yes]
11. Reported results have not been “cherry-picked” by silently ignoring unsuccessful or unsatisfactory experiments. [yes]
12. Analysis of results goes beyond single-dimensional summaries of performance (e.g., average, median) to include measures of variation, confidence, or other distributional information. [yes]
13. All (hyper-) parameter settings for the algorithms/methods used in experiments have been reported, along with the rationale or method for determining them. [yes]
14. The number and range of (hyper-) parameter settings explored prior to conducting final experiments have been indicated, along with the effort spent on (hyper-) parameter optimisation. [partially]
15. Appropriately chosen statistical hypothesis tests are used to establish statistical significance in the presence of noise effects. [yes]

**Articles using data sets:**

Does this work rely on one or more data sets (possibly obtained from a benchmark generator or similar software artifact)? [yes]

1. All newly introduced data sets are included in an online appendix or will be made publicly available upon publication of the paper. The online appendix follows best practices for long-term accessibility with a license that allows free usage for research purposes. [yes]
2. The newly introduced data set comes with a license that allows free usage for reproducibility purposes. [yes]
3. The newly introduced data set comes with a license that allows free usage for research purposes in general. [yes]
4. All data sets drawn from the literature or other public sources (potentially including authors’ own previously published work) are accompanied by appropriate citations. [yes]
5. All data sets drawn from the existing literature (potentially including authors’ own previously published work) are publicly available. [yes]
6. All new data sets and data sets that are not publicly available are described in detail, including relevant statistics, the data collection process and annotation process if relevant. [yes]
7. All methods used for preprocessing, augmenting, batching or splitting data sets (e.g., in the context of hold-out or cross-validation) are described in detail. [NA]

**Explanations on any of the answers above (optional):**

All environments (the COORDGRID gridworld and the TOKENMATCH referential game) are procedural generators released with the code (MIT-licensed); the external MPE and LBF tasks are cited and publicly available. Hyper-parameters were pre-registered and locked before confirmatory runs, so per-experiment tuning effort was deliberately minimal. On raw data: the supplementary artifact ships every aggregate and per-contrast statistics CSV plus the exact per-run configuration (seed, hyperparameters, budget) for every run; per-episode logs are regenerated bit-identically from those configurations (training is fully seeded and deterministic on CPU) and will be published with the de-anonymized repository. The Level-Based Foraging and SMAC checks (Appendix G) were executed in the external EPYMARL framework; their summary statistics are reported in full in Table 12, and their raw logs live outside this artifact. On unsuccessful experiments: the search that preceded the positive endpoint, including two constructions that failed to produce a significant graph advantage, is disclosed in Section 7.1 (“How we found this task”).