

Prints das requisições

1. Criar contato (POST):

The screenshot displays a REST client interface with the following details:

- Method:** POST
- URL:** http://localhost:8080/api/contacts
- Body (JSON):**

```
{
  "nome": "João da Silva",
  "telefone": "9999-9999",
  "email": "joaodasilva@email.com"
}
```
- Status:** 200
- Size:** 87 Bytes
- Time:** 8.74 s
- Response (JSON):**

```
{
  "nome": "João da Silva",
  "telefone": "9999-9999",
  "email": "joaodasilva@email.com",
  "id": 1
}
```

At the bottom, a browser window shows the URL `localhost:8080/api/contacts` and the raw response body: `[{"nome": "João da Silva", "telefone": "9999-9999", "email": "joaodasilva@email.com", "id": 1}]`.

2. Obter todos os contatos (GET):

The screenshot shows a REST client interface with the following components:

- Request Bar:** Method `GET`, URL `http://localhost:8080/api/contacts`, and a `Send` button.
- Request Tabs:** `Query`, `Headers` (with a count of 2), `Auth`, `Body` (selected), `Tests`, and `Pre Run`.
- Body Tab:** Contains a `JSON` tab (selected), `XML`, `Text`, `Form`, `Form-encode`, `GraphQL`, and `Binary`. Below these is a `JSON Content` section with a `Format` button and a text area containing the number `1`.
- Response Bar:** `Status: 200`, `Size: 89 Bytes`, and `Time: 5.26 s`.
- Response Tabs:** `Response` (selected), `Headers` (with a count of 4), `Cookies`, `Results`, and `Docs`. There are also icons for `</>` and a menu.
- Response Content:** A JSON array containing one object, displayed with line numbers 1 through 8:

```
1  [  
2    {  
3      "nome": "João da Silva",  
4      "telefone": "9999-9999",  
5      "email": "joaodasilva@email.com",  
6      "id": 1  
7    }  
8  ]
```

Adicionando mais um contato para testes:

POST

http://localhost:8080/api/contacts

Send

Query

Headers 2

Auth

Body 1

Tests

Pre Run

JSON

XML

Text

Form

Form-encode

GraphQL

Binary

JSON Content

Format

```
1 {
2   "nome": "Maria Santos",
3   "telefone": "8888-8888",
4   "email": "mariasantos@email.com"
5 }
```

Status: 200

Size: 85 Bytes

Time: 8.81 s

Response

Headers 4

Cookies

Results

Docs

</>

≡

```
1 {
2   "nome": "Maria Santos",
3   "telefone": "8888-8888",
4   "email": "mariasantos@email.com",
5   "id": 2
6 }
```

←

↻

localhost:8080/api/contacts

☆

⚙

⌵

👤

...

Chat

▼

Estilos de formatação

```
[{"nome":"João da Silva","telefone":"9999-9999","email":"joaodasilva@email.com","id":1},{ "nome":"Maria Santos","telefone":"8888-8888","email":"mariasantos@email.com","id":2}]
```

GET

http://localhost:8080/api/contacts

Send

Query

Headers 2

Auth

Body

Tests

Pre Run

JSON

XML

Text

Form

Form-encode

GraphQL

Binary

JSON Content

Format

1

Status: 200

Size: 175 Bytes

Time: 5.60 s

Response

Headers 4

Cookies

Results

Docs

</>



```
1  [  
2    {  
3      "nome": "João da Silva",  
4      "telefone": "9999-9999",  
5      "email": "joaodasilva@email.com",  
6      "id": 1  
7    },  
8    {  
9      "nome": "Maria Santos",  
10     "telefone": "8888-8888",  
11     "email": "mariasantos@email.com",  
12     "id": 2  
13   }  
14 ]
```

3. Obter contato específico (GET):

The screenshot shows a REST client interface with the following components:

- Request Bar:** Method `GET`, URL `http://localhost:8080/api/contacts/2`, and a `Send` button.
- Request Tabs:** `Query`, `Headers 2`, `Auth`, `Body` (selected), `Tests`, and `Pre Run`.
- Body Tab:** `JSON` (selected), `XML`, `Text`, `Form`, `Form-encode`, `GraphQL`, and `Binary`.
- JSON Content:** A text area containing `1` and a `Format` button.
- Status Bar:** `Status: 200`, `Size: 85 Bytes`, and `Time: 4.02 s`.
- Response Tabs:** `Response` (selected), `Headers 4`, `Cookies`, `Results`, and `Docs`.
- Response Content:** A JSON object displayed with line numbers 1 through 6:

```
1 {  
2   "nome": "Maria Santos",  
3   "telefone": "8888-8888",  
4   "email": "mariasantos@email.com",  
5   "id": 2  
6 }
```

4. Atualizar contato (PUT):

Mudei de Maria para Mariana

The screenshot shows a REST client interface with a PUT request to `http://localhost:8080/api/contacts/2`. The request body is a JSON object with the following content:

```
{
  "nome": "Mariana Santos",
  "telefone": "8888-8888",
  "email": "marianasantos@email.com"
}
```

The response status is 200, with a size of 89 Bytes and a time of 3.10 s. The response body is a JSON object with the following content:

```
{
  "nome": "Mariana Santos",
  "telefone": "8888-8888",
  "email": "marianasantos@email.com",
  "id": 2
}
```

The browser's developer console shows the following JSON array:

```
[{"nome": "João da Silva", "telefone": "9999-9999", "email": "joaodasilva@email.com", "id": 1}, {"nome": "Mariana Santos", "telefone": "8888-8888", "email": "marianasantos@email.com", "id": 2}]
```

5. Excluir contato (DELETE):

The screenshot displays a REST client interface with a dark theme. At the top, a request is configured with the method **DELETE** and the URL `http://localhost:8080/api/contacts/2`. A **Send** button is visible on the right. Below the URL bar, tabs for **Query**, **Headers** (2), **Auth**, **Body**, **Tests**, and **Pre Run** are shown. The **Query** tab is active, showing a table for **Query Parameters** with columns for **parameter** and **value**. Below this, the **Status** is **200**, **Size** is **0 Bytes**, and **Time** is **3.33 s**. The **Response** tab is also active, showing a list of response items with the number **1** indicating one item. Below the REST client interface, a browser window is visible with the address bar showing `localhost:8080/api/contacts`. The browser's developer tools are open, showing the **Estilos de formatação** (Format Styles) panel. The response body is displayed as a JSON array: `[{"nome": "João da Silva", "telefone": "9999-9999", "email": "joaodasilva@email.com", "id": 1}]`.

DELETE `http://localhost:8080/api/contacts/2` Send

Query Headers ² Auth Body Tests Pre Run

Query Parameters

parameter	value
-----------	-------

Status: 200 Size: 0 Bytes Time: 3.33 s

Response Headers ³ Cookies Results Docs </> ≡


1

← ↻ ⓘ localhost:8080/api/contacts ☆ ⚙️ ☆ 👤

Estilos de formatação ☐

```
[{"nome": "João da Silva", "telefone": "9999-9999", "email": "joaodasilva@email.com", "id": 1}]
```

Testando GET /api/contacts/999 (um id que não existe):

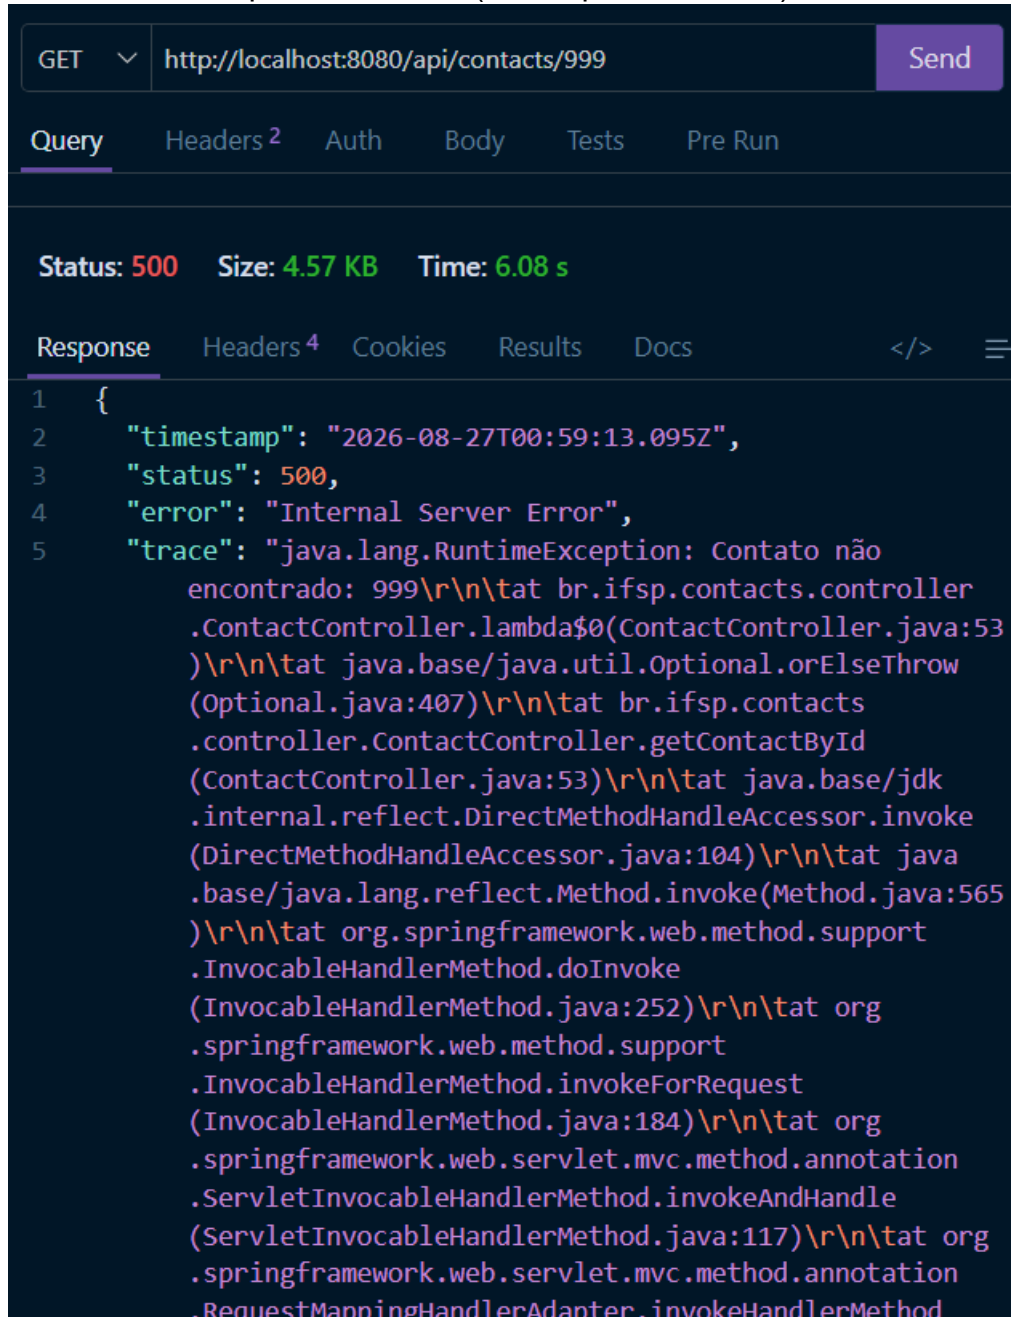

```
GET http://localhost:8080/api/contacts/999 Send

Query Headers 2 Auth Body Tests Pre Run

Status: 500 Size: 4.57 KB Time: 6.08 s

Response Headers 4 Cookies Results Docs </> ≡

1 {
2   "timestamp": "2026-08-27T00:59:13.095Z",
3   "status": 500,
4   "error": "Internal Server Error",
5   "trace": "java.lang.RuntimeException: Contato não
            encontrado: 999\r\n\tat br.ifsp.contacts.controller
            .ContactController.lambda$0(ContactController.java:53
            )\r\n\tat java.base/java.util.Optional.orElseThrow
            (Optional.java:407)\r\n\tat br.ifsp.contacts
            .controller.ContactController.getById
            (ContactController.java:53)\r\n\tat java.base/jdk
            .internal.reflect.DirectMethodHandleAccessor.invoke
            (DirectMethodHandleAccessor.java:104)\r\n\tat java
            .base/java.lang.reflect.Method.invoke(Method.java:565
            )\r\n\tat org.springframework.web.method.support
            .InvocableHandlerMethod.doInvoke
            (InvocableHandlerMethod.java:252)\r\n\tat org
            .springframework.web.method.support
            .InvocableHandlerMethod.invokeForRequest
            (InvocableHandlerMethod.java:184)\r\n\tat org
            .springframework.web.servlet.mvc.method.annotation
            .ServletInvocableHandlerMethod.invokeAndHandle
            (ServletInvocableHandlerMethod.java:117)\r\n\tat org
            .springframework.web.servlet.mvc.method.annotation
            .RequestMappingHandlerAdapter.invokeHandlerMethod
```

O retorno HTTP 500 ocorre porque o sistema lança uma exceção ao não encontrar o registro e ainda não possui um tratamento de erros adequado configurado. Sem esse tratamento para converter a falha em um status 404 Not Found, o erro não capturado é repassado ao servidor, gerando um erro interno genérico.