


# XAUt0 TON Multisig Transaction Review

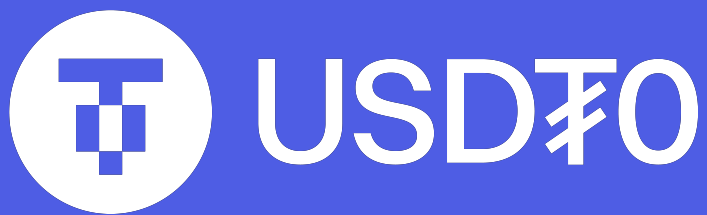

October 28, 2025

# Table of Contents

|                                                |   |
|------------------------------------------------|---|
| Table of Contents                              | 2 |
| Scope                                          | 3 |
| Transaction Table                              | 3 |
| Transaction Breakdown                          | 5 |
| SetPeer Operations (3 transactions)            | 5 |
| DeployChannel Operations (3 transactions)      | 5 |
| DeployConnection Operations (3 transactions)   | 5 |
| SetEnforcedOptions Operations (6 transactions) | 5 |
| SetLzConfig Operations (6 transactions)        | 6 |
| Conclusion                                     | 9 |

# Scope

This report examines pending multisig orders (8-28) for the multisig address [EQACTgTTWCwWCaTSDJSY3inJL0SKJ\\_l\\_m4j2GNUPVyjHvaLU](#), which configure the XAUt0 OFT (Omnichain Fungible Token) contract on TON. Each transaction was decoded according to its LayerZero schema where possible, and was verified for correctness. The results are presented in the table below, followed by a detailed breakdown and analysis.

Total Transactions: 21

## Transaction Table

| Order Address               | Operation               | Details                                                       |
|-----------------------------|-------------------------|---------------------------------------------------------------|
| <a href="#">EQBF...tF4g</a> | <b>SetPeer</b>          | EID 30168 (Solana)<br>Peer: <a href="#">XWxJ...GtKR</a>       |
| <a href="#">EQD-...Njwz</a> | <b>DeployChannel</b>    | dstEid 30168 (Solana)<br>dstOApp: <a href="#">XWxJ...GtKR</a> |
| <a href="#">EQCy...p8ge</a> | <b>DeployConnection</b> | dstEid 30168 (Solana)<br>dstOApp: <a href="#">XWxJ...GtKR</a> |
| <a href="#">EQAo...jk23</a> | <b>SetPeer</b>          | EID 30125 (Celo)<br>Peer (OFT): <a href="#">0x21ca...a3bf</a> |
| <a href="#">EQDH...M83m</a> | <b>DeployChannel</b>    | dstEid 30125 (Celo)<br>dstOApp: <a href="#">0x21ca...a3bf</a> |
| <a href="#">EQA5...lSyE</a> | <b>DeployConnection</b> | dstEid 30125 (Celo)<br>dstOApp: <a href="#">0x21ca...a3bf</a> |
| <a href="#">EQB2...2ov7</a> | <b>SetPeer</b>          | EID 30339 (Ink)<br>Peer (OFT): <a href="#">0xa1be...dab2</a>  |

| Order Address | Operation                 | Details                                                  |
|---------------|---------------------------|----------------------------------------------------------|
| EQDu...wsho   | <b>DeployChannel</b>      | dstEid 30339 (Ink)<br>dstOApp: 0xa1be...dab2             |
| EQB3...GNB2   | <b>DeployConnection</b>   | dstEid 30339 (Ink)<br>dstOApp: 0xa1be...dab2             |
| EQB0...Eiqk   | <b>SetEnforcedOptions</b> | EID 30168 (Solana)<br>MsgType: 1                         |
| EQC-...Lw0E   | <b>SetEnforcedOptions</b> | EID 30168 (Solana)<br>MsgType: 2                         |
| EQAT...4MRR   | <b>SetEnforcedOptions</b> | EID 30125 (Celo)<br>MsgType: 1                           |
| EQA7...ZWIS   | <b>SetEnforcedOptions</b> | EID 30125 (Celo)<br>MsgType: 2                           |
| EQCE...sW5N   | <b>SetEnforcedOptions</b> | EID 30339 (Ink)<br>MsgType: 1                            |
| EQAE...4ITZ   | <b>SetEnforcedOptions</b> | EID 30339 (Ink)<br>MsgType: 2                            |
| EQDk...T3uT   | <b>SetLzConfig</b>        | UlnSendCfg<br>Path: EID 30343 (TON) → EID 30168 (Solana) |
| EQDi...DSJP   | <b>SetLzConfig</b>        | UlnRecvCfg<br>Path: EID 30343 (TON) → EID 30168 (Solana) |
| EQC3...nZ2P   | <b>SetLzConfig</b>        | UlnSendCfg<br>Path: EID 30343 (TON) → EID 30125 (Celo)   |
| EQCI...wpAE   | <b>SetLzConfig</b>        | UlnRecvCfg<br>Path: EID 30343 (TON) → EID 30125 (Celo)   |
| EQAp...70vh   | <b>SetLzConfig</b>        | UlnSendCfg<br>Path: EID 30343 (TON) → EID 30339 (Ink)    |
| EQDP...Zees   | <b>SetLzConfig</b>        | UlnRecvCfg<br>Path: EID 30343 (TON) → EID 30339 (Ink)    |

# Transaction Breakdown

## SetPeer Operations (3 transactions)

The following three transactions configured the cross-chain peer addresses for:

- Solana (EID 30168) — Peer `XWxJ...GtKR` (data account for XAUt0 token)
- Celo (EID 30125) — Peer `0x21ca...a3bf` (XAUt0 OFT proxy)
- Ink (EID 30339) — Peer `0xa1be...dab2` (XAUt0 OFT proxy)

These peers perfectly match the XAUt0 addresses stated in the [official documentation](#).

---

## DeployChannel Operations (3 transactions)

These operations correspond to the **deployments** executed as part of the `deploy-and-wire` scripts present in the `xaut-ton-everdawn` repository. Each transaction initializes a cross-chain communication channel for the configured destination oApp, using the same structure and parameters defined in the repository.

---

## DeployConnection Operations (3 transactions)

These operations correspond to the **deployments** executed under the same `deploy-and-wire` scripts in the `xaut-ton-everdawn` repository. Each transaction deploys the ULN connection for the associated oApp, including the same default configuration and initialization data defined in the repository.

---

## SetEnforcedOptions Operations (6 transactions)

The following six transactions configured the enforced LayerZero execution options for different message types:

- Solana (EID 30168) — MsgType 1 and 2
- Celo (EID 30125) — MsgType 1 and 2

- Ink (EID 30339) — MsgType 1 and 2`

For Celo and Ink, the enforced options correspond exactly to the `EVM_ENFORCED_OPTIONS` constants declared in the `xaut-ton-everdawn` repository, which define:

- MsgType 1 (Send): `lzReceiveGas = 80000`, `lzReceiveValue = 0`
- MsgType 2 (SendCompose): `lzReceiveGas = 140000`, `lzReceiveValue = 0`

For Solana, the configuration differs, and corresponds exactly to the `SOLANA_ENFORCED_OPTIONS` constant declared in the `usdt0-oft-contracts` repository, which defines:

- MsgType 1 (Send): `lzReceiveGas = 200000`, `lzReceiveValue = 2039280`
  - MsgType 2 (SendCompose): `lzReceiveGas = 0`, `lzReceiveValue = 0`
- 

## SetLzConfig Operations (6 transactions)

The six `SetLzConfig` transactions set the ULN Send and ULN Receive parameters that govern the Ultra Light Node (ULN) messaging layer used by LayerZero.

### TON → Solana

- Send Config (UlnSendCfg):
  - Confirmations: `60`
  - Required DVNs: `TON_DVNS`
  - Executor:  
`0x0f9a60ea29c5c9e4643601e8881e850498ee680a413e8ba01d5e55ce1c221024`
  - Max Message Size: `10000`
- Receive Config (UlnRecvCfg):
  - Confirmations: `128`
  - Required DVNs: `TON_DVNS`

### TON → Celo

- Send Config (UlnSendCfg):
  - Confirmations: `60`
  - Required DVNs: `TON_DVNS`

- Executor: `0x0f9a60ea29c5c9e4643601e8881e850498ee680a413e8ba01d5e55ce1c221024`
  - Max Message Size: `10000`
- Receive Config (UInRecvCfg):
    - Confirmations: `1500`
    - Required DVNs: `TON_DVNS`

## TON → Ink

- Send Config (UInSendCfg):
  - Confirmations: `60`
  - Required DVNs: `TON_DVNS`
  - Executor: `0x0f9a60ea29c5c9e4643601e8881e850498ee680a413e8ba01d5e55ce1c221024`
  - Max Message Size: `10000`
- Receive Config (UInRecvCfg):
  - Confirmations: `450`
  - Required DVNs: `TON_DVNS`

Each configuration matches the LayerZero setup from the Everdawn Labs [xaut-ton-everdawn](#) repository and the unified cross-chain configuration defined in [pull request #145](#) of the [usdt0-ofc-contracts](#) repository, ensuring message validation and finality alignment across the TON, Solana, Celo, and Ink networks.



# Conclusion

All **21 transactions** are valid, decoded correctly, and align with the Everdawn Labs LayerZero configuration for XAUt0 on TON.

The sequence properly:

1. sets cross-chain peers
2. deploys channels and connections
3. enforces execution gas limits
4. configures ULN Send/Receive parameters across the Solana, Celo, and Ink networks